






MIC unit connection

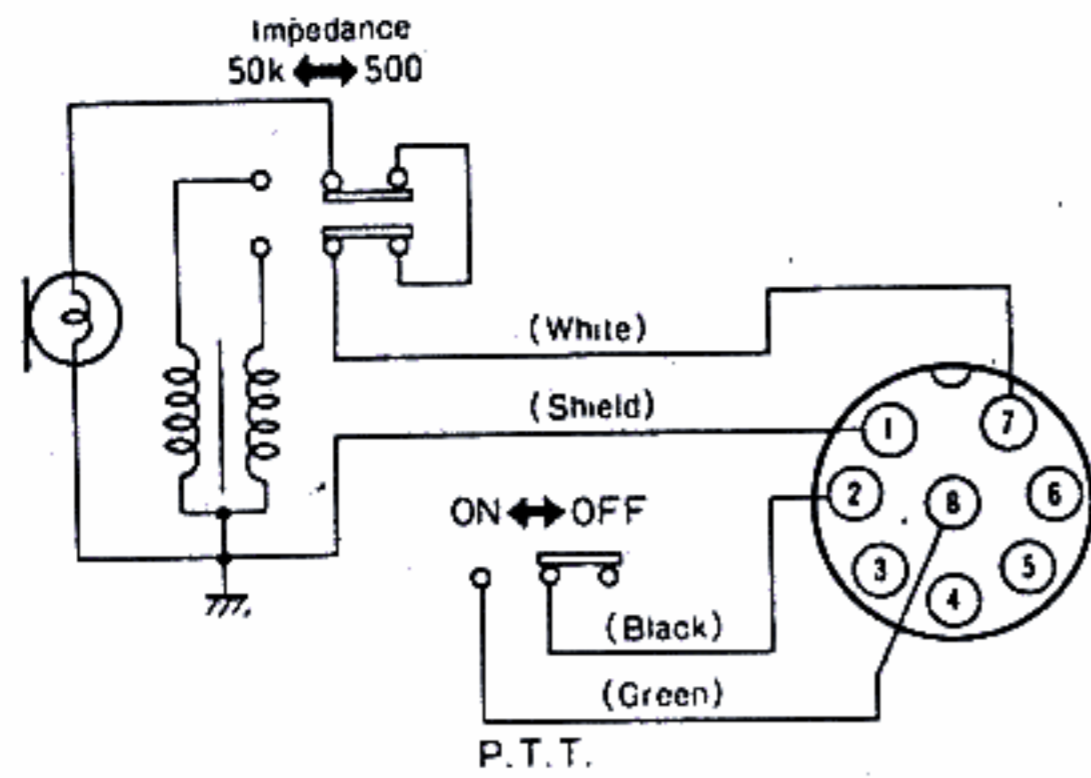

MIC stand connection

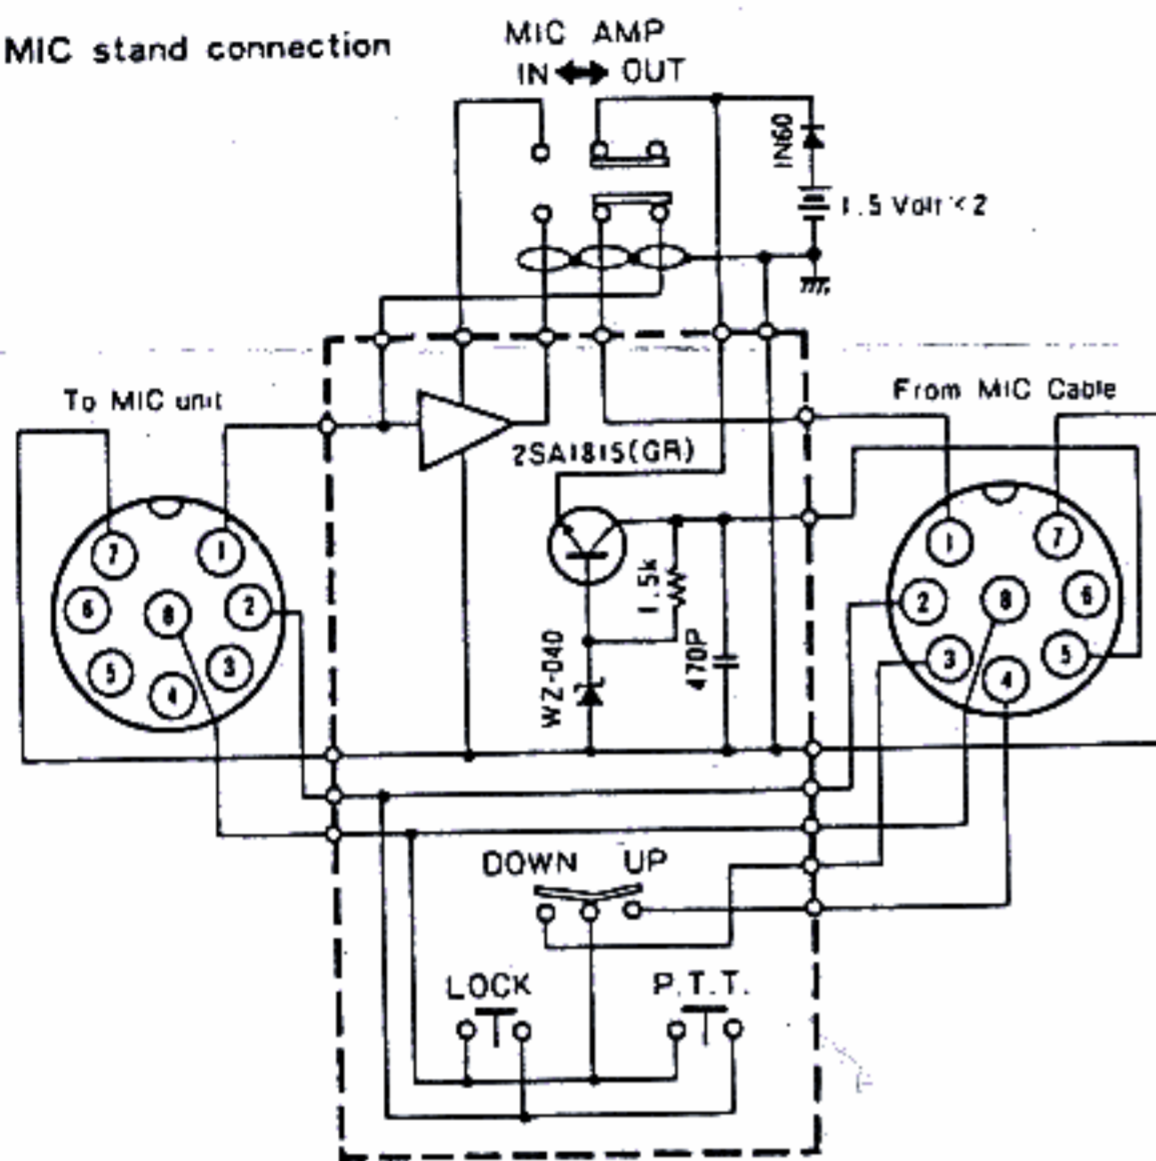

MIC cable connection

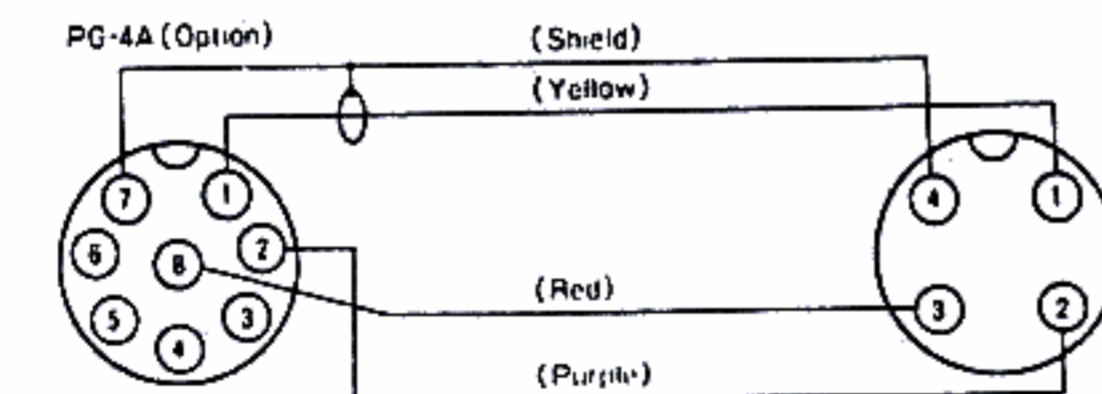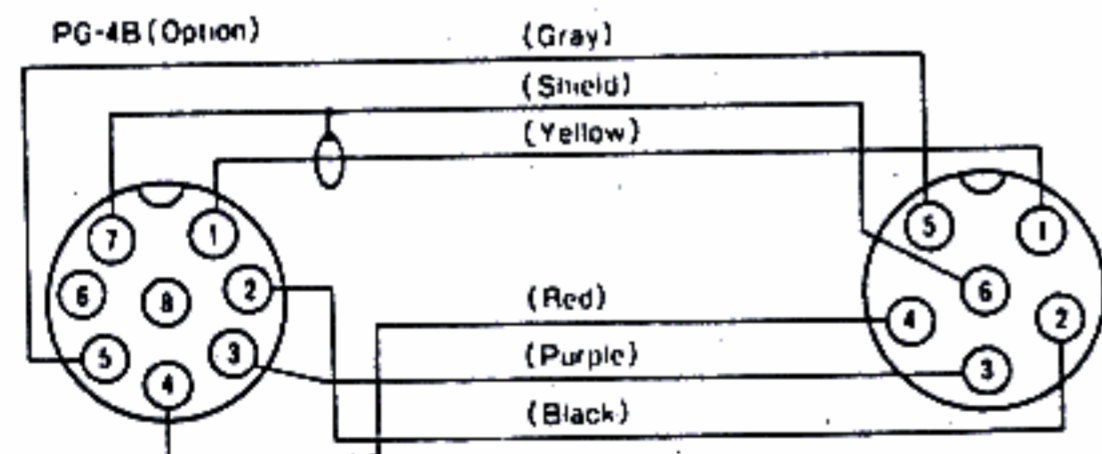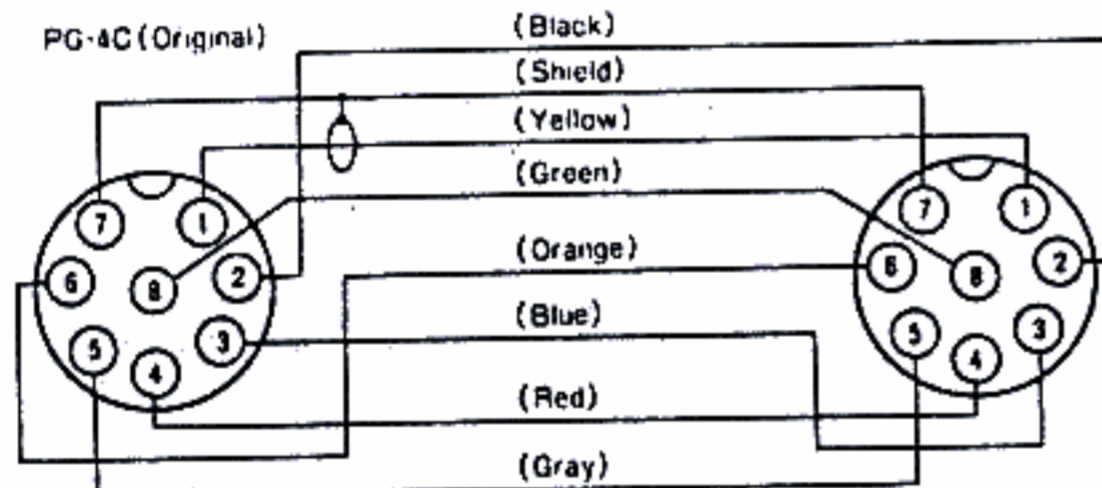

■ SPECIFICATIONS

Type:	Communication type dynamic microphone with PTT circuit.
Element:	Moving coil type, unidirectional
Impedance:	Dual impedance (1000 Hz) 50 kΩ ± 30%, 500 Ω ± 30% slide switch selectable
Sensitivity:	(0 dB = 1V/μ BAR, 1000 Hz)
Microphone	-54.5 dB ± 3dB/50 kΩ -71.0 dB ± 3dB/500Ω
Preamp out	-56.0 dB ± 3dB/50kΩ -71.0 dB ± 3dB/500Ω
Preamp in	-50.5 dB ± 3dB/50kΩ -59.0 dB ± 3dB/500Ω
Frequency response:	
Microphone, or	
Preamp off	150 Hz - 10 kHz (-6 dB)
Preamp in	200 Hz - 7 kHz (-6 dB)
Recommended operating distance to mic.:	10 cm (4") minimum

SCHEMATHEEK
Beh. T. Hultermans
Postbus 4228
5604 EE Eindhoven