

Apr. 2009



# SERVICE MANUAL ADDENDUM

---

## IC-7600

---

### CONTENTS

|                       |    |
|-----------------------|----|
| PARTS LIST .....      | 1  |
| BOARD LAYOUTS .....   | 37 |
| VOLTAGE DIAGRAM ..... | 41 |

## PARTS LIST

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                        | M. | H/V LOCATION |
|---------|------------|------------------------------------|----|--------------|
| IC1     | 1130013750 | S.IC EM639165TS-7G                 | T  | 109/62.6     |
| IC2     | 1130013750 | S.IC EM639165TS-7G                 | T  | 84.1/62.6    |
| IC21    | 1130015113 | S.IC JS28F128J3D-75(SX-3073A-3)    | T  | 103.2/37.1   |
| IC51    | 1130011591 | S.IC IDT70V24L15PFG                | B  | 119.8/87.1   |
| IC53    | 1110005731 | S.IC S-80928CNMC-G8Y-G             | B  | 65.8/89.4    |
| IC54    | 1130007431 | S.IC TC7S14FU(TE85R,F)             | B  | 61/88.6      |
| IC55    | 1130012600 | S.IC SN74AHC1G04DCKR               | B  | 58.1/87.9    |
| IC102   | 1130013010 | S.IC SN74AHC1G08DCK3               | T  | 115.7/35.5   |
| IC103   | 1140014730 | S.IC HD6417751RBG240V              | T  | 70.8/30.7    |
| IC105   | 1130015120 | S.IC CY22393FXC(SX-3073F)          | B  | 97.8/18      |
| IC201   | 1130013750 | S.IC EM639165TS-7G                 | T  | 8.9/79.8     |
| IC202   | 1130013750 | S.IC EM639165TS-7G                 | B  | 14.8/80.1    |
| IC203   | 1140011571 | S.IC HD64404BTDV                   | T  | 40.7/80.6    |
| IC208   | 1130014030 | S.IC BD6516F-E2                    | T  | 65.8/95.2    |
| IC209   | 1190001920 | S.IC AK5355-VT-E2                  | B  | 90.6/6.7     |
| IC210   | 1190001920 | S.IC AK5355-VT-E2                  | B  | 76.7/6.7     |
| IC211   | 1190001910 | S.IC AK4384-VT-E2                  | B  | 65.9/6.7     |
| IC604   | 1140014710 | S.IC HD64F2370VFQ34V               | B  | 140.3/66.4   |
| IC605   | 1140015050 | S.IC XC9572XL-10TQG100C (SX-3073E) | B  | 131.9/35.3   |
| IC607   | 1130013010 | S.IC SN74AHC1G08DCK3               | T  | 142.8/87     |
| IC608   | 1130013010 | S.IC SN74AHC1G08DCK3               | T  | 148.5/87     |
| IC609   | 1130005252 | S.IC TC74HC08AF(EL,F)              | T  | 119/77.2     |
| IC610   | 1130014800 | S.IC R1EX24064ATA00A               | T  | 148/64.6     |
| IC661   | 1130012600 | S.IC SN74AHC1G04DCKR               | T  | 147.8/77.7   |
| IC721   | 1130010111 | S.IC TC7WH04FU(TE12L,F)            | B  | 150.5/43.3   |
| IC851   | 1180003100 | S.REG BD9302FP-E2                  | T  | 179.5/87.9   |
| IC871   | 1180003100 | S.REG BD9302FP-E2                  | T  | 180.1/52.2   |
| IC901   | 1110003870 | S.IC NJM2058M-TE1-#ZZZB            | B  | 141.1/6.6    |
| IC902   | 1110003870 | S.IC NJM2058M-TE1-#ZZZB            | B  | 124.1/6.6    |
| Q725    | 1510000771 | S.TRA 2SA1586-GR(TE85L,F)          | B  | 155/39       |
| Q727    | 1530003900 | S.TRA KTC4075 BL-RTK/P             | B  | 155.1/41.5   |
| Q731    | 1590003680 | S.TRA KRC402 RTK/P                 | B  | 147.9/36.7   |
| Q1031   | 1560001221 | S.FET ECH8301-TL-E                 | T  | 190.2/30.4   |
| D51     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/27.1    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]         |    |              |
| D52     | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       | T  | 52.5/23.6    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [FRA]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D53     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/25.3    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
| D54     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/28.8    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [FRA]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D55     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/20.1    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D56     | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       | T  | 52.5/21.8    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [FRA]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D57     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/18.3    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D58     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/16.6    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]         |    |              |
| D59     | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         | T  | 52.5/14.8    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D60     | 1750001320 | S.DIO KDS4148U RTK/P               | T  | 56.3/27.1    |
| D61     | 1750001320 | S.DIO KDS4148U RTK/P               | T  | 56.3/23.6    |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| D62     | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 56.3/25.3    |
| D63     | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 56.3/28.8    |
| D66     | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 56.3/18.3    |
| D67     | 1750001320 | S.DIO KDS4148U RTK/P [EUR]      | T  | 56.3/16.6    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]    |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]      |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [FRA]      |    |              |
| D68     | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 56.3/14.8    |
| D101    | 1750001320 | S.DIO KDS4148U RTK/P            | B  | 66.5/18.7    |
| D102    | 1750001320 | S.DIO KDS4148U RTK/P            | B  | 68.2/18.7    |
| D206    | 1790000980 | S.DIO MA742(TX)                 | T  | 45.8/95.6    |
| D207    | 1790000980 | S.DIO MA742(TX)                 | T  | 49.2/95.6    |
| D711    | 1750001320 | S.DIO KDS4148U RTK/P            | B  | 154.5/63.6   |
| D715    | 1790001241 | S.DIO MA2S7280GL                | B  | 154.5/65.2   |
| D727    | 1750001320 | S.DIO KDS4148U RTK/P            | B  | 155.1/43.7   |
| D731    | 1750001180 | S.DIO KDS122 RTK/P              | B  | 145/36.7     |
| D732    | 1750001180 | S.DIO KDS122 RTK/P              | B  | 150.8/36.6   |
| D851    | 1750000960 | S.DIO RB081L-20                 | T  | 188.1/88.1   |
| D852    | 1750000960 | S.DIO RB081L-20                 | T  | 171/86.2     |
| D871    | 1750000960 | S.DIO RB081L-20                 | T  | 171.4/52.2   |
| D872    | 1750000960 | S.DIO RB081L-20                 | T  | 188.7/52.2   |
| D901    | 1790000980 | S.DIO MA742(TX)                 | B  | 161.5/33.9   |
| D902    | 1790000980 | S.DIO MA742(TX)                 | B  | 176.5/33.9   |
| D903    | 1790000980 | S.DIO MA742(TX)                 | B  | 164/33.9     |
| D904    | 1790000980 | S.DIO MA742(TX)                 | B  | 166.5/33.9   |
| D905    | 1790000980 | S.DIO MA742(TX)                 | B  | 169/33.9     |
| D906    | 1790000980 | S.DIO MA742(TX)                 | B  | 171.5/33.9   |
| D907    | 1790000980 | S.DIO MA742(TX)                 | B  | 174/33.9     |
| D909    | 1790000980 | S.DIO MA742(TX)                 | T  | 120.5/11.1   |
| D910    | 1790000980 | S.DIO MA742(TX)                 | T  | 120.5/13.6   |
| D911    | 1790000980 | S.DIO MA742(TX)                 | T  | 101.3/6.3    |
| D912    | 1790000980 | S.DIO MA742(TX)                 | T  | 101.3/3.8    |
| D913    | 1790000980 | S.DIO MA742(TX)                 | B  | 159.6/31.1   |
| X101    | 6050011610 | S.XTA CR-751 SMD-49 25.000 MHz  | T  | 97.8/18.1    |
| X201    | 6050010680 | S.XTA CR-628 SMD-49 24.576 MHz  | T  | 36.8/63.7    |
| X202    | 6050011910 | S.XTA CR-780 DSX530G 48 MHz     | T  | 37.6/97.5    |
| X601    | 6050011810 | S.XTA CR-755 SMD-49 15.9744 MHz | T  | 126.6/65.3   |
| L801    | 6200005011 | S.COI NLV25T-100J               | T  | 63/8         |
| L803    | 6200005011 | S.COI NLV25T-100J               | B  | 157.1/32.2   |
| L851    | 6200013280 | S.COI SLF10145T-330M1R6-PF      | T  | 196.3/89.3   |
| L852    | 6200013280 | S.COI SLF10145T-330M1R6-PF      | T  | 164.1/83.7   |
| L853    | 6200010881 | S.COI CDRH124NP-330MC           | T  | 192.9/77.3   |
| L871    | 6200013280 | S.COI SLF10145T-330M1R6-PF      | T  | 164.6/53.5   |
| L872    | 6200013280 | S.COI SLF10145T-330M1R6-PF      | T  | 196.9/49.9   |
| L873    | 6200010881 | S.COI CDRH124NP-330MC           | T  | 193.4/62     |
| R1      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 107.7/24.3   |
| R51     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 130.2/45.4   |
| R52     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 63.2/89.4    |
| R53     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 109.6/87.6   |
| R54     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 129.3/88.4   |
| R61     | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)      | T  | 53.6/30.4    |
| R62     | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)      | T  | 56.6/30.4    |
| R91     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 53.6/43.8    |
| R92     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 56.6/37.6    |
| R93     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 56/50.4      |
| R94     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 55.2/47.4    |
| R95     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 56.4/47.4    |
| R96     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 57.6/47.4    |
| R97     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 57.2/50.4    |
| R98     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 59.6/50.4    |
| R99     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 58.8/47.4    |
| R102    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 71/19        |
| R103    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 68.6/19      |
| R104    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 54.8/50.4    |
| R105    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 58.4/50.4    |
| R106    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 71/19        |
| R107    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 67.4/19      |
| R108    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 69.8/19      |
| R109    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 69.8/16      |
| R110    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 71/16        |
| R111    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 72.2/19      |
| R112    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 68.6/16      |
| R113    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 65/16        |
| R114    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 66.2/16      |
| R115    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 66.2/19      |
| R116    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 65/19        |
| R117    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)       | T  | 63.8/19      |
| R118    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 63.8/16      |
| R119    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 61.4/19      |
| R120    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 56.6/24.4    |
| R121    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 60.2/16      |
| R122    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 61.4/16      |
| R123    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 60.2/19      |
| R125    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 67.4/16      |
| R126    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 69.8/19      |
| R128    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 72.2/16      |
| R129    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 73.4/19      |
| R130    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 73.4/19      |
| R131    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 75.1/19      |
| R132    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 72.2/19      |
| R133    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 73.4/16      |
| R134    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)       | T  | 77.6/19      |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

S.=Surface mount

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R135    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 78.8/19      |
| R136    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 84/19        |
| R139    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 60/47.4      |
| R140    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 66.2/47.5    |
| R141    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 62.5/47.5    |
| R142    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 73.6/47.5    |
| R143    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 81/47.5      |
| R144    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 69.9/47.5    |
| R145    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 77.3/47.5    |
| R146    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 87.2/47.4    |
| R147    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 88.5/47.4    |
| R148    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 84.7/47.5    |
| R149    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 87.6/19.5    |
| R150    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 87.6/23.2    |
| R151    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 87.6/26.9    |
| R152    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 87.6/30.6    |
| R153    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 83.1/32.7    |
| R154    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 83.2/35.2    |
| R155    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 83.2/38.9    |
| R156    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 83.2/42.6    |
| R157    | 7410000800 | S.ARR EXB-V8V 103JV (10K)   | T  | 115.8/29.9   |
| R158    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 115.9/38.6   |
| R159    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 115.9/32.4   |
| R161    | 7030003300 | S.RES ERJ3GEYJ 680 V (68)   | B  | 101.2/14.4   |
| R164    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 94.3/17      |
| R171    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/25.6    |
| R172    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/26.8    |
| R173    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/28      |
| R174    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/31.6    |
| R175    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/29.2    |
| R176    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 53.6/32.8    |
| R177    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/32.8    |
| R178    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/30.4    |
| R179    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 53.6/34      |
| R180    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/34      |
| R181    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 53.6/35.2    |
| R182    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/31.6    |
| R183    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/36.4    |
| R184    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/34      |
| R185    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/35.2    |
| R186    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/35.2    |
| R187    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | B  | 56.6/32.8    |
| R188    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/36.4    |
| R189    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 53.6/42.6    |
| R190    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/42.6    |
| R191    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/43.8    |
| R201    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 23.3/71.5    |
| R202    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 23.3/72.7    |
| R203    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 32.9/63.3    |
| R204    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 31.7/63.3    |
| R205    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 30.5/63.3    |
| R206    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26.5/73.9    |
| R207    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 29.3/63.3    |
| R208    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 34.1/63.3    |
| R209    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 28.1/66.3    |
| R210    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 54.9/73.4    |
| R211    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 54.9/75.8    |
| R212    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 54.9/74.6    |
| R213    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 57.9/78.2    |
| R218    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 30.3/95.7    |
| R219    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 47.3/75.7    |
| R220    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 44/84.5      |
| R221    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 54.9/82.9    |
| R225    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44/79.3      |
| R226    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44/78        |
| R227    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 48.4/65.6    |
| R228    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 48.4/62.6    |
| R229    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 49.6/65.6    |
| R230    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 47.2/62.6    |
| R231    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 48.4/65.6    |
| R232    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44.7/75.7    |
| R233    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 47.2/65.6    |
| R234    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 47.2/65.6    |
| R235    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 46/62.6      |
| R236    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 46/65.6      |
| R237    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 43.4/75.7    |
| R238    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 46/65.6      |
| R239    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 44.8/62.6    |
| R240    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44.8/65.6    |
| R241    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 42.1/75.7    |
| R242    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 44.8/65.6    |
| R243    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 40.8/75.7    |
| R244    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 51.4/95.7    |
| R245    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 57.4/95.7    |
| R246    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 58.6/98.7    |
| R247    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/84.5    |
| R248    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.2/95.7    |
| R249    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 61/95.7      |
| R250    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 59.8/95.7    |
| R251    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 57.4/98.7    |
| R252    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 59.8/98.7    |
| R253    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 47.6/95.7    |
| R254    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 58.6/95.7    |
| R255    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 61/98.7      |
| R256    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/81.9    |
| R257    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 55/95.7      |
| R258    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/80.6    |
| R259    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 55/98.7      |
| R260    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/79.3    |
| R261    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 52.6/98.7    |
| R262    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/78      |
| R263    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 43.5/95.7    |
| R264    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/86.4    |
| R265    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 51.4/98.7    |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                       | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------|----|--------------|
| R266    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 53.8/98.7    |
| R267    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 52.6/95.7    |
| R268    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 44.7/95.7    |
| R269    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 53.8/95.7    |
| R270    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 56.2/98.7    |
| R271    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 46.4/95.7    |
| R272    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 32.7/95.7    |
| R273    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 27.7/98.7    |
| R274    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 38.2/78      |
| R275    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 33.9/95.7    |
| R276    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 27.7/95.7    |
| R277    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 35.3/95.7    |
| R278    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 28.9/98.7    |
| R279    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 38.2/79.3    |
| R280    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 31.5/95.7    |
| R281    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 37.5/83.8    |
| R282    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 38.8/83.8    |
| R283    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 32.5/98.7    |
| R284    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 32.5/95.7    |
| R285    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 38.2/80.6    |
| R286    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 30.1/98.7    |
| R287    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 30.1/95.7    |
| R288    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 31.3/98.7    |
| R289    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 31.3/95.7    |
| R290    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 38.2/81.9    |
| R291    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 28.9/95.7    |
| R292    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 44/83.2      |
| R293    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 44/81.9      |
| R294    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 44/80.6      |
| R295    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 41.4/83.2    |
| R296    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 26.5/70.3    |
| R297    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 26.5/66.7    |
| R298    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 34.1/66.3    |
| R299    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 26.5/67.9    |
| R300    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 23.3/66.7    |
| R301    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 32.9/66.3    |
| R302    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 23.3/65.5    |
| R303    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 31.7/66.3    |
| R304    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 23.3/67.9    |
| R305    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 26.5/69.1    |
| R306    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 26.5/72.7    |
| R307    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 23.3/70.3    |
| R308    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 30.5/66.3    |
| R309    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 23.3/69.1    |
| R310    | 7030003860 | S.RES       | ERJ3GE JPW V          | T  | 54.9/77      |
| R311    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 36.5/95.7    |
| R312    | 7030003860 | S.RES       | ERJ3GE JPW V          | T  | 57.9/77      |
| R315    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 26.5/65.5    |
| R316    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 26.5/64.3    |
| R317    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 23.3/64.3    |
| R318    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 38.9/95.7    |
| R319    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 37.7/95.7    |
| R320    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 26.5/95.7    |
| R322    | 7030003250 | S.RES       | ERJ3GEYJ 270 V (27)   | T  | 44.9/99.3    |
| R323    | 7030003250 | S.RES       | ERJ3GEYJ 270 V (27)   | T  | 48.3/99.3    |
| R324    | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)  | T  | 46.1/99.3    |
| R325    | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)  | T  | 49.5/99.3    |
| R330    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 66.4/100.2   |
| R331    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 65.1/100.2   |
| R332    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 87.3/54.4    |
| R333    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 94.2/8       |
| R334    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | T  | 90.9/8       |
| R335    | 7030003280 | S.RES       | ERJ3GEYJ 470 V (47)   | B  | 87.3/9.5     |
| R336    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 73.2/54.4    |
| R337    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 80.1/8       |
| R338    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | T  | 76.8/8       |
| R339    | 7030003280 | S.RES       | ERJ3GEYJ 470 V (47)   | B  | 73.2/9.5     |
| R340    | 7030003280 | S.RES       | ERJ3GEYJ 470 V (47)   | B  | 62.5/9.5     |
| R341    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 67.9/11.3    |
| R344    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 68.7/2.1     |
| R347    | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 42.3/95.7    |
| R348    | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 41/95.7      |
| R350    | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 29.1/95.7    |
| R351    | 7030003860 | S.RES       | ERJ3GE JPW V          | T  | 26.5/71.5    |
| R361    | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)  | T  | 42.4/96.6    |
| R362    | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)  | T  | 43.7/96.6    |
| R601    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 149.4/82.4   |
| R602    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 150.6/82.4   |
| R606    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 126.6/64.6   |
| R607    | 7030003350 | S.RES       | ERJ3GEYJ 181 V (180)  | B  | 126.6/65.8   |
| R608    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 126.5/62.2   |
| R609    | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 132.6/83.1   |
| R610    | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 133.8/83.1   |
| R611    | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 135/83.1     |
| R612    | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 136.2/83.1   |
| R613    | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 137.4/83.1   |
| R614    | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 138.6/83.1   |
| R615    | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 139.8/83.1   |
| R618    | 7030003800 | S.RES       | ERJ3GEYJ 105 V (1M)   | T  | 139.8/86     |
| R619    | 7030003800 | S.RES       | ERJ3GEYJ 105 V (1M)   | T  | 138.6/86     |
| R620    | 7030003800 | S.RES       | ERJ3GEYJ 105 V (1M)   | T  | 137.4/86     |
| R621    | 7030003800 | S.RES       | ERJ3GEYJ 105 V (1M)   | T  | 136.2/86     |
| R622    | 7030003800 | S.RES       | ERJ3GEYJ 105 V (1M)   | T  | 135/86       |
| R623    | 7030003800 | S.RES       | ERJ3GEYJ 105 V (1M)   | T  | 133.8/86     |
| R624    | 7030003800 | S.RES       | ERJ3GEYJ 105 V (1M)   | T  | 132.6/86     |
| R626    | 7030003600 | S.RES       | ERJ3GEYJ 223 V (22K)  | B  | 148.2/82.4   |
| R627    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 153/82.4     |
| R628    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 151.8/82.4   |
| R629    | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 154.2/82.4   |
| R630    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 116.1/52.4   |
| R631    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 116.1/51.2   |
| R632    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 116.1/50     |
| R633    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 116.1/48.8   |
| R634    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 116.1/47.6   |



## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R635    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 116.1/46.4   |
| R636    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 145/87.4     |
| R637    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 150.7/87.4   |
| R639    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 151.9/90.7   |
| R640    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 147.1/97.7   |
| R641    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 145.9/97.7   |
| R642    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 144.7/97.7   |
| R643    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | B  | 154.4/67.6   |
| R644    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 154.4/66.4   |
| R645    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 154.5/54.9   |
| R646    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 129.2/51.9   |
| R647    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 131.6/51.9   |
| R648    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 132.8/51.9   |
| R649    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 134/51.9     |
| R650    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 135.2/51.9   |
| R651    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 136.4/51.9   |
| R652    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 137.6/51.9   |
| R653    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 138.8/51.9   |
| R654    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 149.9/52     |
| R655    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 148.7/52     |
| R657    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 145.8/82.4   |
| R660    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 155.4/82.4   |
| R661    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 147.8/81.9   |
| R662    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/63.4   |
| R663    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 131.4/82.4   |
| R664    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 147/82.4     |
| R665    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 126.6/75     |
| R666    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 126.6/73.6   |
| R668    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/68.4   |
| R669    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 139.8/82.4   |
| R670    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.5/53.7   |
| R671    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.5/52.5   |
| R672    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/77.4   |
| R674    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.5/58.5   |
| R675    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.5/57.3   |
| R677    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/58.6   |
| R679    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/61     |
| R681    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/59.8   |
| R683    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/77.4   |
| R684    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.4/68.8   |
| R685    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.4/70     |
| R687    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/72.4   |
| R691    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 113.6/77.7   |
| R692    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 129.3/24.6   |
| R693    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 130.5/24.6   |
| R694    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 144.6/82.4   |
| R695    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 143.4/82.4   |
| R696    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 126.9/24.6   |
| R697    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 131.7/24.6   |
| R698    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 143.9/52     |
| R699    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 128.1/24.6   |
| R700    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 142.2/82.4   |
| R701    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 154.5/56.1   |
| R711    | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | B  | 154.5/62.1   |
| R712    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.5/60.9   |
| R721    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 151.4/47.4   |
| R722    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 150.2/47.4   |
| R723    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 149/47.4     |
| R724    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 152.9/41.9   |
| R725    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 157.1/39.3   |
| R726    | 7030003590 | S.RES ERJ3GEYJ 183 V (18K)  | B  | 157.1/42     |
| R727    | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 152.8/39.3   |
| R731    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 144.9/39.8   |
| R732    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 149.4/39.9   |
| R733    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 144.9/38.6   |
| R734    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 150.9/38.5   |
| R801    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 106.6/88.4   |
| R802    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 107.1/81.3   |
| R803    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 105.4/88.4   |
| R804    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 105.9/81.3   |
| R805    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 104.2/88.4   |
| R806    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 104.7/81.3   |
| R807    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 103.5/81.3   |
| R808    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 103/88.4     |
| R809    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 102.3/81.3   |
| R810    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 101.8/88.4   |
| R811    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 101.1/81.3   |
| R812    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 100.6/88.4   |
| R813    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 99.4/88.4    |
| R814    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 99.1/81.3    |
| R815    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 98.2/88.4    |
| R816    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 97.9/81.3    |
| R817    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 97/88.4      |
| R818    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 96.7/81.3    |
| R819    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 95.5/81.3    |
| R822    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 93.1/81.3    |
| R823    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 91.9/81.3    |
| R851    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 181.8/97.1   |
| R852    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 181.8/95.9   |
| R853    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 177.9/95.9   |
| R854    | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | T  | 184.4/95.9   |
| R855    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 175/95.9     |
| R856    | 7030005451 | S.RES ERA3YED 153V (15K)    | T  | 181.8/94.7   |
| R857    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 186.7/94.2   |
| R858    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 173.1/94.2   |
| R861    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 187/97.1     |
| R862    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 172.4/97.1   |
| R871    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 177.5/43.9   |
| R872    | 7030003590 | S.RES ERJ3GEYJ 183 V (18K)  | T  | 181.9/42.1   |
| R873    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 174.9/43.9   |
| R874    | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | T  | 185.8/43.8   |
| R875    | 7030005451 | S.RES ERA3YED 153V (15K)    | T  | 177.5/45.2   |
| R876    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 173/45.8     |
| R877    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 183.9/45.1   |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                       | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------|----|--------------|
| R881    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 173/43.2     |
| R882    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 187.3/42.5   |
| R903    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 147.9/8.6    |
| R904    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 146.8/7.1    |
| R906    | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K) | B  | 146/9.4      |
| R908    | 7030003540 | S.RES       | ERJ3GEYJ 682 V (6.8K) | B  | 147.9/9.9    |
| R909    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 146.8/11.2   |
| R910    | 7030003860 | S.RES       | ERJ3GE JPW V          | T  | 132.8/22.8   |
| R911    | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K) | B  | 148.4/5.3    |
| R912    | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K) | B  | 148.4/7.2    |
| R913    | 7030003410 | S.RES       | ERJ3GEYJ 561 V (560)  | B  | 136.2/13.3   |
| R914    | 7030003690 | S.RES       | ERJ3GEYJ 124 V (120K) | B  | 146/2.7      |
| R915    | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K) | B  | 136.2/10.7   |
| R916    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 147.2/5.3    |
| R917    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 146/5.3      |
| R918    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 135/10.7     |
| R919    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 136.2/8.1    |
| R920    | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 150.8/5.3    |
| R921    | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 135/8.1      |
| R922    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 132.8/5.5    |
| R923    | 7030003460 | S.RES       | ERJ3GEYJ 152 V (1.5K) | B  | 132.8/2.9    |
| R924    | 7030003470 | S.RES       | ERJ3GEYJ 182 V (1.8K) | B  | 131.6/4.4    |
| R925    | 7030003500 | S.RES       | ERJ3GEYJ 332 V (3.3K) | B  | 130.4/5.5    |
| R926    | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | B  | 129/9.2      |
| R927    | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | B  | 135/2.9      |
| R928    | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | B  | 136.2/5.5    |
| R929    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 136.2/2.9    |
| R930    | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)  | T  | 143.1/13.7   |
| R931    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 132.8/8.1    |
| R932    | 7030003460 | S.RES       | ERJ3GEYJ 152 V (1.5K) | B  | 132.8/10.7   |
| R933    | 7030003470 | S.RES       | ERJ3GEYJ 182 V (1.8K) | B  | 131.6/9.2    |
| R934    | 7030003500 | S.RES       | ERJ3GEYJ 332 V (3.3K) | B  | 130.4/8.1    |
| R935    | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | B  | 129/10.7     |
| R936    | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)  | T  | 143.9/12.5   |
| R937    | 7030003410 | S.RES       | ERJ3GEYJ 561 V (560)  | B  | 118/10.5     |
| R938    | 7030003700 | S.RES       | ERJ3GEYJ 154 V (150K) | B  | 119.2/10.5   |
| R939    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 143.9/11.3   |
| R940    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 119.2/7.9    |
| R941    | 7030003410 | S.RES       | ERJ3GEYJ 561 V (560)  | B  | 118/2.7      |
| R942    | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K) | B  | 119.2/2.7    |
| R943    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 143.9/10.1   |
| R944    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 119.2/5.3    |
| R945    | 7030008240 | S.RES       | ERJ12Y0R00U           | T  | 148.4/24.1   |
| R946    | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 138/8.8      |
| R947    | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 141.2/8.8    |
| R948    | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 121.6/8.4    |
| R949    | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 124.8/8.4    |
| R953    | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 132.1/19     |
| R1001   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 161.9/26.1   |
| R1002   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 165.1/29.4   |
| R1003   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 165.5/26.1   |
| R1004   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 166.5/29.4   |
| R1005   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 166.9/26.1   |
| R1006   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 167.8/29.4   |
| R1007   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 168.3/26.1   |
| R1008   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 169.2/29.4   |
| R1009   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 169.7/26.1   |
| R1010   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 170.5/29.4   |
| R1011   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 171.1/26.1   |
| R1012   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 171.8/29.4   |
| R1013   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 172.5/26.1   |
| R1014   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 173.1/29.5   |
| R1015   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 173.9/26.5   |
| R1016   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 174.4/29.7   |
| R1017   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 175.3/27     |
| R1018   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 176/30.3     |
| R1019   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 176.7/27.3   |
| R1020   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 177.9/30     |
| R1021   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 178.1/27.4   |
| R1022   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 179.5/26.7   |
| R1023   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 180.5/29.6   |
| R1024   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 180.9/26.4   |
| R1025   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 181.8/29.6   |
| R1026   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 182.3/26.1   |
| R1027   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 183.1/29.6   |
| R1028   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 183.7/26.1   |
| R1029   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 184.4/29.6   |
| R1031   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 188/25       |
| R1032   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | T  | 188.5/28     |
| R1033   | 7030003670 | S.RES       | ERJ3GEYJ 823 V (82K)  | T  | 190.1/26.2   |
| R1101   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 155.9/8.5    |
| R1102   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 156.2/11.8   |
| R1103   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 157.3/8.5    |
| R1104   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 158/11.8     |
| R1105   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 158.7/8.5    |
| R1106   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 159.4/11.8   |
| R1107   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 160.1/8.5    |
| R1108   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 160.8/11.8   |
| R1109   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 161.5/8.5    |
| R1110   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 162.2/11.8   |
| R1111   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 162.9/8.5    |
| R1112   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 163.6/11.8   |
| R1113   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 164.3/8.5    |
| R1114   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 165/11.8     |
| R1115   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 165.7/8.5    |
| R1116   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 166.4/11.8   |
| R1117   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 167.1/8.5    |
| R1118   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 162.8/16.1   |
| R1119   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 164/15.6     |
| R1120   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 165.2/16.1   |
| R1121   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 166.4/16.1   |
| R1122   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 167.6/16.1   |
| R1123   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 168.8/15.3   |
| R1124   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 170/16.1     |



## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R1125   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 171.2/16.1   |
| R1126   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 172.4/16.1   |
| R1127   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 173.6/16.1   |
| R1128   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 174.8/16.1   |
| R1129   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 176/16.1     |
| R1130   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 177.2/16.1   |
| R1131   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 172.8/8.5    |
| R1132   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 173.5/11.8   |
| R1133   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 174.2/8.5    |
| R1134   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 174.9/11.8   |
| R1135   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 175.6/8.5    |
| R1136   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 176.3/11.8   |
| R1137   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 177/8.5      |
| R1138   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 177.7/11.8   |
| R1139   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 178.4/8.5    |
| R1140   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 179.1/11.8   |
| R1141   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 179.8/8.5    |
| R1142   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 180.5/11.8   |
| R1143   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 181.2/8.5    |
| R1144   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 181.9/11.8   |
| R1145   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 182.6/8.5    |
| R1146   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 183.3/11.8   |
| R1147   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 184/8.5      |
| R1148   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 184.7/11.8   |
|         |            |                             |    |              |
| C1      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 98.1/55.4    |
| C2      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 101/55.4     |
| C3      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 105.7/55.4   |
| C4      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 108.3/55.4   |
| C5      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 120.2/55.4   |
| C6      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 108.2/69.8   |
| C7      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 103.4/69.8   |
| C8      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 73.5/55.4    |
| C9      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 76.1/55.4    |
| C10     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 80.8/55.4    |
| C11     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 83.4/55.4    |
| C12     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 95.3/55.4    |
| C13     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 83.3/69.8    |
| C14     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 78.5/69.8    |
| C21     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 106.7/49.9   |
| C22     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 104.2/24.3   |
| C23     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 101.2/24.3   |
| C51     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 118.5/77.6   |
| C52     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 121.1/77.6   |
| C53     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 129.3/85.8   |
| C61     | 4030009990 | S.CER C1608 CH 1H 200J-T    | T  | 131.4/45.4   |
| C62     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 63.9/91.8    |
| C63     | 4030008880 | S.CER C1608 JB 1H 223K-T    | B  | 66.1/87.1    |
| C64     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 60.9/90.5    |
| C65     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 57.9/89.8    |
| C66     | 4550007470 | S.TAN F931A107MNMBA         | B  | 54.4/96.1    |
| C101    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 101.2/17     |
| C102    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 62.6/19      |
| C103    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 67/39.8      |
| C104    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 60.8/50.4    |
| C105    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74/30.3      |
| C106    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 66.3/26.9    |
| C107    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 67.5/26.9    |
| C108    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 70.4/33.9    |
| C109    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74.6/26.9    |
| C110    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 67.5/33.7    |
| C111    | 4030019500 | GRM21BB31A106KE18 (GRM40 B) | T  | 76.1/16.8    |
| C112    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 77.6/16.4    |
| C113    | 4030019500 | GRM21BB31A106KE18 (GRM40 B) | T  | 80.4/17.8    |
| C114    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 78.8/16.4    |
| C115    | 4030019500 | GRM21BB31A106KE18 (GRM40 B) | T  | 82.4/17.8    |
| C116    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 84/16.4      |
| C117    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 68.2/39.8    |
| C118    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 66.8/30.3    |
| C119    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 61.7/27.8    |
| C120    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 73.4/33.7    |
| C121    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74.6/33.7    |
| C122    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 71.7/33.9    |
| C123    | 4030006860 | S.CER C1608 JB 1H 102K-T    | B  | 61.7/32.5    |
| C124    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 66.3/33.7    |
| C125    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 69.1/33.9    |
| C126    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 66.8/31.6    |
| C127    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 73.4/39.8    |
| C128    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 79.9/27.3    |
| C129    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 66.8/29      |
| C130    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74.6/39.8    |
| C131    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 79.9/32.5    |
| C132    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 79.9/33.7    |
| C133    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74/31.6      |
| C134    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 64.7/21.5    |
| C135    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 62.6/16      |
| C136    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 73.4/26.9    |
| C137    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 67.3/21.5    |
| C138    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 61.7/35.2    |
| C139    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 79.9/26.1    |
| C140    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74/29        |
| C141    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 115.9/37.4   |
| C142    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 115.9/39.8   |
| C143    | 4550007470 | S.TAN F931A107MNMBA         | B  | 84.4/18.1    |
| C201    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 1.7/91.3     |
| C202    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 1.7/88.2     |
| C203    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 1.7/84.9     |
| C204    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 1.7/80.9     |
| C205    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 1.7/69       |
| C206    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 16.1/81      |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                    | M. | H/V LOCATION |
|---------|------------|-------------|--------------------|----|--------------|
| C207    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | T  | 16.1/85.8    |
| C208    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 19.6/68.1    |
| C209    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 22/80.9      |
| C210    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 22/84.9      |
| C211    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 22/88.2      |
| C212    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 16.2/92.2    |
| C213    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 7.6/85.8     |
| C214    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 7.6/81       |
| C215    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 48.2/69.6    |
| C216    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 49/92.4      |
| C217    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/79.3    |
| C218    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46/86.4      |
| C219    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 43.4/86.4    |
| C220    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 47.3/86.4    |
| C221    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 42.4/92.5    |
| C222    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 44.7/69.6    |
| C223    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 50.8/69.6    |
| C224    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 53.1/75.6    |
| C225    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/81.9    |
| C226    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/83.2    |
| C227    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 40.1/86.4    |
| C228    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/84.5    |
| C229    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 37.8/69.6    |
| C230    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 39.5/75.7    |
| C231    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/75.4    |
| C232    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/78      |
| C233    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/80.5    |
| C234    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 38.8/86.4    |
| C235    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.5/92.5    |
| C236    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/76.7    |
| C237    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/78      |
| C238    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/79.3    |
| C239    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 53.1/76.8    |
| C240    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/83.2    |
| C241    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/84.5    |
| C242    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/85.7    |
| C243    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/87      |
| C244    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/80.6    |
| C245    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46/75.7      |
| C246    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/81.9    |
| C247    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 38.2/75.7    |
| C248    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 37.5/86.4    |
| C249    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 44.7/86.4    |
| C250    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 37.8/67      |
| C251    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 40.4/67      |
| C252    | 4030006990 | S.CER       | C1608 CH 1H 080D-T | T  | 36.6/95      |
| C253    | 4030006990 | S.CER       | C1608 CH 1H 080D-T | T  | 39.2/95      |
| C254    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | T  | 52/65.6      |
| C255    | 4510008520 | S.ELE       | EEE1CA470SP        | T  | 57.1/68.5    |
| C256    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | T  | 60.1/89      |
| C257    | 4510007130 | S.ELE       | EEFCD 0J 470R      | T  | 58.1/86      |
| C258    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 39.8/92.5    |
| C259    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 52.5/80.9    |
| C276    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 45.7/97.5    |
| C277    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 49/97.5      |
| C278    | 4510008500 | S.ELE       | EEE1CA101WP        | T  | 66.7/83      |
| C283    | 4510008550 | S.ELE       | EEE1HA010SR        | T  | 65.5/89      |
| C284    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 94.2/5.4     |
| C285    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 96.5/3.7     |
| C286    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 91.7/3.7     |
| C287    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 88.8/2.1     |
| C288    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 86.9/3.7     |
| C289    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 91.4/2.1     |
| C290    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 80.1/5.4     |
| C291    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 82.1/3.7     |
| C292    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 77.3/3.7     |
| C293    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 77.3/2.1     |
| C294    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 72.5/3.7     |
| C295    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 74.7/2.1     |
| C296    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 62.5/5.4     |
| C297    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 62.9/3.7     |
| C298    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 65.7/2.1     |
| C299    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 67.7/3.7     |
| C361    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 42.4/99.3    |
| C362    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 43.7/99.3    |
| C603    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 126.6/71     |
| C604    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 126.6/69.8   |
| C605    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 128/51.9     |
| C606    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 154.5/73.6   |
| C607    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 147.5/52     |
| C608    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 131/74.8     |
| C609    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 135.8/74.8   |
| C610    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | T  | 130.9/78.3   |
| C611    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | T  | 136.8/78.3   |
| C612    | 4030007010 | S.CER       | C1608 CH 1H 100D-T | T  | 129.9/68.9   |
| C613    | 4030007010 | S.CER       | C1608 CH 1H 100D-T | T  | 129.9/66.3   |
| C614    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 126.6/67     |
| C616    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 141/82.7     |
| C617    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 138.6/82.7   |
| C618    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 137.4/82.7   |
| C619    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 136.2/82.7   |
| C620    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 135/82.7     |
| C621    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 133.8/82.7   |
| C622    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 132.6/82.7   |
| C626    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | T  | 146.2/87.4   |
| C627    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | T  | 151.9/85.9   |
| C628    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | T  | 113.6/72.6   |
| C629    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | T  | 150.2/67.1   |
| C630    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 122.4/32     |
| C631    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 125.7/24.6   |
| C632    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 132.9/24.6   |
| C633    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 141.4/40.5   |
| C634    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 141.4/37.5   |
| C635    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 134.4/44.9   |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| C636    | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 125.2/46.1   |
| C656    | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 145.1/52     |
| C661    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 149.7/77.5   |
| C698    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 144/54.4     |
| C711    | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 154.5/59.7   |
| C721    | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 152.9/44.5   |
| C731    | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 147.8/38.6   |
| C732    | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 144.9/41     |
| C801    | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 83.3/88.1    |
| C802    | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 80.6/88.3    |
| C803    | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 82.2/76.8    |
| C804    | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 79.8/76.8    |
| C805    | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 78.4/76.9    |
| C806    | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 76.9/76.9    |
| C807    | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 75.6/78      |
| C808    | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 75.8/88.3    |
| C809    | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 72.7/88.3    |
| C810    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 67.4/95.1    |
| C811    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 152.5/28.9   |
| C812    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 65.7/9       |
| C851    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 184.4/97.1   |
| C852    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 175/97.1     |
| C853    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 184.8/94.7   |
| C854    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 175/94.7     |
| C855    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 184.8/93.4   |
| C856    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 175/93.4     |
| C857    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 181.8/93.4   |
| C858    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 178/94.5     |
| C859    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 184.7/82.7   |
| C860    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 174.3/82.7   |
| C861    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 181.3/82.8   |
| C862    | 4550007900 | S.TAN F931E476MNC                 | T  | 178.9/74.8   |
| C863    | 4030018970 | S.CER C3225 JB 1C 226MT-N         | T  | 177.1/80.6   |
| C864    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 169.7/94.1   |
| C865    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 190/94.4     |
| C866    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 197.7/96.2   |
| C867    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 161.9/96.9   |
| C868    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 197.7/98     |
| C869    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 188.2/94.4   |
| C870    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 171.5/94.1   |
| C871    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 174.9/42.6   |
| C872    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 184.7/42.5   |
| C873    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 174.9/45.2   |
| C874    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 182.1/43.4   |
| C875    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 174.9/46.5   |
| C876    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 182.1/44.7   |
| C877    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 178.1/46.5   |
| C878    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 180.7/46     |
| C879    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 174.9/57.7   |
| C880    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 185.3/57.7   |
| C881    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 178.7/57.7   |
| C882    | 4550007900 | S.TAN F931E476MNC                 | T  | 179.4/66     |
| C883    | 4030018970 | S.CER C3225 JB 1C 226MT-N         | T  | 182.6/59.9   |
| C884    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 187.2/46     |
| C885    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 169.5/46.2   |
| C886    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 161.2/45     |
| C887    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 195.3/41.4   |
| C888    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 161.9/95.1   |
| C889    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 161.2/43.2   |
| C890    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 171.3/46.2   |
| C891    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 185.5/46     |
| C892    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 195.3/43.1   |
| C893    | 4030018970 | S.CER C3225 JB 1C 226MT-N         | T  | 181.7/80.6   |
| C894    | 4030018970 | S.CER C3225 JB 1C 226MT-N         | T  | 177.6/59.9   |
| C895    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 189/46       |
| C896    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 190.7/46     |
| C897    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 167.9/91.7   |
| C898    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 167.9/89.9   |
| C904    | 4030019320 | S.CER C1608 X7R 1C 105K-T         | B  | 149.4/11.2   |
| C906    | 4030008880 | S.CER C1608 JB 1H 82K-T           | B  | 149.6/2.7    |
| C907    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 124.9/13.5   |
| C908    | 4030008880 | S.CER C1608 JB 1H 82K-T           | B  | 150.8/2.7    |
| C909    | 4030007160 | S.CER C1608 CH 1H 181J-T          | B  | 147.2/2.7    |
| C910    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 131/2.6      |
| C911    | 4030009490 | S.CER C1608 JB 1H 82K-T           | B  | 129/5.5      |
| C912    | 4030009490 | S.CER C1608 JB 1H 82K-T           | B  | 130.4/2.9    |
| C913    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 131/7.4      |
| C914    | 4030009490 | S.CER C1608 JB 1H 82K-T           | B  | 129/8.1      |
| C915    | 4030009490 | S.CER C1608 JB 1H 82K-T           | B  | 130.4/10.7   |
| C916    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 105.5/7.4    |
| C917    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 105.5/2.6    |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  |       | DESCRIPTION             | M. | H/V LOCATION |
|---------|------------|-------|-------------------------|----|--------------|
| C918    | 4030011600 | S.CER | C1608 JB 1E 104K-T      | T  | 138/7.6      |
| C919    | 4030011600 | S.CER | C1608 JB 1E 104K-T      | T  | 141.2/7.6    |
| C920    | 4510008540 | S.ELE | EEE1CA100SR             | T  | 137.2/4.1    |
| C921    | 4510008540 | S.ELE | EEE1CA100SR             | T  | 142/4.1      |
| C922    | 4030011600 | S.CER | C1608 JB 1E 104K-T      | T  | 121.6/7.2    |
| C923    | 4030011600 | S.CER | C1608 JB 1E 104K-T      | T  | 124.8/7.2    |
| C924    | 4510008540 | S.ELE | EEE1CA100SR             | T  | 120.8/3.7    |
| C925    | 4510008540 | S.ELE | EEE1CA100SR             | T  | 125.6/3.7    |
| C1002   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 159.3/26.1   |
| C1003   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 156.7/26.1   |
| C1004   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 158/26.1     |
| C1005   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 160.6/26.1   |
| C1006   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 161.9/26.1   |
| C1007   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 155.4/26.1   |
| C1008   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 186.5/34.8   |
| C1009   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 180.5/29.6   |
| C1010   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 179.5/26.1   |
| C1011   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 178.2/30     |
| C1012   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 175.3/26.1   |
| C1013   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 174.4/29.7   |
| C1014   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 173.9/26.1   |
| C1015   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 173.1/29.5   |
| C1016   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 172.5/26.1   |
| C1017   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 171.1/26.1   |
| C1018   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 170.4/29.4   |
| C1019   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 169.7/26.1   |
| C1020   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 169/29.4     |
| C1021   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 168.3/26.1   |
| C1022   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 167.6/29.4   |
| C1023   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 166.9/26.1   |
| C1024   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 166.2/29.4   |
| C1025   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 165.5/26.1   |
| C1026   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 164/30.6     |
| C1027   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 153.6/30.5   |
| C1031   | 4030006900 | S.CER | C1608 JB 1H 103K-T      | T  | 191.4/26.2   |
| C1101   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 179.1/11.8   |
| C1102   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 178.4/8.5    |
| C1103   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 177.7/11.8   |
| C1104   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 176.3/11.8   |
| C1105   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 177.2/16.1   |
| C1106   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 176/16.1     |
| C1107   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 174.8/16.1   |
| C1108   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 173.6/16.1   |
| C1109   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 172.4/16.1   |
| C1110   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 171.2/16.1   |
| C1111   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 170/16.1     |
| C1112   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 168.8/15.3   |
| C1113   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 167.6/16.1   |
| C1114   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 166.4/16.1   |
| C1115   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 162.8/16.1   |
| C1116   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 167.1/8.5    |
| C1117   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 166.4/11.8   |
| C1118   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 165.7/8.5    |
| C1119   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 165/11.8     |
| C1120   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 162.9/8.5    |
| C1121   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 162.2/11.8   |
| C1122   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 161.5/8.5    |
| C1123   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 160.1/8.5    |
| C1124   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 159.4/11.8   |
| C1125   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 158.7/8.5    |
| C1126   | 4030006860 | S.CER | C1608 JB 1H 102K-T      | B  | 158/11.8     |
| J801    | 6510021722 | S.CON | 30FLT-SM2-TB(LF)(SN)(M) | T  | 99.9/85      |
| J802    | 6510021722 | S.CON | 30FLT-SM2-TB(LF)(SN)(M) | T  | 80/85        |
| J901    | 6510018921 | S.CON | B8B-PH-SM4-TB(LF)(SN)   | T  | 150.9/11.5   |
| J1001   | 6510024151 | S.CON | 50FY-BMT-TB(LF)(SN)     | T  | 170.2/21.3   |
| J1002   | 6510022191 | S.CON | B3B-PH-SM4-TB(LF)(SN)   | T  | 192.5/19.1   |
| J1101   | 6510024151 | S.CON | 50FY-BMT-TB(LF)(SN)     | T  | 170.2/3.6    |
| S51     | 2260002740 | S.SWI | LS8J2M-T                | T  | 73.1/75.9    |
| W605    | 7120000470 | JUM   | ERDS2T0                 |    |              |
| EP203   | 6910012350 | S.BEA | MMZ1608Y 102BT          | T  | 50.8/65.6    |
| EP204   | 6910012350 | S.BEA | MMZ1608Y 102BT          | T  | 57.5/89      |
| EP801   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 82.1/88.8    |
| EP802   | 6910014690 | S.BEA | MPZ1608S221A-T          | T  | 80.5/88.4    |
| EP803   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 81.7/80.7    |
| EP804   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 79.9/80.7    |
| EP805   | 6910014690 | S.BEA | MPZ1608S221A-T          | T  | 78.4/80.8    |
| EP806   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 76.8/80.8    |
| EP807   | 6910012350 | S.BEA | MMZ1608Y 102BT          | T  | 75.3/81.1    |
| EP808   | 6910012350 | S.BEA | MMZ1608Y 102BT          | T  | 75.8/88.4    |
| EP809   | 6910012350 | S.BEA | MMZ1608Y 102BT          | T  | 74/81.1      |
| EP810   | 6910012350 | S.BEA | MMZ1608Y 102BT          | T  | 73.9/88.4    |
| EP811   | 6910012350 | S.BEA | MMZ1608Y 102BT          | T  | 72.7/88.4    |
| EP814   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 64.2/93.8    |
| EP851   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 166.8/95.1   |
| EP852   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 194.6/96.7   |
| EP853   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 165.2/96.9   |
| EP854   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 192.1/97.8   |
| EP871   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 192.8/42.6   |
| EP872   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 163.6/46     |
| EP873   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 190.2/41.5   |
| EP874   | 6910014730 | S.BEA | MPZ2012S331A-T          | T  | 165.4/44.4   |
| EP1001  | 6910014640 | S.BEA | MPZ2012S221A-T          | B  | 188/24.7     |
| EP1002  | 6910014690 | S.BEA | MPZ1608S221A-T          | T  | 155.4/26.1   |
| EP1003  | 6910014690 | S.BEA | MPZ1608S221A-T          | T  | 156.7/26.1   |
| EP1004  | 6910014690 | S.BEA | MPZ1608S221A-T          | T  | 158/26.1     |
| EP1005  | 6910014690 | S.BEA | MPZ1608S221A-T          | T  | 159.3/26.1   |



**[LOGIC UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION          | M. | H/V LOCATION |
|---------|------------|----------------------|----|--------------|
| EP1006  | 6910014690 | S.BEA MPZ1608S221A-T | T  | 160.6/26.1   |
| EP1007  | 6910014690 | S.BEA MPZ1608S221A-T | T  | 163.1/26.1   |
| EP1008  | 6910014690 | S.BEA MPZ1608S221A-T | T  | 179.1/29.9   |
| EP1009  | 6910014690 | S.BEA MPZ1608S221A-T | T  | 185.1/26.1   |

**[MAIN UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| IC1201  | 1110003870 | S.IC NJM2058M-TE1-#ZZZB         | B  | 43.2/129.3   |
| IC1301  | 1110003870 | S.IC NJM2058M-TE1-#ZZZB         | B  | 18.8/131.1   |
| IC1401  | 1130011530 | S.IC CD74HC4094M96              | B  | 54.9/96.2    |
| IC1402  | 1130011530 | S.IC CD74HC4094M96              | B  | 54.9/108.1   |
| IC1403  | 1130012000 | S.IC M62352AGP C60Q             | T  | 58.6/95      |
| IC1404  | 1120002830 | S.IC NJM2125F-TE1-#FZZB         | T  | 168.4/132.6  |
| IC2001  | 1110003870 | S.IC NJM2058M-TE1-#ZZZB         | B  | 174.6/75.2   |
| IC2101  | 1190002261 | S.IC USB2502-AEZG               | T  | 162.7/34.5   |
| IC2102  | 1130013010 | S.IC SN74AHC1G08DCK3            | T  | 162.3/40.3   |
| IC2103  | 1180003480 | S.REG NJU7772F33-TE1-#ZZZB      | T  | 176/33.9     |
| IC2104  | 1180003480 | S.REG NJU7772F33-TE1-#ZZZB      | T  | 176.4/27.9   |
| IC2121  | 1190002730 | S.IC CP2102-GMR <MAC>           | T  | 177.2/41.5   |
| IC2131  | 1130007021 | S.IC TC7S66FU(TE85L,F)          | T  | 174.4/58.6   |
| IC2132  | 1190002240 | S.IC PCM2901E/2K                | T  | 160.5/53.1   |
| IC2201  | 1130005252 | S.IC TC74HC08AF(EL,F)           | B  | 182/47.2     |
| IC2202  | 1130005721 | S.IC TC7W04F(TE12L,F)           | B  | 184.1/39.6   |
| IC2301  | 1110003870 | S.IC NJM2058M-TE1-#ZZZB         | B  | 97.7/18.9    |
| IC2312  | 1110003091 | IC LA4425A-E                    |    |              |
| IC2331  | 1110006300 | S.IC NJM2172V-TE1-#ZZZB         | T  | 92.6/10.2    |
| IC2362  | 1120002830 | S.IC NJM2125F-TE1-#FZZB         | T  | 100.6/19.3   |
| IC2601  | 1110006300 | S.IC NJM2172V-TE1-#ZZZB         | T  | 11.6/63.4    |
| IC3001  | 1130012900 | S.IC TC74LCX00FT (EL)           | T  | 144.2/38.8   |
| IC3002  | 1130013110 | S.IC KIC7W53FK-RTK/P            | T  | 89/22.1      |
| IC3201  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 124/41.4     |
| IC3202  | 1110006190 | S.IC NJM074M-TE1-#ZZZB          | B  | 124/51.6     |
| IC3203  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 124/61.2     |
| IC3301  | 1110005100 | S.IC NJM072BM-TE1-#ZZZB         | B  | 129.8/30.7   |
| IC3303  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 121.2/30.7   |
| IC3401  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 104.1/35.1   |
| IC3402  | 1110005461 | S.IC TA4107F(TE12L,F)           | T  | 108.3/48.8   |
| IC3501  | 1130013110 | S.IC KIC7W53FK-RTK/P            | T  | 107.8/59.6   |
| IC3502  | 1130013110 | S.IC KIC7W53FK-RTK/P            | T  | 109.4/76.3   |
| IC3651  | 1180003210 | S.REG NJM2831F                  | T  | 167.8/80.1   |
| IC3715  | 1110006420 | S.IC UPC2708TB-E3-A             | T  | 144/101.5    |
| IC4001  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 79.3/21.6    |
| IC4002  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 79.2/12.2    |
| IC4003  | 1180003490 | S.REG NJM2871BF04-TE1-#ZZZB     | T  | 63.8/9.1     |
| IC4004  | 1190002920 | S.IC PCM4202PFB                 | T  | 65.9/19.5    |
| IC4005  | 1130013440 | S.IC SN74LVC2G74DCTR            | T  | 58.4/12.9    |
| IC4101  | 1130005971 | S.IC TC74HC4053AF(F) S          | B  | 90.8/71.4    |
| IC4201  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 78.3/52.8    |
| IC4202  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 71.1/44.9    |
| IC4204  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 80/44.9      |
| IC4205  | 1110001901 | S.IC UPC4570G2-E1-A             | B  | 79.4/73.4    |
| IC4301  | 1190002650 | S.IC AK4620BVP-E2/P             | T  | 67.3/37.7    |
| IC4302  | 1110004770 | S.IC BU9480F-E2                 | B  | 78.1/62.7    |
| IC4401  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 79.3/31.5    |
| IC4402  | 1110003870 | S.IC NJM2058M-TE1-#ZZZB         | B  | 91.2/59.9    |
| IC4501  | 1130015150 | S.IC CY22381FXC(SX-3073G)       | B  | 66.4/89.1    |
| IC4502  | 1130011930 | S.IC SN74LVC1G04DCKR            | T  | 67.3/86.7    |
| IC5001  | 1140014800 | S.IC TMS320C6726BRFP266         | T  | 41.5/23.4    |
| IC5002  | 1130015210 | S.IC EN29LV040A-70SCP(SX-3073C) | T  | 17.4/23.1    |
| IC5101  | 1140014320 | S.IC TMS320C6720BRFP200         | T  | 50.8/62.9    |
| IC5102  | 1130015220 | S.IC EN29LV040A-70SCP(SX-3073D) | T  | 26.7/62.7    |
| IC6001  | 1120002830 | S.IC NJM2125F-TE1-#FZZB         | T  | 151.2/113.4  |
| IC6002  | 1180000720 | S.IC AN79L05M-(E1)              | B  | 110.4/90.9   |
| IC6003  | 1190002880 | S.IC AD9834CRUZ-REEL7 <FE>      | T  | 80.6/128     |
| IC6004  | 1190002890 | S.IC ADF4360-8BCPZRL7 <FE>      | T  | 79.7/106     |
| IC6005  | 1110006131 | S.IC UPC4094G2-E1-A             | B  | 104.6/81     |
| IC6006  | 1110006131 | S.IC UPC4094G2-E1-A             | B  | 96.1/81      |
| IC6007  | 1190002900 | S.IC ADS7886SDCKR               | T  | 84/76        |
| IC6008  | 1130013440 | S.IC SN74LVC2G74DCTR            | T  | 92.3/107.7   |
| IC6009  | 1110006131 | S.IC UPC4094G2-E1-A             | B  | 88.7/81      |
| IC6010  | 1130011930 | S.IC SN74LVC1G04DCKR            | T  | 71.5/106.9   |
| IC6020  | 1130011930 | S.IC SN74LVC1G04DCKR            | T  | 92.3/112.3   |
| Q1101   | 1540000550 | S.TRA 2SD1664 T100Q             | B  | 4.6/92.4     |
| Q1102   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 7.9/96.5     |
| Q1103   | 1540000550 | S.TRA 2SD1664 T100Q             | B  | 4.6/99.1     |
| Q1111   | 1540000550 | S.TRA 2SD1664 T100Q             | B  | 4.6/106.7    |
| Q1112   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 7.9/104.1    |
| Q1201   | 1560001260 | S.FET 2SK3018 T106              | T  | 42.9/125.7   |
| Q1202   | 1590003780 | S.TRA KRA304E-RTK/P             | T  | 45.2/126     |
| Q1241   | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 36.3/123     |
| Q1242   | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 39.1/123     |
| Q1243   | 1510000510 | S.TRA 2SA1576A T106R            | B  | 20.9/120.8   |
| Q1251   | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 43.3/119.7   |
| Q1252   | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 47.5/119.1   |
| Q1253   | 1590003790 | S.TRA KRC404E RTK/P             | T  | 59/120.2     |
| Q1254   | 1560001260 | S.FET 2SK3018 T106              | T  | 59.1/110.5   |
| Q1255   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 56.1/110.6   |
| Q1256   | 1590003680 | S.TRA KRC402 RTK/P              | T  | 59.3/126.5   |
| Q1257   | 1590003680 | S.TRA KRC402 RTK/P              | T  | 59.3/135.6   |
| Q1401   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 57.2/101.7   |
| Q2001   | 1590003680 | S.TRA KRC402 RTK/P              | T  | 166.9/145.3  |
| Q2031   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 172.1/148.3  |
| Q2041   | 1540000451 | S.TRA 2SD1623T-TD-E             | B  | 187.3/146    |
| Q2042   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 179.8/145.3  |
| Q2043   | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 184.7/148    |
| Q2051   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 162.6/145.3  |

**[MAIN UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION |                             | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------------|----|--------------|
| Q2101   | 1590003770 | S.TRA       | KRA302E-RTK/P               | T  | 159.4/41.8   |
| Q2102   | 1590003680 | S.TRA       | KRC402 RTK/P                | T  | 159.6/39.5   |
| Q2201   | 1590001650 | S.TRA       | XP4601(TX)                  | T  | 189.8/40.3   |
| Q2301   | 1590003680 | S.TRA       | KRC402 RTK/P                | T  | 145.7/5.2    |
| Q2302   | 1590003680 | S.TRA       | KRC402 RTK/P                | T  | 139.6/5.2    |
| Q2311   | 1540000471 | S.TRA       | 2SD1801S-TL-E               | B  | 132.5/9.5    |
| Q2312   | 1560001330 | S.FET       | RSR025N03                   | T  | 109.1/16     |
| Q2361   | 1550000010 | S.FET       | 2SJ364-Q (TX)               | T  | 101.5/26.6   |
| Q3001   | 1530002601 | S.TRA       | 2SC4215-O(TE85R,F)          | B  | 145.3/32.9   |
| Q3201   | 1530003450 | S.TRA       | 2SC4835-R(TX)               | T  | 120.3/74.8   |
| Q3202   | 1530003450 | S.TRA       | 2SC4835-R(TX)               | T  | 126.8/74.8   |
| Q3501   | 1580000751 | S.FET       | 3SK294(TE85L,F)             | T  | 108.6/55.6   |
| Q3502   | 1590003680 | S.TRA       | KRC402 RTK/P                | T  | 99.9/60.5    |
| Q3504   | 1560000561 | S.FET       | 2SK882-GR(TE85L,F)          | B  | 114.1/85.7   |
| Q3601   | 1530003021 | S.TRA       | 2SC4402-3-TL-E              | B  | 152.7/82.8   |
| Q3602   | 1530003021 | S.TRA       | 2SC4402-3-TL-E              | B  | 159.2/81     |
| Q3603   | 1530003842 | S.TRA       | 2SC5501A-4-TR-E             | T  | 162.4/86.6   |
| Q6003   | 1530003900 | S.TRA       | KTC4075 BL-RTK/P            | T  | 150.3/119    |
| Q6004   | 1530003240 | S.TRA       | 2SC4536 QS-T1               | T  | 134/110.5    |
| Q6005   | 1560000561 | S.FET       | 2SK882-GR(TE85L,F)          | B  | 110.5/100.4  |
| Q6006   | 1530003340 | S.TRA       | 2SC3357-T1 RF               | T  | 96.2/132.1   |
| Q6007   | 1560000561 | S.FET       | 2SK882-GR(TE85L,F)          | T  | 114.8/104.4  |
| Q6008   | 1590003680 | S.TRA       | KRC402 RTK/P                | T  | 85.5/107.4   |
|         |            |             |                             |    |              |
| D1001   | 1790000661 | S.DIO       | MA2J7280GL(TX)              | B  | 27.6/104.3   |
| D1002   | 1790000661 | S.DIO       | MA2J7280GL(TX)              | B  | 30.1/104.3   |
| D1101   | 1750001180 | S.DIO       | KDS122 RTK/P                | T  | 7.9/100.3    |
| D1111   | 1750001180 | S.DIO       | KDS122 RTK/P                | T  | 7.9/107.9    |
| D1201   | 1730002341 | S.ZEN       | MAZ8047GML                  | T  | 44.5/128.3   |
| D1202   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 47.2/123.3   |
| D1203   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 39.2/122.8   |
| D1204   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 39.2/135.2   |
| D1205   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 36.3/127     |
| D1206   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 36.8/130.1   |
| D1251   | 1790000661 | S.DIO       | MA2J7280GL(TX)              | B  | 44.6/122.8   |
| D1252   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 57.4/112.8   |
| D1302   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 12.2/138.6   |
| D1303   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 23.5/136.6   |
| D1304   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 27.3/126.7   |
| D1401   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 65.2/101.4   |
| D1406   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 17/88        |
| D1407   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 19/88        |
| D1408   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 21/88        |
| D2031   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 172.1/145.1  |
| D2041   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 183.5/145.1  |
| D2101   | 1790000980 | S.DIO       | MA742(TX)                   | T  | 169.5/29.6   |
| D2102   | 1790000980 | S.DIO       | MA742(TX)                   | T  | 172/29.6     |
| D2131   | 1750001180 | S.DIO       | KDS122 RTK/P                | T  | 171.8/61.5   |
| D2201   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 192.3/37     |
| D2301   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 147.2/6.9    |
| D2302   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 141.1/6.9    |
| D2361   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 101.3/24.5   |
| D3201   | 1750000431 | S.DIO       | HSB88WSTR-E                 | T  | 145.5/63     |
| D3202   | 1750000431 | S.DIO       | HSB88WSTR-E                 | T  | 137.7/66.1   |
| D3301   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 126.2/33.1   |
| D3302   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 126.2/28.3   |
| D3701   | 1750000581 | S.DIO       | 1SV307(TPH3,F)              | B  | 155.8/93.6   |
| D3702   | 1750000581 | S.DIO       | 1SV307(TPH3,F)              | B  | 148.5/94.8   |
| D3703   | 1750000431 | S.DIO       | HSB88WSTR-E                 | T  | 135.1/91     |
| D4001   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 78.6/22.5    |
| D4002   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 78.6/20.7    |
| D4101   | 1790001041 | S.ZEN       | MAZ8033GLL                  | B  | 84.1/77.7    |
| D4102   | 1790001041 | S.ZEN       | MAZ8033GLL                  | B  | 97.8/69.9    |
| D6001   | 1750000971 | S.DIO       | CPH5513-TL-E                | T  | 162.4/116.5  |
| D6002   | 1750000441 | S.DIO       | 1SV263-TL-E                 | B  | 161/120.2    |
| D6003   | 1750000971 | S.DIO       | CPH5513-TL-E                | T  | 160.5/122.8  |
| D6004   | 1750000431 | S.DIO       | HSB88WSTR-E                 | T  | 93.4/92.5    |
| D6005   | 1750000431 | S.DIO       | HSB88WSTR-E                 | T  | 118.6/127.1  |
|         |            |             |                             |    |              |
| FI3501  | 2020001070 | CER         | CFWLA455KDFA-B0 (CFWS455D)  |    |              |
| FI3502  | 2020001510 | CER         | CFWLA455KJFA-B0 (CFWS455IT) |    |              |
| FI5001  | 2040000790 | S.LC        | EXCCET103U                  | T  | 37.6/41.4    |
| FI5101  | 2040000790 | S.LC        | EXCCET103U                  | T  | 41.1/81      |
| FI6001  | 2030000290 | S.MON       | DSF753SBF 45 MHz (FL-357)   | T  | 111.9/111    |
|         |            |             |                             |    |              |
| X2101   | 6050012780 | S.XTA       | CR-871 DSX321G 24 MHz       | T  | 160.3/25.2   |
| X2131   | 6050012770 | S.XTA       | CR-870 DSX321G 12 MHz       | T  | 164.4/60.8   |
|         |            |             |                             |    |              |
| L1501   | 6190002000 | S.COI       | SLF12575T-330M3R2-PF        | T  | 163.1/13.9   |
| L1901   | 6200003241 | S.COI       | NLV32T-221J                 | T  | 145.2/141.7  |
| L1902   | 6200003241 | S.COI       | NLV32T-221J                 | T  | 145.2/138.7  |
| L2001   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/138.7    |
| L2002   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/135.6    |
| L2003   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/129.4    |
| L2004   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/132.5    |
| L2005   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/126.3    |
| L2006   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/118      |
| L2007   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/114.9    |
| L2311   | 6180003640 | COI         | SZW1012T-142-0.3            |    |              |
| L2331   | 6200002041 | S.COI       | NLV25T-101J                 | B  | 87.9/10.6    |
| L2501   | 6200002041 | S.COI       | NLV25T-101J                 | B  | 179.7/94.9   |
| L2601   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 17.1/68.5    |
| L3001   | 6200001831 | S.COI       | NLV32T-100J                 | B  | 139.7/37.3   |
| L3002   | 6200001831 | S.COI       | NLV32T-100J                 | B  | 139.7/40.3   |
| L3003   | 6200002520 | S.COI       | ELJNC R18K-F                | T  | 147.7/43.3   |
| L3201   | 6200003520 | S.COI       | ELJFB 102K-F                | T  | 125.7/68.9   |
| L3202   | 6140002810 | S.COI       | LR-317                      | T  | 145.5/69     |
| L3203   | 6140002810 | S.COI       | LR-317                      | T  | 145.5/57     |
| L3204   | 6140002810 | S.COI       | LR-317                      | T  | 137.7/60.1   |
| L3205   | 6140002810 | S.COI       | LR-317                      | T  | 137.7/72.1   |



## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| L3401   | 6200002041 | S.COI NLV25T-101J           | B  | 109.3/47.8   |
| L3402   | 6200002041 | S.COI NLV25T-101J           | B  | 112.3/48.1   |
| L3403   | 6200002041 | S.COI NLV25T-101J           | B  | 112.7/43.5   |
| L3501   | 6200002041 | S.COI NLV25T-101J           | B  | 101.9/54.2   |
| L3502   | 6200003520 | S.COI ELJFB 102K-F          | B  | 105.7/55     |
| L3503   | 6150004090 | COI LS-469 (C-13969)        |    |              |
| L3601   | 6200005011 | S.COI NLV25T-100J           | B  | 163.6/79.4   |
| L3602   | 6190001621 | COI #E544EN-100028          |    |              |
| L3603   | 6140003930 | COI LR-492                  |    |              |
| L3604   | 6200007750 | S.COI LQW2BHN56NJ03L        | B  | 162.5/93.2   |
| L3605   | 6200007770 | S.COI LQW2BHN10J03L         | B  | 159.8/94.1   |
| L3701   | 6140004680 | S.COI LR-528 4KBL           | T  | 128.2/91     |
| L3702   | 6140002810 | S.COI LR-317                | T  | 142.1/91     |
| L3703   | 6200003281 | S.COI NLV25T-2R2J           | B  | 159.7/97.9   |
| L3704   | 6200003281 | S.COI NLV25T-2R2J           | B  | 149.6/86.7   |
| L3705   | 6200003281 | S.COI NLV25T-2R2J           | B  | 154.8/96.8   |
| L3715   | 6200005041 | S.COI NLV25T-220J           | B  | 144.5/100.6  |
| L4001   | 6200001831 | S.COI NLV32T-100J           | B  | 60.4/11.9    |
| L4301   | 6200001831 | S.COI NLV32T-100J           | T  | 58.1/43.6    |
| L4302   | 6200001831 | S.COI NLV32T-100J           | T  | 64.1/31.4    |
| L4303   | 6200001831 | S.COI NLV32T-100J           | T  | 72/66.3      |
| L4501   | 6200001831 | S.COI NLV32T-100J           | T  | 73.3/87.3    |
| L5001   | 6200011900 | S.COI LQH43CN100K03L        | T  | 44/41.9      |
| L5101   | 6200011900 | S.COI LQH43CN100K03L        | T  | 35.7/78.9    |
| L6001   | 6200001831 | S.COI NLV32T-100J           | T  | 157.4/118    |
| L6003   | 6200001831 | S.COI NLV32T-100J           | B  | 85.3/134.6   |
| L6004   | 6200001831 | S.COI NLV32T-100J           | T  | 163.9/120.3  |
| L6005   | 6200001831 | S.COI NLV32T-100J           | B  | 76.3/134.2   |
| L6006   | 6200001831 | S.COI NLV32T-100J           | B  | 161.6/123.3  |
| L6008   | 6200001831 | S.COI NLV32T-100J           | B  | 148.7/117.5  |
| L6009   | 6200005051 | S.COI NLV25T-330J           | B  | 98.5/89.9    |
| L6010   | 6200013650 | S.COI LQW18ANR27G00D        | T  | 74.8/104.3   |
| L6011   | 6200013650 | S.COI LQW18ANR27G00D        | T  | 75.6/107.4   |
| L6012   | 6200001831 | S.COI NLV32T-100J           | T  | 155.8/123.4  |
| L6013   | 6200002041 | S.COI NLV25T-101J           | B  | 103.4/75.7   |
| L6014   | 6200010940 | S.COI C2520C-39NG-A         | T  | 155.9/128.3  |
| L6015   | 6200001831 | S.COI NLV32T-100J           | B  | 83/110.3     |
| L6016   | 6140004680 | S.COI LR-528 4KBL           | T  | 87.4/92.5    |
| L6017   | 6200002041 | S.COI NLV25T-101J           | B  | 90.1/87.6    |
| L6018   | 6200010860 | S.COI C2520C-R10G-A (0.1U)  | T  | 152.3/129.1  |
| L6019   | 6200002911 | S.COI NLV25T-2R2J           | B  | 87.3/121.6   |
| L6020   | 6140004680 | S.COI LR-528 4KBL           | T  | 99.4/92.5    |
| L6021   | 6200004961 | S.COI NLV25T-R33J           | T  | 88.1/122.4   |
| L6022   | 6200001831 | S.COI NLV32T-100J           | B  | 83/107       |
| L6023   | 6150004280 | COI LS-484B (C-14927)       |    |              |
| L6024   | 6200002651 | S.COI NLV25T-R18J           | B  | 76.5/111.3   |
| L6025   | 6200002651 | S.COI NLV25T-R18J           | B  | 79.3/111.3   |
| L6026   | 6200010450 | S.COI C2520C-R82G-A (0.82U) | T  | 139.7/118.6  |
| L6027   | 6200009851 | S.COI NLV25T-R33J           | B  | 91.4/120.4   |
| L6028   | 6150004280 | COI LS-484B (C-14927)       |    |              |
| L6029   | 6200009851 | S.COI NLV25T-R33J           | B  | 94.2/125.7   |
| L6030   | 6200001831 | S.COI NLV32T-100J           | T  | 115.1/99.3   |
| L6031   | 6200002690 | S.COI MLF1608A 1R0M-T       | B  | 139.6/113.7  |
| L6032   | 6150004280 | COI LS-484B (C-14927)       |    |              |
| L6033   | 6140003790 | COI LR-442                  |    |              |
| L6034   | 6200001831 | S.COI NLV32T-100J           | T  | 128/117      |
| L6035   | 6200001831 | S.COI NLV32T-100J           | T  | 128/111.5    |
| L6036   | 6200004961 | S.COI NLV25T-R33J           | T  | 90.5/133.4   |
| L6037   | 6150004280 | COI LS-484B (C-14927)       |    |              |
| L6038   | 6200009851 | S.COI NLV25T-R33J           | B  | 103.4/131.5  |
| L6039   | 6140002810 | S.COI LR-317                | T  | 124.6/127.1  |
| L6040   | 6140002810 | S.COI LR-317                | T  | 113.1/127.1  |
| L6041   | 6150004250 | COI LS-471A (C-14922)       |    |              |
| L6042   | 6200011670 | S.COI LQW18ANR28NG00D       | T  | 110.6/117    |
| L6043   | 6200002651 | S.COI NLV25T-R18J           | T  | 95.2/102     |
| L6044   | 6200002841 | S.COI NLV25T-R22J           | T  | 91.6/101.1   |
| L6045   | 6200002611 | S.COI NLV25T-R47J           | B  | 107/134.4    |
| L6046   | 6200005140 | S.COI MLF1608D R33K-T       | B  | 72.5/118.6   |
| L6047   | 6200003540 | S.COI MLF1608D R22K-T       | B  | 77.3/119.3   |
|         |            |                             |    |              |
| R1001   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/114.7   |
| R1002   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/113.2   |
| R1003   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/111.9   |
| R1004   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/110.6   |
| R1005   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/109.3   |
| R1006   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/108     |
| R1007   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/106.7   |
| R1008   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/105.4   |
| R1009   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/109.4   |
| R1010   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/108.1   |
| R1011   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/106.8   |
| R1012   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/105.5   |
| R1013   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/104.2   |
| R1014   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/102.9   |
| R1015   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/101.6   |
| R1016   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/100.3   |
| R1017   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/99      |
| R1018   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/100.2   |
| R1019   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/98.9    |
| R1020   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/97.7    |
| R1021   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/97.6    |
| R1022   | 7030003860 | S.RES ERJ3GE JPW V          | T  | 13.8/96.4    |
| R1023   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/95.1    |
| R1024   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/93.8    |
| R1025   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/96.3    |
| R1026   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/95      |
| R1027   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/93.7    |
| R1028   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/92.4    |
| R1029   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/91.1    |
| R1030   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 25.1/104.1   |
| R1031   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 25.1/89.8    |
| R1051   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/116.5   |
| R1052   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/115.2   |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                       | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------|----|--------------|
| R1053   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/113.9   |
| R1054   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/117.8   |
| R1055   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/116.5   |
| R1056   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/115.2   |
| R1057   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/113.9   |
| R1058   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/112.6   |
| R1059   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/112.6   |
| R1060   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/111.3   |
| R1061   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/110     |
| R1062   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/111.3   |
| R1063   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/110     |
| R1064   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/108.7   |
| R1065   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/107.4   |
| R1066   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/106.1   |
| R1067   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/104.8   |
| R1068   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/103.5   |
| R1069   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/108.7   |
| R1070   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/107.4   |
| R1071   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 33.4/102.2   |
| R1072   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 33.4/100.9   |
| R1073   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 33.4/99.6    |
| R1074   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 33.4/98.3    |
| R1075   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 33.1/97      |
| R1076   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 33.5/95.7    |
| R1077   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 33.5/94.4    |
| R1078   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/93.1    |
| R1079   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/91.8    |
| R1080   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/90.5    |
| R1081   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/106.1   |
| R1082   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/104.8   |
| R1083   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/103.5   |
| R1084   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/102.2   |
| R1085   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/100.9   |
| R1086   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/89.2    |
| R1087   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/99.6    |
| R1088   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/87.9    |
| R1089   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/86.6    |
| R1090   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 34.2/85.3    |
| R1091   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/98.3    |
| R1092   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/97      |
| R1093   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/95.7    |
| R1094   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/94.4    |
| R1095   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/93.1    |
| R1096   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/91.8    |
| R1097   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/90.5    |
| R1098   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 47.1/89.2    |
| R1101   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 8/93.2       |
| R1102   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 5.3/93.2     |
| R1103   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 8/94.5       |
| R1104   | 7030006210 | S.RES       | ERJ12YJ4R7U (4.7)     | T  | 3.3/98.7     |
| R1105   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 2/96.1       |
| R1106   | 7030003240 | S.RES       | ERJ3GEYJ 220 V (22)   | B  | 8.9/96.5     |
| R1107   | 7030003240 | S.RES       | ERJ3GEYJ 220 V (22)   | B  | 8.9/95.2     |
| R1111   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 8/102.2      |
| R1112   | 7030006210 | S.RES       | ERJ12YJ4R7U (4.7)     | T  | 3.3/106.3    |
| R1113   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 2/103.7      |
| R1201   | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | T  | 47.4/121.7   |
| R1202   | 7030003840 | S.RES       | ERJ3GEYJ 225 V (2.2M) | B  | 50.1/122.6   |
| R1203   | 7030011360 | S.RES       | ERJ8GEYJ 241V (240)   | T  | 49.3/128     |
| R1205   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 39.9/129.3   |
| R1206   | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | B  | 38.1/129.7   |
| R1207   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 36.1/123.9   |
| R1208   | 7030003620 | S.RES       | ERJ3GEYJ 333 V (33K)  | T  | 46.5/137.7   |
| R1209   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | T  | 43.7/137.7   |
| R1210   | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 47.3/134.6   |
| R1211   | 7310005390 | S.TRI       | EVM-3VSX50 BQ3 (472)  | T  | 44.2/134.9   |
| R1212   | 7030003450 | S.RES       | ERJ3GEYJ 122 V (1.2K) | B  | 43/135.7     |
| R1213   | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 35.6/130.9   |
| R1214   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 47.5/124.8   |
| R1215   | 7030003720 | S.RES       | ERJ3GEYJ 224 V (220K) | B  | 37.4/125.4   |
| R1216   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | B  | 35.6/127.7   |
| R1217   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 39.3/126.7   |
| R1218   | 7030003660 | S.RES       | ERJ3GEYJ 683 V (68K)  | T  | 39.3/128     |
| R1219   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | T  | 36.6/125.5   |
| R1220   | 7030003720 | S.RES       | ERJ3GEYJ 224 V (220K) | B  | 38.1/132.9   |
| R1221   | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)  | B  | 36.8/134.4   |
| R1222   | 7030003740 | S.RES       | ERJ3GEYJ 334 V (330K) | B  | 49.9/133.1   |
| R1223   | 7510001511 | S.THE       | NTCG16 4LH 223JT      | T  | 36.2/128.6   |
| R1224   | 7030005681 | S.RES       | ERA3YKD 473V (47K)    | B  | 53/133.9     |
| R1225   | 7030008121 | S.RES       | ERA3YED 682V (6.8K)   | B  | 50.7/134.6   |
| R1226   | 7030009861 | S.RES       | ERA3YED 471V (47K)    | T  | 47.3/130.9   |
| R1227   | 7310005370 | S.TRI       | EVM-3VSX50 BQ2 (471)  | T  | 44.2/131.2   |
| R1228   | 7030008121 | S.RES       | ERA3YED 682V (6.8K)   | B  | 50.7/131.4   |
| R1229   | 7030005681 | S.RES       | ERA3YKD 473V (47K)    | B  | 50.7/129.8   |
| R1241   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 37.4/121     |
| R1242   | 7030003720 | S.RES       | ERJ3GEYJ 224 V (220K) | T  | 39.3/125.4   |
| R1243   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | B  | 21.9/124.3   |
| R1244   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | B  | 24/125.1     |
| R1245   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | B  | 18.7/121.5   |
| R1251   | 7030003310 | S.RES       | ERJ3GEYJ 820 V (82)   | B  | 41.1/118.7   |
| R1252   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 47/121.6     |
| R1253   | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)  | B  | 48.3/123.1   |
| R1254   | 7030009920 | S.RES       | ERJ3GEYJ 335 V (3.3M) | B  | 50.7/125.9   |
| R1255   | 7310005420 | S.TRI       | EVM-3VSX50 B15 (104)  | T  | 55.4/121.2   |
| R1256   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | T  | 52.9/111.3   |
| R1257   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 52.9/113.1   |
| R1258   | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | T  | 57.7/114.3   |
| R1259   | 7030003760 | S.RES       | ERJ3GEYJ 474 V (470K) | B  | 53/125.9     |
| R1260   | 7030003720 | S.RES       | ERJ3GEYJ 224 V (220K) | T  | 53.6/130     |
| R1262   | 7310005430 | S.TRI       | EVM-3VSX50 BE5 (224)  | T  | 55.4/127.5   |
| R1263   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | B  | 54.8/125.9   |
| R1264   | 7030003620 | S.RES       | ERJ3GEYJ 333 V (33K)  | T  | 56.3/130     |
| R1267   | 7310005430 | S.TRI       | EVM-3VSX50 BE5 (224)  | T  | 55.4/136.4   |
| R1268   | 7030003600 | S.RES       | ERJ3GEYJ 223 V (22K)  | T  | 56.3/131.3   |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R1272   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 45.7/119.9   |
| R1301   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 18/124.3     |
| R1302   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 19.1/137.8   |
| R1303   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 8.8/139.1    |
| R1304   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 9/136.3      |
| R1305   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 26.6/136.6   |
| R1306   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 27.5/134.2   |
| R1307   | 7030003730 | S.RES ERJ3GEYJ 274 V (270K) | B  | 12.5/136     |
| R1308   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 25.1/135     |
| R1309   | 7030009920 | S.RES ERJ3GEYJ 335 V (3.3M) | B  | 24.9/127.4   |
| R1310   | 7030003820 | S.RES ERJ3GEYJ 155 V (1.5M) | B  | 8.5/132      |
| R1311   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 10.1/133.8   |
| R1312   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | B  | 12.9/132     |
| R1313   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 24.3/133.7   |
| R1314   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | B  | 24.3/131.1   |
| R1315   | 7030003740 | S.RES ERJ3GEYJ 334 V (330K) | B  | 7.8/129.6    |
| R1317   | 7030003820 | S.RES ERJ3GEYJ 155 V (1.5M) | B  | 19.9/124.4   |
| R1318   | 7030003840 | S.RES ERJ3GEYJ 225 V (2.2M) | B  | 25.1/129.8   |
| R1319   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 12.6/128.2   |
| R1401   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 165.7/130.2  |
| R1402   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 168.5/130.2  |
| R1403   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 171.3/130.2  |
| R1404   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 170.9/135.7  |
| R1405   | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 61.9/102.7   |
| R1406   | 7030008061 | S.RES ERA3YED 222V (2.2K)   | B  | 61.5/101.4   |
| R1407   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 11.6/91.6    |
| R1408   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 13/91.6      |
| R1701   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 137.8/139.9  |
| R1702   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 136.5/139.9  |
| R1703   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 135.2/139.9  |
| R1705   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 132.6/139.9  |
| R1706   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 131.3/139.9  |
| R1801   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 50.6/142.5   |
| R1802   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 51.9/142.5   |
| R1803   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 53.2/142.5   |
| R1804   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 54.5/142.5   |
| R1805   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 55.8/142.5   |
| R1806   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 57.1/142.5   |
| R1807   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 58.4/142.5   |
| R1808   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 59.7/142.5   |
| R1809   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 61/142.5     |
| R1810   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 62.3/142.5   |
| R2001   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | T  | 168.8/145.4  |
| R2002   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 173.1/81.7   |
| R2003   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 171.3/81.6   |
| R2004   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 168.3/73.8   |
| R2005   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 177.7/75.9   |
| R2006   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 174.4/69.6   |
| R2007   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 177.4/81.7   |
| R2008   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 181.5/81.7   |
| R2031   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 175.3/145.4  |
| R2032   | 7030003620 | S.RES ERJ3GEYJ 333 V (33K)  | T  | 174/145.4    |
| R2033   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 170.2/145.4  |
| R2034   | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 174/148.1    |
| R2041   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 183.1/148.1  |
| R2042   | 7030003620 | S.RES ERJ3GEYJ 333 V (33K)  | T  | 181.8/148.1  |
| R2043   | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 180.3/148.1  |
| R2044   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 176.6/145.4  |
| R2045   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 189.5/148.1  |
| R2046   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 186.9/148.1  |
| R2051   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 164.5/145.4  |
| R2052   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 164.5/148.1  |
| R2053   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 160.7/145.4  |
| R2062   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 176.6/73.4   |
| R2063   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 177.9/73.4   |
| R2101   | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 160.8/27.3   |
| R2102   | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 168.8/32     |
| R2103   | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 168.8/33.3   |
| R2104   | 7030003240 | S.RES ERJ3GEYJ 220 V (22)   | B  | 168.1/36.5   |
| R2105   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 157/34.1     |
| R2106   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 157.1/35.8   |
| R2107   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 155.3/37.4   |
| R2108   | 7030005691 | S.RES ERA3YED 123V (12K)    | B  | 166.1/29.7   |
| R2109   | 7030003240 | S.RES ERJ3GEYJ 220 V (22)   | B  | 168.8/34     |
| R2110   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 157.1/37.1   |
| R2111   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 168.9/38.1   |
| R2112   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 177.9/30.3   |
| R2113   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 166.8/40.1   |
| R2114   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 165.5/40.1   |
| R2115   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 170.5/67     |
| R2116   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 170.5/69.6   |
| R2117   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 177.5/69.6   |
| R2118   | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | B  | 182.4/72.8   |
| R2121   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 176.5/36.8   |
| R2131   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 174.1/61.3   |
| R2132   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 171.9/61.3   |
| R2133   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 171.2/58.8   |
| R2135   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 179.4/69.6   |
| R2137   | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 160.7/47.8   |
| R2138   | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 163.6/58.6   |
| R2139   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 175.9/55.4   |
| R2140   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 174.6/55.4   |
| R2141   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 173.3/55.4   |
| R2202   | 7030003590 | S.RES ERJ3GEYJ 183 V (18K)  | B  | 189.4/37.8   |
| R2203   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 189.3/38.3   |
| R2205   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 187.9/41.9   |
| R2206   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | T  | 189.8/43.9   |
| R2207   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 180.5/54.2   |
| R2208   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 182.9/35.4   |
| R2209   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 185.1/35.4   |
| R2201   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 149/5.3      |
| R2302   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 142.9/5.3    |
| R2303   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 7.9/70       |
| R2304   | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | B  | 12.7/69.2    |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R2305   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 94.4/5.7     |
| R2308   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 96/9.9       |
| R2311   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 136.4/19.5   |
| R2312   | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 108.1/4.7    |
| R2313   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | B  | 135.7/17.4   |
| R2314   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 99.8/6.8     |
| R2315   | 7030003660 | S.RES ERJ3GEYJ 683 V (68K)  | T  | 99.1/11.3    |
| R2318   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 131/15.2     |
| R2319   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 109.4/12.1   |
| R2320   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 114.1/17.5   |
| R2321   | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 100.9/12.3   |
| R2323   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 109.4/13.5   |
| R2324   | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | B  | 105.6/10     |
| R2325   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 110.1/20.3   |
| R2326   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 96/20.4      |
| R2327   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 98.2/15.7    |
| R2333   | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 64.1/96.9    |
| R2334   | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 64.1/98.1    |
| R2335   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 87.6/10      |
| R2336   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 96/12.9      |
| R2351   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 93.6/24.7    |
| R2352   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 90.5/20.5    |
| R2353   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 95.2/24.7    |
| R2354   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 96.8/25.5    |
| R2361   | 7030003350 | S.RES ERJ3GEYJ 332 V (3.3K) | B  | 103.6/13.4   |
| R2362   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 103.6/21.2   |
| R2363   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 100.8/24.2   |
| R2364   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | B  | 100.8/27.5   |
| R2365   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 98.4/24.7    |
| R2366   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 100.8/28.5   |
| R2367   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 98.4/27.5    |
| R2369   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 100.8/29.8   |
| R2370   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 103.7/25.7   |
| R2371   | 7030003700 | S.RES ERJ3GEYJ 154 V (150K) | T  | 101/22.9     |
| R2372   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 101/21.6     |
| R2373   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 99.5/15.7    |
| R2374   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 103.8/18.3   |
| R2375   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 103.8/21.6   |
| R2401   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 195.6/81.9   |
| R2601   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 4.7/60.2     |
| R2602   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 17.9/60      |
| R2603   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | T  | 17.9/61.3    |
| R2604   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 17.3/66.6    |
| R2605   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | T  | 17.9/65.4    |
| R2607   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 6.5/59.4     |
| R2608   | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | T  | 6/62         |
| R2609   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 6.5/56.8     |
| R3001   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 145.1/26.9   |
| R3002   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | B  | 143.1/27.4   |
| R3003   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 145.1/29.5   |
| R3004   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 143.1/35.8   |
| R3005   | 7030003630 | S.RES ERJ3GEYJ 393 V (39K)  | B  | 143.1/33     |
| R3006   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 144.8/34     |
| R3007   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 144.7/35.8   |
| R3008   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 147.7/37.6   |
| R3009   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 147.7/40.2   |
| R3010   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 146.1/43.4   |
| R3011   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 144.2/44.2   |
| R3013   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 86.5/27.6    |
| R3015   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 92.2/24      |
| R3016   | 7030003860 | S.RES ERJ3GE JPW V          | T  | 92.2/25.3    |
| R3201   | 7030010390 | S.RES ERA3YED 821V (820)    | B  | 116.5/39.6   |
| R3202   | 7030009691 | S.RES ERA3YED 101V (100)    | B  | 114.4/37.7   |
| R3203   | 7030008061 | S.RES ERA3YED 222V (2.2K)   | B  | 118.3/47.2   |
| R3204   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 129.1/48.3   |
| R3205   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 123.8/45.7   |
| R3206   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 126.6/57.5   |
| R3207   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 123.8/57.5   |
| R3208   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 122.6/48.5   |
| R3209   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 121/45.5     |
| R3210   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 118.2/50.7   |
| R3211   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 1            |



## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R3303   | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 132.7/39.3   |
| R3304   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 125.4/35.8   |
| R3305   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 125.4/25.6   |
| R3306   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 122.6/25.6   |
| R3307   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 123.2/37.3   |
| R3308   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 124.6/30.7   |
| R3309   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | B  | 119.2/25.6   |
| R3310   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 120.1/36.6   |
| R3311   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | B  | 116.7/33.8   |
| R3312   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 121.7/38.8   |
| R3313   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 123.5/36.9   |
| R3401   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 106/41.6     |
| R3402   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 104.7/41.6   |
| R3403   | 7030007230 | S.RES ERA3YED 102V (1K)     | B  | 94.1/33.3    |
| R3405   | 7030007230 | S.RES ERA3YED 102V (1K)     | B  | 95.6/34.6    |
| R3406   | 7030007230 | S.RES ERA3YED 102V (1K)     | B  | 97.7/38.2    |
| R3407   | 7030007230 | S.RES ERA3YED 102V (1K)     | B  | 104.4/38.5   |
| R3408   | 7030007230 | S.RES ERA3YED 102V (1K)     | B  | 109.2/36.9   |
| R3409   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 107.3/41.6   |
| R3410   | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 108.6/41.6   |
| R3411   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 102.2/34.2   |
| R3412   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 105.8/34.3   |
| R3413   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 110.7/48.5   |
| R3414   | 7030003410 | S.RES ERJ3GEYJ 561 V (560)  | B  | 114.2/48.4   |
| R3501   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 109.4/55.5   |
| R3502   | 7030003630 | S.RES ERJ3GEYJ 393 V (39K)  | T  | 108.6/52.4   |
| R3503   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 111.8/56.3   |
| R3504   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 111.8/55     |
| R3505   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 111.8/53.7   |
| R3506   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 108.6/53.7   |
| R3507   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 111.8/57.6   |
| R3508   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 102.6/57.6   |
| R3509   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 112.6/75.4   |
| R3510   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 112.6/78.2   |
| R3511   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 105.4/53.7   |
| R3512   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 111.7/60.4   |
| R3513   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 111.8/82.9   |
| R3514   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 104.1/60.5   |
| R3515   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 107.5/75.4   |
| R3516   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 102/59.8     |
| R3517   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 111.2/83.8   |
| R3518   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | B  | 114.3/83.8   |
| R3519   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 114.6/81.1   |
| R3520   | 7310005400 | S.TRI EVM-3VXS50 BE4 (223)  | T  | 112.1/82.9   |
| R3521   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 110.6/86.5   |
| R3522   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | B  | 110.1/77.2   |
| R3523   | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | B  | 111.6/65.2   |
| R3524   | 7030003500 | S.RES ERJ3GEYJ 332 V (3.3K) | B  | 112.3/68.4   |
| R3601   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 153.8/71     |
| R3602   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 166.6/79.7   |
| R3603   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | B  | 152.3/79.9   |
| R3604   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | B  | 156.5/79.7   |
| R3605   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 156.4/76     |
| R3606   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 166.2/82.5   |
| R3607   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | B  | 162.4/81.9   |
| R3608   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 156.9/82.4   |
| R3609   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | B  | 159.1/84.6   |
| R3610   | 7030003300 | S.RES ERJ3GEYJ 680 V (68)   | B  | 156.8/87.4   |
| R3611   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 161.7/89.3   |
| R3612   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | T  | 164.4/82.8   |
| R3614   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 163.1/84.3   |
| R3616   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 163/84.6     |
| R3617   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 165/88.5     |
| R3618   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 165.6/84.6   |
| R3619   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 165/89.8     |
| R3620   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 157.4/96.8   |
| R3651   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 167.4/77.8   |
| R3701   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 150.5/91.1   |
| R3702   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 124.8/86     |
| R3703   | 7030004030 | S.RES ERJ3GEYJ 5R6 V (5.6)  | B  | 126.4/88     |
| R3704   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 125.7/90.4   |
| R3705   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 132.2/90.3   |
| R3706   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 152.4/95.5   |
| R3707   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 144/92.7     |
| R3708   | 7030004030 | S.RES ERJ3GEYJ 5R6 V (5.6)  | B  | 145.5/90.4   |
| R3709   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 146.9/92.7   |
| R3710   | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 135/89.6     |
| R3711   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 137.4/90.3   |
| R3715   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 138.6/100.1  |
| R3716   | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 140.7/101.8  |
| R3717   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 141/99.8     |
| R3718   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 141.4/99     |
| R4001   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 83.6/24.4    |
| R4002   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 75.2/18.5    |
| R4003   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 82.7/13.2    |
| R4004   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 79.2/17.7    |
| R4005   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 77.3/6.8     |
| R4006   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 83.5/14.3    |
| R4007   | 7030003520 | S.RES ERA3YED 472 V (4.7K)  | T  | 81.9/22.5    |
| R4008   | 7030006601 | S.RES ERA3YED 272V (2.7K)   | T  | 77.8/12.4    |
| R4009   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 77.8/9.4     |
| R4010   | 7030006601 | S.RES ERA3YED 272V (2.7K)   | T  | 79.2/15.2    |
| R4011   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 77.8/10.7    |
| R4012   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 73.9/12.4    |
| R4013   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 76.6/15.2    |
| R4014   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 78.4/24.4    |
| R4015   | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | T  | 81.9/25.1    |
| R4016   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 73.9/10.9    |
| R4017   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 74.6/14.5    |
| R4018   | 7030003690 | S.RES ERJ3GEYJ 124 V (120K) | T  | 76.3/22.4    |
| R4019   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | T  | 74.8/22.4    |
| R4020   | 7410001090 | S.ARR EXB-V8V 101JV         | T  | 59/17.8      |
| R4021   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 97/54.8      |
| R4022   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 97/56.4      |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                       | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------|----|--------------|
| R4101   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 78.2/67.6    |
| R4102   | 7030003620 | S.RES       | ERJ3GEYJ 333 V (33K)  | T  | 93.3/69.2    |
| R4103   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 97.5/73.3    |
| R4104   | 7030003460 | S.RES       | ERJ3GEYJ 152 V (1.5K) | B  | 84.3/80.1    |
| R4105   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 97.5/71.7    |
| R4106   | 7030003620 | S.RES       | ERJ3GEYJ 333 V (33K)  | B  | 84.5/68.8    |
| R4107   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | B  | 84.5/66.2    |
| R4108   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | B  | 84.5/70.4    |
| R4109   | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)  | B  | 97.8/64.6    |
| R4201   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 75.2/57.3    |
| R4202   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 83.8/54.6    |
| R4203   | 7030003400 | S.RES       | ERJ3GEYJ 471 V (470)  | T  | 95.2/65.8    |
| R4204   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 76.7/40.4    |
| R4205   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | T  | 93.9/63.2    |
| R4206   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 82.6/39.3    |
| R4207   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 91.9/63.2    |
| R4208   | 7030006601 | S.RES       | ERA3YED 272V (2.7K)   | B  | 71/51.9      |
| R4209   | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 71.4/54.4    |
| R4210   | 7030006601 | S.RES       | ERA3YED 272V (2.7K)   | T  | 82.6/52.8    |
| R4211   | 7030006601 | S.RES       | ERA3YED 272V (2.7K)   | B  | 73/51.1      |
| R4212   | 7030006601 | S.RES       | ERA3YED 272V (2.7K)   | T  | 81.2/52.8    |
| R4213   | 7030005321 | S.RES       | ERA3YED 103V (10K)    | T  | 74.5/45.6    |
| R4214   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 65.4/49.4    |
| R4215   | 7030005321 | S.RES       | ERA3YED 103V (10K)    | T  | 67.3/45.6    |
| R4216   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | B  | 97/61.2      |
| R4217   | 7030005321 | S.RES       | ERA3YED 103V (10K)    | T  | 78.2/44.7    |
| R4218   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 76/50.8      |
| R4219   | 7030005321 | S.RES       | ERA3YED 103V (10K)    | T  | 81.1/44.7    |
| R4220   | 7030009591 | S.RES       | ERA3YED 472V (4.7K)   | B  | 62.5/41.7    |
| R4221   | 7030009591 | S.RES       | ERA3YED 472V (4.7K)   | T  | 73.9/43.5    |
| R4222   | 7030009591 | S.RES       | ERA3YED 472V (4.7K)   | T  | 70.2/45.7    |
| R4223   | 7030009591 | S.RES       | ERA3YED 472V (4.7K)   | T  | 78.2/41.9    |
| R4224   | 7030009591 | S.RES       | ERA3YED 472V (4.7K)   | T  | 81.1/41.9    |
| R4225   | 7030009691 | S.RES       | ERA3YED 101V (100)    | T  | 71.7/45.7    |
| R4226   | 7030009691 | S.RES       | ERA3YED 101V (100)    | T  | 68.7/43.5    |
| R4227   | 7030009691 | S.RES       | ERA3YED 101V (100)    | T  | 76.1/41.9    |
| R4228   | 7030009691 | S.RES       | ERA3YED 101V (100)    | T  | 79.5/41.9    |
| R4229   | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 73/54.4      |
| R4230   | 7030009591 | S.RES       | ERA3YED 472V (4.7K)   | B  | 65.3/41.7    |
| R4231   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 84.1/72.5    |
| R4232   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | T  | 80.7/71.8    |
| R4233   | 7030003570 | S.RES       | ERJ3GEYJ 123 V (12K)  | T  | 78.8/72.7    |
| R4234   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | B  | 84.5/72      |
| R4235   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 81.2/79.5    |
| R4236   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 80.4/66.3    |
| R4241   | 7030003450 | S.RES       | ERJ3GEYJ 122 V (1.2K) | B  | 71.1/72.4    |
| R4242   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | T  | 71.9/76.1    |
| R4301   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 60.1/36.3    |
| R4302   | 7410001090 | S.ARR       | EXB-V8V 101JV         | T  | 60.2/39      |
| R4303   | 7410001090 | S.ARR       | EXB-V8V 101JV         | T  | 72.2/62.9    |
| R4401   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 83.5/29.7    |
| R4402   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 83/36.6      |
| R4403   | 7030003490 | S.RES       | ERJ3GEYJ 272 V (2.7K) | T  | 94.5/59.7    |
| R4404   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | T  | 91.9/59.7    |
| R4405   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 85.4/56.9    |
| R4406   | 7030009591 | S.RES       | ERA3YED 472V (4.7K)   | T  | 74.7/28.4    |
| R4407   | 7030009591 | S.RES       | ERA3YED 472V (4.7K)   | T  | 74.7/29.7    |
| R4408   | 7030009591 | S.RES       | ERA3YED 472V (4.7K)   | T  | 74.7/31.1    |
| R4409   | 7030005341 | S.RES       | ERA3YED 332V (3.3K)   | T  | 76.5/35.4    |
| R4410   | 7030005341 | S.RES       | ERA3YED 332V (3.3K)   | T  | 76.5/36.8    |
| R4411   | 7030005341 | S.RES       | ERA3YED 332V (3.3K)   | T  | 79.3/38.1    |
| R4412   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | T  | 90/60.4      |
| R4413   | 7030009591 | S.RES       | ERA3YED 472V (4.7K)   | T  | 79/26.7      |
| R4414   | 7030009961 | S.RES       | ERA3YED 221V (220)    | T  | 79/27.9      |
| R4415   | 7030009961 | S.RES       | ERA3YED 221V (220)    | T  | 77.5/31.1    |
| R4416   | 7030005341 | S.RES       | ERA3YED 332V (3.3K)   | T  | 79.3/35.4    |
| R4417   | 7030009861 | S.RES       | ERA3YED 471V (470)    | T  | 76.5/34      |
| R4418   | 7030009861 | S.RES       | ERA3YED 471V (470)    | T  | 76.5/38.1    |
| R4419   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | T  | 81.6/60.8    |
| R4420   | 7030003460 | S.RES       | ERJ3GEYJ 152 V (1.5K) | T  | 84.5/56.6    |
| R4421   | 7030003650 | S.RES       | ERJ3GEYJ 563 V (56K)  | B  | 84.4/63.2    |
| R4422   | 7030003470 | S.RES       | ERJ3GEYJ 182 V (1.8K) | T  | 85.8/59.3    |
| R4423   | 7030003500 | S.RES       | ERJ3GEYJ 332 V (3.3K) | T  | 89.7/57.1    |
| R4424   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | T  | 87.7/56.6    |
| R4425   | 7030003860 | S.RES       | ERJ3GE JPW V          | T  | 82.4/29.9    |
| R4426   | 7030003340 | S.RES       | ERJ3GEYJ 151 V (150)  | T  | 87.8/63.8    |
| R4428   | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)  | T  | 89.7/55.8    |
| R4430   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 97/59.6      |
| R4501   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 62.8/88.5    |
| R4502   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 67.3/83.6    |
| R4503   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 69.8/84.4    |
| R4504   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | B  | 70.4/87.1    |
| R4505   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | T  | 67.3/88.7    |
| R4506   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 69.3/91.3    |
| R4507   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 66.4/90.5    |
| R5001   | 7410000720 | S.ARR       | EXB-V8V 473JV (47K)   | T  | 27.7/13.3    |
| R5002   | 7410000720 | S.ARR       | EXB-V8V 473JV (47K)   | T  | 25.4/9.1     |
| R5003   | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 46.7/33.3    |
| R5005   | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 55.6/30.2    |
| R5006   | 7410000720 | S.ARR       | EXB-V8V 473JV (47K)   | T  | 54.1/10.8    |
| R5007   | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 55.7/32.4    |
| R5008   | 7410000720 | S.ARR       | EXB-V8V 473JV (47K)   | T  | 18.6/9.1     |
| R5009   | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | T  | 14.7/9.2     |
| R5010   | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | T  | 62/13.1      |
| R5011   | 7030003720 | S.RES       | ERJ3GEYJ 224 V (220K) | B  | 51.1/26      |
| R5012   | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 54.7/28.7    |
| R5013   | 7030003860 | S.RES       | ERJ3GE JPW V          | T  | 50.7/10.3    |
| R5101   | 7410000720 | S.ARR       | EXB-V8V 473JV (47K)   | T  | 28.2/48.6    |
| R5102   | 7030003640 | S.RES       | ERJ3GEYJ 473 V (47K)  | T  | 24.2/48.6    |
| R5103   | 7410000720 | S.ARR       | EXB-V8V 473JV (47K)   | T  | 37/52.7      |
| R5104   | 7410000720 | S.ARR       | EXB-V8V 473JV (47K)   | T  | 37.1/48.5    |
| R5105   | 7410000720 | S.ARR       | EXB-V8V 473JV (47K)   | T  | 32.7/44.6    |
| R5401   | 7410001100 | S.ARR       | EXB-V8V 472JV (4.7K)  | T  | 14.4/37.1    |
| R5402   | 7410001100 | S.ARR       | EXB-V8V 472JV (4.7K)  | T  | 42.9/84.7    |



## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R6001   | 7030003700 | S.RES ERJ3GEYJ 154 V (150K) | T  | 144.2/111.3  |
| R6002   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 149.4/109.8  |
| R6003   | 7030003690 | S.RES ERJ3GEYJ 124 V (120K) | T  | 146.5/112.5  |
| R6004   | 7030003690 | S.RES ERJ3GEYJ 124 V (120K) | T  | 148.5/112.1  |
| R6005   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 152.1/111    |
| R6006   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | B  | 76.7/95.4    |
| R6007   | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 73.9/96.1    |
| R6008   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 72.4/110.7   |
| R6009   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | B  | 71.2/95      |
| R6010   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 70.7/98.1    |
| R6011   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 71.6/104.7   |
| R6012   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 159.4/115.3  |
| R6013   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 72.1/102.8   |
| R6014   | 7030010520 | S.ARR ERJ1TYJ 101U (100)    | B  | 113.4/95.8   |
| R6015   | 7410001090 | S.ARR EXB-V8V 101JV         | T  | 81.9/101.7   |
| R6016   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | B  | 72.4/110.1   |
| R6018   | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | B  | 86/131.6     |
| R6019   | 7030003860 | S.RES ERJ3GE JPW V          | T  | 70.3/125.5   |
| R6020   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | B  | 158/118      |
| R6021   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 78.3/102.1   |
| R6023   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 77.8/134.2   |
| R6024   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 76.5/134.2   |
| R6025   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 155.3/118.7  |
| R6026   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | B  | 152.6/118    |
| R6028   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 74.8/105.5   |
| R6029   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 74.3/107.4   |
| R6031   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 106/81.7     |
| R6032   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 101.6/91     |
| R6033   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 85.8/94.5    |
| R6034   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 150.9/117.1  |
| R6035   | 7410001090 | S.ARR EXB-V8V 101JV         | T  | 82.4/122.3   |
| R6036   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 103.2/80.4   |
| R6037   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 101.9/84.7   |
| R6038   | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 148.8/116.5  |
| R6040   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 101.9/83.4   |
| R6041   | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | T  | 83.7/109.7   |
| R6042   | 7030003730 | S.RES ERJ3GEYJ 274 V (270K) | B  | 104.7/86.2   |
| R6043   | 7310005400 | S.TRI EVM-3VSX50 BE4 (223)  | T  | 146.4/116.2  |
| R6044   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 86.7/109     |
| R6045   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 77.4/112.4   |
| R6046   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 101/97.2     |
| R6047   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 95.3/86.2    |
| R6048   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | B  | 101.7/101.5  |
| R6049   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 81.8/113.5   |
| R6050   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 101/103.6    |
| R6051   | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 83.9/113.7   |
| R6052   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 86.7/114.2   |
| R6053   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 94.6/84.2    |
| R6054   | 7410001090 | S.ARR EXB-V8V 101JV         | T  | 87/75.6      |
| R6055   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 98.3/125.8   |
| R6056   | 7030003290 | S.RES ERJ3GEYJ 560 V (56)   | B  | 139.6/116.8  |
| R6057   | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 100.4/124.1  |
| R6058   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 97/81.7      |
| R6059   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 111.6/100    |
| R6060   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 95.1/77.9    |
| R6061   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 135.3/111.3  |
| R6062   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 110.3/102.8  |
| R6063   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 88.6/133.4   |
| R6064   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 101.1/126.8  |
| R6065   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 138.8/110.3  |
| R6066   | 7030003500 | S.RES ERJ3GEYJ 332 V (3.3K) | T  | 130.2/110.1  |
| R6067   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | T  | 90.6/131     |
| R6068   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 92.7/129.9   |
| R6069   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 98.5/84.2    |
| R6070   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 112.4/100.6  |
| R6071   | 7310005410 | S.TRI EVM-3VSX50 BQ4 (473)  | T  | 98.3/77.4    |
| R6072   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 97.2/135.3   |
| R6073   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 87.1/80.4    |
| R6074   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 80.7/79.5    |
| R6075   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 80.6/80.9    |
| R6076   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 84.4/79.1    |
| R6077   | 7030003630 | S.RES ERJ3GEYJ 393 V (39K)  | T  | 89.9/78.6    |
| R6079   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 112.9/100    |
| R6081   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | T  | 89.9/80.4    |
| R6082   | 7030003330 | S.RES ERJ3GEYJ 121 V (120)  | B  | 110.7/126.3  |
| R6083   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | B  | 84.4/82.1    |
| R6085   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | T  | 113.8/106.3  |
| R6086   | 7030003290 | S.RES ERJ3GEYJ 560 V (56)   | B  | 111.4/128.7  |
| R6087   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | T  | 113.8/107.6  |
| R6088   | 7030003330 | S.RES ERJ3GEYJ 121 V (120)  | B  | 109.1/129.4  |
| R6089   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 95.5/112.4   |
| R6090   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 115.2/115.1  |
| R6091   | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 114.1/117.3  |
| R6092   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 113.3/115.2  |
| R6093   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 90.4/110.9   |
| R6094   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 90.4/112.4   |
| R6095   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 95.5/109.8   |
| R6096   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 148.3/114.3  |
| R6097   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 83.3/106.3   |
| R6098   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 95.7/103     |
| R6099   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 95.5/107.1   |
| R6103   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 161.7/129.6  |
| R6106   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 148.8/126.8  |
| R6107   | 7030004030 | S.RES ERJ3GEYJ 5R6 V (5.6)  | B  | 151/129.1    |
| R6108   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 150.2/131.5  |
| R6110   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 137.6/120.2  |
| R6113   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 125/122.5    |
| R6115   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 162.5/112.7  |
| R6116   | 7030004030 | S.RES ERJ3GEYJ 5R6 V (5.6)  | B  | 159.9/113.4  |
| R6117   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 162.7/114.6  |
| R6120   | 7030003860 | S.RES ERJ3GE JPW V          | T  | 76.5/127.4   |
| R6121   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 79.1/134.2   |
| R6122   | 7030003860 | S.RES ERJ3GE-JPW            | T  | 77.3/119.3   |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| C1001   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 28.3/105.4   |
| C1002   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/93.8    |
| C1003   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.7/95.1    |
| C1004   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/96.4    |
| C1005   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.7/97.7    |
| C1006   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/99      |
| C1007   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.7/100.3   |
| C1008   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/101.6   |
| C1009   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.7/102.9   |
| C1010   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/104.2   |
| C1011   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.7/106.9   |
| C1012   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/108.1   |
| C1013   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.6/109.5   |
| C1014   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.4/104.1   |
| C1015   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/106.7   |
| C1016   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/108     |
| C1017   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/109.3   |
| C1018   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/110.6   |
| C1019   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/111.9   |
| C1020   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/113.2   |
| C1021   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/110.7   |
| C1051   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/117.8   |
| C1052   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/116.5   |
| C1053   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/115.2   |
| C1054   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/113.9   |
| C1055   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/112.6   |
| C1056   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/111.3   |
| C1057   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/110     |
| C1058   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/108.7   |
| C1059   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/107.4   |
| C1060   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/106.1   |
| C1061   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/104.8   |
| C1062   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/103.5   |
| C1063   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.3/102.2   |
| C1064   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.3/100.9   |
| C1065   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.3/99.6    |
| C1066   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.3/98.3    |
| C1067   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30/97        |
| C1068   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.4/95.7    |
| C1069   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.4/94.4    |
| C1070   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/93.1    |
| C1071   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/91.8    |
| C1072   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/90.5    |
| C1073   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/89.2    |
| C1074   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/87.9    |
| C1075   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/86.6    |
| C1076   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/85.3    |
| C1101   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 7.7/98.4     |
| C1111   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 7.7/106      |
| C1201   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 50.7/128.2   |
| C1202   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 35.6/129.3   |
| C1252   | 4030017490 | S.CER C1608 JB 1A 105K-T          | B  | 42.2/121.6   |
| C1253   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 44.6/121.1   |
| C1254   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 43.5/118     |
| C1256   | 4030017490 | S.CER C1608 JB 1A 105K-T          | B  | 46.7/118     |
| C1257   | 4030017490 | S.CER C1608 JB 1A 105K-T          | B  | 48.3/118.8   |
| C1258   | 4030009530 | S.CER C1608 CH 1H 030B-T          | B  | 49/125.9     |
| C1259   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 55/114.1     |
| C1260   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 60/113.2     |
| C1301   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 15.8/124.5   |
| C1302   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 17.5/137.8   |
| C1303   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 6.5/135.6    |
| C1304   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 27.6/138.9   |
| C1305   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 23.6/127.4   |
| C1401   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 57.3/99.5    |
| C1402   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 61.8/99.5    |
| C1403   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 41.5/123.6   |
| C1404   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 56.8/90.4    |
| C1405   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 56.8/102.2   |
| C1407   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 170.9/132.9  |
| C1409   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 61.9/101.4   |
| C1410   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 64.5/95.6    |
| C1601   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 1.8/111.3    |
| C1901   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 154.6/146.4  |
| C1902   | 4030011340 | S.CER C1608 CH 1H 471J-T          | T  | 152.7/142.9  |
| C1903   | 4030011340 | S.CER C1608 CH 1H 471J-T          | T  | 151.3/142.9  |
| C2001   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/122.8  |
| C2002   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/126.3  |
| C2003   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/114.9  |
| C2004   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 174.5/132.5  |
| C2005   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/120.2  |
| C2006   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/124.1  |
| C2007   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/118    |
| C2008   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/129.4  |
| C2009   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/135.6  |
| C2010   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/138.7  |
| C2011   | 4030019090 | S.CER C2012 JB 1C 225M-T          | T  | 172.3/77.8   |
| C2012   | 4030019090 | S.CER C2012 JB 1C 225M-T          | B  | 171.5/85.9   |
| C2013   | 4030018620 | S.CER C1608 CH 1H 222J-T          | B  | 166.7/773    |
| C2014   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 175.3/82     |
| C2015   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 168.7/70.9   |
| C2016   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 179.7/81.7   |
| C2031   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 170.2/148.1  |
| C2041   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 177.9/145.4  |
| C2042   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 188.2/148.1  |
| C2051   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 163.2/148.1  |
| C2062   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 173.5/70.9   |
| C2063   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 181.3/72.4   |
| C2101   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 156/32.4     |
| C2102   | 4030007040 | S.CER C1608 CH 1H 180J-T          | T  | 158.2/27.3   |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| C2103   | 4030007040 | S.CER C1608 CH 1H 180J-T          | T  | 160.9/28.6   |
| C2104   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 158.5/29.7   |
| C2105   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 155.3/40     |
| C2106   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 163/28.8     |
| C2107   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 165.3/29.8   |
| C2108   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 167.6/29.9   |
| C2109   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 168.9/35.5   |
| C2110   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 156.8/39.3   |
| C2111   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 178.7/33.4   |
| C2112   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 178.7/27.7   |
| C2113   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 164.2/40.1   |
| C2114   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 175.6/31.6   |
| C2115   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 176/25.6     |
| C2116   | 4030011330 | S.CER C1608 CH 1H 391J-T          | B  | 180.8/72.8   |
| C2117   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 169.2/69.6   |
| C2118   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 154.3/54.1   |
| C2119   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 160.9/61.5   |
| C2120   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 158.1/31.9   |
| C2121   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 171.4/41.5   |
| C2122   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 173/38.7     |
| C2123   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 173.8/37.4   |
| C2124   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 173/40       |
| C2131   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 177.5/55.7   |
| C2132   | 4550007480 | S.TAN F930J106MAABMA              | B  | 171.9/56.8   |
| C2133   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 155.2/47.6   |
| C2134   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 158.1/47.5   |
| C2135   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 172.5/58.8   |
| C2137   | 4550007230 | S.TAN F930J475MAABMA              | B  | 171.9/49.5   |
| C2138   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 165.9/46.7   |
| C2139   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 164.1/46.7   |
| C2140   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 162.6/47.1   |
| C2141   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 166.5/54     |
| C2142   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 168.1/53.9   |
| C2143   | 4030007040 | S.CER C1608 CH 1H 180J-T          | T  | 161/58.7     |
| C2144   | 4030007040 | S.CER C1608 CH 1H 180J-T          | T  | 161/60       |
| C2145   | 4550007480 | S.TAN F930J106MAABMA              | B  | 167.4/59.7   |
| C2146   | 4550007230 | S.TAN F930J475MAABMA              | B  | 171.9/52.3   |
| C2201   | 4030007010 | S.CER C1608 CH 1H 100D-T          | B  | 191.7/40.4   |
| C2202   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 185/54.2     |
| C2203   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 187.1/35.4   |
| C2300   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 96.5/12      |
| C2301   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 146.4/5.3    |
| C2302   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 148.4/5.8    |
| C2303   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 140.2/5.3    |
| C2304   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 142.4/5.7    |
| C2305   | 4510009920 | S.ELE 16 CE 100 LH                | T  | 28/78.4      |
| C2306   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 10.5/69.2    |
| C2307   | 4030011340 | S.CER C1608 CH 1H 471J-T          | B  | 180.8/13     |
| C2309   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 90.2/4       |
| C2310   | 4510009930 | S.ELE 10 CE 10 FN                 | T  | 96.4/28.3    |
| C2311   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 106.7/4.6    |
| C2312   | 4510009370 | ELE 16 ME 470 CZ                  | T  |              |
| C2313   | 4510009390 | ELE 16 ME 2200 CZ                 | T  |              |
| C2314   | 4340000260 | S.MYL ECPU1C104MA5                | B  | 111.3/4.7    |
| C2315   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 102.2/8.3    |
| C2316   | 4030018580 | S.CER C1608 CH 1H 821J-T          | B  | 100.9/13.7   |
| C2317   | 4510009370 | ELE 16 ME 470 CZ                  | T  |              |
| C2318   | 4030018620 | S.CER C1608 CH 1H 222J-T          | B  | 114.4/4.6    |
| C2319   | 4550003220 | S.TAN TEESVA 1E 105M8R            | B  | 114.1/12.9   |
| C2321   | 4030008950 | S.CER C2012 JB 1C 823K-T          | B  | 111.4/13.2   |
| C2322   | 4030018640 | S.CER C2012 CH 1H 103J-T          | B  | 108.9/11.5   |
| C2323   | 4030017490 | S.CER C1608 JB 1A 105K-T          | B  | 104.1/13.7   |
| C2325   | 4550002890 | S.TAN TEESVA 1A 225M8R            | B  | 111.4/19.2   |
| C2326   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 96.4/16.1    |
| C2327   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 96.4/23.5    |
| C2328   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 109.3/18.4   |
| C2331   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 90.9/12.2    |
| C2333   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 87.6/8.7     |
| C2334   | 4550007480 | S.TAN F930J106MAABMA              | T  | 94.3/17      |
| C2335   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 92/4         |
| C2336   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 93.9/10      |
| C2351   | 4030018620 | S.CER C1608 CH 1H 222J-T          | B  | 91.8/20.5    |
| C2352   | 4550007480 | S.TAN F930J106MAABMA              | B  | 94.3/28      |
| C2361   | 4030017810 | S.CER C1608 CH 1H 102J-T          | B  | 100.8/25.5   |
| C2362   | 4510009930 | S.ELE 10 CE 10 FN                 | T  | 105.7/29.6   |
| C2363   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 106.3/25.7   |
| C2364   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 97.4/18.3    |
| C2401   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 190.6/80.2   |
| C2402   | 4030011340 | S.CER C1608 CH 1H 471J-T          | B  | 188.6/80.2   |
| C2501   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 175.1/96.5   |
| C2502   | 4030011340 | S.CER C1608 CH 1H 471J-T          | B  | 175.8/94.9   |
| C2601   | 4550003220 | S.TAN TEESVA 1E 105M8R            | B  | 4/61.3       |
| C2602   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 13.6/67      |
| C2603   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 17.9/62.6    |
| C2604   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 17.9/64.2    |
| C2605   | 4030007120 | S.CER C1608 CH 1H 820J-T          | T  | 4.7/62.8     |
| C2606   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 4.8/65.7     |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                            | M. | H/V LOCATION |
|---------|------------|----------------------------------------|----|--------------|
| C2607   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 6.6/66.2     |
| C3001   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 143.1/30.2   |
| C3002   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 143.1/38.6   |
| C3003   | 4030017810 | S.CER C1608 CH 1H 102J-T               | B  | 147.1/36.6   |
| C3004   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 140.6/41     |
| C3005   | 4030009530 | S.CER C1608 CH 1H 030B-T               | T  | 142.8/43.8   |
| C3006   | 4610001970 | S.TRI TZC3P200A110R00 (TZC03P200A1102) | T  | 145.2/46.6   |
| C3007   | 4030017810 | S.CER C1608 CH 1H 102J-T               | B  | 146.1/46.2   |
| C3008   | 4030017810 | S.CER C1608 CH 1H 102J-T               | B  | 144.2/46.9   |
| C3009   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 86.9/20.2    |
| C3010   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 86.2/28.8    |
| C3012   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 89.6/24      |
| C3201   | 4030017870 | S.CER C1608 CH 1H 681J-T               | B  | 118.3/39.6   |
| C3202   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 116.1/43.6   |
| C3203   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 119/44.3     |
| C3204   | 4030007160 | S.CER C1608 CH 1H 181J-T               | B  | 118.2/47.5   |
| C3205   | 4030009350 | S.CER C1608 CH 1H 3R5B-T               | B  | 117.4/49.1   |
| C3206   | 4030017870 | S.CER C1608 CH 1H 681J-T               | B  | 117.4/55.5   |
| C3207   | 4030011330 | S.CER C1608 CH 1H 391J-T               | B  | 118.2/53.9   |
| C3208   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 119.8/48.5   |
| C3209   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 126.8/41.8   |
| C3210   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 132.1/43.4   |
| C3211   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 119/61.1     |
| C3212   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 119.8/65.3   |
| C3213   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 128.7/65.3   |
| C3214   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 129.5/61.1   |
| C3215   | 4030007170 | S.CER C1608 CH 1H 221J-T               | B  | 118.4/60     |
| C3216   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 118.4/70.5   |
| C3217   | 4510009910 | S.ELE 16 CE 10 LH                      | T  | 121.5/68.9   |
| C3218   | 4030018800 | S.CER C3216 CH 1H 223J-T               | B  | 119.5/68.6   |
| C3219   | 4030007170 | S.CER C1608 CH 1H 221J-T               | B  | 129.1/59.9   |
| C3220   | 4030018800 | S.CER C3216 CH 1H 223J-T               | B  | 125.2/66.6   |
| C3221   | 4030010760 | S.CER C1608 CH 1H 331J-T               | T  | 122.3/74.7   |
| C3222   | 4030017490 | S.CER C1608 JB 1A 105K-T               | T  | 122.3/77.7   |
| C3223   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 123.6/77.7   |
| C3224   | 4030007010 | S.CER C1608 CH 1H 100D-T               | T  | 118.4/77.7   |
| C3225   | 4550003220 | S.TAN TEESVA 1E 105M8R                 | B  | 122.1/76     |
| C3226   | 4030018640 | S.CER C2012 CH 1H 103J-T               | B  | 145.5/62.7   |
| C3227   | 4030010760 | S.CER C1608 CH 1H 331J-T               | T  | 128.8/74.7   |
| C3228   | 4030017490 | S.CER C1608 JB 1A 105K-T               | T  | 128.8/77.7   |
| C3229   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 130.1/77.7   |
| C3230   | 4030007010 | S.CER C1608 CH 1H 100D-T               | T  | 123.6/74.7   |
| C3231   | 4550003220 | S.TAN TEESVA 1E 105M8R                 | B  | 129.4/73.6   |
| C3232   | 4030018640 | S.CER C2012 CH 1H 103J-T               | B  | 137.7/65.9   |
| C3233   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 118.3/54     |
| C3234   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 119.8/49.8   |
| C3235   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 126.8/45     |
| C3236   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 129.5/50.5   |
| C3237   | 4030009920 | S.CER C1608 CH 1H 050B-T               | B  | 151/69.4     |
| C3239   | 4030009920 | S.CER C1608 CH 1H 050B-T               | B  | 151/71       |
| C3301   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 131/38.5     |
| C3302   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 117.5/36.5   |
| C3303   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 121.7/35.7   |
| C3304   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 123.5/33.3   |
| C3305   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 120/28.7     |
| C3306   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 132.8/35.8   |
| C3307   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 128.7/25.2   |
| C3401   | 4030017810 | S.CER C1608 CH 1H 102J-T               | T  | 106/44.4     |
| C3403   | 4030018590 | S.CER C1608 CH 1H 122J-T               | B  | 94.9/36.7    |
| C3404   | 4030018600 | S.CER C1608 CH 1H 152J-T               | B  | 99/33.9      |
| C3405   | 4030018620 | S.CER C1608 CH 1H 222J-T               | B  | 110.5/34.1   |
| C3406   | 4030007140 | S.CER C1608 CH 1H 121J-T               | B  | 97.7/33.9    |
| C3407   | 4030011330 | S.CER C1608 CH 1H 391J-T               | B  | 99/39.7      |
| C3408   | 4030018620 | S.CER C1608 CH 1H 222J-T               | B  | 109.2/34.1   |
| C3409   | 4030011280 | S.CER C1608 CH 1H 271J-T               | B  | 110.5/38.4   |
| C3410   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 107.3/44.4   |
| C3411   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 104.4/47.6   |
| C3412   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 106/47.3     |
| C3413   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 108.6/44.4   |
| C3414   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 98/35.5      |
| C3415   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 102.2/36.9   |
| C3416   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 105.8/37     |
| C3417   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 110.1/35.5   |
| C3418   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 106/50.1     |
| C3501   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 109.4/52.7   |
| C3502   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 105.4/52.4   |
| C3503   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 102.3/50.3   |
| C3504   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 111.8/52.4   |
| C3505   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 108.6/57.6   |
| C3506   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 105.4/57.6   |
| C3507   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 111.3/75.4   |
| C3509   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 105.4/55     |
| C3510   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 111.3/78.2   |
| C3513   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 115/81.8     |
| C3515   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 110/58.9     |
| C3516   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 110.7/81.4   |
| C3517   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 112.8/81.4   |
| C3518   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 111.7/85.9   |
| C3519   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 111.9/87.4   |
| C3520   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 111.9/86.5   |
| C3522   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 106.2/75.4   |
| C3601   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 165.8/77.1   |
| C3602   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 160.8/70.9   |
| C3603   | 4030006860 | S.CER C1608 JB 1H 102K-T               | B  | 160.8/72.7   |
| C3604   | 4030006860 | S.CER C1608 JB 1H 102K-T               | B  | 156.4/77.7   |
| C3605   | 4030007040 | S.CER C1608 CH 1H 180J-T               | B  | 157.6/71.9   |
| C3606   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 155.1/82.4   |
| C3607   | 4030006980 | S.CER C1608 CH 1H 070D-T               | B  | 156/84.6     |



## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| C3608   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 166.2/82.5   |
| C3609   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 168.5/84.2   |
| C3610   | 4030007010 | S.CER C1608 CH 1H 100D-T          | T  | 163/89.3     |
| C3611   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 165/87.2     |
| C3612   | 4030010750 | S.CER C1608 CH 1H 201J-T          | B  | 161.8/90.8   |
| C3613   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 165/85.9     |
| C3615   | 4030007150 | S.CER C1608 CH 1H 151J-T          | B  | 164.9/94.1   |
| C3616   | 4030007120 | S.CER C1608 CH 1H 820J-T          | B  | 159.6/96     |
| C3651   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 167.4/76.5   |
| C3652   | 4030019090 | S.CER C2012 JB 1C 225M-T          | T  | 164.4/79.8   |
| C3701   | 4030011340 | S.CER C1608 CH 1H 471J-T          | T  | 132.5/91     |
| C3702   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 150.6/95.5   |
| C3704   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 148.7/91.1   |
| C3705   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 163.4/97.9   |
| C3706   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 146.6/85.6   |
| C3715   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 140.8/100.9  |
| C3716   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 144.2/98.5   |
| C3717   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 142.5/103.6  |
| C3718   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 143.3/99.5   |
| C4001   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 89.5/28.4    |
| C4002   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 83.6/22.6    |
| C4003   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 83.5/12.5    |
| C4004   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 84.3/20.6    |
| C4005   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 83.1/17.9    |
| C4006   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 83.5/8.1     |
| C4007   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 83.8/6.3     |
| C4008   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 79.2/16.5    |
| C4009   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 88.5/17      |
| C4010   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 83.5/9.7     |
| C4011   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 80.4/10.7    |
| C4012   | 4030017870 | S.CER C1608 CH 1H 681J-T          | T  | 75.8/11.7    |
| C4013   | 4030017870 | S.CER C1608 CH 1H 681J-T          | T  | 76.6/13.7    |
| C4014   | 4030007080 | S.CER C1608 CH 1H 390J-T          | T  | 75.6/24.4    |
| C4015   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 66.8/9.5     |
| C4016   | 4030018620 | S.CER C1608 CH 1H 222J-T          | T  | 73.2/14.5    |
| C4017   | 4030018620 | S.CER C1608 CH 1H 222J-T          | T  | 73/22.4      |
| C4018   | 4550007470 | S.TAN F931A107MNMBA               | B  | 72.9/10.7    |
| C4019   | 4550007470 | S.TAN F931A107MNMBA               | B  | 72.9/26.2    |
| C4020   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 73.8/17.6    |
| C4021   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 73.1/19.8    |
| C4022   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 69.2/26.1    |
| C4023   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 70.3/13.3    |
| C4024   | 4550007470 | S.TAN F931A107MNMBA               | B  | 67.5/27.7    |
| C4025   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 68.1/11.7    |
| C4026   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 67.6/26.1    |
| C4027   | 4550007470 | S.TAN F931A107MNMBA               | B  | 67.5/13      |
| C4028   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 59/20.3      |
| C4029   | 4550007470 | S.TAN F931A107MNMBA               | B  | 60.4/19.6    |
| C4030   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 80.4/12.4    |
| C4031   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 81.9/23.8    |
| C4032   | 4030007090 | S.CER C1608 CH 1H 470J-T          | B  | 97/53.2      |
| C4033   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 60.7/10.1    |
| C4034   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 60.7/8.1     |
| C4035   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 58.2/15.3    |
| C4101   | 4550007480 | S.TAN F930J106MAABMA              | T  | 82.5/68.5    |
| C4102   | 4550007480 | S.TAN F930J106MAABMA              | T  | 89.5/69.2    |
| C4106   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 84.1/74.5    |
| C4107   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 97.8/68      |
| C4201   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 73.3/54      |
| C4202   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 65.4/47.6    |
| C4203   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 77.3/56.6    |
| C4205   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 85.8/52.3    |
| C4207   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 74.4/39.4    |
| C4209   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 85.2/40.1    |
| C4210   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 68.5/54      |
| C4211   | 4550007480 | S.TAN F930J106MAABMA              | T  | 73.2/48.1    |
| C4212   | 4550007480 | S.TAN F930J106MAABMA              | T  | 67.9/48.1    |
| C4213   | 4550007480 | S.TAN F930J106MAABMA              | T  | 80.5/48.1    |
| C4214   | 4550007480 | S.TAN F930J106MAABMA              | T  | 82.9/44.3    |
| C4215   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 73.4/48.4    |
| C4216   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 65/45.5      |
| C4217   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 76.7/48.4    |
| C4218   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 83/48.4      |
| C4219   | 4030017810 | S.CER C1608 CH 1H 102J-T          | T  | 73.2/45.7    |
| C4220   | 4030017810 | S.CER C1608 CH 1H 102J-T          | T  | 68.8/45.7    |
| C4221   | 4030017810 | S.CER C1608 CH 1H 102J-T          | T  | 77/44.7      |
| C4222   | 4030017810 | S.CER C1608 CH 1H 102J-T          | T  | 79.5/44.7    |
| C4223   | 4030018620 | S.CER C1608 CH 1H 222J-T          | T  | 71.3/43.5    |
| C4224   | 4030018620 | S.CER C1608 CH 1H 222J-T          | T  | 74.1/40.4    |
| C4225   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 79.9/48.4    |
| C4226   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 78.1/53.9    |
| C4227   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 64.3/39.4    |
| C4228   | 4550007480 | S.TAN F930J106MAABMA              | T  | 88.4/72.5    |
| C4229   | 4030007140 | S.CER C1608 CH 1H 121J-T          | T  | 80.6/73.5    |
| C4231   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 78.8/78.8    |
| C4232   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 80.6/68.2    |
| C4236   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 95.2/63.2    |
| C4237   | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 80.6/74.7    |
| C4301   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 70.7/39.4    |
| C4302   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 69.1/39.4    |
| C4303   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 64.3/44.6    |
| C4304   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 65.8/44.4    |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                             | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------------|----|--------------|
| C4305   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 76.4/66.4    |
| C4306   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 83.3/63.8    |
| C4307   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 67.6/30.8    |
| C4308   | 4030017490 | S.CER       | C1608 JB 1A 105K-T          | T  | 67.6/32.1    |
| C4310   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 62.5/44.6    |
| C4311   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 60.9/44.4    |
| C4401   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 76.1/27.7    |
| C4402   | 4550007480 | S.TAN       | F930J106MAABMA              | T  | 72.1/30      |
| C4404   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 83/33.5      |
| C4405   | 4550007480 | S.TAN       | F930J106MAABMA              | T  | 70/30        |
| C4406   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 73.9/35.4    |
| C4408   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 84.4/59.9    |
| C4409   | 4340000510 | S.MYL       | ECHU01153JX5                | T  | 76.9/28.7    |
| C4410   | 4030018600 | S.CER       | C1608 CH 1H 152J-T          | B  | 79.3/37.6    |
| C4411   | 4550007480 | S.TAN       | F930J106MAABMA              | T  | 79.9/61.7    |
| C4412   | 4030018620 | S.CER       | C1608 CH 1H 222J-T          | T  | 81.6/27.9    |
| C4413   | 4030018620 | S.CER       | C1608 CH 1H 222J-T          | T  | 80.1/31.1    |
| C4414   | 4030011340 | S.CER       | C1608 CH 1H 471J-T          | T  | 79.3/34      |
| C4415   | 4030011340 | S.CER       | C1608 CH 1H 471J-T          | B  | 75.9/33.9    |
| C4416   | 4030018580 | S.CER       | C1608 CH 1H 821J-T          | T  | 89.7/58.4    |
| C4417   | 4030018580 | S.CER       | C1608 CH 1H 821J-T          | T  | 85.8/56.6    |
| C4418   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 73.9/36.8    |
| C4419   | 4510009910 | S.ELE       | 16 CE 10 LH                 | T  | 89.5/34.3    |
| C4420   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 97/58        |
| C4421   | 4510009910 | S.ELE       | 16 CE 10 LH                 | T  | 96.2/56.1    |
| C4422   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 93.2/59.7    |
| C4423   | 4030007090 | S.CER       | C1608 CH 1H 470J-T          | B  | 86.2/63.3    |
| C4501   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 70.9/89.9    |
| C4502   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 67.2/84.8    |
| C4503   | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 69.3/88.7    |
| C4505   | 4030006960 | S.CER       | C1608 CH 1H 050C-T          | B  | 41.9/31.4    |
| C5001   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 46.7/37.7    |
| C5002   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 44.9/37.7    |
| C5003   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 42.8/37.7    |
| C5004   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 40.7/37.7    |
| C5005   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 38.8/37.7    |
| C5006   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 35.2/37.7    |
| C5007   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 37.1/37.7    |
| C5008   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 31.5/36      |
| C5009   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 33.6/38      |
| C5010   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 32.9/41.4    |
| C5011   | 4550007470 | S.TAN       | F931A107MNMNBMA             | B  | 54/38.5      |
| C5012   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/28.7    |
| C5014   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/30.1    |
| C5015   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/28.6    |
| C5016   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/26.7    |
| C5017   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/24.4    |
| C5018   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/22.9    |
| C5019   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/21.4    |
| C5020   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/25.8    |
| C5021   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/24.1    |
| C5022   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/22.3    |
| C5023   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/20.7    |
| C5024   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/18.3    |
| C5025   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.4/15.9    |
| C5026   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/17      |
| C5027   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 48.1/9.2     |
| C5028   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 46.5/9.2     |
| C5029   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 42.6/9.2     |
| C5030   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 41/9.2       |
| C5031   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 38.9/9.2     |
| C5032   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.8/9.2     |
| C5033   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 34.5/9.2     |
| C5034   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 32.7/9.2     |
| C5036   | 4550007470 | S.TAN       | F931A107MNMNBMA             | B  | 23.6/21.7    |
| C5101   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 56.7/76.6    |
| C5102   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 54.7/77.4    |
| C5103   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 52.1/77.4    |
| C5104   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 50.5/77.4    |
| C5105   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 48.2/77.4    |
| C5106   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 43.3/77.4    |
| C5107   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 45.8/76.6    |
| C5108   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 41.5/75.7    |
| C5109   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 41.7/78      |
| C5110   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 45.8/78.3    |
| C5111   | 4550007470 | S.TAN       | F931A107MNMNBMA             | B  | 32.5/72.3    |
| C5113   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 65.2/68.1    |
| C5114   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 65.2/65.6    |
| C5115   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 65.2/63.2    |
| C5116   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 65.2/62      |
| C5117   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 65.2/60.5    |
| C5118   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/69.4    |
| C5119   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/68.2    |
| C5120   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/65.1    |
| C5121   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/63.7    |
| C5122   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/61.7    |
| C5123   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 64.8/55.3    |
| C5124   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/60.2    |
| C5125   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/57.7    |
| C5126   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/56.4    |
| C5127   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 57.2/48.5    |
| C5128   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/48.5    |
| C5129   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 51.6/48.5    |
| C5130   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 50.2/48.5    |
| C5131   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 48/48.5      |



## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                            | M. | H/V LOCATION |
|---------|------------|----------------------------------------|----|--------------|
| C5132   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 46.1/48.5    |
| C5133   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 44.4/48.5    |
| C5134   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 42.4/48.5    |
| C5135   | 4030017490 | S.CER C1608 JB 1A 105K-T               | T  | 21.1/59.9    |
| C5136   | 4550007470 | S.TAN F931A107MNMBA                    | B  | 32.8/60.9    |
| C5201   | 4030017490 | S.CER C1608 JB 1A 105K-T               | T  | 16.1/9.2     |
| C6001   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 142.9/110.8  |
| C6002   | 4030007010 | S.CER C1608 CH 1H 100D-T               | T  | 152.1/109.8  |
| C6003   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 71.7/108.8   |
| C6004   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 70.8/102.8   |
| C6005   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 162.7/114.2  |
| C6006   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 85.5/130.3   |
| C6007   | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 161.2/119.2  |
| C6008   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 82.9/130.3   |
| C6010   | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 145.5/110.7  |
| C6011   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 78.2/130.3   |
| C6013   | 4030011340 | S.CER C1608 CH 1H 471J-T               | B  | 158/120      |
| C6015   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 80.2/130.3   |
| C6018   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 74/101.2     |
| C6019   | 4510009910 | S.ELE 16 CE 10 LH                      | T  | 109.1/92.2   |
| C6020   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 161.1/120.4  |
| C6022   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 86/134.2     |
| C6023   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 84.7/134.2   |
| C6024   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 83.4/134.2   |
| C6025   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 115.3/90.9   |
| C6026   | 4030017490 | S.CER C1608 JB 1A 105K-T               | T  | 80.6/134.2   |
| C6028   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 157.8/123.3  |
| C6029   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 81.9/134.2   |
| C6030   | 4030007130 | S.CER C1608 CH 1H 101J-T               | B  | 84.8/101.7   |
| C6032   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 78.4/106     |
| C6035   | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 75.3/102.8   |
| C6036   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 113.5/91.6   |
| C6037   | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 85.4/104.2   |
| C6039   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 159.5/126.1  |
| C6040   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 160.8/126.1  |
| C6041   | 4030017490 | S.CER C1608 JB 1A 105K-T               | T  | 85.4/105.5   |
| C6042   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 81.6/125.5   |
| C6043   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 151.6/123.4  |
| C6044   | 4030008850 | S.CER C1608 JB 1H 123K-T               | B  | 101.6/88.9   |
| C6045   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 101.9/86     |
| C6046   | 4030007030 | S.CER C1608 CH 1H 150J-T               | B  | 158.5/127.4  |
| C6047   | 4030018610 | S.CER C1608 CH 1H 182J-T               | B  | 108.6/80.2   |
| C6048   | 4030007120 | S.CER C1608 CH 1H 820J-T               | B  | 156.7/128.9  |
| C6049   | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 77.4/109.9   |
| C6050   | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 80.9/109.7   |
| C6051   | 4030007100 | S.CER C1608 CH 1H 560J-T               | B  | 154.4/128.9  |
| C6052   | 4030007050 | S.CER C1608 CH 1H 220J-T               | T  | 84.9/126.6   |
| C6053   | 4030007130 | S.CER C1608 CH 1H 101J-T               | T  | 80.9/111     |
| C6054   | 4030007050 | S.CER C1608 CH 1H 220J-T               | T  | 84.9/123.9   |
| C6055   | 4030018580 | S.CER C1608 CH 1H 821J-T               | T  | 103.3/77.9   |
| C6056   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 84.9/121.2   |
| C6057   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 102/77.9     |
| C6058   | 4030009510 | S.CER C1608 CH 1H 010B-T               | T  | 104.7/84.7   |
| C6059   | 4030007040 | S.CER C1608 CH 1H 180J-T               | T  | 152.9/126.8  |
| C6060   | 4030007140 | S.CER C1608 CH 1H 121J-T               | T  | 104.6/77.9   |
| C6061   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 86.6/87.6    |
| C6062   | 4030008750 | S.CER C1608 CH 1H 360J-T               | B  | 151/124.6    |
| C6063   | 4030007150 | S.CER C1608 CH 1H 151J-T               | B  | 84.6/122.6   |
| C6064   | 4030008650 | S.CER C1608 JB 1H 332K-T               | B  | 89/108.2     |
| C6065   | 4030007110 | S.CER C1608 CH 1H 680J-T               | B  | 87.3/119.2   |
| C6066   | 4030010750 | S.CER C1608 CH 1H 201J-T               | B  | 87.5/111     |
| C6067   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 107.5/83.4   |
| C6068   | 4030011280 | S.CER C1608 CH 1H 271J-T               | B  | 88.4/124.7   |
| C6069   | 4030007080 | S.CER C1608 CH 1H 390J-T               | T  | 90.3/122.1   |
| C6070   | 4030009510 | S.CER C1608 CH 1H 010B-T               | T  | 142.9/118.6  |
| C6071   | 4030007130 | S.CER C1608 CH 1H 101J-T               | T  | 77.4/113.7   |
| C6072   | 4030007030 | S.CER C1608 CH 1H 150J-T               | B  | 141.2/125.4  |
| C6073   | 4030011830 | S.CER C1608 CH 1H 301J-T               | T  | 88.1/125.4   |
| C6074   | 4030007130 | S.CER C1608 CH 1H 101J-T               | B  | 79.6/114.2   |
| C6075   | 4030007020 | S.CER C1608 CH 1H 120J-T               | B  | 91/122.7     |
| C6076   | 4610001830 | S.TRI TZB4S100AB10R00 (TZBX4N100BA110) | T  | 140.2/114.5  |
| C6077   | 4030007030 | S.CER C1608 CH 1H 150J-T               | B  | 141.2/128.3  |
| C6078   | 4030007170 | S.CER C1608 CH 1H 221J-T               | B  | 91.8/125.3   |
| C6079   | 4030018620 | S.CER C1608 CH 1H 222J-T               | T  | 92.2/84.2    |
| C6080   | 4030011280 | S.CER C1608 CH 1H 271J-T               | B  | 94.3/122.7   |
| C6081   | 4030018620 | S.CER C1608 CH 1H 222J-T               | T  | 95.9/84.2    |
| C6082   | 4030006860 | S.CER C1608 JB 1H 102K-T               | B  | 96.6/125.3   |
| C6083   | 4030011340 | S.CER C1608 CH 1H 471J-T               | B  | 133.7/122.2  |
| C6084   | 4030011280 | S.CER C1608 CH 1H 271J-T               | B  | 97.9/122.7   |
| C6085   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 93.8/77.9    |
| C6086   | 4030007010 | S.CER C1608 CH 1H 100D-T               | T  | 93.3/84.2    |
| C6087   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 111.6/97.2   |
| C6088   | 4030007140 | S.CER C1608 CH 1H 121J-T               | T  | 92/84.2      |
| C6089   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 98.3/128.4   |
| C6090   | 4030007070 | S.CER C1608 CH 1H 330J-T               | B  | 110.1/103.9  |
| C6091   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 110.3/100    |
| C6092   | 4030009920 | S.CER C1608 CH 1H 050B-T               | B  | 131/111.3    |
| C6093   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 99.8/84.2    |
| C6094   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 138.8/109    |
| C6095   | 4030009510 | S.CER C1608 CH 1H 010B-T               | T  | 97/80.4      |
| C6096   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 127.9/119.7  |
| C6097   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 81.8/77.1    |
| C6098   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 94.1/135.3   |
| C6099   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 80/77        |
| C6100   | 4030007150 | S.CER C1608 CH 1H 151J-T               | B  | 91.7/133.4   |
| C6101   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 99.5/134.8   |
| C6102   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 127.6/118.1  |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                             | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------------|----|--------------|
| C6103   | 4030009920 | S.CER       | C1608 CH 1H 050B-T          | B  | 115/100.7    |
| C6104   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 89.9/77.3    |
| C6105   | 4030007100 | S.CER       | C1608 CH 1H 560J-T          | B  | 103.6/135.2  |
| C6106   | 4030007170 | S.CER       | C1608 CH 1H 221J-T          | B  | 101/134.5    |
| C6107   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 84.4/80.4    |
| C6109   | 4030007070 | S.CER       | C1608 CH 1H 330J-T          | B  | 101/131.9    |
| C6110   | 4030007070 | S.CER       | C1608 CH 1H 330J-T          | B  | 113.4/104.7  |
| C6111   | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 115.2/106.2  |
| C6112   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 87.1/78.4    |
| C6113   | 4030010760 | S.CER       | C1608 CH 1H 331J-T          | B  | 101/129.4    |
| C6114   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 86.6/86      |
| C6115   | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 85.2/81.8    |
| C6116   | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 115.7/106.9  |
| C6117   | 4030007040 | S.CER       | C1608 CH 1H 180J-T          | T  | 111.2/106.9  |
| C6118   | 4030009530 | S.CER       | C1608 CH 1H 030B-T          | T  | 111.2/105.6  |
| C6119   | 4030009550 | S.CER       | C1608 CH 1H 2R5B-T          | T  | 105.2/108.6  |
| C6120   | 4030007040 | S.CER       | C1608 CH 1H 180J-T          | T  | 106.5/108.6  |
| C6121   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 94.2/112.4   |
| C6122   | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 93.9/104.6   |
| C6123   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 93.4/110.1   |
| C6124   | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 88.6/114     |
| C6125   | 4030007130 | S.CER       | C1608 CH 1H 101J-T          | T  | 95/104.5     |
| C6126   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 99.9/75.7    |
| C6127   | 4030007150 | S.CER       | C1608 CH 1H 151J-T          | B  | 92/103.6     |
| C6129   | 4030007140 | S.CER       | C1608 CH 1H 121J-T          | B  | 89.6/102.7   |
| C6130   | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 127.8/114.2  |
| C6132   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 150.8/115.8  |
| C6134   | 4030007130 | S.CER       | C1608 CH 1H 101J-T          | T  | 108.9/127.2  |
| C6135   | 4030007030 | S.CER       | C1608 CH 1H 150J-T          | B  | 93.4/101.4   |
| C6136   | 4030009920 | S.CER       | C1608 CH 1H 050B-T          | T  | 91.9/103     |
| C6138   | 4030007020 | S.CER       | C1608 CH 1H 120J-T          | B  | 106.6/132.2  |
| C6139   | 4030007170 | S.CER       | C1608 CH 1H 221J-T          | B  | 109.8/132.2  |
| C6140   | 4030007050 | S.CER       | C1608 CH 1H 220J-T          | B  | 71/122.5     |
| C6141   | 4030009920 | S.CER       | C1608 CH 1H 050B-T          | B  | 71.7/120.2   |
| C6142   | 4030007060 | S.CER       | C1608 CH 1H 270J-T          | B  | 73.4/122.4   |
| C6143   | 4030007030 | S.CER       | C1608 CH 1H 150J-T          | B  | 74.9/119.3   |
| C6144   | 4030007030 | S.CER       | C1608 CH 1H 150J-T          | B  | 75.7/122.4   |
| C6145   | 4030017490 | S.CER       | C1608 JB 1A 105K-T          | T  | 77.4/111.1   |
| RL2301  | 6330001721 | REL         | ATN207-K1                   |    |              |
| RL2302  | 6330001721 | REL         | ATN207-K1                   |    |              |
| CP1253  | 6910009670 | S.CHE       | HK3-S-T                     | T  | 51.1/120.6   |
| J1002   | 6510024151 | S.CON       | 50FY-BMT-TB(LF)(SN)         | T  | 18.4/102.8   |
| J1003   | 6510021861 | CON         | BH-800.4GG <LTC>            |    |              |
| J1051   | 6510024151 | S.CON       | 50FY-BMT-TB(LF)(SN)         | T  | 39.4/102.8   |
| J1501   | 6510022601 | S.CON       | 30FMN-BMTTR-A-TBT(LF)(SN)   | T  | 166.6/4.4    |
| J1601   | 6510022581 | S.CON       | 24FMN-BMTTR-A-TBT(LF)(SN)   | T  | 7.9/122.5    |
| J1701   | 6510022581 | S.CON       | 24FMN-BMTTR-A-TBT(LF)(SN)   | T  | 125.3/135.6  |
| J1801   | 6510022581 | S.CON       | 24FMN-BMTTR-A-TBT(LF)(SN)   | T  | 52.5/147     |
| J1901   | 6510024311 | CON         | B4B-PH-K-S(LF)(SN)          |    |              |
| J2001   | 6510023671 | CON         | TCS4480-0141577             |    |              |
| J2002   | 6510023661 | CON         | TCS4470-0141577             |    |              |
| J2101   | 6510026540 | CON         | UBB-4R-D14T-4D(LF)(SN)      |    |              |
| J2201   | 6510023720 | CON         | LGY6501-0600C               |    |              |
| J2301   | 6510024311 | CON         | B4B-PH-K-S(LF)(SN)          |    |              |
| J2302   | 6510023720 | CON         | LGY6501-0600C               |    |              |
| J2401   | 6510023720 | CON         | LGY6501-0600C               |    |              |
| J2501   | 6510023900 | CON         | LGR4619-7000                |    |              |
| J2502   | 6510024311 | CON         | B4B-PH-K-S(LF)(SN)          |    |              |
| J3001   | 6510007020 | CON         | TMP-J01X-V6                 |    |              |
| J3401   | 6510007020 | CON         | TMP-J01X-V6                 |    |              |
| J3701   | 6510007020 | CON         | TMP-J01X-V6                 |    |              |
| J3702   | 6510007020 | CON         | TMP-J01X-V6                 |    |              |
| J4101   | 6510022801 | S.CON       | B10B-PH-SM4-TB(LF)(SN)      | T  | 12.7/85      |
| J6001   | 6510007020 | CON         | TMP-J01X-V6                 |    |              |
| J6002   | 6510007020 | CON         | TMP-J01X-V6                 |    |              |
| J6102   | 6510026920 | CON         | IMSA-9180B-12Z904           |    |              |
| BT1001  | 3020000110 | LIT         | CR2032                      |    |              |
| W6001   | 7120000490 | JUM         | ERD25T0                     |    |              |
| EP1002  | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 13.8/115.9   |
| EP1003  | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 13.8/114.6   |
| EP1004  | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 13.8/113.3   |
| EP1005  | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 13.8/112     |
| EP1006  | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 25.1/116     |
| EP1007  | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 13.8/110.7   |
| EP1501  | 6910012350 | S.BEA       | MMZ1608Y 102BT              | T  | 181.6/8.6    |
| EP1502  | 6910014640 | S.BEA       | MPZ2012S221A-T              | T  | 180/9        |
| EP1503  | 6910012350 | S.BEA       | MMZ1608Y 102BT              | T  | 178.5/9.4    |
| EP1504  | 6910012350 | S.BEA       | MMZ1608Y 102BT              | T  | 176.4/8.6    |
| EP1505  | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 175.1/8.6    |
| EP1506  | 6910012350 | S.BEA       | MMZ1608Y 102BT              | T  | 172.9/8.6    |
| EP1507  | 6910012350 | S.BEA       | MMZ1608Y 102BT              | T  | 171.2/8.6    |
| EP1510  | 6910014640 | S.BEA       | MPZ2012S221A-T              | T  | 155/10.1     |
| EP1511  | 6910012350 | S.BEA       | MMZ1608Y 102BT              | T  | 151.5/11.3   |
| EP1512  | 6910012350 | S.BEA       | MMZ1608Y 102BT              | T  | 152.8/11.3   |
| EP1601  | 6910015970 | S.BEA       | MMZ1608B 301CT-AS           | T  | 3.7/135      |
| EP1602  | 6910015970 | S.BEA       | MMZ1608B 301CT-AS           | T  | 3.7/133.8    |
| EP1603  | 6910015970 | S.BEA       | MMZ1608B 301CT-AS           | T  | 3.7/132.6    |
| EP1604  | 6910015970 | S.BEA       | MMZ1608B 301CT-AS           | T  | 3.7/131.3    |
| EP1605  | 6910015970 | S.BEA       | MMZ1608B 301CT-AS           | T  | 3.7/129.9    |
| EP1606  | 6910015970 | S.BEA       | MMZ1608B 301CT-AS           | T  | 3.7/128.6    |
| EP1607  | 6910015970 | S.BEA       | MMZ1608B 301CT-AS           | T  | 3.7/127.3    |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION             | M. | H/V LOCATION |
|---------|------------|-------------------------|----|--------------|
| EP1608  | 6910015970 | S.BEA MMZ1608B 301CT-AS | T  | 3.7/126      |
| EP1609  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 12.5/125.3   |
| EP1610  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 12.5/124     |
| EP1611  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 15.2/122.9   |
| EP1612  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 12.5/121     |
| EP1613  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 12.5/119.3   |
| EP1614  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 12.5/118     |
| EP1615  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 3.7/116      |
| EP1616  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 3.7/114.8    |
| EP1617  | 6910014640 | S.BEA MPZ2012S221A-T    | T  | 4/110.5      |
| EP1618  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 3.7/124.7    |
| EP1701  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 130/139.9    |
| EP1702  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 128.7/139.9  |
| EP1703  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 127.4/139.9  |
| EP1704  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 126.1/139.9  |
| EP1705  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 124.8/139.9  |
| EP1706  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 122.4/139.9  |
| EP1707  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 121.1/139.9  |
| EP1708  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 119.8/139.9  |
| EP1709  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 118.5/139.9  |
| EP1710  | 6910014640 | S.BEA MPZ2012S221A-T    | T  | 115.8/139.9  |
| EP1801  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 41.7/142.5   |
| EP1802  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 43/142.5     |
| EP1803  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 44.3/142.5   |
| EP1804  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 47/142.5     |
| EP1805  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 48.3/142.5   |
| EP1901  | 6910018930 | S.BEA MPZ2012S601A      | T  | 154.6/143    |
| EP1902  | 6910018930 | S.BEA MPZ2012S601A      | T  | 158.2/143.1  |
| EP2001  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 178.8/121.5  |
| EP2002  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 178.8/124.1  |
| EP2003  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 174.5/112.8  |
| EP2004  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 178.8/120.2  |
| EP2031  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 181.8/144.8  |
| EP2101  | 6910012350 | S.BEA MMZ1608Y 102BT    | B  | 192.2/62.7   |
| EP2102  | 6910012350 | S.BEA MMZ1608Y 102BT    | B  | 183.7/62.7   |
| EP2103  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 175.3/30.3   |
| EP2104  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 172.7/26.3   |
| EP2121  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 173.8/36.1   |
| EP2131  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 158/58.7     |
| EP2132  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 158/60.4     |
| EP2201  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 195.2/37     |
| EP2301  | 6910014730 | S.BEA MPZ2012S331A-T    | B  | 188.7/11.5   |
| EP2302  | 6910014730 | S.BEA MPZ2012S331A-T    | B  | 183/19.2     |
| EP2303  | 6910014730 | S.BEA MPZ2012S331A-T    | B  | 186.4/17     |
| EP2304  | 6910014730 | S.BEA MPZ2012S331A-T    | B  | 196.1/20     |
| EP2401  | 6910015970 | S.BEA MMZ1608B 301CT-AS | B  | 193.5/79.5   |
| EP2402  | 6910015970 | S.BEA MMZ1608B 301CT-AS | B  | 197.2/79.6   |
| EP3001  | 6910012350 | S.BEA MMZ1608Y 102BT    | B  | 136.9/38.8   |
| EP3601  | 6910012350 | S.BEA MMZ1608Y 102BT    | B  | 135.5/27.8   |
| EP3602  | 6910012350 | S.BEA MMZ1608Y 102BT    | B  | 132.5/25.6   |
| EP3715  | 6910015970 | S.BEA MMZ1608B 301CT-AS | T  | 140.1/99     |
| EP4101  | 6910014730 | S.BEA MPZ2012S331A-T    | B  | 2.3/79.1     |
| EP5001  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 29.5/36.8    |
| EP5101  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 38.9/76.6    |
| EP6001  | 6910015970 | S.BEA MMZ1608B 301CT-AS | T  | 146.8/110.7  |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                    | M. | H/V LOCATION |
|---------|------------|--------------------------------|----|--------------|
| IC1     | 1180000421 | S.IC TA78L05F(TE12R,F)         | B  | 94.4/59.7    |
| IC2     | 1130009691 | S.IC TC74HCT7007AF(F) S        | T  | 133.6/64.3   |
| IC3     | 1130011530 | S.IC CD74HC4094M96             | T  | 122.4/64.6   |
| IC4     | 1130011530 | S.IC CD74HC4094M96             | T  | 133/75.2     |
| IC101   | 1190002101 | S.IC AD9951YSVZ <FE>           | T  | 110.6/100.7  |
| IC102   | 1130010560 | S.IC SN74AHC244PWR             | T  | 126.1/95.9   |
| IC103   | 1180003190 | S.REG UPD120N33TA-E1-A         | T  | 115.7/86.4   |
| IC104   | 1180003200 | S.REG UPD120N18TA-E1-A         | T  | 115.8/91.4   |
| IC192   | 1130013010 | S.IC SN74AHC1G08DCK3           | T  | 77.6/36.8    |
| IC320   | 1110007400 | S.IC BGA616                    | T  | 43.3/67.2    |
| IC381   | 1130013270 | S.IC ADF4116BRUZ <FE>          | T  | 70/70.3      |
| IC401   | 1130013010 | S.IC SN74AHC1G08DCK3           | T  | 114/3.1      |
| IC402   | 1130003831 | S.IC TC7S04F(TE85R,F)          | T  | 90.5/9.5     |
| IC403   | 1140007881 | S.IC TC190G08EFG004JDZ/SC1246A | T  | 104.1/13.6   |
| IC405   | 1130013010 | S.IC SN74AHC1G08DCK3           | T  | 75.2/53.2    |
| IC620   | 1110007400 | S.IC BGA616                    | T  | 38.4/47.5    |
| IC681   | 1130013270 | S.IC ADF4116BRUZ <FE>          | T  | 29.3/39.8    |
| IC701   | 1140014960 | S.IC TC190G02EFG-0058/SC1287A  | T  | 130.6/15.3   |
| Q1      | 1590003680 | S.TRA KRC402 RTK/P             | T  | 138.4/75.4   |
| Q51     | 1530003890 | S.TRA KTC3880S Y-RTK/P         | T  | 101.5/41.6   |
| Q61     | 1530004011 | S.TRA KTC3770U-C-RTK/P         | T  | 109.9/41.5   |
| Q71     | 1530003890 | S.TRA KTC3880S Y-RTK/P         | T  | 109.5/51.1   |
| Q87     | 1530003890 | S.TRA KTC3880S Y-RTK/P         | T  | 133.1/87.2   |
| Q121    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 85.8/93.8    |
| Q122    | 1590003680 | S.TRA KRC402 RTK/P             | B  | 87.2/92.2    |
| Q123    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 85.2/96.3    |
| Q124    | 1590003680 | S.TRA KRC402 RTK/P             | B  | 87.6/95.2    |
| Q125    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 85.8/91.1    |
| Q126    | 1590003680 | S.TRA KRC402 RTK/P             | B  | 86.9/89.2    |
| Q127    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 86/99        |
| Q128    | 1590003680 | S.TRA KRC402 RTK/P             | B  | 87.9/98.2    |
| Q151    | 1530003900 | S.TRA KTC4075 BL-RTK/P         | T  | 82.7/70.0    |
| Q152    | 1530003340 | S.TRA 2SC3357-T1 RF            | B  | 117.3/106.5  |
| Q181    | 1530003900 | S.TRA KTC4075 BL-RTK/P         | T  | 53.9/78.1    |
| Q201    | 1560000491 | S.FET 2SK508-T2B-A K52         | T  | 74.1/96.5    |
| Q202    | 1530003960 | S.TRA KTC2875-B-RTK/P          | T  | 73.6/102.5   |
| Q221    | 1560000491 | S.FET 2SK508-T2B-A K52         | T  | 57.2/96.5    |
| Q222    | 1530003960 | S.TRA KTC2875-B-RTK/P          | T  | 56.8/102.5   |
| Q251    | 1560000491 | S.FET 2SK508-T2B-A K52         | T  | 40.1/96.5    |
| Q252    | 1530003960 | S.TRA KTC2875-B-RTK/P          | T  | 40.1/102.5   |
| Q271    | 1560000491 | S.FET 2SK508-T2B-A K52         | T  | 23.1/96.5    |
| Q272    | 1530003960 | S.TRA KTC2875-B-RTK/P          | T  | 23.1/102.5   |
| Q301    | 1530004011 | S.TRA KTC3770U-C-RTK/P         | T  | 33.2/76      |
| Q361    | 1590003680 | S.TRA KRC402 RTK/P             | B  | 20.9/77.3    |
| Q402    | 1530003900 | S.TRA KTC4075 BL-RTK/P         | T  | 93.2/20.9    |
| Q403    | 1530003900 | S.TRA KTC4075 BL-RTK/P         | T  | 115.6/12.5   |
| Q404    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 94.1/4.8     |
| Q421    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 81.3/9.9     |
| Q422    | 1590003680 | S.TRA KRC402 RTK/P             | T  | 83.1/12.4    |
| Q423    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 81.3/7.4     |
| Q424    | 1590003680 | S.TRA KRC402 RTK/P             | T  | 82.7/5       |
| Q425    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 81.7/14.3    |
| Q426    | 1590003680 | S.TRA KRC402 RTK/P             | T  | 83.1/16.6    |
| Q427    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 81.3/18.6    |
| Q428    | 1590003680 | S.TRA KRC402 RTK/P             | T  | 83.1/20.8    |
| Q451    | 1560000331 | S.FET 2SK210-GR(TE85R,F)       | T  | 61/44        |
| Q452    | 1530003900 | S.TRA KTC4075 BL-RTK/P         | T  | 61.9/34.8    |
| Q481    | 1530003900 | S.TRA KTC4075 BL-RTK/P         | T  | 22.8/34.1    |
| Q501    | 1560000491 | S.FET 2SK508-T2B-A K52         | T  | 30.8/13.4    |
| Q502    | 1530003960 | S.TRA KTC2875-B-RTK/P          | T  | 31.2/7.5     |
| Q521    | 1560000491 | S.FET 2SK508-T2B-A K52         | T  | 14/13.5      |
| Q522    | 1530003960 | S.TRA KTC2875-B-RTK/P          | T  | 14.3/7.5     |
| Q551    | 1560000491 | S.FET 2SK508-T2B-A K52         | T  | 47.6/13.4    |
| Q552    | 1530003960 | S.TRA KTC2875-B-RTK/P          | T  | 47.9/7.5     |
| Q571    | 1560000491 | S.FET 2SK508-T2B-A K52         | T  | 64.5/13.5    |
| Q572    | 1530003960 | S.TRA KTC2875-B-RTK/P          | T  | 64.7/7.5     |
| Q601    | 1530004011 | S.TRA KTC3770U-C-RTK/P         | T  | 41/37        |
| Q661    | 1590003680 | S.TRA KRC402 RTK/P             | B  | 5.1/29.9     |
| Q681    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 67.8/51.5    |
| Q701    | 1530003900 | S.TRA KTC4075 BL-RTK/P         | B  | 123.9/12.4   |
| Q702    | 1530003900 | S.TRA KTC4075 BL-RTK/P         | T  | 141.9/19.2   |
| Q801    | 1530003890 | S.TRA KTC3880S Y-RTK/P         | T  | 127.9/46.7   |
| Q831    | 1560000561 | S.FET 2SK882-GR(TE85L,F)       | T  | 149.4/37.4   |
| Q851    | 1590003680 | S.TRA KRC402 RTK/P             | T  | 138/52.1     |
| Q852    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 137.8/49.8   |
| Q853    | 1590003680 | S.TRA KRC402 RTK/P             | B  | 109.5/55.3   |
| Q854    | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 106.6/54.7   |
| Q1502   | 1590003680 | S.TRA KRC402 RTK/P             | T  | 73/63.6      |
| Q1521   | 1590003680 | S.TRA KRC402 RTK/P             | B  | 21.5/62.4    |
| Q1522   | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 21.2/64.1    |
| Q2501   | 1590003680 | S.TRA KRC402 RTK/P             | T  | 85.1/50.4    |
| Q2511   | 1590003680 | S.TRA KRC402 RTK/P             | B  | 7.2/47.5     |
| Q2512   | 1590003770 | S.TRA KRA302E-RTK/P            | T  | 5.6/45.5     |
| D81     | 1750000581 | S.DIO 1SV307(TPH3,F)           | B  | 97/49.7      |
| D201    | 1720000831 | S.VAR KV1770STL-G              | T  | 74.5/88.8    |
| D202    | 1720000831 | S.VAR KV1770STL-G              | B  | 74.3/88.7    |
| D221    | 1720000831 | S.VAR KV1770STL-G              | T  | 57.5/88.7    |
| D222    | 1720000831 | S.VAR KV1770STL-G              | B  | 57.5/88.7    |
| D251    | 1750001720 | S.VAR 1SV215(TPH3,F)           | T  | 39.1/87.9    |
| D252    | 1750001720 | S.VAR 1SV215(TPH3,F)           | T  | 41.4/87.9    |
| D253    | 1750001720 | S.VAR 1SV215(TPH3,F)           | B  | 41.4/88      |
| D254    | 1750001720 | S.VAR 1SV215(TPH3,F)           | B  | 39.1/87.9    |
| D271    | 1750001720 | S.VAR 1SV215(TPH3,F)           | T  | 22.3/87.2    |
| D272    | 1750001720 | S.VAR 1SV215(TPH3,F)           | T  | 24.6/87.1    |
| D273    | 1750001720 | S.VAR 1SV215(TPH3,F)           | B  | 24.5/87.9    |
| D274    | 1750001720 | S.VAR 1SV215(TPH3,F)           | B  | 22.3/88      |
| D361    | 1750000581 | S.DIO 1SV307(TPH3,F)           | T  | 22.7/75.5    |
| D362    | 1750000581 | S.DIO 1SV307(TPH3,F)           | T  | 26.1/75.4    |
| D401    | 1750001320 | S.DIO KDS4148U RTK/P           | B  | 88.9/6.7     |
| D451    | 1720000681 | S.VAR 1SV262(TPH2,F)           | T  | 64.7/33.5    |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                            | M. | H/V LOCATION |
|---------|------------|----------------------------------------|----|--------------|
| D452    | 1790000491 | S.DIO HSM88ASTR-E                      | T  | 67/46.2      |
| D453    | 1790000491 | S.DIO HSM88ASTR-E                      | T  | 67.1/43      |
| D501    | 1720000831 | S.VAR KV1770STL-G                      | T  | 30.2/21.3    |
| D502    | 1720000831 | S.VAR KV1770STL-G                      | B  | 30.3/21.2    |
| D521    | 1720000831 | S.VAR KV1770STL-G                      | T  | 13.5/21.2    |
| D522    | 1720000831 | S.VAR KV1770STL-G                      | B  | 13.5/21.2    |
| D551    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | T  | 48.7/22      |
| D552    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | T  | 46.4/22      |
| D553    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | B  | 46.5/22      |
| D554    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | B  | 48.7/22      |
| D571    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | T  | 65.5/22      |
| D572    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | T  | 63.2/22      |
| D573    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | B  | 63.3/22      |
| D574    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | B  | 65.5/22      |
| D661    | 1750000581 | S.DIO 1SV307(TPH3,F)                   | T  | 6.6/27.3     |
| D662    | 1750000581 | S.DIO 1SV307(TPH3,F)                   | T  | 6.7/29.9     |
| D680    | 1750001320 | S.DIO KDS4148U RTK/P                   | B  | 43.8/47.6    |
| D681    | 1750001320 | S.DIO KDS4148U RTK/P                   | T  | 69.8/52.2    |
| D821    | 1750000431 | S.DIO HSB88WSTR-E                      | T  | 132.7/32.5   |
| D1201   | 1750001310 | S.DIO KDS114 RTK/PA                    | T  | 36.4/64.1    |
| D1221   | 1750001310 | S.DIO KDS114 RTK/PA                    | B  | 22.5/70      |
| D2201   | 1750001310 | S.DIO KDS114 RTK/PA                    | T  | 19.5/46.8    |
| D2221   | 1750001310 | S.DIO KDS114 RTK/PA                    | T  | 8.5/39       |
| FI101   | 2020001820 | S.CER SFECV10M5FA00-R0 (SFECV10.5MA5S) | T  | 96.1/89      |
| FI401   | 2020001820 | S.CER SFECV10M5FA00-R0 (SFECV10.5MA5S) | T  | 92.9/28.8    |
| FI831   | 2030000300 | S.MON DSF753SBF 64.491 MHz (FL-356)    | T  | 149.7/42.6   |
| X51     | 6050012560 | S.XTA CR-770B DSA321SD 32 MHz          | T  | 97.9/41.6    |
| L51     | 6200005011 | S.COI NLV25T-100J                      | T  | 96.8/44.9    |
| L52     | 6200005011 | S.COI NLV25T-100J                      | T  | 103.4/44.4   |
| L53     | 6200009351 | S.COI ELJRE R22GFA                     | T  | 105.8/41.9   |
| L61     | 6150004831 | S.COI LS-509-LF                        | T  | 119.3/40.8   |
| L62     | 6150004831 | S.COI LS-509-LF                        | T  | 119.3/48.3   |
| L72     | 6200009181 | S.COI ELJRE R10JFA                     | T  | 103/52       |
| L73     | 6200009531 | S.COI ELJRE R15GFA                     | T  | 101.2/54.1   |
| L75     | 6200009531 | S.COI ELJRE R15GFA                     | T  | 98.6/55.2    |
| L86     | 6200002861 | S.COI NLV25T-4R7J                      | T  | 102.9/49.6   |
| L87     | 6200009181 | S.COI ELJRE R10JFA                     | T  | 135.4/87.2   |
| L88     | 6200009531 | S.COI ELJRE R15GFA                     | T  | 138.8/86.5   |
| L89     | 6200009531 | S.COI ELJRE R15GFA                     | T  | 142.3/89.8   |
| L101    | 6200005011 | S.COI NLV25T-100J                      | B  | 113.9/86.4   |
| L103    | 6140002810 | S.COI LR-317                           | T  | 98.2/100.8   |
| L104    | 6200005011 | S.COI NLV25T-100J                      | B  | 109/94.8     |
| L105    | 6200005011 | S.COI NLV25T-100J                      | B  | 111.8/94.8   |
| L106    | 6200006671 | S.COI ELJRE 68NGFA                     | B  | 105.8/98.2   |
| L121    | 6200005011 | S.COI NLV25T-100J                      | B  | 84.1/97.1    |
| L122    | 6200005011 | S.COI NLV25T-100J                      | B  | 82.2/90.2    |
| L123    | 6200005011 | S.COI NLV25T-100J                      | T  | 82.4/95.7    |
| L125    | 6200005011 | S.COI NLV25T-100J                      | T  | 82.4/90.9    |
| L127    | 6200004951 | S.COI NLV25T-1R8J                      | T  | 99.8/90.6    |
| L128    | 6200005011 | S.COI NLV25T-100J                      | T  | 85.4/88.4    |
| L151    | 6200002651 | S.COI NLV25T-R18J                      | B  | 112.8/105.9  |
| L155    | 6200002851 | S.COI NLV25T-R82J                      | T  | 98.2/94      |
| L156    | 6200002851 | S.COI NLV25T-R82J                      | T  | 100.9/93.4   |
| L161    | 6200001981 | S.COI NLV25T-1R0J                      | T  | 90.1/76.3    |
| L162    | 6200001981 | S.COI NLV25T-1R0J                      | T  | 81.8/66.4    |
| L181    | 6200005011 | S.COI NLV25T-100J                      | T  | 52.7/75.5    |
| L202    | 6190001411 | COI #E526GN-110501                     |    |              |
| L204    | 6200002041 | S.COI NLV25T-101J                      | B  | 74.1/92.4    |
| L205    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 63.9/91.5    |
| L206    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 67.8/86.8    |
| L222    | 6190001411 | COI #E526GN-110501                     |    |              |
| L224    | 6200002041 | S.COI NLV25T-101J                      | B  | 57.3/92.4    |
| L225    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 46.9/91.5    |
| L226    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 51/86.8      |
| L252    | 6190001421 | COI #E526GN-110502                     |    |              |
| L254    | 6200002041 | S.COI NLV25T-101J                      | B  | 39.6/92.4    |
| L255    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 29.9/91.5    |
| L256    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 34.4/86.8    |
| L272    | 6190001441 | COI #E526GN-110504                     |    |              |
| L274    | 6200002041 | S.COI NLV25T-101J                      | B  | 22.8/92.4    |
| L275    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 13.4/91.5    |
| L276    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 16/86.8      |
| L301    | 6200005011 | S.COI NLV25T-100J                      | T  | 33.9/72.7    |
| L304    | 6200002861 | S.COI NLV25T-4R7J                      | T  | 33.9/70.2    |
| L320    | 6200009101 | S.COI ELJRE R18GFA                     | T  | 40.3/74.2    |
| L321    | 6200002841 | S.COI NLV25T-R22J                      | T  | 42.3/64.1    |
| L328    | 6200006991 | S.COI ELJRE 56NGFA                     | T  | 42.3/77.3    |
| L329    | 6200006991 | S.COI ELJRE 56NGFA                     | T  | 43.9/75.4    |
| L401    | 6200005011 | S.COI NLV25T-100J                      | T  | 88.3/13.9    |
| L421    | 6200005011 | S.COI NLV25T-100J                      | B  | 84.5/10.9    |
| L422    | 6200005011 | S.COI NLV25T-100J                      | B  | 83.8/7.6     |
| L423    | 6200005011 | S.COI NLV25T-100J                      | B  | 81.7/1.9     |
| L425    | 6200005011 | S.COI NLV25T-100J                      | B  | 83.1/4.6     |
| L428    | 6200005011 | S.COI NLV25T-100J                      | T  | 81.6/23.7    |
| L452    | 6130002970 | COI LB-343                             |    |              |
| L453    | 6200005011 | S.COI NLV25T-100J                      | T  | 56.8/40.6    |
| L454    | 6200009861 | S.COI NLV25T-1R5J                      | T  | 57.8/34.4    |
| L455    | 6200005011 | S.COI NLV25T-100J                      | T  | 54/39.6      |
| L481    | 6200005011 | S.COI NLV25T-100J                      | B  | 21.7/37.1    |
| L502    | 6190001411 | COI #E526GN-110501                     |    |              |
| L504    | 6200002041 | S.COI NLV25T-101J                      | B  | 29.7/17.5    |
| L505    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 40.7/18.4    |
| L506    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 36.6/23.1    |
| L522    | 6190001411 | COI #E526GN-110501                     |    |              |
| L524    | 6200002041 | S.COI NLV25T-101J                      | B  | 14.1/17.5    |
| L525    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 24.1/18.4    |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                         | M. | H/V LOCATION |
|---------|------------|-------------|-------------------------|----|--------------|
| L526    | 6200010440 | S.COI       | C2520C-1R2G-A (1.2U)    | T  | 19.7/23.1    |
| L552    | 6190001421 | COI         | #E526GN-110502          |    |              |
| L554    | 6200002041 | S.COI       | NLV25T-101J             | B  | 47/17.6      |
| L555    | 6200010440 | S.COI       | C2520C-1R2G-A (1.2U)    | T  | 57.9/18.4    |
| L556    | 6200010440 | S.COI       | C2520C-1R2G-A (1.2U)    | T  | 53.3/23.1    |
| L572    | 6190001441 | COI         | #E526GN-110504          |    |              |
| L574    | 6200002041 | S.COI       | NLV25T-101J             | B  | 63.8/17.6    |
| L575    | 6200010440 | S.COI       | C2520C-1R2G-A (1.2U)    | T  | 73.9/18.4    |
| L576    | 6200010440 | S.COI       | C2520C-1R2G-A (1.2U)    | T  | 72/23.1      |
| L601    | 6200005011 | S.COI       | NLV25T-100J             | T  | 39.8/34      |
| L604    | 6200002861 | S.COI       | NLV25T-4R7J             | B  | 43.7/40.5    |
| L620    | 6200009101 | S.COI       | ELJRE R18GFA            | T  | 44.1/41.6    |
| L621    | 6200002841 | S.COI       | NLV25T-R22J             | T  | 33.3/47.7    |
| L628    | 6200006991 | S.COI       | ELJRE 56NGFA            | T  | 41.1/44.1    |
| L629    | 6200006991 | S.COI       | ELJRE 56NGFA            | T  | 41.1/45.3    |
| L701    | 6200005011 | S.COI       | NLV25T-100J             | T  | 124.1/24.8   |
| L702    | 6200005491 | S.COI       | NLV32T-331J             | T  | 137.5/6.4    |
| L703    | 6200005491 | S.COI       | NLV32T-331J             | T  | 141.2/6      |
| L704    | 6200008641 | S.COI       | NLV32T-391J             | T  | 144.8/3      |
| L721    | 6200002041 | S.COI       | NLV25T-101J             | T  | 141/12.4     |
| L821    | 6140002810 | S.COI       | LR-317                  | T  | 127/32.5     |
| L822    | 6140002810 | S.COI       | LR-317                  | T  | 138.4/32.5   |
| L831    | 6140003770 | S.COI       | LR-414 4KBL (STP-01435) | T  | 139.5/40.5   |
| L834    | 6150004280 | COI         | LS-484B (C-14927)       |    |              |
| L851    | 6200005011 | S.COI       | NLV25T-100J             | T  | 135.2/50.8   |
| L852    | 6200005011 | S.COI       | NLV25T-100J             | B  | 106.8/57.2   |
| L1201   | 6200002601 | S.COI       | NLV25T-047J             | T  | 33.6/65.5    |
| L1221   | 6200002431 | S.COI       | NLV25T-082J             | T  | 27.9/65.5    |
| L1222   | 6200002431 | S.COI       | NLV25T-082J             | T  | 27.2/68.9    |
| L1223   | 6200002641 | S.COI       | NLV25T-R15J             | T  | 21/70.1      |
| L1224   | 6200002411 | S.COI       | NLV25T-056J             | T  | 30.8/64.4    |
| L1225   | 6200005011 | S.COI       | NLV25T-100J             | B  | 25.1/66.3    |
| L1301   | 6200005011 | S.COI       | NLV25T-100J             | T  | 75.6/72.4    |
| L1521   | 6200005011 | S.COI       | NLV25T-100J             | B  | 27.2/63.7    |
| L2201   | 6200002601 | S.COI       | NLV25T-047J             | T  | 19.5/44.4    |
| L2202   | 6200005011 | S.COI       | NLV25T-100J             | B  | 28.3/48.9    |
| L2221   | 6200002431 | S.COI       | NLV25T-082J             | T  | 12.4/43.7    |
| L2222   | 6200002431 | S.COI       | NLV25T-082J             | T  | 11.2/39.4    |
| L2223   | 6200002641 | S.COI       | NLV25T-R15J             | T  | 5.1/34.6     |
| L2224   | 6200002411 | S.COI       | NLV25T-056J             | T  | 13.4/46.6    |
| L2225   | 6200005011 | S.COI       | NLV25T-100J             | T  | 6/43.2       |
| L2511   | 6200005011 | S.COI       | NLV25T-100J             | B  | 11.8/48.8    |
| L4301   | 6200005011 | S.COI       | NLV25T-100J             | B  | 35.1/46.1    |
|         |            |             |                         |    |              |
| R1      | 7030003360 | S.RES       | ERJ3GEYJ 221 V (220)    | B  | 149.3/61.5   |
| R2      | 7030003360 | S.RES       | ERJ3GEYJ 221 V (220)    | B  | 142.5/61.8   |
| R3      | 7030003360 | S.RES       | ERJ3GEYJ 221 V (220)    | B  | 141.8/74.5   |
| R4      | 7030003360 | S.RES       | ERJ3GEYJ 221 V (220)    | B  | 149.3/75.5   |
| R6      | 7030003360 | S.RES       | ERJ3GEYJ 221 V (220)    | B  | 149.3/77.5   |
| R7      | 7030003360 | S.RES       | ERJ3GEYJ 221 V (220)    | B  | 141.8/78.5   |
| R8      | 7030003360 | S.RES       | ERJ3GEYJ 221 V (220)    | B  | 149.3/79.5   |
| R9      | 7030011030 | S.RES       | ERJ1TYJ 270U (27)       | B  | 104.4/60.7   |
| R10     | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)     | T  | 127.8/72     |
| R11     | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)     | T  | 127.8/75.6   |
| R12     | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)     | T  | 127.8/74.4   |
| R13     | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)     | T  | 127.8/77.2   |
| R14     | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)     | B  | 131.4/73.1   |
| R16     | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K)   | T  | 127.4/63.4   |
| R18     | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K)   | T  | 127.4/64.7   |
| R19     | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K)   | T  | 127.4/66.4   |
| R20     | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K)   | T  | 118/60.1     |
| R21     | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K)   | T  | 116.6/61.4   |
| R22     | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K)   | B  | 122.5/62.4   |
| R23     | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K)   | T  | 126.6/68.4   |
| R24     | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)    | T  | 137.5/78.9   |
| R25     | 7030003860 | S.RES       | ERJ3GE JPW V            | T  | 117.4/65.5   |
| R26     | 7030003860 | S.RES       | ERJ3GE JPW V            | T  | 116.1/65.5   |
| R51     | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)    | T  | 93.1/43.6    |
| R52     | 7030003590 | S.RES       | ERJ3GEYJ 183 V (18K)    | T  | 93.1/40.8    |
| R53     | 7030003690 | S.RES       | ERJ3GEYJ 124 V (120K)   | T  | 94.4/43.6    |
| R54     | 7030003590 | S.RES       | ERJ3GEYJ 183 V (18K)    | T  | 100.7/44     |
| R55     | 7030003610 | S.RES       | ERJ3GEYJ 273 V (27K)    | T  | 101.1/38.5   |
| R56     | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)    | T  | 103.5/38.5   |
| R57     | 7030003860 | S.RES       | ERJ3GE JPW V            | T  | 103.8/41.3   |
| R58     | 7030003860 | S.RES       | ERJ3GE JPW V            | T  | 107.1/38.5   |
| R61     | 7030003260 | S.RES       | ERJ3GEYJ 330 V (33)     | T  | 106.5/44.1   |
| R62     | 7030003600 | S.RES       | ERJ3GEYJ 223 V (22K)    | T  | 107.8/44.1   |
| R63     | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)    | T  | 109.7/43.4   |
| R64     | 7030003370 | S.RES       | ERJ3GEYJ 271 V (270)    | T  | 109.9/38.1   |
| R65     | 7030003860 | S.RES       | ERJ3GE JPW V            | B  | 123.5/48.6   |
| R66     | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)    | T  | 115.8/52.5   |
| R71     | 7030003510 | S.RES       | ERJ3GEYJ 392 V (3.9K)   | T  | 108.5/48.8   |
| R72     | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K)   | T  | 111.6/50.9   |
| R73     | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)     | B  | 106/52       |
| R74     | 7030003360 | S.RES       | ERJ3GEYJ 221 V (220)    | T  | 111.2/53.5   |
| R85     | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)    | T  | 99.9/70.7    |
| R86     | 7030003400 | S.RES       | ERJ3GEYJ 471 V (470)    | T  | 127/85.3     |
| R87     | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)     | T  | 130.8/89.3   |
| R88     | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K)   | T  | 129.4/87.2   |
| R89     | 7030003510 | S.RES       | ERJ3GEYJ 392 V (3.9K)   | T  | 130.7/87.2   |
| R90     | 7030003360 | S.RES       | ERJ3GEYJ 221 V (220)    | T  | 135.4/48.8   |
| R91     | 7030008240 | S.RES       | ERJ12Y0R00U             | B  | 84.1/45.2    |
| R92     | 7030008240 | S.RES       | ERJ12Y0R00U             | B  | 152.8/97.2   |
| R93     | 7030003430 | S.RES       | ERJ3GEYJ 821 V (820)    | B  | 97.6/51.4    |
| R94     | 7030004030 | S.RES       | ERJ3GEYJ 5R6 V (5.6)    | B  | 96.9/53.7    |
| R95     | 7030003430 | S.RES       | ERJ3GEYJ 821 V (820)    | B  | 97.6/55.9    |
| R96     | 7030003370 | S.RES       | ERJ3GEYJ 271 V (270)    | B  | 146.5/86.5   |
| R97     | 7030003230 | S.RES       | ERJ3GEYJ 180 V (18)     | B  | 149.1/89.1   |
| R98     | 7030003370 | S.RES       | ERJ3GEYJ 271 V (270)    | B  | 149.8/86.5   |
| R101    | 7030003860 | S.RES       | ERJ3GE JPW V            | T  | 117.9/107.4  |
| R108    | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)     | T  | 115.2/105.4  |
| R109    | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)     | T  | 117.3/99.8   |
| R110    | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)     | T  | 117.3/98.6   |



## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R111    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 117.3/97.4   |
| R112    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 115.3/94.6   |
| R113    | 7030003510 | S.RES ERJ3GEYJ 392 V (3.9K) | T  | 104.8/96.9   |
| R114    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 101.5/99.9   |
| R115    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 103.1/100.7  |
| R116    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 105.9/108    |
| R131    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 93.1/76.3    |
| R133    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | T  | 93.9/78.2    |
| R152    | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 124.6/105.3  |
| R154    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 115/101      |
| R155    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | B  | 125/104.4    |
| R157    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 121.7/103.5  |
| R158    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 120.7/107.2  |
| R159    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 85.5/67.3    |
| R160    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 84.7/69.4    |
| R161    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 82.7/72.1    |
| R181    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 55.8/78      |
| R182    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 53.8/80.1    |
| R191    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 75.7/39.8    |
| R192    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 77.6/39      |
| R193    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 78.2/34.6    |
| R202    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 61.9/88.1    |
| R203    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 73.7/104.9   |
| R204    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 72.4/99.5    |
| R222    | 7030009841 | S.RES ERA3YHD 330V (33)     | T  | 45/88.1      |
| R223    | 7030009861 | S.RES ERA3YED 471V (470)    | T  | 56.9/104.9   |
| R224    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 55.5/99.5    |
| R252    | 7030009851 | S.RES ERA3YED 271V (270)    | T  | 28.3/88.1    |
| R253    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 40.1/104.9   |
| R254    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 38.8/99.5    |
| R272    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 12.3/87.9    |
| R273    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 23.3/104.9   |
| R274    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 22/99.6      |
| R275    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 30.6/77.9    |
| R281    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 33.1/92.5    |
| R282    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 49.7/92.5    |
| R283    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 66.4/92.5    |
| R284    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 78.2/106.7   |
| R301    | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 33.2/77.9    |
| R302    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 31.2/76.1    |
| R303    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 38.8/74.2    |
| R304    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | T  | 31.7/71.5    |
| R305    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 45.1/74.2    |
| R309    | 7030003410 | S.RES ERJ3GEYJ 561 V (560)  | T  | 63.4/67.5    |
| R321    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 45.1/71.5    |
| R323    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 40.4/63.6    |
| R352    | 7030003410 | S.RES ERJ3GEYJ 561 V (560)  | T  | 14.2/78.3    |
| R353    | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | T  | 13.5/75.2    |
| R354    | 7030003410 | S.RES ERJ3GEYJ 561 V (560)  | T  | 12.3/75.2    |
| R361    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 25.6/73.2    |
| R362    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 21.7/74.2    |
| R363    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 20/75        |
| R380    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 71/66.2      |
| R385    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 75.5/68.1    |
| R386    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 75.6/69.3    |
| R387    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 75.5/70.5    |
| R392    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 68/74.5      |
| R393    | 7030009961 | S.RES ERA3YED 221V (220)    | T  | 69.3/74.5    |
| R394    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 66/73.8      |
| R401    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 115.7/28.7   |
| R402    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 114.4/28.7   |
| R403    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 115.1/30.8   |
| R404    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 112.1/27.4   |
| R405    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 113/29.4     |
| R406    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 110.3/27.2   |
| R407    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 110.9/29.3   |
| R408    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 109/27.2     |
| R409    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 108.1/30.6   |
| R410    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 107.7/27.2   |
| R411    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 108.1/29.3   |
| R412    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 106.4/27.2   |
| R413    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 105.2/30.6   |
| R414    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 105.1/27.2   |
| R415    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 105.2/29.3   |
| R416    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 103.8/27.2   |
| R417    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 102.3/30.6   |
| R418    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 102.5/27.2   |
| R419    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 102.3/29.3   |
| R420    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 101.2/27.2   |
| R421    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 99.4/30.6    |
| R422    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 99.9/27.2    |
| R423    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 99.4/29.3    |
| R424    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 98.6/27.2    |
| R425    | 7030009861 | S.RES ERA3YED 471V (470)    | T  | 97.3/27.2    |
| R427    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 92.9/9.2     |
| R428    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 115.9/39.9   |
| R430    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 88.1/11.3    |
| R431    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 90/23.7      |
| R432    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 95/23.9      |
| R433    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 92.1/16.4    |
| R434    | 7030003240 | S.RES ERJ3GEYJ 220 V (22)   | T  | 89.4/16.4    |
| R435    | 7030003330 | S.RES ERJ3GEYJ 121 V (120)  | T  | 97.1/2.8     |
| R436    | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | T  | 94.5/2.8     |
| R437    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 97.1/4.3     |
| R438    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 91.7/11      |
| R439    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | T  | 115.6/10.6   |
| R440    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 115.7/8.2    |
| R441    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 90.4/21.6    |
| R442    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 99.6/6.5     |
| R443    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 116.3/20.5   |
| R444    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 114.7/20.5   |
| R445    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 115/20.8     |
| R446    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 116.2/20     |
| R447    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 100.4/14.9   |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R448    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 115.7/9.4    |
| R449    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 115.2/5.1    |
| R450    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 66.9/33.2    |
| R451    | 7030005871 | S.RES ERA3YKD 104V (100K)   | T  | 64/46.2      |
| R452    | 7030005871 | S.RES ERA3YKD 104V (100K)   | T  | 56.1/43.7    |
| R453    | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 56.5/38.7    |
| R454    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 58.7/46.3    |
| R455    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | T  | 61.3/46.2    |
| R456    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | T  | 60.1/33.1    |
| R457    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 54.2/34.8    |
| R459    | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | T  | 57.1/31.9    |
| R460    | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | T  | 55.2/31.2    |
| R461    | 7030003310 | S.RES ERJ3GEYJ 820 V (82)   | T  | 58.9/31.2    |
| R462    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 115.9/15.6   |
| R463    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 72.6/51.3    |
| R464    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 71.3/52      |
| R471    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 89.8/18.3    |
| R481    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 20.9/34.2    |
| R482    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 19.6/32.4    |
| R502    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 42.9/21.9    |
| R503    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 31.1/5.1     |
| R504    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 32.2/10.5    |
| R522    | 7030009841 | S.RES ERA3YHD 330V (33)     | T  | 26/21.9      |
| R523    | 7030009861 | S.RES ERA3YED 471V (470)    | T  | 14.2/5.1     |
| R524    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 15.3/10.4    |
| R552    | 7030009851 | S.RES ERA3YED 271V (270)    | T  | 59.7/21.8    |
| R553    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 47.8/5.1     |
| R554    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 48.9/10.4    |
| R572    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 75.5/21.8    |
| R573    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 64.6/5.1     |
| R574    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 65.7/10.4    |
| R575    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 35/35.4      |
| R581    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 21.8/17.6    |
| R582    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 37.8/17.6    |
| R583    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 54.8/17.6    |
| R601    | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 38.7/37.4    |
| R602    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 44.1/36.5    |
| R603    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 44.1/38.9    |
| R604    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 40.7/39.7    |
| R609    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 18.7/40.4    |
| R621    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 41.9/47.3    |
| R623    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 31.2/47.4    |
| R624    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 36.5/48.1    |
| R652    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 5/27         |
| R653    | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | T  | 5/22.9       |
| R654    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 3.7/24.1     |
| R661    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 3.5/30.3     |
| R662    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 4.5/29.9     |
| R663    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 2.1/29.6     |
| R680    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/46.8    |
| R685    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 23.5/41.7    |
| R686    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 23.5/40.5    |
| R687    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 23.5/39.3    |
| R692    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 25.2/34.7    |
| R693    | 7030009651 | S.RES ERA3YHD 820V (82)     | T  | 28.2/34.7    |
| R694    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 29.5/34.5    |
| R701    | 7030007200 | S.RES ERA3YEB 202V (2K)     | T  | 135.4/5.4    |
| R702    | 7030007210 | S.RES ERA3YEB 102V (1K)     | T  | 134.6/3.4    |
| R703    | 7030007200 | S.RES ERA3YEB 202V (2K)     | T  | 134.1/5.4    |
| R704    | 7030007210 | S.RES ERA3YEB 102V (1K)     | T  | 133.3/2.1    |
| R705    | 7030007200 | S.RES ERA3YEB 202V (2K)     | T  | 132.8/5.4    |
| R706    | 7030007210 | S.RES ERA3YEB 102V (1K)     | T  | 132/3.4      |
| R707    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 131.5/5.4    |
| R708    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 130.7/2.1    |
| R709    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 130.2/5.5    |
| R710    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 129.4/3.6    |
| R711    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 128.9/5.5    |
| R712    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 128.1/2.3    |
| R713    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 127.6/5.5    |
| R714    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 126.8/3.6    |
| R715    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 126.3/5.5    |
| R716    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 124.4/2.3    |
| R717    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 125/5.5      |
| R718    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 124.2/3.6    |
| R719    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 123.7/5.5    |
| R720    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 122.4/5.5    |
| R721    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | B  | 124.9/14.6   |
| R722    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 124.9/16.7   |
| R724    | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 145/10.8     |
| R726    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 143.9/17.8   |
| R727    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 127.8/23.7   |
| R728    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 126.6/23.7   |
| R729    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 129/23.7     |
| R730    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 139.6/15.4   |
| R731    | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 142/17.3     |
| R732    | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 144.6/19.8   |
| R734    | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | B  | 148.1/15.4   |
| R735    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 150.4/14.6   |
| R736    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 124.9/20.9   |
| R801    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | T  | 125.6/50.4   |
| R802    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 125.6/45.2   |
| R803    | 7030003500 | S.RES ERJ3GEYJ 332 V (3.3K) | T  | 130.3/47     |
| R804    | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | T  | 133.4/47.7   |
| R805    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 128.5/37.1   |
| R806    | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 126.4/36.3   |
| R807    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 124.3/35.5   |
| R808    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | T  | 128.7/43.7   |
| R811    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 143.5/22.4   |
| R812    | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | T  | 140.4/23.1   |
| R813    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 143.5/23.7   |
| R831    | 7030003330 | S.RES ERJ3GEYJ 121 V (120)  | B  | 141.5/35.7   |
| R832    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 139.4/36.3   |
| R833    | 7030003330 | S.RES ERJ3GEYJ 121 V (120)  | B  | 141.5/37.1   |
| R834    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | T  | 152.2/38.1   |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| R835    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)        | B  | 154/36.4     |
| R836    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)        | B  | 149.5/27.7   |
| R837    | 7030003230 | S.RES ERJ3GEYJ 180 V (18)         | B  | 148.8/25.4   |
| R838    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)        | B  | 150.4/25.4   |
| R851    | 7030003860 | S.RES ERJ3GE JPW V                | T  | 141/51.5     |
| R852    | 7030003860 | S.RES ERJ3GE JPW V                | B  | 111.2/57.4   |
| R1201   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K)       | T  | 38.9/63.6    |
| R1202   | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K)       | T  | 37.5/62.1    |
| R1205   | 7030003860 | S.RES ERJ3GE JPW V                | T  | 2.4/60.4     |
| R1221   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)        | B  | 19.5/69.9    |
| R1222   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)        | T  | 23/73.4      |
| R1223   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 25.1/72.9    |
| R1224   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 34.3/62.4    |
| R1521   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)        | B  | 19.6/66.5    |
| R2201   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K)       | T  | 25.4/47.7    |
| R2202   | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K)       | T  | 23/47.7      |
| R2205   | 7030003860 | S.RES ERJ3GE JPW V                | T  | 2.4/49.7     |
| R2221   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)        | T  | 8/41.3       |
| R2222   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)        | B  | 3.3/36.8     |
| R2223   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | B  | 3.3/34.1     |
| R2224   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 14.3/43.6    |
| R2512   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)        | B  | 5.7/41       |
|         |            |                                   |    |              |
| C1      | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 153.7/79.5   |
| C2      | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 141.8/78.5   |
| C3      | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 153.7/77.5   |
| C5      | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 153.7/73.5   |
| C6      | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 141.8/72.5   |
| C7      | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 153.7/71.5   |
| C8      | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 141.8/70.5   |
| C9      | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 153.4/67.5   |
| C10     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 141.4/64.8   |
| C11     | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 141.8/63.9   |
| C12     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 153.5/61.5   |
| C13     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 143.6/59.1   |
| C14     | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 90.5/60.1    |
| C15     | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 92.4/64.1    |
| C16     | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 96.5/64.1    |
| C17     | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 98.4/60.7    |
| C18     | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 131/58.1     |
| C19     | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 124.9/70.5   |
| C20     | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 136.6/80.8   |
| C22     | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 130.6/75     |
| C23     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 125.8/72.4   |
| C24     | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 128.2/74     |
| C25     | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 128.2/75.6   |
| C26     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 127.8/70.8   |
| C51     | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 94.4/40.8    |
| C52     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 95.7/42.3    |
| C53     | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 99.1/38.8    |
| C54     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 102.3/38.5   |
| C55     | 4030007120 | S.CER C1608 CH 1H 820J-T          | T  | 104.7/38.5   |
| C56     | 4030007040 | S.CER C1608 CH 1H 180J-T          | T  | 105.8/40.6   |
| C57     | 4030007120 | S.CER C1608 CH 1H 820J-T          | T  | 105.9/38.5   |
| C58     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 107.8/41.3   |
| C61     | 4030007170 | S.CER C1608 CH 1H 221J-T          | T  | 109.7/39.3   |
| C62     | 4030007050 | S.CER C1608 CH 1H 220J-T          | B  | 115.1/43.4   |
| C63     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 109.7/44.6   |
| C64     | 4030009510 | S.CER C1608 CH 1H 010B-T          | T  | 114.9/45.7   |
| C65     | 4030007050 | S.CER C1608 CH 1H 220J-T          | T  | 114.9/48.5   |
| C67     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 112.9/50.9   |
| C75     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 107.3/52.1   |
| C76     | 4030007090 | S.CER C1608 CH 1H 470J-T          | T  | 103.8/55.2   |
| C77     | 4030007000 | S.CER C1608 CH 1H 090D-T          | T  | 103/53.3     |
| C78     | 4030007120 | S.CER C1608 CH 1H 820J-T          | T  | 102.5/55.2   |
| C79     | 4030009910 | S.CER C1608 CH 1H 040B-T          | T  | 100.4/52     |
| C80     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 99.9/55.2    |
| C83     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 99.3/53.3    |
| C84     | 4030007170 | S.CER C1608 CH 1H 221J-T          | T  | 97.3/54.1    |
| C85     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 98/51.5      |
| C86     | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 95.3/53.7    |
| C87     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 105.2/49.3   |
| C88     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 130.8/90.6   |
| C89     | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 129.6/85.3   |
| C90     | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 133.5/90.1   |
| C92     | 4030007000 | S.CER C1608 CH 1H 090D-T          | T  | 136.7/87.2   |
| C93     | 4030007090 | S.CER C1608 CH 1H 470J-T          | T  | 136.7/89.8   |
| C94     | 4030007120 | S.CER C1608 CH 1H 820J-T          | T  | 138.1/89.8   |
| C95     | 4030009910 | S.CER C1608 CH 1H 040B-T          | T  | 138.8/87.8   |
| C96     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 141.6/87.8   |
| C97     | 4030007170 | S.CER C1608 CH 1H 221J-T          | T  | 143.7/88.5   |
| C98     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 145.1/88.5   |
| C99     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 139.5/89.8   |
| C101    | 4550007090 | S.TAN TEESVA 1A 226M8R            | B  | 109.4/84.1   |
| C102    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 115.3/89     |
| C103    | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 106/101      |
| C105    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 106/106.7    |
| C106    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 108.5/108    |
| C107    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 114.2/106.9  |
| C108    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 112/107.4    |
| C109    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 110.6/107.6  |
| C110    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 103.7/103.3  |
| C111    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 105.6/104.7  |
| C112    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 104.2/101.4  |
| C113    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 103/98.6     |
| C114    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 107.1/93.8   |
| C115    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 108.6/93.8   |
| C119    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 104.8/95.7   |
| C120    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 123.8/91.7   |
| C121    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 113.2/86.3   |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                            | M. | H/V LOCATION |
|---------|------------|----------------------------------------|----|--------------|
| C122    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 114.3/91.2   |
| C123    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 113.3/90.3   |
| C124    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 114.5/94.8   |
| C128    | 4030007140 | S.CER C1608 CH 1H 121J-T               | T  | 98.7/88.3    |
| C129    | 4030007060 | S.CER C1608 CH 1H 270J-T               | B  | 102.2/96.9   |
| C132    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 82.2/99.7    |
| C133    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 81.7/92.5    |
| C134    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 82.2/98.1    |
| C137    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 85.6/100     |
| C138    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 83.7/92.9    |
| C139    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 83.4/98.1    |
| C146    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 82.2/93.3    |
| C147    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 83.4/93.3    |
| C150    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 81.7/88.3    |
| C151    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 122.9/107.2  |
| C152    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 115.7/103.2  |
| C153    | 4030007130 | S.CER C1608 CH 1H 101J-T               | B  | 110.8/105.8  |
| C154    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 123.3/103.4  |
| C155    | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 94.9/94.3    |
| C156    | 4030017800 | S.CER C1608 CH 1H 561J-T               | T  | 100.5/95.7   |
| C157    | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 100.8/88.3   |
| C161    | 4030007070 | S.CER C1608 CH 1H 330J-T               | B  | 110.1/107.7  |
| C163    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 82.6/68.3    |
| C164    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 83.5/73.9    |
| C165    | 4030010760 | S.CER C1608 CH 1H 331J-T               | T  | 91.2/78.6    |
| C166    | 4030011280 | S.CER C1608 CH 1H 271J-T               | T  | 89.1/78.6    |
| C167    | 4030010760 | S.CER C1608 CH 1H 331J-T               | T  | 82/64        |
| C168    | 4030011280 | S.CER C1608 CH 1H 271J-T               | T  | 80.7/63.3    |
| C181    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 51.3/77.5    |
| C182    | 4550007520 | S.TAN F931A106MAABMA                   | B  | 53.1/75.2    |
| C183    | 4340000290 | S.MYL ECHU 1C 103JX5                   | T  | 50.1/79.1    |
| C184    | 4550007470 | S.TAN F931A107MNBMA                    | B  | 50.6/78.6    |
| C192    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 75.7/36.9    |
| C201    | 4340000290 | S.MYL ECHU 1C 103JX5                   | T  | 64.7/86.4    |
| C202    | 4030009990 | S.CER C1608 CH 1H 200J-T               | T  | 68.8/89.6    |
| C203    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 64.2/94.4    |
| C204    | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 63.2/88.1    |
| C205    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 73.7/106.1   |
| C206    | 4030009500 | S.CER C1608 CH 1H 0R5B-T               | B  | 68.9/94.1    |
| C207    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 74.3/100.1   |
| C208    | 4610001860 | S.TRI TZB4Z060AB10R00 (TZBX4Z060BA110) | T  | 70.8/92.6    |
| C209    | 4030009350 | S.CER C1608 CH 1H 3R5B-T               | T  | 74.5/94.1    |
| C222    | 4030007100 | S.CER C1608 CH 1H 560J-T               | T  | 51.6/89.7    |
| C223    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 47.4/94.4    |
| C224    | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 46.3/88.1    |
| C225    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 56.9/106.1   |
| C226    | 4030009510 | S.CER C1608 CH 1H 010B-T               | B  | 52.4/94.1    |
| C227    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 57.4/100.1   |
| C228    | 4610001830 | S.TRI TZB4S100AB10R00 (TZBX4N100BA110) | T  | 53.9/92.6    |
| C229    | 4030009920 | S.CER C1608 CH 1H 050B-T               | T  | 57.7/94.1    |
| C252    | 4030007150 | S.CER C1608 CH 1H 151J-T               | T  | 34.3/89.7    |
| C253    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 30.6/94.4    |
| C254    | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 29.6/88.1    |
| C255    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 40/106.1     |
| C256    | 4030009510 | S.CER C1608 CH 1H 010B-T               | B  | 36.1/94.1    |
| C257    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 40.8/100.1   |
| C258    | 4610001830 | S.TRI TZB4S100AB10R00 (TZBX4N100BA110) | T  | 36.8/92.6    |
| C259    | 4030011770 | S.CER C1608 CH 1H 060B-T               | T  | 41/94.1      |
| C272    | 4030007130 | S.CER C1608 CH 1H 101J-T               | T  | 17.6/89.7    |
| C273    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 13.8/94.4    |
| C274    | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 11/87.9      |
| C275    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 23.3/106.1   |
| C276    | 4030009510 | S.CER C1608 CH 1H 010B-T               | B  | 18.3/94.1    |
| C277    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 23.9/100.1   |
| C278    | 4610001830 | S.TRI TZB4S100AB10R00 (TZBX4N100BA110) | T  | 19.8/92.6    |
| C279    | 4030007020 | S.CER C1608 CH 1H 120J-T               | T  | 24.2/94.1    |
| C301    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 35.2/75.3    |
| C302    | 4030007080 | S.CER C1608 CH 1H 390J-T               | T  | 37.1/77.1    |
| C309    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 29.8/72.2    |
| C310    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 29.8/70.7    |
| C320    | 4030007080 | S.CER C1608 CH 1H 390J-T               | T  | 39.7/77.3    |
| C321    | 4030007120 | S.CER C1608 CH 1H 820J-T               | T  | 39.7/76.1    |
| C322    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 43.9/70.2    |
| C323    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 40.7/66.7    |
| C324    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 44.6/63.1    |
| C326    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 44.6/64.3    |
| C328    | 4030006990 | S.CER C1608 CH 1H 080D-T               | T  | 41.5/75.4    |
| C329    | 4030007060 | S.CER C1608 CH 1H 270J-T               | T  | 42.7/75.4    |
| C330    | 4030006990 | S.CER C1608 CH 1H 080D-T               | T  | 43.2/73.5    |
| C345    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 23.6/76.8    |
| C361    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 14.2/77.1    |
| C362    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 28.1/74.1    |
| C363    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 12.3/77.8    |
| C364    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 23.2/73.9    |
| C381    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 67.3/66.8    |
| C382    | 4030007130 | S.CER C1608 CH 1H 101J-T               | T  | 65.3/68.3    |
| C386    | 4550005980 | S.TAN TEESVA 1A 475M8R                 | T  | 67.9/76.8    |
| C387    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 72.2/74.9    |
| C389    | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 72.2/73.7    |
| C392    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 72.9/66.8    |
| C393    | 4340000290 | S.MYL ECHU 1C 103JX5                   | T  | 63/74.2      |
| C394    | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 63.2/75.7    |
| C395    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 65.3/70.9    |
| C396    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 66.4/68.6    |
| C401    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 97.9/10.6    |
| C402    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 112.9/21.7   |



## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                               | M. | H/V LOCATION |
|---------|------------|-------------------------------------------|----|--------------|
| C403    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 100.1/24     |
| C404    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 99.4/22.2    |
| C405    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 94.6/18      |
| C406    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 94.6/15.2    |
| C407    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 93.8/13      |
| C408    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 94.8/11.1    |
| C409    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 99.2/3.6     |
| C410    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 96.9/7.1     |
| C411    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 100.5/3.2    |
| C412    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 103.9/3.5    |
| C413    | 4550007470 | S.TAN F931A107MNMBA                       | B  | 95.7/17.7    |
| C414    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 113.6/11.3   |
| C415    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 112.9/20.5   |
| C416    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 97.3/30.1    |
| C417    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 88.5/27.4    |
| C418    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 90/11.8      |
| C419    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 93.1/22.8    |
| C420    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 91.7/17.6    |
| C421    | 4550007520 | S.TAN F931A106MAABMA                      | B  | 93.4/6.4     |
| C422    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 115.9/14.4   |
| C423    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 106.1/3      |
| C424    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 106.3/8.7    |
| C425    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 106.5/10.2   |
| C426    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 108.4/3.2    |
| C427    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 110.3/3.9    |
| C428    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 110.3/2.7    |
| C429    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 96.2/8.5     |
| C430    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 113.5/8.4    |
| C431    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 113.6/13.9   |
| C432    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 81.4/10.2    |
| C433    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 79.1/5.7     |
| C434    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 79.1/1.7     |
| C435    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 90.6/13.7    |
| C436    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 91.8/13.7    |
| C437    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 83.5/18.5    |
| C438    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 83.5/10.5    |
| C439    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 81.8/3.1     |
| C440    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 93.9/7.2     |
| C441    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 117.1/6      |
| C444    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 116.2/3.2    |
| C445    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 113.4/5.8    |
| C446    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 77.5/1.9     |
| C447    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 83.5/8.7     |
| C450    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 83.5/23.3    |
| C451    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 65.1/32      |
| C452    | 4030007070 | S.CER C1608 CH 1H 330J-T                  | T  | 68.2/35.1    |
| C453    | 4030009910 | S.CER C1608 CH 1H 040B-T                  | T  | 65.5/35.1    |
| C454    | 4610001850 | S.TRI TZB4R200AB10R00<br>(TZBX4R200BA110) | T  | 61.2/39.4    |
| C455    | 4030016550 | S.CER CM105 CH 151G 50AT                  | T  | 64.7/43      |
| C456    | 4030016550 | S.CER CM105 CH 151G 50AT                  | T  | 58.7/43.7    |
| C457    | 4030016550 | S.CER CM105 CH 151G 50AT                  | T  | 57.4/43      |
| C458    | 4030019500 | S.CER GRM21BB31A106KE18<br>(GRM40 B)      | T  | 55.5/46.2    |
| C459    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 54.8/44.1    |
| C460    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 63.4/44.3    |
| C461    | 4030009920 | S.CER C1608 CH 1H 050B-T                  | B  | 58.4/35      |
| C462    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 54.7/36.7    |
| C463    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 55.5/33.1    |
| C464    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 74.5/51.3    |
| C465    | 4030007160 | S.CER C1608 CH 1H 181J-T                  | T  | 56.7/36.8    |
| C466    | 4030007150 | S.CER C1608 CH 1H 151J-T                  | T  | 58/36.8      |
| C467    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 68.9/50.1    |
| C472    | 4030006900 | S.CER C1608 CH 1H 080D-T                  | B  | 104.8/22.5   |
| C473    | 4030007030 | S.CER C1608 CH 1H 150J-T                  | B  | 103/21.7     |
| C474    | 4030007060 | S.CER C1608 CH 1H 270J-T                  | B  | 101.2/22.5   |
| C481    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 19.7/34.2    |
| C482    | 4550007520 | S.TAN F931A106MAABMA                      | B  | 18.4/31.7    |
| C483    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 23.3/32.1    |
| C501    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 40.1/23.5    |
| C502    | 4030009990 | S.CER C1608 CH 1H 200J-T                  | T  | 36.1/20.3    |
| C503    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 40.4/15.6    |
| C504    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 41.6/21.9    |
| C505    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 31.1/3.9     |
| C506    | 4030009510 | S.CER C1608 CH 1H 010B-T                  | B  | 34.9/15.9    |
| C507    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 30.3/9.9     |
| C508    | 4610001860 | S.TRI TZB4Z060AB10R00<br>(TZBX4Z060BA110) | T  | 33.8/17.4    |
| C509    | 4030009350 | S.CER C1608 CH 1H 3R5B-T                  | T  | 30.1/15.8    |
| C522    | 4030007100 | S.CER C1608 CH 1H 560J-T                  | T  | 18.9/20.3    |
| C523    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 23.6/15.6    |
| C524    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 24.7/21.9    |
| C525    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 14.2/3.9     |
| C526    | 4030009510 | S.CER C1608 CH 1H 010B-T                  | B  | 18.6/15.9    |
| C527    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 13.4/9.9     |
| C528    | 4610001830 | S.TRI TZB4S100AB10R00<br>(TZBX4N100BA110) | T  | 17.2/17.4    |
| C529    | 4030009920 | S.CER C1608 CH 1H 050B-T                  | T  | 13.3/15.8    |
| C552    | 4030007150 | S.CER C1608 CH 1H 151J-T                  | T  | 52.9/20.3    |
| C553    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 57.2/15.6    |
| C554    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 58.4/21.8    |
| C555    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 47.8/3.9     |
| C556    | 4030009510 | S.CER C1608 CH 1H 010B-T                  | B  | 51.7/15.9    |
| C557    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 47/9.9       |
| C558    | 4610001830 | S.TRI TZB4S100AB10R00<br>(TZBX4N100BA110) | T  | 51/17.4      |
| C559    | 4030011770 | S.CER C1608 CH 1H 060B-T                  | T  | 46.9/15.8    |
| C572    | 4030007130 | S.CER C1608 CH 1H 101J-T                  | T  | 69.7/20.3    |
| C573    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 74/15.6      |
| C574    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 76.8/21.8    |
| C575    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 64.6/3.9     |
| C576    | 4030009510 | S.CER C1608 CH 1H 010B-T                  | B  | 68.6/15.9    |
| C577    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 63.8/9.9     |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                            | M. | H/V LOCATION |
|---------|------------|----------------------------------------|----|--------------|
| C578    | 4610001830 | S.TRI TZB4S100AB10R00 (TZBX4N100BA110) | T  | 68/17.4      |
| C579    | 4030007020 | S.CER C1608 CH 1H 120J-T               | T  | 63.8/15.9    |
| C601    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 44.1/35.3    |
| C602    | 4030007080 | S.CER C1608 CH 1H 390J-T               | T  | 41.2/40.2    |
| C603    | 4030007010 | S.CER C1608 CH 1H 100D-T               | T  | 44.1/37.7    |
| C609    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 44.1/34      |
| C610    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 42.7/37.6    |
| C620    | 4030007080 | S.CER C1608 CH 1H 390J-T               | T  | 41.2/42.8    |
| C621    | 4030007120 | S.CER C1608 CH 1H 820J-T               | T  | 41.2/41.6    |
| C622    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 40.4/47.3    |
| C623    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 29.9/47.8    |
| C624    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 36.5/45.4    |
| C626    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 35.3/45.4    |
| C628    | 4030006990 | S.CER C1608 CH 1H 080D-T               | T  | 44.1/42.8    |
| C629    | 4030007060 | S.CER C1608 CH 1H 270J-T               | T  | 44.1/44.1    |
| C630    | 4030006990 | S.CER C1608 CH 1H 080D-T               | T  | 44.1/45.3    |
| C645    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 7.3/27.8     |
| C661    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 5.8/29.4     |
| C662    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 3.5/29       |
| C663    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 3.7/27       |
| C664    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 5.3/31.2     |
| C681    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 34.9/42.1    |
| C682    | 4030007130 | S.CER C1608 CH 1H 101J-T               | T  | 19.5/38.4    |
| C686    | 4550005980 | S.TAN TEESVA 1A 475M8R                 | T  | 30.4/32.2    |
| C687    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 24.5/36.9    |
| C689    | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 25.6/43.2    |
| C690    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 26.8/44.5    |
| C691    | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 27/37.2      |
| C692    | 4030006860 | S.CER C1608 JB 1H 102K-T               | B  | 32.5/45.1    |
| C693    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 30.7/34.5    |
| C694    | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 26.6/32.2    |
| C695    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 34.8/39.4    |
| C696    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 30.2/43.7    |
| C701    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 134.7/19.9   |
| C702    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 131/23       |
| C703    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 123.9/20.5   |
| C704    | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 128.5/16.4   |
| C705    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 122.8/12.1   |
| C706    | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 130.6/8.6    |
| C707    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 138.4/12     |
| C708    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 124.9/19.1   |
| C709    | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 139.1/2.1    |
| C710    | 4030007120 | S.CER C1608 CH 1H 820J-T               | T  | 139.3/3.6    |
| C711    | 4030017870 | S.CER C1608 CH 1H 681J-T               | T  | 141.4/3.3    |
| C712    | 4030007060 | S.CER C1608 CH 1H 270J-T               | T  | 140.5/8.2    |
| C713    | 4030017800 | S.CER C1608 CH 1H 561J-T               | T  | 142.7/3.2    |
| C714    | 4030011280 | S.CER C1608 CH 1H 271J-T               | T  | 143.6/8.2    |
| C715    | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 144.6/6.6    |
| C716    | 4030011280 | S.CER C1608 CH 1H 271J-T               | T  | 145/9.5      |
| C717    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 124.5/21.7   |
| C718    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 124.5/22.9   |
| C719    | 4550007710 | S.TAN TEESVB2 1A 476M8R                | B  | 130.2/20.9   |
| C720    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 137.3/2.8    |
| C721    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 142.5/10.4   |
| C722    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 142.9/12.8   |
| C723    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 142.9/16     |
| C724    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 141.7/21.6   |
| C725    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 143.5/21.1   |
| C726    | 4030017490 | S.CER C1608 JB 1A 105K-T               | T  | 142.9/14.7   |
| C801    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 125.6/47.8   |
| C802    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 131.6/47     |
| C803    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 133.4/46.4   |
| C804    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 126.6/42.5   |
| C831    | 4030009910 | S.CER C1608 CH 1H 040B-T               | T  | 144.6/42.5   |
| C832    | 4030009510 | S.CER C1608 CH 1H 010B-T               | T  | 154.8/42.1   |
| C834    | 4030007030 | S.CER C1608 CH 1H 150J-T               | T  | 152.2/36.8   |
| C835    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 154.8/36.8   |
| C838    | 4030007020 | S.CER C1608 CH 1H 120J-T               | T  | 150.5/46.7   |
| C851    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 143.1/50.7   |
| C852    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 111.9/55.3   |
| C853    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 140.5/49.8   |
| C854    | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 108.1/52.8   |
| C855    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 140.8/50.2   |
| C856    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 103.4/54.5   |
| C1201   | 4030007080 | S.CER C1608 CH 1H 390J-T               | T  | 31.1/66.5    |
| C1202   | 4030006980 | S.CER C1608 CH 1H 070D-T               | T  | 36.2/66.2    |
| C1203   | 4030007020 | S.CER C1608 CH 1H 120J-T               | T  | 37.4/66.2    |
| C1204   | 4030007080 | S.CER C1608 CH 1H 390J-T               | T  | 33/62.4      |
| C1205   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 20.4/73.4    |
| C1222   | 4030008560 | S.CER C1608 CH 1H 300J-T               | T  | 24.1/64.4    |
| C1223   | 4030009530 | S.CER C1608 CH 1H 030B-T               | T  | 26/65.1      |
| C1224   | 4030007070 | S.CER C1608 CH 1H 330J-T               | T  | 24.1/65.7    |
| C1225   | 4030009520 | S.CER C1608 CH 1H 020B-T               | T  | 25.6/67      |
| C1226   | 4030007050 | S.CER C1608 CH 1H 220J-T               | T  | 23.1/68.1    |
| C1227   | 4030007100 | S.CER C1608 CH 1H 560J-T               | T  | 24.9/68.9    |
| C1228   | 4030011280 | S.CER C1608 CH 1H 271J-T               | T  | 24.2/70.8    |
| C1229   | 4030007100 | S.CER C1608 CH 1H 560J-T               | T  | 26.3/72.2    |
| C1230   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 23/72.9      |
| C1231   | 4030007010 | S.CER C1608 CH 1H 100D-T               | B  | 24.9/68.2    |
| C1232   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 18.8/68.1    |
| C1503   | 4030007010 | S.CER C1608 CH 1H 100D-T               | T  | 36.4/74.2    |
| C1505   | 4030011810 | S.CER C1608 JB 1A 224K-T               | T  | 72.9/65.6    |
| C1521   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 20.3/64.9    |
| C1522   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 18.8/62.4    |
| C2201   | 4030007080 | S.CER C1608 CH 1H 390J-T               | T  | 21.8/47.7    |
| C2202   | 4030006980 | S.CER C1608 CH 1H 070D-T               | T  | 19.5/42.5    |
| C2203   | 4030007020 | S.CER C1608 CH 1H 120J-T               | T  | 24.2/46.9    |
| C2204   | 4030007080 | S.CER C1608 CH 1H 390J-T               | T  | 19.2/48.4    |
| C2205   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 26.8/47.7    |



## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| C2222   | 4030008560 | S.CER C1608 CH 1H 300J-T        | T  | 9.6/46.6     |
| C2223   | 4030009530 | S.CER C1608 CH 1H 030B-T        | T  | 10.3/44.8    |
| C2224   | 4030007070 | S.CER C1608 CH 1H 330J-T        | T  | 9.6/42.9     |
| C2225   | 4030009520 | S.CER C1608 CH 1H 020B-T        | T  | 11.4/37.3    |
| C2226   | 4030007050 | S.CER C1608 CH 1H 220J-T        | T  | 7/38.7       |
| C2227   | 4030007100 | S.CER C1608 CH 1H 560J-T        | T  | 7.9/36.6     |
| C2228   | 4030011280 | S.CER C1608 CH 1H 271J-T        | T  | 7.1/34.4     |
| C2229   | 4030007100 | S.CER C1608 CH 1H 560J-T        | T  | 8.8/34.4     |
| C2230   | 4030006900 | S.CER C1608 JB 1H 103K-T        | B  | 4.9/34.1     |
| C2231   | 4030007010 | S.CER C1608 CH 1H 100D-T        | T  | 11.5/41.3    |
| C2232   | 4030006900 | S.CER C1608 JB 1H 103K-T        | B  | 5.7/42.5     |
| C2511   | 4030006900 | S.CER C1608 JB 1H 103K-T        | B  | 9.5/47.3     |
| C2512   | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 5.7/47.1     |
| J1      | 6510022581 | S.CON 24FMN-BMTRA-A-TBT(LF)(SN) | T  | 147.7/71     |
| J51     | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J81     | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J351    | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J651    | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J701    | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J831    | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J851    | 6510007020 | CON TMP-J01X-V6                 |    |              |
| EP1     | 6910019900 | S.BEA MPZ1608S601AT             | T  | 142.1/60.5   |
| EP2     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 148.3/59.4   |
| EP3     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 142.5/59     |
| EP4     | 6910019900 | S.BEA MPZ1608S601AT             | T  | 142.1/62.9   |
| EP5     | 6910019900 | S.BEA MPZ1608S601AT             | B  | 149.3/67.5   |
| EP6     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 141.8/70.5   |
| EP7     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 149.3/71.5   |
| EP8     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 141.8/72.5   |
| EP9     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 149.3/73.5   |
| EP103   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 103/101.4    |
| EP204   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 71.1/101.2   |
| EP224   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 62.8/105.3   |
| EP254   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 48.1/105.7   |
| EP274   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 20.7/101.2   |
| EP382   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 66/75.1      |
| EP401   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 106.1/4.2    |
| EP402   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 106.7/5.4    |
| EP403   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 96.7/3.2     |
| EP404   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 108.3/5.4    |
| EP405   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 96/1.8       |
| EP406   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 109.9/5.4    |
| EP407   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | T  | 115.2/6.3    |
| EP504   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 37/4.6       |
| EP524   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 20.5/4.3     |
| EP554   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 53.9/4.4     |
| EP574   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 71/4.1       |
| EP682   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 25.2/33.5    |
| EP1503  | 6910015970 | S.BEA MMZ1608B 301CT-AS         | T  | 39.6/65.4    |
| EP2501  | 6910015970 | S.BEA MMZ1608B 301CT-AS         | T  | 28.4/47.7    |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION              | M. | H/V LOCATION |
|---------|------------|--------------------------|----|--------------|
| IC161   | 1190001930 | S.IC PS7122AL-1A-E3      | T  | 134.8/91.3   |
| IC201   | 1110007400 | S.IC BGA616              | T  | 4.1/33.2     |
| IC301   | 1130011530 | S.IC CD74HC4094M96       | B  | 40.1/13.4    |
| IC303   | 1130011530 | S.IC CD74HC4094M96       | B  | 40.1/24.3    |
| IC305   | 1130011530 | S.IC CD74HC4094M96       | B  | 29/19        |
| IC1401  | 1110006420 | S.IC UPC2708TB-E3-A      | T  | 53.6/40      |
| Q101    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 9.2/68       |
| Q102    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 5.6/68.4     |
| Q103    | 1530003900 | S.TRA KTC4075 BL-RTK/P   | B  | 74.7/71.7    |
| Q104    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 72.4/73.2    |
| Q151    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 46.8/83.2    |
| Q152    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 44/81.2      |
| Q153    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 49.5/83.3    |
| Q161    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 115.2/81     |
| Q162    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 143/85.6     |
| Q201    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 7.5/27.8     |
| Q202    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 8/30.8       |
| Q203    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 9.5/34.5     |
| Q204    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 6.7/34.4     |
| Q303    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 44.5/13.5    |
| Q307    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 38/13.3      |
| Q308    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 38.2/7.9     |
| Q309    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 38/16.2      |
| Q310    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 40.3/7.9     |
| Q311    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 43.6/9.6     |
| Q312    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 44/7         |
| Q313    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 34/11.5      |
| Q314    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 31.7/11.1    |
| Q317    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 43.4/24.3    |
| Q318    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 28.3/6.5     |
| Q319    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 39.3/23.1    |
| Q320    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 27.9/9.7     |
| Q321    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 31.1/7.5     |
| Q322    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 28.6/5.7     |
| Q323    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 32.4/11.1    |
| Q324    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 27.8/8.3     |
| Q325    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 33/25.1      |
| Q326    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 25.4/8.3     |
| Q327    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 28.5/12.5    |
| Q328    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 27/10.3      |
| Q329    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 32.9/27.6    |
| Q330    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 30.1/28.2    |
| Q331    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 29/29.3      |
| Q332    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 28.5/32.1    |
| Q333    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 24.9/31.4    |
| Q334    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 22.2/30.9    |
| Q335    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 24.9/28.8    |
| Q336    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 22.1/28.3    |
| Q337    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 26.5/17.8    |
| Q338    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 26/20.9      |
| Q339    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 24.9/26.2    |
| Q340    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 22.1/25.7    |
| Q341    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 27.7/25      |
| Q342    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 25.2/24.4    |
| Q343    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 26.3/27.7    |
| Q344    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 23.8/27.1    |
| Q345    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 24.9/30.4    |
| Q346    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 22.4/29.8    |
| Q1001   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 72.6/26.6    |
| Q1002   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 72.6/23.5    |
| Q1003   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | B  | 92.6/27.5    |
| Q1004   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 90.1/31.9    |
| Q1005   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 90.1/24.1    |
| Q1006   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | B  | 92.6/23.4    |
| Q1007   | 1530003900 | S.TRA KTC4075 BL-RTK/P   | T  | 106.8/33.2   |
| Q1008   | 1530003340 | S.TRA 2SC3357-T1 RF      | T  | 107.6/20.6   |
| Q1101   | 1530003340 | S.TRA 2SC3357-T1 RF      | T  | 81.1/19.7    |
| Q1201   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 72.3/48.5    |
| Q1202   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 72.3/45.5    |
| Q1203   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | B  | 92.6/49.9    |
| Q1204   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 89.2/51.1    |
| Q1205   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 89.2/45.5    |
| Q1206   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | B  | 92.6/46.5    |
| Q1207   | 1530003900 | S.TRA KTC4075 BL-RTK/P   | T  | 103.3/58.6   |
| Q1208   | 1530003340 | S.TRA 2SC3357-T1 RF      | T  | 108.5/51.8   |
| Q1209   | 1530003851 | S.TRA 2SC5551-FD-E       | B  | 98.9/56.2    |
| Q1301   | 1530003340 | S.TRA 2SC3357-T1 RF      | T  | 75.5/62.4    |
| Q1551   | 1560000561 | S.FET 2SK882-GR(TE85L,F) | B  | 121/70.1     |
| Q1901   | 1590003680 | S.TRA KRC402 RTK/P       | T  | 130.9/27.2   |
| Q1902   | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 130.9/29.5   |
| Q2001   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 106.6/76     |
| D101    | 1790000980 | S.DIO MA742(TX)          | B  | 83.2/72.4    |
| D104    | 1750000581 | S.DIO 1SV307(TPH3,F)     | B  | 14.1/79.4    |
| D105    | 1750001320 | S.DIO KDS4148U RTK/P     | B  | 77.4/74.7    |
| D106    | 1750001320 | S.DIO KDS4148U RTK/P     | T  | 59.4/77.7    |
| D107    | 1750001320 | S.DIO KDS4148U RTK/P     | T  | 67/75.1      |
| D108    | 1750001320 | S.DIO KDS4148U RTK/P     | B  | 86.2/75      |
| D109    | 1750001320 | S.DIO KDS4148U RTK/P     | B  | 94.7/75.7    |
| D151    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 46/86        |
| D152    | 1750000581 | S.DIO 1SV307(TPH3,F)     | B  | 16.4/82.1    |
| D161    | 1750001320 | S.DIO KDS4148U RTK/P     | B  | 111/83.4     |
| D201    | 1750000581 | S.DIO 1SV307(TPH3,F)     | B  | 2.9/77.8     |
| D501    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 20.5/71.8    |
| D502    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 28.8/41.8    |
| D551    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 31/74.8      |
| D552    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 33/44.6      |
| D601    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 21.4/75.2    |
| D602    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 25.7/74.5    |
| D603    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 28.8/43.6    |
| D604    | 1750000581 | S.DIO 1SV307(TPH3,F)     | B  | 42/44.9      |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

S.=Surface mount

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                      | M. | H/V LOCATION |
|---------|------------|----------------------------------|----|--------------|
| D651    | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 43.8/74.2    |
| D652    | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 42.5/45.6    |
| D701    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 41.6/75.9    |
| D702    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 45.1/45.3    |
| D751    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 37.2/76      |
| D752    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 35.7/45.3    |
| D801    | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 10.9/65.6    |
| D802    | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 34.8/42.5    |
| D851    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 20.5/72.6    |
| D852    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 32/44.8      |
| D951    | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 51.8/29.1    |
| D1001   | 1750000971 | S.DIO CPH5513-TL-E               | T  | 103.5/27.5   |
| D1002   | 1750000441 | S.DIO 1SV263-TL-E                | T  | 109.8/31.8   |
| D1003   | 1750000971 | S.DIO CPH5513-TL-E               | T  | 107.1/27.5   |
| D1004   | 1750001320 | S.DIO KDS4148U RTK/P             | B  | 109/32.4     |
| D1201   | 1750000971 | S.DIO CPH5513-TL-E               | T  | 103.5/46.2   |
| D1202   | 1750001310 | S.DIO KDS114 RTK/PA              | T  | 100.2/60.7   |
| D1203   | 1750000441 | S.DIO 1SV263-TL-E                | T  | 103.8/50.5   |
| D1204   | 1750000971 | S.DIO CPH5513-TL-E               | T  | 107/46.2     |
| D1205   | 1750001320 | S.DIO KDS4148U RTK/P             | T  | 102.5/62.1   |
| D1301   | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 93.4/64.1    |
| D1302   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 88.6/65.6    |
| D1401   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 46.9/35.1    |
| D1451   | 1750000431 | S.DIO HSB88WSTR-E                | T  | 80.2/71      |
| D1501   | 1750001310 | S.DIO KDS114 RTK/PA              | T  | 102.7/68.6   |
| D1551   | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 124.2/30.5   |
| D1601   | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 122.1/30.5   |
| D1701   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 149.5/43.3   |
| D1702   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 150.4/79.8   |
| D1703   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 125.2/37.5   |
| D1704   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 131.8/78.9   |
| D1705   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 137.9/37.5   |
| D1706   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 139.9/78.3   |
| L101    | 6200007780 | S.COI LQW2BHN12J03L              | T  | 46.2/89.3    |
| L102    | 6200007760 | S.COI LQW2BHN82NJ03L             | T  | 40.1/88.4    |
| L103    | 6200010730 | S.COI C2520C-68NG-A              | T  | 14.7/83.4    |
| L104    | 6200005491 | S.COI NLV32T-331J                | B  | 9.3/67.5     |
| L137    | 6190001650 | COI ELC06D102E                   |    |              |
| L151    | 6200005491 | S.COI NLV32T-331J                | T  | 44.8/78      |
| L161    | 6200002041 | S.COI NLV25T-100J                | B  | 99.2/88.4    |
| L201    | 6200009810 | S.COI LQH31HNR61J03L             | T  | 3.8/20       |
| L202    | 6200002181 | S.COI NLV25T-R12J                | T  | 3.3/23       |
| L203    | 6200005041 | S.COI NLV25T-220J                | T  | 3.9/27.6     |
| L251    | 6200005491 | S.COI NLV32T-331J                | B  | 12.2/76.1    |
| L252    | 6200005491 | S.COI NLV32T-331J                | B  | 10.4/72.5    |
| L253    | 6180003560 | COI SP0406-5R6K-6                |    |              |
| L271    | 6180003550 | COI SP0406-4R7K-6                |    |              |
| L501    | 6200010780 | S.COI C2520C-1R0G-A              | T  | 15.1/65.7    |
| L502    | 6200010970 | S.COI C2520C-1R8G-A (1.8U)       | T  | 15.1/60.1    |
| L503    | 6200010970 | S.COI C2520C-1R8G-A (1.8U)       | T  | 15.1/54.4    |
| L504    | 6200010780 | S.COI C2520C-1R0G-A              | T  | 15.2/43.4    |
| L505    | 6200010970 | S.COI C2520C-1R8G-A (1.8U)       | T  | 15.1/49.2    |
| L551    | 6200010770 | S.COI C2520C-R68G-A              | T  | 34.8/70.4    |
| L552    | 6200010950 | S.COI C2520C-1R5G-A (1.5U)       | T  | 34.8/64.7    |
| L553    | 6200010950 | S.COI C2520C-1R5G-A (1.5U)       | T  | 34.8/59.1    |
| L554    | 6200010770 | S.COI C2520C-R68G-A              | T  | 34.9/47.7    |
| L555    | 6200010950 | S.COI C2520C-1R5G-A (1.5U)       | T  | 34.9/53.3    |
| L601    | 6200010530 | S.COI C2520C-R56G-A (0.56U)      | T  | 25.1/70.3    |
| L602    | 6200010450 | S.COI C2520C-R82G-A (0.82U)      | T  | 25.1/64.6    |
| L603    | 6200010450 | S.COI C2520C-R82G-A (0.82U)      | T  | 25.1/59      |
| L604    | 6200010530 | S.COI C2520C-R56G-A (0.56U)      | T  | 25.1/48      |
| L605    | 6200010450 | S.COI C2520C-R82G-A (0.82U)      | T  | 25/53.3      |
| L651    | 6200010870 | S.COI C2520C-R33G-A (0.33U)      | T  | 44.3/69.8    |
| L652    | 6200010770 | S.COI C2520C-R68G-A              | T  | 44.3/64.1    |
| L653    | 6200010770 | S.COI C2520C-R68G-A              | T  | 44.2/58.7    |
| L654    | 6200010870 | S.COI C2520C-R33G-A (0.33U)      | T  | 44.4/47.5    |
| L655    | 6200010770 | S.COI C2520C-R68G-A              | T  | 44.3/53.4    |
| L701    | 6200010980 | S.COI LQW2BHN12J03L              | B  | 45.1/67.2    |
| L702    | 6200008080 | S.COI LQW2BHN22J03L              | B  | 45.6/58.9    |
| L703    | 6200010980 | S.COI LQW2BHN27J03L              | B  | 44.6/55.7    |
| L751    | 6200008100 | S.COI LQH31HNR14J03L             | B  | 33.8/70      |
| L753    | 6200007810 | S.COI LQH31HN95NK03L             | B  | 38.6/59.5    |
| L754    | 6200008100 | S.COI LQH31HNR14J03L             | B  | 34.2/49.2    |
| L801    | 6200010800 | S.COI C2520C-4R7G-A              | T  | 33.8/34.4    |
| L802    | 6200010800 | S.COI C2520C-4R7G-A              | T  | 34.3/38.2    |
| L803    | 6200009060 | S.COI LQH32CN101K23L             | T  | 22.7/38      |
| L851    | 6200007810 | S.COI LQH31HN95NK03L             | B  | 25/69.5      |
| L852    | 6200009810 | S.COI LQH31HNR61J03L             | B  | 25/64.4      |
| L853    | 6200009810 | S.COI LQH31HNR61J03L             | B  | 28.5/60      |
| L854    | 6200009810 | S.COI LQH31HNR61J03L             | B  | 25/54.5      |
| L855    | 6200007810 | S.COI LQH31HN95NK03L             | B  | 25/49.5      |
| L901    | 6200005491 | S.COI NLV32T-331J                | B  | 42.7/32.1    |
| L904    | 6140004680 | S.COI LR-528 4KBL                | T  | 54.5/24.4    |
| L905    | 6140004680 | S.COI LR-528 4KBL                | T  | 56.7/13.2    |
| L971    | 6200005491 | S.COI NLV32T-331J                | B  | 25.9/41.7    |
| L972    | 6200005491 | S.COI NLV32T-331J                | B  | 25.9/37.5    |
| L1001   | 6200012470 | S.COI 0.30-1.7-TTL 45.3N <COMO>  | T  | 61.6/20.2    |
| L1002   | 6200013080 | S.COI 0.25-1.9-10TL 97.0N <COMO> | T  | 62.8/24.3    |
| L1003   | 6200013000 | S.COI 0.25-1.9-13TL 135N <COMO>  | T  | 62.8/29.1    |
| L1004   | 6200008940 | S.COI LQH32MN331K23L             | T  | 65.7/33.6    |
| L1005   | 6200010870 | S.COI C2520C-R33G-A (0.33U)      | T  | 72.4/31.7    |
| L1006   | 6200009060 | S.COI LQH32CN101K23L             | B  | 85.6/18.3    |
| L1007   | 6140004420 | COI LR-501                       |    |              |
| L1008   | 6200007780 | S.COI LQW2BHN12J03L              | B  | 94.9/33.8    |
| L1009   | 6200007780 | S.COI LQW2BHN12J03L              | B  | 95.4/19.6    |
| L1010   | 6200009060 | S.COI LQH32CN101K23L             | T  | 99.9/21.2    |
| L1011   | 6150005320 | COI LS-546 7K7                   |    |              |
| L1012   | 6200005011 | S.COI NLV25T-100J                | B  | 105.3/24.5   |
| L1013   | 6200005011 | S.COI NLV25T-100J                | T  | 112.6/31.2   |
| L1014   | 6200005011 | S.COI NLV25T-100J                | B  | 108.9/29.7   |
| L1015   | 6200005011 | S.COI NLV25T-100J                | T  | 113.7/27.1   |
| L1016   | 6200005011 | S.COI NLV25T-100J                | T  | 112/12.5     |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                            | M. | H/V LOCATION |
|---------|------------|-------------|----------------------------|----|--------------|
| L1017   | 6200010740 | S.COI       | C2520C-R27G-A              | T  | 108.9/15.7   |
| L1018   | 6140002810 | S.COI       | LR-317                     | T  | 122.7/35.1   |
| L1019   | 6190001650 | COI         | ELC06D102E                 |    |              |
| L1020   | 6200003711 | S.COI       | NLV25T-2R7J                | B  | 111.3/14.6   |
| L1101   | 6130002961 | S.COI       | #617DB-1327=P3             | T  | 90.7/20.1    |
| L1102   | 6200008090 | S.COI       | LQW2BHN68NJ03L             | T  | 93.3/15.1    |
| L1103   | 6200008090 | S.COI       | LQW2BHN68NJ03L             | T  | 89.4/13.6    |
| L1104   | 6200007750 | S.COI       | LQW2BHN56NJ03L             | T  | 85.8/13.1    |
| L1105   | 6200005011 | S.COI       | NLV25T-100J                | T  | 79.5/12.1    |
| L1106   | 6200003281 | S.COI       | NLV25T-2R2J                | T  | 75.4/15.5    |
| L1201   | 6200012470 | S.COI       | 0.30-1.7-TTL 45.3N <COMO>  | T  | 61.8/37.8    |
| L1202   | 6200013080 | S.COI       | 0.25-1.9-10TL 97.0N <COMO> | T  | 62.6/42.2    |
| L1203   | 6200013000 | S.COI       | 0.25-1.9-13TL 135N <COMO>  | T  | 62/47        |
| L1204   | 6200008940 | S.COI       | LQH32MN331K23L             | T  | 65.3/50.7    |
| L1205   | 6200010870 | S.COI       | C2520C-R33G-A (0.33U)      | T  | 72.4/52.2    |
| L1206   | 6200009060 | S.COI       | LQH32CN101K23L             | B  | 79.6/50.8    |
| L1207   | 6140004420 | COI         | LR-501                     |    |              |
| L1208   | 6200007780 | S.COI       | LQW2BHN12J03L              | B  | 92.4/42.5    |
| L1209   | 6200007780 | S.COI       | LQW2BHN12J03L              | B  | 89.3/53.5    |
| L1210   | 6200009060 | S.COI       | LQH32CN101K23L             | T  | 98.6/54.4    |
| L1211   | 6150005320 | COI         | LS-546 7K7                 |    |              |
| L1212   | 6200005011 | S.COI       | NLV25T-100J                | B  | 105.3/45.1   |
| L1214   | 6200005011 | S.COI       | NLV25T-100J                | B  | 112.1/52.3   |
| L1215   | 6200005011 | S.COI       | NLV25T-100J                | B  | 104.6/49     |
| L1216   | 6200005011 | S.COI       | NLV25T-100J                | B  | 110.8/46.4   |
| L1217   | 6200005011 | S.COI       | NLV25T-100J                | T  | 113.7/56.7   |
| L1218   | 6200010740 | S.COI       | C2520C-R27G-A              | T  | 114.3/48.7   |
| L1219   | 6200003711 | S.COI       | NLV25T-2R7J                | B  | 111/64.4     |
| L1220   | 6200010980 | S.COI       | LQW2BHN12J03L              | B  | 94.7/59.4    |
| L1221   | 6200005011 | S.COI       | NLV25T-100J                | B  | 91.9/60.5    |
| L1242   | 6200005011 | S.COI       | NLV25T-100J                | B  | 106.7/58.5   |
| L1301   | 6130002961 | S.COI       | #617DB-1327=P3             | T  | 91.8/54.9    |
| L1302   | 6200003281 | S.COI       | NLV25T-2R2J                | B  | 99.4/63      |
| L1303   | 6200008090 | S.COI       | LQW2BHN68NJ03L             | T  | 89.5/62.4    |
| L1304   | 6200008090 | S.COI       | LQW2BHN68NJ03L             | T  | 86.9/58.8    |
| L1305   | 6200007750 | S.COI       | LQW2BHN56NJ03L             | T  | 85.9/63.2    |
| L1306   | 6200005011 | S.COI       | NLV25T-100J                | T  | 80.2/55.7    |
| L1307   | 6200003281 | S.COI       | NLV25T-2R2J                | T  | 79.2/58.9    |
| L1401   | 6200005041 | S.COI       | NLV25T-220J                | T  | 50.2/40.2    |
| L1402   | 6200002641 | S.COI       | NLV25T-R15J                | T  | 52/46.4      |
| L1403   | 6200002431 | S.COI       | NLV25T-082J                | T  | 51.4/51.2    |
| L1451   | 6130002961 | S.COI       | #617DB-1327=P3             | T  | 73.9/71      |
| L1452   | 6130002961 | S.COI       | #617DB-1327=P3             | T  | 86.6/71      |
| L1551   | 6200004600 | S.COI       | MLF1608D R15K-T            | B  | 98.7/69.4    |
| L1552   | 6200004600 | S.COI       | MLF1608D R15K-T            | B  | 103.3/72     |
| L1553   | 6150004280 | COI         | LS-484B (C-14927)          |    |              |
| L1554   | 6200002611 | S.COI       | NLV25T-R47J                | B  | 124.2/71     |
| L1555   | 6200003281 | S.COI       | NLV25T-2R2J                | B  | 127.6/60     |
| L1601   | 6200010760 | S.COI       | C2520C-27NG-A              | T  | 132.6/32.7   |
| L1602   | 6200003281 | S.COI       | NLV25T-2R2J                | T  | 119.8/30.5   |
| L1703   | 6200003281 | S.COI       | NLV25T-2R2J                | B  | 143.4/46.4   |
| L1704   | 6200003281 | S.COI       | NLV25T-2R2J                | B  | 144.2/74.4   |
|         |            |             |                            |    |              |
| R101    | 7540000130 | ABS         | 2P-50A-301                 |    |              |
| R102    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 52.4/91.5    |
| R103    | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)      | B  | 77.7/70.9    |
| R104    | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K)      | B  | 74.6/69.3    |
| R105    | 7030003860 | S.RES       | ERJ3GE JPW V               | B  | 80.5/70.9    |
| R106    | 7030003340 | S.RES       | ERJ3GEYJ 151 V (150)       | B  | 69.5/89.5    |
| R107    | 7030008180 | S.RES       | ERJ12YJ331U (330)          | B  | 12.8/67.5    |
| R108    | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K)      | T  | 63.7/70.4    |
| R109    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 5.8/66.4     |
| R110    | 7030003270 | S.RES       | ERJ3GEYJ 390 V (39)        | B  | 70.2/87.2    |
| R111    | 7030003340 | S.RES       | ERJ3GEYJ 151 V (150)       | B  | 71.1/89.5    |
| R112    | 7030003310 | S.RES       | ERJ3GEYJ 820 V (82)        | B  | 65.4/89.5    |
| R113    | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)       | B  | 66.2/87.2    |
| R114    | 7030003310 | S.RES       | ERJ3GEYJ 820 V (82)        | B  | 67/89.5      |
| R115    | 7030003340 | S.RES       | ERJ3GEYJ 151 V (150)       | B  | 74.2/75      |
| R116    | 7030003340 | S.RES       | ERJ3GEYJ 151 V (150)       | T  | 22.1/27      |
| R117    | 7030003340 | S.RES       | ERJ3GEYJ 151 V (150)       | T  | 21.4/10.2    |
| R118    | 7030003340 | S.RES       | ERJ3GEYJ 151 V (150)       | T  | 87/75.4      |
| R119    | 7030003340 | S.RES       | ERJ3GEYJ 151 V (150)       | T  | 92.9/75.3    |
| R151    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 52.1/83.7    |
| R152    | 7540000130 | ABS         | 2P-50A-301                 |    |              |
| R153    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | B  | 6.5/84.2     |
| R154    | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K)      | T  | 47.4/81.2    |
| R155    | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)      | T  | 47.6/86.1    |
| R156    | 7030008180 | S.RES       | ERJ12YJ331U (330)          | T  | 40.9/81.9    |
| R157    | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K)      | T  | 47.4/79.4    |
| R161    | 7540000270 | S.ABS       | ERZVF2M201                 | T  | 134.3/83     |
| R162    | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)        | B  | 102/80.5     |
| R163    | 7030003390 | S.RES       | ERJ3GEYJ 391 V (390)       | T  | 140.5/85.4   |
| R201    | 7030003400 | S.RES       | ERJ3GEYJ 471 V (470)       | T  | 5.8/17       |
| R202    | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)        | T  | 3.9/17.5     |
| R203    | 7030003400 | S.RES       | ERJ3GEYJ 471 V (470)       | T  | 5.8/18.2     |
| R207    | 7030003220 | S.RES       | ERJ3GEYJ 150 V (15)        | T  | 7.4/25.8     |
| R208    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 8.9/37.3     |
| R209    | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)       | T  | 3.8/40.7     |
| R210    | 7030003220 | S.RES       | ERJ3GEYJ 150 V (15)        | T  | 6/42.2       |
| R211    | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)       | T  | 3.8/42.5     |
| R212    | 7030003350 | S.RES       | ERJ3GEYJ 181 V (180)       | T  | 4.1/44.5     |
| R213    | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K)      | T  | 7.6/37.6     |
| R251    | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K)      | B  | 8/76.9       |
| R301    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 28.6/4.6     |
| R302    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 25.2/6.4     |
| R303    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | B  | 26.6/5.8     |
| R304    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | B  | 24.7/7.9     |
| R305    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 22.9/7.7     |
| R306    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | B  | 25/12.7      |
| R307    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 28.4/30.5    |
| R308    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 27.9/32.4    |
| R309    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | B  | 21.2/23      |
| R310    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 19.8/29.3    |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R311    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26/13.8      |
| R312    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 19.8/27.2    |
| R313    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26/15.3      |
| R314    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 37.1/10.4    |
| R315    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 46.2/8.6     |
| R316    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 42.4/7.1     |
| R360    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 24.6/4.7     |
| R361    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 19.5/29.3    |
| R362    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 46/11.7      |
| R451    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 147.5/13.4   |
| R452    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 146.3/13.4   |
| R501    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 18.4/64.8    |
| R502    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 17.7/41.5    |
| R551    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 37.6/71.6    |
| R552    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 37.7/46.2    |
| R601    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 27.9/71.3    |
| R602    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 28/46.4      |
| R651    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 46.8/67.5    |
| R652    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 46.9/45.7    |
| R701    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 42.2/66.4    |
| R702    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 41.4/50      |
| R751    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 31.8/70.1    |
| R752    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 35.6/67.7    |
| R753    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 32.9/56.7    |
| R754    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 38/49        |
| R801    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 26.3/37.4    |
| R802    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 26.3/36      |
| R803    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 28.9/37.4    |
| R851    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 29.4/65.8    |
| R852    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 28.5/52      |
| R901    | 7030009220 | S.RES ERJ12YJ561U           | B  | 46.5/30.2    |
| R902    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 54.5/17.8    |
| R951    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 52.1/30.7    |
| R952    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | T  | 48.4/27.8    |
| R953    | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | T  | 48.4/30.4    |
| R954    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 49.6/27.8    |
| R971    | 7030008180 | S.RES ERJ12YJ331U (330)     | B  | 32/41.7      |
| R972    | 7030009220 | S.RES ERJ12YJ561U           | B  | 32/37.5      |
| R1001   | 7030003270 | S.RES ERJ3GEYJ 390 V (39)   | T  | 66.7/30.8    |
| R1002   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 85.9/29.6    |
| R1003   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 87.2/29.7    |
| R1004   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 87.2/24.5    |
| R1005   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 85.9/22.6    |
| R1006   | 7310004650 | S.TRI EVM-2WSX80 B53 (502)  | T  | 87.2/27.7    |
| R1007   | 7310004650 | S.TRI EVM-2WSX80 B53 (502)  | T  | 92.1/27.7    |
| R1008   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 94.4/36.4    |
| R1009   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 95.5/21.8    |
| R1010   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 97.8/27.7    |
| R1011   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 105.8/31.1   |
| R1012   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 103.2/31.2   |
| R1013   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 102.1/33     |
| R1014   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | T  | 109.3/24.2   |
| R1015   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 104.8/32.9   |
| R1016   | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 111.5/24.9   |
| R1017   | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | T  | 112.6/18.3   |
| R1018   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 112.6/17.1   |
| R1019   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 111.7/15.9   |
| R1020   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 118/38       |
| R1021   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 110.8/22.8   |
| R1101   | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | T  | 95.9/19.5    |
| R1102   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 94.7/18.3    |
| R1103   | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | T  | 94.7/21      |
| R1104   | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | T  | 79.9/16.5    |
| R1106   | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | T  | 76.1/18.5    |
| R1107   | 7030003450 | S.RES ERJ3GEYJ 122 V (1.2K) | T  | 76.2/20.9    |
| R1108   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | T  | 83.9/21.6    |
| R1201   | 7030003270 | S.RES ERJ3GEYJ 390 V (39)   | T  | 66.6/46.7    |
| R1202   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 85.8/52.6    |
| R1203   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 86.3/50.5    |
| R1204   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 86.3/44.5    |
| R1205   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 86.2/43.8    |
| R1206   | 7310004650 | S.TRI EVM-2WSX80 B53 (502)  | T  | 87/48.2      |
| R1207   | 7310004650 | S.TRI EVM-2WSX80 B53 (502)  | T  | 92/48.2      |
| R1208   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 92.4/40.2    |
| R1209   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 91.8/53.2    |
| R1210   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 101.3/47.8   |
| R1212   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | B  | 103.9/57.2   |
| R1213   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 103.3/52.8   |
| R1214   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 105.2/53.4   |
| R1215   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 103.3/54     |
| R1216   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | T  | 110.1/47.4   |
| R1217   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 103.6/56.7   |
| R1218   | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 110.8/45.5   |
| R1219   | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | T  | 107.8/56.2   |
| R1220   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 105.9/55.2   |
| R1221   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 112.1/49.6   |
| R1222   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 100.5/52.3   |
| R1223   | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | B  | 95/56.1      |
| R1224   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 91.2/56.5    |
| R1225   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 112.1/46.7   |
| R1226   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 99.1/57      |
| R1229   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 108.9/56.1   |
| R1301   | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | T  | 94.3/62      |
| R1302   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 95.6/62      |
| R1303   | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | T  | 95.6/59.3    |
| R1304   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 94/58.8      |
| R1305   | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | T  | 73.9/59.2    |
| R1307   | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | T  | 79.9/61.6    |
| R1308   | 7030003450 | S.RES ERJ3GEYJ 122 V (1.2K) | T  | 79.9/63.1    |
| R1309   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | T  | 72.3/63.1    |
| R1401   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 50.7/35.2    |
| R1402   | 7030003270 | S.RES ERJ3GEYJ 390 V (39)   | T  | 50.7/36.4    |
| R1403   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 52.6/36.3    |
| R1404   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 54.5/36.9    |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                             | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------------|----|--------------|
| R1405   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)        | T  | 54.8/50.5    |
| R1406   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)         | T  | 51.4/43.1    |
| R1451   | 7030003430 | S.RES       | ERJ3GEYJ 821 V (820)        | B  | 91.1/73.8    |
| R1452   | 7030003430 | S.RES       | ERJ3GEYJ 821 V (820)        | B  | 88.4/73.8    |
| R1453   | 7030004030 | S.RES       | ERJ3GEYJ 5R6 V (5.6)        | B  | 86.8/69.4    |
| R1454   | 7030003430 | S.RES       | ERJ3GEYJ 821 V (820)        | B  | 88.6/69.4    |
| R1502   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | T  | 100.4/69.4   |
| R1503   | 7030003290 | S.RES       | ERJ3GEYJ 560 V (56)         | T  | 97.6/70.5    |
| R1504   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | T  | 95.8/68.6    |
| R1552   | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)        | B  | 118.8/69.9   |
| R1553   | 7510001491 | S.THE       | NTCG16 3NH 681JT            | B  | 121.1/66.7   |
| R1554   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | B  | 122.4/66.7   |
| R1555   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)         | B  | 125/69       |
| R1556   | 7030003340 | S.RES       | ERJ3GEYJ 151 V (150)        | B  | 127.5/68.2   |
| R1557   | 7030004040 | S.RES       | ERJ3GEYJ 4R7 V (4.7)        | B  | 127.7/71     |
| R1558   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)         | B  | 129.1/63.5   |
| R1601   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | T  | 120.8/27.8   |
| R1602   | 7030003280 | S.RES       | ERJ3GEYJ 470 V (47)         | T  | 128.1/35.2   |
| R1603   | 7030003280 | S.RES       | ERJ3GEYJ 470 V (47)         | T  | 129/32.7     |
| R1604   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | T  | 120.8/26.6   |
| R1701   | 7030003400 | S.RES       | ERJ3GEYJ 471 V (470)        | B  | 145.5/42.7   |
| R1702   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)         | B  | 156/43.2     |
| R1703   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)         | B  | 127.8/38.6   |
| R1704   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)         | T  | 138/37.5     |
| R1705   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)         | B  | 141.5/73.4   |
| R1706   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)         | B  | 130.6/75.2   |
| R1707   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)         | B  | 150.2/73.1   |
| R1708   | 7030003400 | S.RES       | ERJ3GEYJ 471 V (470)        | B  | 144.4/78     |
| R1901   | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)        | T  | 128.2/28.1   |
| R2001   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)         | T  | 103/72.8     |
| R2002   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)         | T  | 105.2/73.4   |
| R2003   | 7030003600 | S.RES       | ERJ3GEYJ 223 V (22K)        | T  | 103/74.1     |
| R2004   | 7030003340 | S.RES       | ERJ3GEYJ 151 V (150)        | T  | 106.9/78.2   |
| R2005   | 7030003280 | S.RES       | ERJ3GEYJ 470 V (47)         | T  | 103/75.5     |
|         |            |             |                             |    |              |
| C101    | 4030007090 | S.CER       | C1608 CH 1H 470J-T          | T  | 41/91.7      |
| C102    | 4030007030 | S.CER       | C1608 CH 1H 150J-T          | T  | 43.6/90.2    |
| C103    | 4030007120 | S.CER       | C1608 CH 1H 820J-T          | T  | 39.8/91.7    |
| C104    | 4030009560 | S.CER       | C1608 CH 1H R75B-T          | T  | 42.1/89.1    |
| C105    | 4030007070 | S.CER       | C1608 CH 1H 330J-T          | T  | 38.6/91.7    |
| C106    | 4030019320 | S.CER       | C1608 X7R 1C 105K-T         | T  | 37.2/89.4    |
| C108    | 4030006930 | S.CER       | C1608 CH 1H 020C-T          | B  | 82.8/75.3    |
| C109    | 4030007050 | S.CER       | C1608 CH 1H 220J-T          | B  | 84.4/75.3    |
| C110    | 4030019320 | S.CER       | C1608 X7R 1C 105K-T         | T  | 14.1/80.3    |
| C111    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 9.4/70       |
| C112    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 8.4/65.9     |
| C113    | 4030010760 | S.CER       | C1608 CH 1H 331J-T          | B  | 83.3/70      |
| C114    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 57.9/78      |
| C115    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 70.4/75.4    |
| C116    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 75.8/75      |
| C117    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 88/76        |
| C118    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 96.6/75.3    |
| C151    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 49.5/86.8    |
| C152    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 43.5/84      |
| C153    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 52.1/82.5    |
| C154    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 44/85.8      |
| C155    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 48.6/79.4    |
| C161    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 96.6/90.6    |
| C163    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 108.9/83.4   |
| C164    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 113/80.9     |
| C165    | 4030019540 | S.CER       | GRM31BR72J472KW01L          | B  | 122.2/86.7   |
| C201    | 4030007010 | S.CER       | C1608 CH 1H 100D-T          | T  | 7.3/20.3     |
| C202    | 4030007120 | S.CER       | C1608 CH 1H 820J-T          | T  | 7.3/21.5     |
| C203    | 4030007020 | S.CER       | C1608 CH 1H 120J-T          | T  | 5.5/22.2     |
| C204    | 4030007120 | S.CER       | C1608 CH 1H 820J-T          | T  | 7.3/23       |
| C205    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 5.5/24.8     |
| C206    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 4.6/29.8     |
| C207    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 8.9/39.9     |
| C208    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 6/39.6       |
| C209    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 2.9/39       |
| C210    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 7.3/24.5     |
| C251    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 13.6/72.5    |
| C252    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 9.8/76.1     |
| C271    | 4030018600 | S.CER       | C1608 CH 1H 152J-T          | T  | 8.9/80.1     |
| C272    | 4030018590 | S.CER       | C1608 CH 1H 122J-T          | T  | 8.9/78.9     |
| C273    | 4030018620 | S.CER       | C1608 CH 1H 222J-T          | T  | 10.5/77      |
| C274    | 4030018620 | S.CER       | C1608 CH 1H 222J-T          | T  | 12/77        |
| C275    | 4030018620 | S.CER       | C1608 CH 1H 222J-T          | T  | 13.5/77      |
| C276    | 4030018600 | S.CER       | C1608 CH 1H 152J-T          | T  | 16/77.5      |
| C301    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 42.2/17.8    |
| C302    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 35/28.7      |
| C303    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 28.4/25.5    |
| C304    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 38.5/10.4    |
| C330    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 112.5/58.2   |
| C332    | 4510008540 | S.ELE       | EEE1CA100SR                 | T  | 106.8/61.9   |
| C334    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 114.3/58.9   |
| C451    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 149.6/15.8   |
| C452    | 4030018960 | S.CER       | C3216 JB 1C 106MT-N         | T  | 157.3/14.8   |
| C453    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 149.6/17.8   |
| C454    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 145.6/16.1   |
| C455    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 150.6/26.5   |
| C456    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 150.4/24.5   |
| C457    | 4030007130 | S.CER       | C1608 CH 1H 101J-T          | B  | 149.5/35.8   |
| C458    | 4030007130 | S.CER       | C1608 CH 1H 101J-T          | B  | 153.4/34.8   |
| C459    | 4030007130 | S.CER       | C1608 CH 1H 101J-T          | B  | 149.5/33.8   |
| C460    | 4030007130 | S.CER       | C1608 CH 1H 101J-T          | B  | 153.5/32.8   |
| C461    | 4030017810 | S.CER       | C1608 CH 1H 102J-T          | B  | 149.6/31.8   |
| C462    | 4030017810 | S.CER       | C1608 CH 1H 102J-T          | B  | 153.5/30.8   |
| C463    | 4030017810 | S.CER       | C1608 CH 1H 102J-T          | B  | 149.6/29.8   |
| C464    | 4030017810 | S.CER       | C1608 CH 1H 102J-T          | B  | 145.5/28.5   |
| C465    | 4030017810 | S.CER       | C1608 CH 1H 102J-T          | B  | 154.1/28.4   |



## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION              | M. | H/V LOCATION |
|---------|------------|--------------------------|----|--------------|
| C466    | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 149.6/21.8   |
| C467    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 149.7/19.8   |
| C468    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 153.5/18.8   |
| C469    | 4510008510 | S.ELE EEE1CA471P         | T  | 141.8/7.4    |
| C470    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 141.2/17.8   |
| C471    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 158.6/17.1   |
| C472    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 141.4/19.8   |
| C473    | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 141.4/21.8   |
| C474    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 158/25.5     |
| C475    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 158.7/28.1   |
| C476    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 141.4/27.8   |
| C477    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 141.5/29.8   |
| C478    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 158.6/32     |
| C479    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 141.3/31.8   |
| C480    | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 153.5/22.7   |
| C481    | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 157.9/21.9   |
| C501    | 4030007170 | S.CER C1608 CH 1H 221J-T | T  | 17.4/68.6    |
| C502    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 18.2/66.6    |
| C503    | 4030007110 | S.CER C1608 CH 1H 680J-T | T  | 18.6/68.6    |
| C504    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 19.3/59.1    |
| C505    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 19.3/57.9    |
| C506    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 16.1/57.2    |
| C507    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 17.3/57.2    |
| C508    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 19.3/56.4    |
| C509    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 19.3/55.2    |
| C510    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 12.4/51.8    |
| C511    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 13.6/51.8    |
| C512    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 18.2/52.6    |
| C513    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 18.2/51.4    |
| C514    | 4030007170 | S.CER C1608 CH 1H 221J-T | T  | 18.2/47.7    |
| C515    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 19.7/45      |
| C516    | 4030007110 | S.CER C1608 CH 1H 680J-T | T  | 18.2/46.4    |
| C551    | 4030007160 | S.CER C1608 CH 1H 181J-T | T  | 38.1/73.6    |
| C552    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 37.4/67.8    |
| C553    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 36.8/73.6    |
| C554    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 39/63.9      |
| C555    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 39/62.6      |
| C556    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 37.1/61.9    |
| C557    | 4030007030 | S.CER C1608 CH 1H 150J-T | T  | 35.9/61.9    |
| C558    | 4030006990 | S.CER C1608 CH 1H 080D-T | T  | 39/61.1      |
| C559    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 39/59.9      |
| C560    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 31.5/56.1    |
| C561    | 4030007030 | S.CER C1608 CH 1H 150J-T | T  | 32.8/56.1    |
| C562    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 38.1/56.6    |
| C563    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 38.1/55.3    |
| C564    | 4030007160 | S.CER C1608 CH 1H 181J-T | T  | 38/50.7      |
| C565    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 39.5/49.4    |
| C566    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 38/52        |
| C601    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 27.2/73.3    |
| C602    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 27.5/67.8    |
| C603    | 4030007140 | S.CER C1608 CH 1H 121J-T | T  | 28.5/73.3    |
| C604    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 29.4/62.7    |
| C605    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 29.4/63.9    |
| C606    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 26.2/61.9    |
| C607    | 4030007010 | S.CER C1608 CH 1H 100D-T | T  | 27.5/61.9    |
| C609    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 29.4/59.9    |
| C610    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 21.7/56      |
| C611    | 4030007010 | S.CER C1608 CH 1H 100D-T | T  | 23/56        |
| C612    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 28.4/56.5    |
| C613    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 28.4/55.2    |
| C614    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 28.4/52.1    |
| C615    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 29.8/49.6    |
| C616    | 4030007140 | S.CER C1608 CH 1H 121J-T | T  | 28.4/50.8    |
| C651    | 4030007130 | S.CER C1608 CH 1H 101J-T | T  | 46/73.3      |
| C652    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 46.8/71.3    |
| C653    | 4030007030 | S.CER C1608 CH 1H 150J-T | T  | 47.2/73.3    |
| C654    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 48.8/63.5    |
| C655    | 4030007020 | S.CER C1608 CH 1H 120J-T | T  | 48.8/62.2    |
| C656    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 45.5/61.5    |
| C658    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 48.8/60.7    |
| C659    | 4030006980 | S.CER C1608 CH 1H 070D-T | T  | 48.8/59.5    |
| C660    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 40.9/56      |
| C662    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 47.7/56.8    |
| C663    | 4030007020 | S.CER C1608 CH 1H 120J-T | T  | 47.7/55.6    |
| C664    | 4030007130 | S.CER C1608 CH 1H 101J-T | T  | 46.1/49.9    |
| C665    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 47.6/52.3    |
| C666    | 4030007030 | S.CER C1608 CH 1H 150J-T | T  | 46.1/51.1    |
| C701    | 4030007100 | S.CER C1608 CH 1H 560J-T | B  | 45.1/69.2    |
| C702    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 44/62.7      |
| C704    | 4030007110 | S.CER C1608 CH 1H 680J-T | B  | 47.7/62.3    |
| C706    | 4030007100 | S.CER C1608 CH 1H 560J-T | B  | 44.6/51.7    |
| C707    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 42.5/58.7    |
| C752    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 32.1/73.9    |
| C756    | 4030007090 | S.CER C1608 CH 1H 470J-T | B  | 35.6/64.4    |
| C757    | 4030006990 | S.CER C1608 CH 1H 080D-T | B  | 33.8/64.4    |
| C760    | 4030007090 | S.CER C1608 CH 1H 470J-T | B  | 35.6/61.1    |
| C765    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 39/52.3      |
| C801    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 28.9/36      |
| C803    | 4030018600 | S.CER C1608 CH 1H 152J-T | T  | 29.6/39.5    |
| C804    | 4030018610 | S.CER C1608 CH 1H 182J-T | T  | 28.4/39.5    |
| C805    | 4030018610 | S.CER C1608 CH 1H 182J-T | T  | 31.5/39.6    |
| C806    | 4030018600 | S.CER C1608 CH 1H 152J-T | T  | 31.5/37.2    |
| C807    | 4030018600 | S.CER C1608 CH 1H 152J-T | T  | 31.5/38.4    |
| C808    | 4030018600 | S.CER C1608 CH 1H 152J-T | T  | 32/41.6      |
| C809    | 4030018610 | S.CER C1608 CH 1H 182J-T | T  | 33.3/41.6    |
| C810    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 19.6/37.7    |
| C845    | 4030011770 | S.CER C1608 CH 1H 060B-T | B  | 29.4/62.4    |
| C851    | 4030007140 | S.CER C1608 CH 1H 121J-T | B  | 25/67        |
| C852    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 28.7/67.4    |
| C853    | 4030011770 | S.CER C1608 CH 1H 060B-T | B  | 29.4/64      |
| C855    | 4030009550 | S.CER C1608 CH 1H 2R5B-T | B  | 23.2/61.1    |
| C856    | 4030009920 | S.CER C1608 CH 1H 050B-T | B  | 25/61.1      |
| C857    | 4030007010 | S.CER C1608 CH 1H 100D-T | B  | 29.4/57.8    |
| C858    | 4030009920 | S.CER C1608 CH 1H 050B-T | B  | 23.2/57.8    |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                           | M. | H/V LOCATION |
|---------|------------|---------------------------------------|----|--------------|
| C859    | 4030009550 | S.CER C1608 CH 1H 2R5B-T              | B  | 25/57.8      |
| C860    | 4030011770 | S.CER C1608 CH 1H 060B-T              | B  | 29.4/54.2    |
| C861    | 4030011770 | S.CER C1608 CH 1H 060B-T              | B  | 29.4/56      |
| C862    | 4030007030 | S.CER C1608 CH 1H 150J-T              | B  | 25/52        |
| C863    | 4030007140 | S.CER C1608 CH 1H 121J-T              | B  | 25/47.3      |
| C864    | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 29.3/50.1    |
| C901    | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 50.1/13.8    |
| C951    | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 49.6/30.4    |
| C952    | 4030007170 | S.CER C1608 CH 1H 221J-T              | T  | 48.4/25.2    |
| C971    | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 35.7/39.7    |
| C1001   | 4030007050 | S.CER C1608 CH 1H 220J-T              | T  | 66.4/20.6    |
| C1002   | 4030007140 | S.CER C1608 CH 1H 121J-T              | T  | 59.2/22.6    |
| C1004   | 4030007070 | S.CER C1608 CH 1H 330J-T              | T  | 66.4/23      |
| C1005   | 4030007080 | S.CER C1608 CH 1H 390J-T              | T  | 66.4/21.8    |
| C1006   | 4030007090 | S.CER C1608 CH 1H 470J-T              | T  | 59.9/25.3    |
| C1007   | 4030007080 | S.CER C1608 CH 1H 390J-T              | T  | 66.4/24.2    |
| C1008   | 4030007100 | S.CER C1608 CH 1H 560J-T              | T  | 66.4/25.4    |
| C1009   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 64.4/26.6    |
| C1010   | 4030007100 | S.CER C1608 CH 1H 560J-T              | T  | 66.4/26.6    |
| C1011   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 66.4/27.8    |
| C1012   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 73.2/29      |
| C1013   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 73/21.4      |
| C1014   | 4030007020 | S.CER C1608 CH 1H 120J-T              | B  | 86.2/27      |
| C1015   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 85.9/31.4    |
| C1016   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 87.2/30.9    |
| C1017   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 87.2/25.7    |
| C1018   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 85.9/24.4    |
| C1019   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 93.2/30.3    |
| C1020   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 93.1/25.1    |
| C1021   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 101.6/27.7   |
| C1022   | 4030011340 | S.CER C1608 CH 1H 471J-T              | T  | 103.8/24.9   |
| C1023   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 106.4/24.9   |
| C1024   | 4030011340 | S.CER C1608 CH 1H 471J-T              | T  | 105.8/29.9   |
| C1025   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 100.9/33     |
| C1026   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 108.4/29.9   |
| C1027   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 110.1/28.5   |
| C1028   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 110.1/26.5   |
| C1029   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 109.6/33.8   |
| C1030   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)     | B  | 105.5/31     |
| C1031   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 112.6/19.5   |
| C1032   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 112.5/14.7   |
| C1033   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 108.6/11.6   |
| C1034   | 4030009530 | S.CER C1608 CH 1H 030B-T              | T  | 112.6/20.7   |
| C1035   | 4030007030 | S.CER C1608 CH 1H 150J-T              | B  | 112.6/19.6   |
| C1036   | 4540000020 | S.TRI TZY2Z060A001R00 (TZVY2Z060A110) | T  | 113.5/22.7   |
| C1037   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 96.2/12.5    |
| C1038   | 4510008540 | S.ELE EEE1CA100SR                     | T  | 104.9/14     |
| C1039   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 99.5/12.5    |
| C1040   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 113.7/13.9   |
| C1041   | 4030009920 | S.CER C1608 CH 1H 050B-T              | T  | 114.2/24.8   |
| C1042   | 4030017810 | S.CER C1608 CH 1H 102J-T              | B  | 113.3/30.4   |
| C1101   | 4030007040 | S.CER C1608 CH 1H 180J-T              | T  | 89.6/17      |
| C1102   | 4030006980 | S.CER C1608 CH 1H 070D-T              | T  | 89.6/15.8    |
| C1103   | 4030008560 | S.CER C1608 CH 1H 300J-T              | T  | 87/17        |
| C1104   | 4030007020 | S.CER C1608 CH 1H 120J-T              | T  | 87/15.8      |
| C1105   | 4030007060 | S.CER C1608 CH 1H 270J-T              | T  | 85.2/16.5    |
| C1107   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 77.7/15.3    |
| C1108   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 76.1/12      |
| C1110   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 77.4/20.9    |
| C1111   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 73/20.2      |
| C1201   | 4030007050 | S.CER C1608 CH 1H 220J-T              | T  | 67.1/37.9    |
| C1202   | 4030007140 | S.CER C1608 CH 1H 121J-T              | T  | 63.9/39.9    |
| C1204   | 4030007070 | S.CER C1608 CH 1H 330J-T              | T  | 67.1/40.3    |
| C1205   | 4030007080 | S.CER C1608 CH 1H 390J-T              | T  | 67.1/39.1    |
| C1206   | 4030007090 | S.CER C1608 CH 1H 470J-T              | T  | 61/44.2      |
| C1207   | 4030007080 | S.CER C1608 CH 1H 390J-T              | T  | 67.1/41.5    |
| C1208   | 4030007100 | S.CER C1608 CH 1H 560J-T              | T  | 67.1/42.7    |
| C1209   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 64.9/44.5    |
| C1210   | 4030007100 | S.CER C1608 CH 1H 560J-T              | T  | 67.1/43.9    |
| C1211   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 67.1/45.1    |
| C1212   | 4030007030 | S.CER C1608 CH 1H 150J-T              | B  | 73.8/50.6    |
| C1213   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 72.5/43.3    |
| C1214   | 4030007020 | S.CER C1608 CH 1H 120J-T              | B  | 85.3/48.1    |
| C1215   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 85.8/50.8    |
| C1216   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 86.3/51.7    |
| C1217   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 86.3/45.7    |
| C1218   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 86.2/45.6    |
| C1219   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 93/50.8      |
| C1220   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 93/45.3      |
| C1221   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 97.7/48.2    |
| C1222   | 4030007040 | S.CER C1608 CH 1H 180J-T              | B  | 99.4/60.2    |
| C1223   | 4030011340 | S.CER C1608 CH 1H 471J-T              | T  | 103.9/43.9   |
| C1224   | 4030006900 | S.CER C1608 JB 1H 103K-T              | B  | 104.7/55.5   |
| C1225   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 106.5/43.9   |
| C1226   | 4030011340 | S.CER C1608 CH 1H 471J-T              | T  | 103.9/48.6   |
| C1227   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 103.3/55.2   |
| C1228   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 105.8/49.1   |
| C1229   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 108.9/48.6   |
| C1230   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 109.6/45.5   |
| C1231   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 102.6/60.5   |
| C1232   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)     | T  | 102.5/64.1   |
| C1233   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 109/56.3     |
| C1234   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 114.5/53.2   |
| C1235   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 111.1/57.2   |
| C1236   | 4030009530 | S.CER C1608 CH 1H 030B-T              | T  | 110.3/54.6   |
| C1237   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 114.5/46.1   |
| C1238   | 4540000020 | S.TRI TZY2Z060A001R00 (TZVY2Z060A110) | T  | 112.4/53.2   |
| C1239   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 114.8/65.2   |
| C1240   | 4030007000 | S.CER C1608 CH 1H 090D-T              | B  | 102.8/52.1   |
| C1241   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 88.8/59.4    |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                    | M. | H/V LOCATION |
|---------|------------|--------------------------------|----|--------------|
| C1242   | 4030011600 | S.CER C1608 JB 1E 104K-T       | B  | 93/55.8      |
| C1243   | 4030009920 | S.CER C1608 CH 1H 050B-T       | T  | 112.1/44     |
| C1245   | 4030017810 | S.CER C1608 CH 1H 102J-T       | B  | 106/61.5     |
| C1246   | 4030007010 | S.CER C1608 CH 1H 100D-T       | T  | 99.1/58.2    |
| C1247   | 4550007650 | S.TAN F931V105MAABMA           | B  | 106.9/53.5   |
| C1301   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 96.7/57.5    |
| C1302   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 102.9/61.2   |
| C1303   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 96.4/64.1    |
| C1304   | 4030007040 | S.CER C1608 CH 1H 180J-T       | T  | 92.8/59.7    |
| C1305   | 4030006980 | S.CER C1608 CH 1H 070D-T       | T  | 91.8/62      |
| C1306   | 4030008560 | S.CER C1608 CH 1H 300J-T       | T  | 91/58.6      |
| C1307   | 4030007020 | S.CER C1608 CH 1H 120J-T       | T  | 89.1/59      |
| C1308   | 4030007060 | S.CER C1608 CH 1H 270J-T       | T  | 91/59.8      |
| C1310   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 82.2/60.8    |
| C1311   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 77/58.5      |
| C1313   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 79.9/64.3    |
| C1314   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 70.1/61.2    |
| C1400   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 49.5/46.2    |
| C1401   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 54.5/38.1    |
| C1402   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 50.7/37.6    |
| C1403   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 52.9/41.9    |
| C1404   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 54.8/42.4    |
| C1405   | 4030007120 | S.CER C1608 CH 1H 820J-T       | T  | 54/44.3      |
| C1406   | 4030007040 | S.CER C1608 CH 1H 180J-T       | T  | 51.4/48.6    |
| C1407   | 4030007130 | S.CER C1608 CH 1H 101J-T       | T  | 54/48.6      |
| C1408   | 4030007110 | S.CER C1608 CH 1H 680J-T       | T  | 53.6/50.5    |
| C1409   | 4030007100 | S.CER C1608 CH 1H 560J-T       | T  | 54.1/52.4    |
| C1452   | 4030009920 | S.CER C1608 CH 1H 050B-T       | T  | 82.6/71      |
| C1453   | 4030011600 | S.CER C1608 JB 1E 104K-T       | B  | 86/72        |
| C1454   | 4030011600 | S.CER C1608 JB 1E 104K-T       | B  | 91.1/68.2    |
| C1501   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 98.4/68.6    |
| C1502   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 99.7/71.3    |
| C1550   | 4030017810 | S.CER C1608 CH 1H 102J-T       | B  | 125.1/64.3   |
| C1551   | 4030007100 | S.CER C1608 CH 1H 560J-T       | B  | 96.3/70.1    |
| C1552   | 4030006980 | S.CER C1608 CH 1H 070D-T       | B  | 98.7/70.9    |
| C1553   | 4030007100 | S.CER C1608 CH 1H 560J-T       | B  | 101.1/71     |
| C1556   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 116.6/66.7   |
| C1557   | 4030007010 | S.CER C1608 CH 1H 100D-T       | B  | 117.1/69.9   |
| C1558   | 4030011600 | S.CER C1608 JB 1E 104K-T       | B  | 119.2/67.4   |
| C1559   | 4030006970 | S.CER C1608 CH 1H 060D-T       | B  | 124/66.7     |
| C1560   | 4030017810 | S.CER C1608 CH 1H 102J-T       | B  | 125.9/66.7   |
| C1561   | 4030017810 | S.CER C1608 CH 1H 102J-T       | B  | 129.1/68.7   |
| C1563   | 4030017810 | S.CER C1608 CH 1H 102J-T       | B  | 124.9/58.9   |
| C1601   | 4030007170 | S.CER C1608 CH 1H 221J-T       | T  | 130.3/33.1   |
| C1603   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 127.4/32.7   |
| C1604   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 128.2/30.7   |
| C1651   | 4030009920 | S.CER C1608 CH 1H 050B-T       | B  | 125.8/25.4   |
| C1701   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 128.3/30.2   |
| C1704   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 149.7/84.4   |
| C1705   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 159/43.2     |
| C1706   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 127.6/35.4   |
| C1707   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 140.2/36.7   |
| C1708   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 138.1/71.3   |
| C1709   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 130.6/71     |
| C1710   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 147.2/73.1   |
| C1901   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 128.2/29.5   |
| C2001   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 104.5/71.4   |
| C2002   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 103/77.1     |
| C2003   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 109.7/77     |
| C9001   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 4.6/59.4     |
| C9002   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 7.4/59.4     |
| C9007   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 42/38.9      |
| C9008   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 42/36.1      |
| C9011   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 26/82.4      |
| C9012   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 26/79.6      |
| C9015   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 54.6/67.5    |
| C9016   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 57.4/67.5    |
| C9018   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 20.6/17.5    |
| C9020   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 23.4/17.5    |
| C9021   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 49.4/17.5    |
| C9024   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 46.6/17.5    |
| C9026   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 44.1/42.9    |
| C9027   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 44.1/40.1    |
| C9031   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 154.9/54.3   |
| C9035   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 142.9/62.7   |
| C9036   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 146.3/62.7   |
| C9061   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 150.6/77.8   |
| C9062   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 149/74.4     |
| C9065   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 148.9/42.2   |
| C9066   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 150.6/38.8   |
| C9071   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 137.9/77.8   |
| C9072   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 137.9/74.4   |
| C9075   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 137.9/42.2   |
| C9076   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 136.1/38.8   |
| C9081   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 125.2/77.8   |
| C9082   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 125.2/74.4   |
| C9085   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 125.2/42.2   |
| C9086   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 125.2/38.8   |
| RL101   | 6330001860 | REL UA2-12NU                   |    |              |
| RL102   | 6330001860 | REL UA2-12NU                   |    |              |
| RL103   | 6330001860 | REL UA2-12NU                   |    |              |
| RL104   | 6330001860 | REL UA2-12NU                   |    |              |
| RL105   | 6330001860 | REL UA2-12NU                   |    |              |
| RL161   | 6330000540 | REL 2-1419131-2(OMR-109F)      |    |              |
| J101    | 6510007020 | CON TMP-J01X-V6                |    |              |
| J102    | 6450001130 | CON JPJ2042-01-110             |    |              |
| J103    | 6450001800 | CON JPJ1044-01-010             |    |              |
| J161    | 6450001130 | CON JPJ2042-01-110             |    |              |
| J201    | 6510007020 | CON TMP-J01X-V6                |    |              |
| J451    | 6510022581 | S.CON 24FMN-BMTR-A-TBT(LF)(SN) | T  | 151.7/24.3   |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| J801    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J802    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J803    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J804    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J805    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J807    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J809    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J951    | 6510007020 | CON TMP-J01X-V6             |    |              |
| J1101   | 6510007020 | CON TMP-J01X-V6             |    |              |
| J1301   | 6510007020 | CON TMP-J01X-V6             |    |              |
| J1651   | 6510007020 | CON TMP-J01X-V6             |    |              |
| J1701   | 6510007020 | CON TMP-J01X-V6             |    |              |
| J1702   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1703   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1704   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1705   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1706   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1707   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1708   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1709   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J2001   | 6510007020 | CON TMP-J01X-V6             |    |              |
| EP451   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 145.6/35.8   |
| EP452   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 156.3/36.2   |
| EP453   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 145.6/33.8   |
| EP454   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 157.6/32.8   |
| EP455   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 145.6/31.8   |
| EP456   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 157.6/30.8   |
| EP457   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 145.6/29.8   |
| EP458   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 145.6/27.8   |
| EP459   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 157.5/26.8   |
| EP460   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 157.5/24.8   |
| EP461   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 145.6/21.8   |
| EP462   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 145.6/19.8   |
| EP463   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 157.4/18.8   |
| EP464   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 145.6/17.8   |
| EP465   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 35.5/7.5     |
| EP466   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 32.6/4.2     |
| EP467   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 157.5/22.8   |
| EP1001  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | B  | 112.5/32.4   |
| EP1009  | 6910019900 | S.BEA MPZ1608S601AT         | T  | 120.6/9.9    |
| EP1201  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | B  | 106/63       |
| EP1406  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 50.7/44.3    |
| EP1551  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | B  | 127.5/65.1   |
| EP1701  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | B  | 158.2/41     |
| EP1702  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | B  | 129.9/36.2   |
| EP1703  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 137.2/35.5   |
| EP1901  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 133.6/30     |
| MP1     | 8930065741 | SPR 2590 D-EARTH SPRING-1   | B  | 100.3/94.8   |
| MP2     | 8930065741 | SPR 2590 D-EARTH SPRING-1   | B  | 68.3/94.8    |
| MP3     | 8930065741 | SPR 2590 D-EARTH SPRING-1   | B  | 26.3/94.8    |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [BPF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                | M. | H/V LOCATION |
|---------|------------|----------------------------|----|--------------|
| D3201   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 39.6/48.2    |
| D3202   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 48.2/9.2     |
| D3301   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 33.9/45.3    |
| D3302   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 30.9/3.5     |
| D3401   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 21.7/44.3    |
| D3402   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 27.5/5.7     |
| D3501   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 36.5/48.4    |
| D3502   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 40/10.5      |
| D3601   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 26.6/41.6    |
| D3602   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 27.5/3.9     |
| L3201   | 6180003540 | COI SP0406-3R9K-6          |    |              |
| L3202   | 6180003580 | COI SP0406-120K-6          |    |              |
| L3203   | 6180003580 | COI SP0406-120K-6          |    |              |
| L3204   | 6180003540 | COI SP0406-3R9K-6          |    |              |
| L3205   | 6180003580 | COI SP0406-120K-6          |    |              |
| L3301   | 6180003550 | COI SP0406-4R7K-6          |    |              |
| L3302   | 6180003560 | COI SP0406-5R6K-6          |    |              |
| L3303   | 6180003560 | COI SP0406-5R6K-6          |    |              |
| L3304   | 6180003550 | COI SP0406-4R7K-6          |    |              |
| L3305   | 6180003560 | COI SP0406-5R6K-6          |    |              |
| L3401   | 6180003410 | COI SP0406-2R2K-6          |    |              |
| L3402   | 6180003510 | COI SP0406-6R8K-6          |    |              |
| L3403   | 6180003510 | COI SP0406-6R8K-6          |    |              |
| L3404   | 6180003410 | COI SP0406-2R2K-6          |    |              |
| L3405   | 6180003510 | COI SP0406-6R8K-6          |    |              |
| L3501   | 6180003410 | COI SP0406-2R2K-6          |    |              |
| L3502   | 6180003570 | COI SP0406-3R3K-6          |    |              |
| L3503   | 6180003570 | COI SP0406-3R3K-6          |    |              |
| L3504   | 6180003410 | COI SP0406-2R2K-6          |    |              |
| L3505   | 6180003570 | COI SP0406-3R3K-6          |    |              |
| L3601   | 6180003390 | COI SP0406-1R2K-6          |    |              |
| L3602   | 6180003490 | COI SP0406-2R7K-6          |    |              |
| L3603   | 6180003490 | COI SP0406-2R7K-6          |    |              |
| L3604   | 6180003390 | COI SP0406-1R2K-6          |    |              |
| L3605   | 6180003490 | COI SP0406-2R7K-6          |    |              |
| R3201   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 54.2/39.5    |
| R3202   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 56.9/25.8    |
| R3301   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 31.3/39.2    |
| R3302   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 30.2/12.7    |
| R3401   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 6/32.5       |
| R3402   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 6/17.5       |
| R3501   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 47.4/42.4    |
| R3502   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 45.2/23.4    |
| R3601   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 22/40.5      |
| R3602   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 20.2/11.1    |
| C3201   | 4030017810 | S.CER C1608 CH 1H 102J-T   | B  | 53.6/41.5    |
| C3202   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 51/41.6      |
| C3203   | 4030017810 | S.CER C1608 CH 1H 102J-T   | B  | 53.6/43.3    |
| C3204   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 50.4/39.2    |
| C3205   | 4030007140 | S.CER C1608 CH 1H 121J-T   | B  | 50.4/37.4    |
| C3206   | 4030007160 | S.CER C1608 CH 1H 181J-T   | B  | 48/33.6      |
| C3207   | 4030007060 | S.CER C1608 CH 1H 270J-T   | B  | 48/35.4      |
| C3208   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 49.4/31.8    |
| C3209   | 4030007090 | S.CER C1608 CH 1H 470J-T   | B  | 49.4/30      |
| C3210   | 4030007160 | S.CER C1608 CH 1H 181J-T   | B  | 47.9/27.3    |
| C3211   | 4030007060 | S.CER C1608 CH 1H 270J-T   | B  | 49.7/27.3    |
| C3212   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 49.4/24.6    |
| C3213   | 4030007140 | S.CER C1608 CH 1H 121J-T   | B  | 49.4/22.8    |
| C3214   | 4030017810 | S.CER C1608 CH 1H 102J-T   | B  | 53/20.3      |
| C3215   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 53/24.8      |
| C3216   | 4030017810 | S.CER C1608 CH 1H 102J-T   | B  | 53/22.1      |
| C3301   | 4030017800 | S.CER C1608 CH 1H 561J-T   | B  | 29.2/34.8    |
| C3302   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 31.2/31.2    |
| C3303   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 29.2/33      |
| C3304   | 4030007080 | S.CER C1608 CH 1H 390J-T   | B  | 31.2/29.4    |
| C3305   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 31.2/27.6    |
| C3306   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 34.4/25      |
| C3307   | 4030007100 | S.CER C1608 CH 1H 560J-T   | B  | 32.6/25      |
| C3308   | 4030007090 | S.CER C1608 CH 1H 470J-T   | B  | 30/24.4      |
| C3309   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 30/22.6      |
| C3310   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 32.6/21.3    |
| C3311   | 4030007100 | S.CER C1608 CH 1H 560J-T   | B  | 34.4/21.3    |
| C3312   | 4030007080 | S.CER C1608 CH 1H 390J-T   | B  | 30/20.6      |
| C3313   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 31.2/18.8    |
| C3314   | 4030017800 | S.CER C1608 CH 1H 561J-T   | B  | 32.2/12.9    |
| C3315   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 29.3/16.7    |
| C3316   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 34/12.9      |
| C3401   | 4030011330 | S.CER C1608 CH 1H 391J-T   | B  | 10.2/32      |
| C3402   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 10.2/30.2    |
| C3403   | 4030017800 | S.CER C1608 CH 1H 561J-T   | B  | 10.2/33.8    |
| C3404   | 4030007160 | S.CER C1608 CH 1H 181J-T   | B  | 10.2/26.6    |
| C3405   | 4030007070 | S.CER C1608 CH 1H 330J-T   | B  | 10.2/28.4    |
| C3406   | 4030007120 | S.CER C1608 CH 1H 820J-T   | B  | 12.9/27.4    |
| C3407   | 4030007030 | S.CER C1608 CH 1H 150J-T   | B  | 14.7/27.4    |
| C3408   | 4030007140 | S.CER C1608 CH 1H 121J-T   | B  | 11.5/22.8    |
| C3409   | 4030007100 | S.CER C1608 CH 1H 560J-T   | B  | 11.5/24.6    |
| C3410   | 4030007120 | S.CER C1608 CH 1H 820J-T   | B  | 15.9/20.7    |
| C3411   | 4030007030 | S.CER C1608 CH 1H 150J-T   | B  | 14.1/20.7    |
| C3412   | 4030007160 | S.CER C1608 CH 1H 181J-T   | B  | 13.5/16.4    |
| C3413   | 4030007070 | S.CER C1608 CH 1H 330J-T   | B  | 13.5/18.2    |
| C3414   | 4030011330 | S.CER C1608 CH 1H 391J-T   | B  | 13.8/11.3    |
| C3415   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 12/14.7      |
| C3416   | 4030017800 | S.CER C1608 CH 1H 561J-T   | B  | 12/11.3      |
| C3501   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 45.4/42.4    |
| C3502   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 41.8/40.8    |
| C3503   | 4030007150 | S.CER C1608 CH 1H 151J-T   | B  | 43.6/42.4    |
| C3504   | 4030007060 | S.CER C1608 CH 1H 270J-T   | B  | 40.8/38.2    |
| C3505   | 4030007150 | S.CER C1608 CH 1H 151J-T   | B  | 40.8/36.4    |

## [BPF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION              | M. | H/V LOCATION |
|---------|------------|--------------------------|----|--------------|
| C3506   | 4030007140 | S.CER C1608 CH 1H 121J-T | B  | 38/34.5      |
| C3507   | 4030007060 | S.CER C1608 CH 1H 270J-T | B  | 38/32.7      |
| C3508   | 4030007010 | S.CER C1608 CH 1H 100D-T | B  | 39.3/30.9    |
| C3509   | 4030007150 | S.CER C1608 CH 1H 151J-T | B  | 39.3/29.1    |
| C3510   | 4030007140 | S.CER C1608 CH 1H 121J-T | B  | 38.8/26.4    |
| C3511   | 4030007060 | S.CER C1608 CH 1H 270J-T | B  | 40.6/26.4    |
| C3512   | 4030007060 | S.CER C1608 CH 1H 270J-T | B  | 39.3/23.7    |
| C3513   | 4030007150 | S.CER C1608 CH 1H 151J-T | B  | 38.8/21.9    |
| C3514   | 4030010760 | S.CER C1608 CH 1H 331J-T | B  | 42.6/19.6    |
| C3515   | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 42.6/23.2    |
| C3516   | 4030007150 | S.CER C1608 CH 1H 151J-T | B  | 42.6/21.4    |
| C3601   | 4030007170 | S.CER C1608 CH 1H 221J-T | B  | 20.8/34.8    |
| C3602   | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 22/42.4      |
| C3603   | 4030007170 | S.CER C1608 CH 1H 221J-T | B  | 20.8/33      |
| C3604   | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 21.8/29.4    |
| C3605   | 4030007050 | S.CER C1608 CH 1H 220J-T | B  | 21.8/31.2    |
| C3606   | 4030007080 | S.CER C1608 CH 1H 390J-T | B  | 22/26.8      |
| C3607   | 4030007070 | S.CER C1608 CH 1H 330J-T | B  | 23.8/26.8    |
| C3608   | 4030007120 | S.CER C1608 CH 1H 820J-T | B  | 21.8/22.2    |
| C3609   | 4030007050 | S.CER C1608 CH 1H 220J-T | B  | 21.8/24      |
| C3610   | 4030007080 | S.CER C1608 CH 1H 390J-T | B  | 24.4/20.8    |
| C3611   | 4030007070 | S.CER C1608 CH 1H 330J-T | B  | 26.2/20.8    |
| C3612   | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 23/18.2      |
| C3613   | 4030007050 | S.CER C1608 CH 1H 220J-T | B  | 23/16.4      |
| C3614   | 4030007170 | S.CER C1608 CH 1H 221J-T | B  | 22.2/11.3    |
| C3615   | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 21.5/14.2    |
| C3616   | 4030007170 | S.CER C1608 CH 1H 221J-T | B  | 24/11.3      |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount



**[PREAMP UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| Q4101   | 1590003680 | S.TRA KRC402 RTK/P          | T  | 49.4/33.7    |
| Q4102   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 47/31.7      |
| Q4201   | 1530003851 | S.TRA 2SC5551F-TD-E         | T  | 43.8/24.4    |
| Q4202   | 1530003851 | S.TRA 2SC5551F-TD-E         | T  | 36.3/12.9    |
| Q4203   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 21/10.2      |
| Q4204   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 20.5/4.7     |
| Q4205   | 1590003770 | S.TRA KRA302E-RTK/P         | B  | 45.7/24.5    |
| Q4301   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 23.5/25.7    |
| Q4302   | 1530003851 | S.TRA 2SC5551F-TD-E         | B  | 6/18.9       |
| Q4303   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 22.7/23.6    |
| Q4304   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 18.9/8.4     |
| Q4305   | 1590003680 | S.TRA KRC402 RTK/P          | T  | 16.6/7.3     |
| D4101   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 41.9/30.8    |
| D4102   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 48.8/26.2    |
| D4201   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 37.8/31.7    |
| D4202   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 44.5/15.9    |
| D4203   | 1750001320 | S.DIO KDS4148U RTK/P        | T  | 21/7.5       |
| D4301   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 35.1/32.1    |
| D4302   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 48.4/7.4     |
| D4303   | 1750001320 | S.DIO KDS4148U RTK/P        | T  | 22.4/21.7    |
| L4101   | 6200003221 | S.COI NLV32T-151J           | B  | 47.5/33      |
| L4201   | 6200003221 | S.COI NLV32T-151J           | T  | 38/28.6      |
| L4202   | 6140003800 | COI LR-439                  |    |              |
| L4203   | 6200009060 | S.COI LQH32CN101K23L        | T  | 38.1/17.5    |
| L4204   | 6200009060 | S.COI LQH32CN101K23L        | T  | 25.4/7.5     |
| L4205   | 6140003810 | COI LR-440                  |    |              |
| L4206   | 6140003810 | COI LR-440                  |    |              |
| L4207   | 6200009060 | S.COI LQH32CN101K23L        | T  | 31.6/7.5     |
| L4208   | 6140003800 | COI LR-439                  |    |              |
| L4209   | 6200003221 | S.COI NLV32T-151J           | B  | 42.9/23.1    |
| L4210   | 6200007780 | S.COI LQW2BHNH12J03L        | B  | 42.4/17.5    |
| L4301   | 6200003221 | S.COI NLV32T-151J           | T  | 19.2/26.5    |
| L4302   | 6140004430 | COI LR-500                  |    |              |
| L4303   | 6140003900 | COI LR-489                  |    |              |
| L4304   | 6200009060 | S.COI LQH32CN101K23L        | T  | 15.1/24.1    |
| L4305   | 6200003221 | S.COI NLV32T-151J           | T  | 17.1/12.4    |
| R4101   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 42.7/32.3    |
| R4102   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 44.7/32.3    |
| R4201   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 34.6/27.7    |
| R4202   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 41.7/17      |
| R4203   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 27.5/6.1     |
| R4204   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 44.5/19.9    |
| R4205   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 41.8/13.1    |
| R4206   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 41.8/18.8    |
| R4207   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 39.9/15      |
| R4208   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 41.6/19.7    |
| R4209   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | B  | 37.2/23.6    |
| R4210   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | B  | 28.7/15.2    |
| R4213   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 40.6/21.4    |
| R4214   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 33.1/12.4    |
| R4301   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 21.4/28.4    |
| R4302   | 7030003510 | S.RES ERJ3GEYJ 392 V (3.9K) | B  | 13.3/25.7    |
| R4303   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 13.3/23.3    |
| R4304   | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | B  | 1.6/19.3     |
| R4305   | 7030003240 | S.RES ERJ3GEYJ 220 V (22)   | B  | 11.9/28.7    |
| R4306   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 15.4/10.3    |
| R4307   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 14.3/28.6    |
| R4308   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 5.2/26.4     |
| C4101   | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 47.3/29.4    |
| C4102   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | T  | 45.4/29.8    |
| C4103   | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 48.4/30      |
| C4104   | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 49.6/31.3    |
| C4201   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | T  | 30.2/27.7    |
| C4202   | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 44.1/28.3    |
| C4205   | 4030017490 | S.CER C1608 JB 1A 105K-T    | B  | 33.9/23.6    |
| C4206   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 26.7/18.8    |
| C4207   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 46.9/22.8    |
| C4208   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 40.6/13.1    |
| C4209   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | B  | 35/18.9      |
| C4210   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | B  | 26.5/8.1     |
| C4211   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | B  | 39/16        |
| C4212   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | B  | 33.5/8.9     |
| C4213   | 4030017810 | S.CER C1608 CH 1H 102J-T    | T  | 34.1/7.8     |
| C4215   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | B  | 44/11.5      |
| C4216   | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 43.7/26.4    |
| C4217   | 4030007110 | S.CER C1608 CH 1H 680J-T    | B  | 44.2/14.1    |
| C4218   | 4030007110 | S.CER C1608 CH 1H 680J-T    | B  | 42.5/15.6    |
| C4221   | 4030009510 | S.CER C1608 CH 1H 010B-T    | T  | 42.6/20.7    |
| C4222   | 4030009510 | S.CER C1608 CH 1H 010B-T    | T  | 38.1/10.1    |
| C4223   | 4030007010 | S.CER C1608 CH 1H 100D-T    | B  | 38.5/8       |
| C4224   | 4030017810 | S.CER C1608 CH 1H 102J-T    | T  | 29.6/18.9    |
| C4225   | 4030017810 | S.CER C1608 CH 1H 102J-T    | T  | 43.3/18.8    |
| C4226   | 4030017810 | S.CER C1608 CH 1H 102J-T    | T  | 39.4/13.1    |
| C4301   | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 21.4/25.8    |
| C4302   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | T  | 17.3/29.3    |
| C4303   | 4030017810 | S.CER C1608 CH 1H 102J-T    | B  | 10.2/24.2    |
| C4304   | 4030017810 | S.CER C1608 CH 1H 102J-T    | B  | 10.2/27.2    |
| C4305   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | T  | 11.3/18.5    |
| C4306   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 14.5/13.3    |
| C4307   | 4030017810 | S.CER C1608 CH 1H 102J-T    | B  | 11.1/21.1    |
| C4308   | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 18/10.3      |
| C4309   | 4030006990 | S.CER C1608 CH 1H 080D-T    | T  | 15.5/27.2    |
| C4310   | 4550006120 | S.TAN TEESVA 0G 226M8R      | T  | 11.6/25.9    |
| C4311   | 4550006120 | S.TAN TEESVA 0G 226M8R      | T  | 6.7/19.3     |
| C4312   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 9.8/27.2     |
| C4313   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 8.2/21.1     |

**[MCF-M UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                         | M. | H/V LOCATION |
|---------|------------|-------------------------------------|----|--------------|
| FI5001  | 2030000740 | S.MON FL-425 (HF-734A 64.455M BW6K) | T  | 20/6         |
| L5001   | 6200012350 | S.COI C2520C-R62G-A                 | T  | 8.9/7.6      |
| L5002   | 6200012350 | S.COI C2520C-R62G-A                 | T  | 8.9/4.4      |
| L5003   | 6200012350 | S.COI C2520C-R62G-A                 | T  | 31.2/7.6     |
| L5004   | 6200012350 | S.COI C2520C-R62G-A                 | T  | 31.2/4.4     |
| C5001   | 4030006900 | S.CER C1608 JB 1H 103K-T            | T  | 6.2/6        |
| C5002   | 4030007010 | S.CER C1608 CH 1H 100D-T            | T  | 13.6/6.5     |
| C5003   | 4030007010 | S.CER C1608 CH 1H 100D-T            | T  | 14.9/6.5     |
| C5004   | 4030007030 | S.CER C1608 CH 1H 150J-T            | T  | 17.9/2.6     |
| C5006   | 4030007010 | S.CER C1608 CH 1H 100D-T            | T  | 25/5.5       |
| C5007   | 4030007010 | S.CER C1608 CH 1H 100D-T            | T  | 26.3/5.5     |
| C5008   | 4030006900 | S.CER C1608 JB 1H 103K-T            | T  | 33.9/6       |
| EP5001  | 6910002161 | CAS CASE-BM7H-LF                    |    |              |
| EP5002  | 6910002161 | CAS CASE-BM7H-LF                    |    |              |

**[MCF-N UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                         | M. | H/V LOCATION |
|---------|------------|-------------------------------------|----|--------------|
| FI6001  | 2030000750 | S.MON FL-426 (HF-734A 64.455M BW3K) | T  | 20/6         |
| L6001   | 6200010960 | S.COI C2520C-R47G-A (0.47U)         | T  | 8.9/7.6      |
| L6002   | 6200010960 | S.COI C2520C-R47G-A (0.47U)         | T  | 8.9/4.4      |
| L6003   | 6200010960 | S.COI C2520C-R47G-A (0.47U)         | T  | 31.2/7.6     |
| L6004   | 6200010960 | S.COI C2520C-R47G-A (0.47U)         | T  | 31.2/4.4     |
| C6001   | 4030006900 | S.CER C1608 JB 1H 103K-T            | T  | 6.2/6        |
| C6002   | 4030009990 | S.CER C1608 CH 1H 200J-T            | T  | 13.6/6.5     |
| C6004   | 4030007030 | S.CER C1608 CH 1H 150J-T            | T  | 17.9/2.6     |
| C6007   | 4030009990 | S.CER C1608 CH 1H 200J-T            | T  | 26.3/5.5     |
| C6008   | 4030006900 | S.CER C1608 JB 1H 103K-T            | T  | 33.9/6       |
| EP6001  | 6910002161 | CAS CASE-BM7H-LF                    |    |              |
| EP6002  | 6910002161 | CAS CASE-BM7H-LF                    |    |              |

**[MCF-W UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                             | M. | H/V LOCATION |
|---------|------------|-----------------------------------------|----|--------------|
| FI7001  | 2030000730 | S.MON FL-424<br>(HF-734A 64.455M BW15K) | T  | 20/6         |
| L7001   | 6200012350 | S.COI C2520C-R62G-A                     | T  | 8.9/7.6      |
| L7002   | 6200012350 | S.COI C2520C-R62G-A                     | T  | 8.9/4.4      |
| L7003   | 6200012350 | S.COI C2520C-R62G-A                     | T  | 31.2/7.6     |
| L7004   | 6200012350 | S.COI C2520C-R62G-A                     | T  | 31.2/4.4     |
| C7001   | 4030006900 | S.CER C1608 JB 1H 103K-T                | T  | 6.2/6        |
| C7002   | 4030007040 | S.CER C1608 CH 1H 180J-T                | T  | 13.6/6.5     |
| C7005   | 4030006990 | S.CER 8P C1608 CH                       | T  | 17.9/2.6     |
| C7007   | 4030007040 | S.CER C1608 CH 1H 180J-T                | T  | 26.3/5.5     |
| C7008   | 4030006900 | S.CER C1608 JB 1H 103K-T                | T  | 33.9/6       |
| EP7001  | 6910002161 | CAS CASE-BM7H-LF                        |    |              |
| EP7002  | 6910002161 | CAS CASE-BM7H-LF                        |    |              |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [PA UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| IC1     | 1180002020 | S.REG BA033FP-E2            | T  | 21.5/71.2    |
| IC2     | 1180002781 | REG KIA7805API-U/PF         |    |              |
| IC3     | 1180003150 | REG KIA7808API-U/PF         |    |              |
| IC101   | 1110006380 | S.IC LM2904PWR              | T  | 53.2/11.7    |
| Q1      | 1560001620 | FET RD06HVF1-101            |    |              |
| Q2      | 1560001530 | FET RD15HVF1-101            |    |              |
| Q3      | 1560001530 | FET RD15HVF1-101            |    |              |
| Q4      | 1560001640 | FET RD100HHF1C-103          |    |              |
| Q5      | 1560001640 | FET RD100HHF1C-103          |    |              |
| Q9      | 1590003680 | S.TRA KRC402 RTK/P          | T  | 75.1/86.5    |
| Q101    | 1520000651 | S.TRA 2SB1201S-TL-E         | T  | 63.4/9.5     |
| Q102    | 1530002060 | S.TRA 2SC4081 T106 R        | T  | 58.2/10.8    |
| D1      | 1160000060 | S.DIO DAN202U T106          | T  | 28.7/20.7    |
| D2      | 1160000060 | S.DIO DAN202U T106          | T  | 32.7/55.8    |
| D4      | 1790000700 | DIO DSA3A1                  |    |              |
| D5      | 1790000700 | DIO DSA3A1                  |    |              |
| D7      | 1160000060 | S.DIO DAN202U T106          | T  | 74.1/82.2    |
| D8      | 1790000700 | DIO DSA3A1                  |    |              |
| D11     | 1160000060 | S.DIO DAN202U T106          | T  | 84/60.7      |
| D12     | 1160000060 | S.DIO DAN202U T106          | T  | 74.8/8.9     |
| D101    | 1730002341 | S.ZEN MAZ8047GML            | T  | 59/14.1      |
| L1      | 6140003240 | COI LR-361                  |    |              |
| L4      | 6140001180 | COI LR-143                  |    |              |
| L6      | 6140003510 | COI LR-393                  |    |              |
| L7      | 6140000610 | COI LR-83                   |    |              |
| L8      | 6140002030 | COI LR-230 (SK-10M-15Y 120) |    |              |
| L14     | 6140003230 | S.COI LR-360                | T  | 10/42.6      |
| L21     | 6110001730 | COI LA-262                  |    |              |
| R1      | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 11.5/34.4    |
| R2      | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | T  | 9.6/35.2     |
| R3      | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 11.6/36      |
| R4      | 7310005390 | S.TRI EVM-3VXS50 BQ3 (472)  | T  | 13/52.3      |
| R5      | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 12.8/48.7    |
| R6      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 14.2/48.7    |
| R7      | 7030006210 | S.RES ERJ12YJ4R7U (4.7)     | T  | 16/38.8      |
| R8      | 7030006270 | S.RES ERJ12YJ221U (220)     | T  | 19.7/31.6    |
| R9      | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | T  | 16.6/41.3    |
| R11     | 7030000220 | S.RES MCR10EZJH 47 (470)    | T  | 32.7/52.2    |
| R12     | 7030000220 | S.RES MCR10EZJH 47 (470)    | T  | 30.5/18      |
| R13     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 32.9/58.9    |
| R14     | 7310005390 | S.TRI EVM-3VXS50 BQ3 (472)  | T  | 38.3/75.6    |
| R15     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 27.4/22.7    |
| R16     | 7310005390 | S.TRI EVM-3VXS50 BQ3 (472)  | T  | 22.5/22.9    |
| R17     | 7030010480 | S.RES ERJ1TYJ 181U (180)    | T  | 46.8/46.1    |
| R18     | 7030010480 | S.RES ERJ1TYJ 181U (180)    | T  | 41.3/12.5    |
| R19     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 34.8/47.3    |
| R20     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 31.4/15.9    |
| R22     | 7030010950 | S.RES ERJ1TYJ 100U (10)     | T  | 63/51.2      |
| R23     | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 10.7/46.8    |
| R28     | 7030011240 | S.RES LRF3W-LF-01-R020F     | T  | 136.9/85.3   |
| R29     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 131/83.5     |
| R30     | 7030011240 | S.RES LRF3W-LF-01-R020F     | T  | 144.3/85.3   |
| R31     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 132.9/84.4   |
| R38     | 7030010570 | S.RES ERJ1TYJ 4R7U (4.7)    | T  | 162.4/54.5   |
| R39     | 7030010570 | S.RES ERJ1TYJ 4R7U (4.7)    | T  | 162.4/58.2   |
| R40     | 7030010570 | S.RES ERJ1TYJ 4R7U (4.7)    | T  | 162.4/61.9   |
| R44     | 7070000681 | RES ERX3SJ 3R9 (3.9)        |    |              |
| R45     | 7030003860 | S.RES ERJ3GE JPW V          | T  | 6.2/24.7     |
| R61     | 7030010520 | S.RES ERJ1TYJ 101U (100)    | T  | 77/32.9      |
| R62     | 7030010410 | S.RES ERJ1TYJ 220U (22)     | T  | 87.2/56.1    |
| R63     | 7030010410 | S.RES ERJ1TYJ 220U (22)     | T  | 87.2/11      |
| R64     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 84.7/63.8    |
| R65     | 7310005450 | S.TRI EVM-3VXS50 BE3 (222)  | T  | 83.2/69      |
| R66     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 74.1/6.1     |
| R67     | 7310005450 | S.TRI EVM-3VXS50 BE3 (222)  | T  | 76.3/69      |
| R69     | 7030010470 | S.RES ERJ1TYJ 5R6U (5.6)    | T  | 80.8/50      |
| R70     | 7030010470 | S.RES ERJ1TYJ 5R6U (5.6)    | T  | 80.8/16      |
| R72     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 80.7/57.6    |
| R73     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 80.7/8.2     |
| R74     | 7030011220 | S.RES ERJ1TY 180U (18)      | T  | 87.6/28.2    |
| R75     | 7030011220 | S.RES ERJ1TY 180U (18)      | T  | 87.3/24.5    |
| R76     | 7030011220 | S.RES ERJ1TY 180U (18)      | T  | 87.5/38      |
| R77     | 7030011220 | S.RES ERJ1TY 180U (18)      | T  | 87.3/41.7    |
| R83     | 7030010470 | S.RES ERJ1TYJ 5R6U (5.6)    | T  | 80.8/53.7    |
| R84     | 7030010470 | S.RES ERJ1TYJ 5R6U (5.6)    | T  | 80.8/12.1    |
| R85     | 7510001551 | S.THE NTCG16 4LH 333JT      | T  | 93.2/6.6     |
| R86     | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 91.7/5.4     |
| R87     | 7030003860 | S.RES ERJ3GE JPW V          | T  | 44.8/5.4     |
| R88     | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 44.8/6.8     |
| R103    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 54.5/16.5    |
| R104    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 51.9/16.5    |
| R105    | 7030008170 | S.RES ERJ12YJ1R0U (1)       | T  | 68.9/12.6    |
| R108    | 7030000340 | S.RES MCR10EZJH 470 (471)   | T  | 59/7.5       |
| R109    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.3/10.6    |
| R110    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 53.9/6.1     |
| R111    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 52.4/6.1     |
| R112    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 51.1/6.1     |
| C1      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 14/45        |
| C2      | 4030006860 | S.CER C1608 JB 1H 102K-T    | T  | 11.4/48.7    |
| C3      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 10/48.7      |
| C4      | 4030006860 | S.CER C1608 JB 1H 102K-T    | T  | 16.4/36.3    |
| C5      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 18.9/27.3    |
| C6      | 4030006860 | S.CER C1608 JB 1H 102K-T    | T  | 20.1/27.3    |
| C7      | 4030011340 | S.CER C1608 CH 1H 471J-T    | T  | 14.4/42.1    |

## [PA UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                           | M. | H/V LOCATION |
|---------|------------|---------------------------------------|----|--------------|
| C8      | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 16.4/35.1    |
| C14     | 4030008920 | S.CER C1608 JB 1H 473K-T              | T  | 30.8/57.4    |
| C15     | 4030008920 | S.CER C1608 JB 1H 473K-T              | T  | 26.2/21.5    |
| C16     | 4030012490 | S.CER GRM31M1X2A472JZ01L (GRM42-6 SL) | T  | 38.6/46.9    |
| C17     | 4030012490 | S.CER GRM31M1X2A472JZ01L (GRM42-6 SL) | T  | 33.4/15.8    |
| C19     | 4010005830 | CER HM74SJ SL 151J 500V               |    |              |
| C20     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 61/59        |
| C22     | 4030008920 | S.CER C1608 JB 1H 473K-T              | T  | 82.1/63.8    |
| C23     | 4030008920 | S.CER C1608 JB 1H 473K-T              | T  | 75.4/6.1     |
| C24     | 4030007090 | S.CER C1608 CH 1H 470J-T              | T  | 9.6/38.1     |
| C25     | 4030018530 | S.CER C3216 CH 1H 103J-T              | T  | 32.5/44.9    |
| C26     | 4030018530 | S.CER C3216 CH 1H 103J-T              | T  | 33.7/24.7    |
| C27     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 83.4/63.8    |
| C28     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 76.7/6.1     |
| C30     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 125.3/68.8   |
| C33     | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 132.9/78.9   |
| C34     | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 131/80       |
| C35     | 4030006860 | S.CER C1608 JB 1H 102K-T              | T  | 125.3/67     |
| C36     | 4510004601 | ELE 16 ME 1000 HC                     |    |              |
| C37     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 151.3/79.9   |
| C39     | 4510004601 | ELE 16 ME 1000 HC                     |    |              |
| C40     | 4510004601 | ELE 16 ME 1000 HC                     |    |              |
| C41     | 4030006860 | S.CER C1608 JB 1H 102K-T              | T  | 14/46.3      |
| C42     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 74/84.1      |
| C52     | 4030011740 | S.CER GRM32N2C2H201JV01L (GRM42-2 CH) | T  | 80.7/32.9    |
| C57     | 4030018750 | S.CER C3225 CH 2J 682K-T              | T  | 84.4/45.8    |
| C58     | 4030018750 | S.CER C3225 CH 2J 682K-T              | T  | 84.3/20.3    |
| C62     | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 117.8/51.6   |
| C63     | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 118/14.2     |
| C64     | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) |    |              |
| C65     | 4030011740 | S.CER GRM32N2C2H201JV01L (GRM42-2 CH) | T  | 110.6/33     |
| C66     | 4030011740 | S.CER GRM32N2C2H201JV01L (GRM42-2 CH) | T  | 113.6/33     |
| C67     | 4030011740 | S.CER GRM32N2C2H201JV01L (GRM42-2 CH) | T  | 116.6/33     |
| C68     | 4030011740 | S.CER GRM32N2C2H201JV01L (GRM42-2 CH) | T  | 119.7/33     |
| C71     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 26/66.7      |
| C72     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 31.6/76.0    |
| C73     | 4510009910 | S.ELE 16 CE 10 LH                     | T  | 30/68.8      |
| C74     | 4510009910 | S.ELE 16 CE 10 LH                     | T  | 30/73.6      |
| C75     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 11.2/83.8    |
| C76     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 17.9/85.7    |
| C77     | 4510009920 | S.ELE 16 CE 100 LH                    | T  | 15.6/80.9    |
| C78     | 4510009920 | S.ELE 16 CE 100 LH                    | T  | 23.4/84.5    |
| C79     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 37.1/81.2    |
| C80     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 48.7/81.2    |
| C81     | 4510009910 | S.ELE 16 CE 10 LH                     | T  | 40.7/81.5    |
| C82     | 4510009910 | S.ELE 16 CE 10 LH                     | T  | 45.6/81.5    |
| C89     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 73.2/86.4    |
| C90     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 94.7/5.4     |
| C91     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 47.5/5.4     |
| C101    | 4510009920 | S.ELE 16 CE 100 LH                    | T  | 147.7/11.4   |
| C102    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 68.9/8.2     |
| C103    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 56.3/7.7     |
| C104    | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 55.1/7.7     |
| C107    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 149.9/79.9   |
| C108    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 10.9/12.7    |
| C109    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 14.7/12.7    |
| C110    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 19.7/12.7    |
| C111    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 20.9/12.7    |
| C112    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 15.9/12.7    |
| C113    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 12.1/12.7    |
| C114    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 22.1/12.7    |
| C115    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 18/12.7      |
| C121    | 4550007650 | S.TAN F931V105MAABMA                  | T  | 90.6/71.5    |
| C131    | 4030018750 | S.CER C3225 CH 2J 682K-T              | T  | 74.3/45.3    |
| C132    | 4030018750 | S.CER C3225 CH 2J 682K-T              | T  | 74.2/20.7    |
| C133    | 4030012620 | S.CER GRM55R2C2H102JV01L (GRM44-1)    | T  | 78.5/43.4    |
| C134    | 4030012620 | S.CER GRM55R2C2H102JV01L (GRM44-1)    | T  | 78.5/22.6    |
| C135    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 70.3/44.4    |
| C136    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 70.3/21.6    |
| RL1     | 6330001471 | REL AJS1311F-K2                       |    |              |
| CP1     | 6910009670 | S.CHE HK3-S-T                         | T  | 48.5/10      |
| CP2     | 6910009670 | S.CHE HK3-S-T                         | T  | 48.5/8.2     |
| J1      | 6510007020 | CON TMP-J01X-V6                       |    |              |
| J2      | 6510007020 | CON TMP-J01X-V6                       |    |              |
| J3      | 6510022601 | S.CON 30FMN-BMTR-A-TBT(LF)(SN)        | T  | 25.4/7.7     |
| J10     | 6510003081 | CON RT01T-1.0B(LF)                    |    |              |
| J101    | 6510018961 | S.CON B2B-PH-SM4-TB(LF)(SN)           | T  | 138.5/10.7   |
| F1      | 5220000400 | HOL FHA010-01F                        |    |              |
| F2      | 5210000940 | FUS 1205                              |    |              |
| W14     | 9016910440 | WIR 23/06/050/D21/W05                 |    |              |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [PA UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION          | M. | H/V LOCATION |
|---------|------------|----------------------|----|--------------|
| EP2     | 6910019200 | S.BEA N2012ZPS121T50 | T  | 28.1/56.7    |
| EP4     | 6510018330 | TER F4053A           |    |              |
| EP5     | 6510018330 | TER F4053A           |    |              |
| EP6     | 6910019200 | S.BEA N2012ZPS121T50 | T  | 65.2/56.6    |
| EP19    | 6910019200 | S.BEA N2012ZPS121T50 | T  | 60.2/52.8    |
| EP20    | 6910019200 | S.BEA N2012ZPS121T50 | T  | 60.2/49.5    |

## [FILTER UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                           | M. | H/V LOCATION |
|---------|------------|---------------------------------------|----|--------------|
| Q101    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 145.4/87.7   |
| Q102    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 145.6/85.1   |
| Q151    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 142.9/87.7   |
| Q152    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 143.1/85.1   |
| Q201    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 140.4/87.7   |
| Q202    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 140.6/85.1   |
| Q251    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 116.8/87.7   |
| Q252    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 117/85.1     |
| Q301    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 114.3/87.7   |
| Q302    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 114.4/85.1   |
| Q351    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 109.3/87.7   |
| Q352    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 109.5/85.1   |
| Q401    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 106.8/87.7   |
| Q402    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 107/85.1     |
| D102    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 154.9/77.3   |
| D152    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 139.4/77.3   |
| D154    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 135.6/86.5   |
| D155    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 137.4/86.5   |
| D202    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 124/77.3     |
| D252    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 106.5/78.6   |
| D302    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 92.5/84      |
| D352    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 61.9/84      |
| D402    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 46.6/84      |
| L1      | 6200002041 | S.COI NLV25T-101J                     | T  | 121/84.5     |
| L102    | 6110003540 | COI LA-548 (LA-215A)                  |    |              |
| L103    | 6110003570 | COI LA-550                            |    |              |
| L104    | 6110003550 | COI LA-547 (LA-214A)                  |    |              |
| L152    | 6110002920 | COI LA-481                            |    |              |
| L153    | 6140004750 | COI LR-535                            |    |              |
| L154    | 6140004750 | COI LR-535                            |    |              |
| L202    | 6140003450 | COI LR-387 (T50-10)                   |    |              |
| L203    | 6140003460 | COI LR-388 (T50-10)                   |    |              |
| L204    | 6140003460 | COI LR-388 (T50-10)                   |    |              |
| L252    | 6140001160 | COI LR-141 (T68-2)                    |    |              |
| L253    | 6140001160 | COI LR-141 (T68-2)                    |    |              |
| L254    | 6140001160 | COI LR-141 (T68-2)                    |    |              |
| L302    | 6110002920 | COI LA-481                            |    |              |
| L303    | 6110002910 | COI LA-480                            |    |              |
| L352    | 6140001240 | COI LR-149 (T68-2)                    |    |              |
| L353    | 6140001130 | COI LR-138 (T68-2)                    |    |              |
| L401    | 6200002041 | S.COI NLV25T-101J                     | T  | 38.7/20.9    |
| L402    | 6140002570 | COI LR-294 (T50-2)                    |    |              |
| L403    | 6140002580 | COI LR-295 (T50-2)                    |    |              |
| L501    | 6140003440 | COI LR-386 (FK-100E-5003H)            |    |              |
| L502    | 6140003440 | COI LR-386 (FK-100E-5003H)            |    |              |
| R101    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 158.1/77.3   |
| R102    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 158.1/79.2   |
| R151    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 142.5/77.3   |
| R152    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 142.5/79.1   |
| R201    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 127.2/77.3   |
| R202    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 127.2/79.1   |
| R251    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 110.4/79.4   |
| R252    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 109.2/79.4   |
| R301    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 95.6/84      |
| R302    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 95.6/85.8    |
| R351    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 65/84        |
| R352    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 65/85.8      |
| R401    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 49.7/84      |
| R402    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 49.7/85.8    |
| C101    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 150/21       |
| C105    | 4030011160 | S.CER GRM31M2C2H150JV01L (GRM42-6 CH) | T  | 161.6/26     |
| C106    | 4030011120 | S.CER GRM31M2C2H100JV01L (GRM42-6 CH) | T  | 168.6/34.1   |
| C107    | 4030011190 | S.CER GRM31M2C2H270JV01L (GRM42-6 CH) | T  | 155.4/39.7   |
| C108    | 4030011240 | S.CER GRM31M2C2H470JV01L (GRM42-6 CH) | T  | 155.4/41.8   |
| C109    | 4030011160 | S.CER GRM31M2C2H150JV01L (GRM42-6 CH) | T  | 168.6/44.1   |
| C110    | 4030011240 | S.CER GRM31M2C2H470JV01L (GRM42-6 CH) | T  | 155.2/57.6   |
| C111    | 4030011240 | S.CER GRM31M2C2H470JV01L (GRM42-6 CH) | T  | 155.2/60.4   |
| C112    | 4030011100 | S.CER GRM31M2C2H8R0DV01L (GRM42-6 CH) | T  | 158.8/61.9   |
| C113    | 4030011240 | S.CER GRM31M2C2H470JV01L (GRM42-6 CH) | T  | 155.2/63.5   |
| C114    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 155.2/79.2   |
| C154    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 137.1/18.1   |
| C158    | 4030011180 | S.CER GRM31M2C2H220JV01L (GRM42-6 CH) | T  | 148.8/29.5   |
| C159    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 150.4/36.4   |
| C160    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 150.4/38.5   |
| C162    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 141.4/48.9   |
| C163    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 147.5/48.9   |
| C165    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 147.5/51     |
| C166    | 4030011510 | S.CER GRM31M2C2H560JV01L (GRM42-6 CH) | T  | 140.4/63.4   |
| C170    | 4030014460 | S.CER GRM31M2C2H820JV01L (GRM42-6 CH) | T  | 146.2/65.6   |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount



## [FILTER UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                           | M. | H/V LOCATION |
|---------|------------|---------------------------------------|----|--------------|
| C172    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 139.7/79.1   |
| C201    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 122.1/18.1   |
| C203    | 4030011190 | S.CER GRM31M2C2H270JV01L (GRM42-6 CH) | T  | 126.1/32.1   |
| C204    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 126.1/37.3   |
| C206    | 4030011050 | S.CER GRM31M3C2H3R0CY21L (GRM42-6 CJ) | T  | 131.6/48.1   |
| C207    | 4030011190 | S.CER GRM31M2C2H270JV01L (GRM42-6 CH) | T  | 131.6/50.2   |
| C209    | 4030011550 | S.CER GRM31M2C2H680JV01L (GRM42-6 CH) | T  | 123.3/50.1   |
| C210    | 4030011550 | S.CER GRM31M2C2H680JV01L (GRM42-6 CH) | T  | 123.3/48     |
| C211    | 4030011120 | S.CER GRM31M2C2H100JV01L (GRM42-6 CH) | T  | 134.9/57.5   |
| C212    | 4030011210 | S.CER GRM31M2C2H330JV01L (GRM42-6 CH) | T  | 124/62.9     |
| C213    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 124.3/79.1   |
| C251    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 106.7/17.8   |
| C252    | 4010005880 | CER HM95SJ SL 271J 500V               |    |              |
| C253    | 4010005880 | CER HM95SJ SL 271J 500V               |    |              |
| C254    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 102.5/36.2   |
| C255    | 4030011550 | S.CER GRM31M2C2H680JV01L (GRM42-6 CH) | T  | 104.8/36.2   |
| C256    | 4010008300 | CER HM11TJ SL 391J 500V               |    |              |
| C257    | 4010008200 | CER HM11TJ SL 331J 500V               |    |              |
| C260    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 106.5/51.9   |
| C261    | 4010008300 | CER HM11TJ SL 391J 500V               |    |              |
| C262    | 4030011230 | S.CER GRM31M2C2H390JV01L (GRM42-6 CH) | T  | 106.9/69.6   |
| C263    | 4010008300 | CER HM11TJ SL 391J 500V               |    |              |
| C264    | 4010005880 | CER HM95SJ SL 271J 500V               |    |              |
| C265    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 106.8/80.3   |
| C301    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 91.5/16.1    |
| C302    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 96/20.7      |
| C303    | 4030011170 | S.CER GRM31M2C2H180JV01L (GRM42-6 CH) | T  | 94/34.9      |
| C304    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 90.1/45.2    |
| C305    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 90.1/47.7    |
| C306    | 4030011240 | S.CER GRM31M2C2H470JV01L (GRM42-6 CH) | T  | 95.4/55.2    |
| C307    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 95.4/72.1    |
| C308    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 92.8/85.8    |
| C351    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 60.9/16.1    |
| C352    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C353    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C354    | 4010005370 | CER HM11SJ SL 331J 500V               |    |              |
| C355    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C356    | 4010005830 | CER HM74SJ SL 151J 500V               |    |              |
| C357    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C358    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C360    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 62.8/63.1    |
| C361    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C362    | 4010008300 | CER HM11TJ SL 391J 500V               |    |              |
| C363    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 62.2/85.8    |
| C401    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 45.4/16      |
| C402    | 4010007590 | CER HM15SJ SL 681J 500V               |    |              |
| C403    | 4010007590 | CER HM15SJ SL 681J 500V               |    |              |
| C404    | 4010007590 | CER HM15SJ SL 681J 500V               |    |              |
| C405    | 4010007590 | CER HM15SJ SL 681J 500V               |    |              |
| C406    | 4010006410 | CER HM13SJ SL 471J 500V               |    |              |
| C407    | 4010008260 | CER HM74TJ SL 151J 500V               |    |              |
| C408    | 4010008200 | CER HM11TJ SL 331J 500V               |    |              |
| C409    | 4010008280 | CER HM95TJ SL 221J 500V               |    |              |
| C410    | 4010005390 | CER HM15SJ SL 621J 500V               |    |              |
| C411    | 4010005390 | CER HM15SJ SL 621J 500V               |    |              |
| C412    | 4010005390 | CER HM15SJ SL 621J 500V               |    |              |
| C413    | 4010008200 | CER HM11TJ SL 331J 500V               |    |              |
| C415    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 55.5/61.2    |
| C416    | 4010005390 | CER HM15SJ SL 621J 500V               |    |              |
| C417    | 4010005390 | CER HM15SJ SL 621J 500V               |    |              |
| C419    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 46.9/85.8    |
| C501    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 24.5/85.7    |
| C502    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 15.5/85.7    |
| C503    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 26.5/85.7    |
| C504    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 13.5/85.7    |
| C507    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 20/84        |
| C508    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 20/80.5      |
| C513    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 30/47        |
| C514    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 10/47        |
| C515    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 30/44.5      |
| C516    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 10/44.5      |
| C517    | 4510004330 | ELE 35 ME 10 SWB                      |    |              |
| C521    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 33.1/21.4    |
| C522    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 6.8/21.4     |
| C523    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 33.1/19      |
| C524    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 6.8/19       |
| C527    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 20/8.3       |
| C528    | 4510004330 | ELE 35 ME 10 SWB                      |    |              |
| RL101   | 6330001721 | REL ATN207-K1                         |    |              |
| RL102   | 6330001721 | REL ATN207-K1                         |    |              |
| RL151   | 6330001721 | REL ATN207-K1                         |    |              |
| RL152   | 6330001721 | REL ATN207-K1                         |    |              |

## [FILTER UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| RL201   | 6330001721 | REL ATN207-K1                   |    |              |
| RL202   | 6330001721 | REL ATN207-K1                   |    |              |
| RL251   | 6330001721 | REL ATN207-K1                   |    |              |
| RL252   | 6330001721 | REL ATN207-K1                   |    |              |
| RL301   | 6330001721 | REL ATN207-K1                   |    |              |
| RL302   | 6330001721 | REL ATN207-K1                   |    |              |
| RL351   | 6330001721 | REL ATN207-K1                   |    |              |
| RL352   | 6330001721 | REL ATN207-K1                   |    |              |
| RL401   | 6330001721 | REL ATN207-K1                   |    |              |
| RL402   | 6330001721 | REL ATN207-K1                   |    |              |
| J1      | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J2      | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J3      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 128.5/86     |
| W9      | 8900009621 | CAB OPC-961A                    |    |              |
| W10     | 8900009631 | CAB OPC-962A                    |    |              |
| EP501   | 6510018330 | TER F4053A                      |    |              |
| EP502   | 6510018330 | TER F4053A                      |    |              |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [CTRL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| IC1     | 1110000960 | S.IC NJM4558M-TE1-#FMZB         | T  | 112.5/54.9   |
| IC21    | 1120002301 | S.IC TC74AC04F(F) S             | T  | 104/68.5     |
| IC22    | 1120002252 | S.IC TC74ACT32F(F)              | T  | 121.5/68.8   |
| IC23    | 1120002242 | S.IC TC74AC112F(F)              | T  | 131.7/69     |
| IC51    | 1110000960 | S.IC NJM4558M-TE1-#FMZB         | T  | 116.6/80.8   |
| IC81    | 1110002690 | S.IC NJM2903M-TE1-#FMZB         | T  | 44.6/10      |
| IC201   | 1140015071 | S.IC R5F212A75NFP(SX-3073B-1)   | T  | 153.9/68.5   |
| IC202   | 1130011570 | S.IC BR24L32FV-WE2              | T  | 172.3/63.6   |
| IC203   | 1110005920 | S.IC S-80851CNMC-B9CT2G         | T  | 142.2/76.8   |
| IC204   | 1180001071 | S.IC TA7805F(TE16L.Q)           | T  | 156.5/35.2   |
| IC251   | 1130012620 | S.IC SN74AHCT1G86DCKR           | T  | 176.5/86.1   |
| IC261   | 1130011530 | S.IC CD74HC4094M96              | T  | 146.4/28.4   |
|         |            |                                 |    |              |
| Q41     | 1560000871 | S.FET 2SK515-T1B-A (X33)        | T  | 104.2/80.2   |
| Q42     | 1590001330 | S.TRA DTA114EUA T106            | T  | 108.2/86.4   |
| Q101    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 14.2/13      |
| Q102    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 30.4/54.2    |
| Q103    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 34.9/53.9    |
| Q104    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 14.2/10.1    |
| Q105    | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 19.3/46.8    |
| Q106    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 60.3/91.5    |
| Q107    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 62.8/91.2    |
| Q108    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 38.7/40.7    |
| Q109    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 72.5/16.6    |
| Q110    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 38.5/43.4    |
| Q111    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 69.9/16.3    |
| Q112    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 23.2/61.8    |
| Q131    | 1520000561 | S.TRA 2SB1123 T-TD-E            | T  | 26.7/81.3    |
| Q132    | 1540000441 | S.TRA 2SD1619T-TD-E             | T  | 26.7/68.2    |
| Q133    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 28.9/76.1    |
| Q202    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 167.6/91.3   |
| Q203    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 170.1/88     |
| Q241    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 184.2/89.1   |
| Q242    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 186.7/89.1   |
| Q243    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 178.9/89.1   |
| Q244    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 181.4/89.1   |
| Q245    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 186/79.1     |
| Q246    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 188.5/79.1   |
| Q247    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 180.6/79.1   |
| Q248    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 183.1/79.1   |
| Q249    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 150/92.5     |
| Q261    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 163/41.8     |
| Q263    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 171.1/77.2   |
| Q264    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 172.2/73.5   |
|         |            |                                 |    |              |
| D1      | 1790000491 | S.DIO HSM88ASTR-E               | T  | 96/49        |
| D2      | 1790000491 | S.DIO HSM88ASTR-E               | T  | 96/60.7      |
| D3      | 1750000201 | S.DIO 1SS319(TE85R,F)           | T  | 120.5/45.7   |
| D21     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 103.7/62.1   |
| D22     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 102.6/75     |
| D23     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 127.9/84.6   |
| D24     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 128.2/79.5   |
| D41     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 97.4/82.2    |
| D42     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 97.4/78.8    |
| D51     | 1750000121 | S.DIO DWA010-TE-E               | T  | 121.5/86.6   |
| D81     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 36.1/10.9    |
| D101    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 14.2/15.2    |
| D102    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 38.2/54.3    |
| D103    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 67.9/91      |
| D104    | 1750000851 | S.DIO MMBV3700LT1G              | T  | 23.7/49      |
| D105    | 1750000851 | S.DIO MMBV3700LT1G              | T  | 26.7/48.9    |
| D106    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 75/16.2      |
| D107    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 38.3/38      |
| D131    | 1710000140 | DIO U05G                        | T  |              |
| D202    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 160.9/28.6   |
| D241    | 1750000201 | S.DIO 1SS319(TE85R,F)           | T  | 181.5/75.2   |
| D242    | 1750000201 | S.DIO 1SS319(TE85R,F)           | T  | 187.5/75.2   |
| D243    | 1750000201 | S.DIO 1SS319(TE85R,F)           | T  | 179.7/85.5   |
| D244    | 1750000201 | S.DIO 1SS319(TE85R,F)           | T  | 185.8/85.5   |
|         |            |                                 |    |              |
| X201    | 6050009520 | S.XTA CR-520 SMD-49 19.6608 MHz | T  | 167/67       |
|         |            |                                 |    |              |
| L1      | 6140003270 | COI LR-364 (TR10X5X5 3A6)       | T  |              |
| L2      | 6200005011 | S.COI NLV25T-100J               | T  | 123.8/51.8   |
| L21     | 6140003270 | COI LR-364 (TR10X5X5 3A6)       | T  |              |
| L22     | 6200005011 | S.COI NLV25T-100J               | T  | 133/47       |
| L41     | 6140003270 | COI LR-364 (TR10X5X5 3A6)       | T  |              |
| L42     | 6180003300 | COI T6-222J (2.2M)              | T  |              |
| L51     | 6200002041 | S.COI NLV25T-101J               | T  | 126.6/52.9   |
| L81     | 6140003270 | COI LR-364 (TR10X5X5 3A6)       | T  |              |
| L82     | 6200002041 | S.COI NLV25T-101J               | T  | 56.3/6.6     |
| L83     | 6180003300 | COI T6-222J (2.2M)              | T  |              |
| L102    | 6110001560 | COI LA-236                      | T  |              |
| L103    | 6110001630 | COI LA-246                      | T  |              |
| L133    | 6140004740 | COI LR-533                      | T  |              |
| L134    | 6140004740 | COI LR-533                      | T  |              |
| L201    | 6200009300 | S.COI ELJPA 100KF 10U           | T  | 161.8/57.5   |
| L202    | 6200002041 | S.COI NLV25T-101J               | T  | 167.2/57.2   |
| L240    | 6200005131 | S.COI NLC453232T-101K-PF        | T  | 169.8/22.5   |
| L251    | 6200002041 | S.COI NLV25T-101J               | T  | 173.9/89.4   |
| L261    | 6200002041 | S.COI NLV25T-101J               | T  | 141.8/38.6   |
| L262    | 6200002041 | S.COI NLV25T-101J               | T  | 124.9/11.9   |
| L291    | 6200005011 | S.COI NLV25T-100J               | T  | 165.6/51.8   |
|         |            |                                 |    |              |
| R1      | 7030010910 | S.RES ERJ1TYJ 150U (15)         | T  | 95.8/52.7    |
| R2      | 7030010910 | S.RES ERJ1TYJ 150U (15)         | T  | 95.8/56.8    |
| R3      | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 104.1/47.1   |
| R4      | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 100.9/59.9   |
| R5      | 7030003720 | S.RES ERJ3GEYJ 224 V (220K)     | T  | 106.2/48.9   |

## [CTRL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R6      | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | T  | 106.9/58.6   |
| R7      | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | T  | 107.8/50.3   |
| R8      | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | T  | 106.9/57.4   |
| R9      | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | T  | 109.1/50.3   |
| R10     | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | T  | 108.8/58.3   |
| R11     | 7030003790 | S.RES ERJ3GEYJ 824 V (820K) | T  | 113.1/60.2   |
| R12     | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 112.5/50.2   |
| R13     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 117.1/47.9   |
| R14     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 117.2/43.8   |
| R18     | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 100.8/62.3   |
| R19     | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 97.8/71.9    |
| R21     | 7030010540 | S.RES ERJ1TYJ 330U (33)     | T  | 92.4/69.8    |
| R22     | 7030003860 | S.RES ERJ3GE JPW V          | T  | 105/74.6     |
| R23     | 7030003860 | S.RES ERJ3GE JPW V          | T  | 107.4/61.7   |
| R25     | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 106.3/74.6   |
| R26     | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 107.4/63     |
| R27     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 110.2/63     |
| R28     | 7030003440 | S.RES ERJ3GEYJ 470 V (47)   | T  | 115/73.3     |
| R29     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 116.4/68     |
| R30     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 116.4/71.8   |
| R31     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 126.6/71     |
| R32     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 120.9/62.6   |
| R33     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 123.7/62.6   |
| R34     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 126.6/65.9   |
| R35     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 133/62.8     |
| R36     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 124/61.3     |
| R37     | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 129.5/75.1   |
| R38     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 130.8/78.2   |
| R39     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 128/77.4     |
| R40     | 7030003500 | S.RES ERJ3GEYJ 332 V (3.3K) | T  | 127.4/82.5   |
| R41     | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 126.1/81.2   |
| R42     | 7030010550 | S.RES ERJ1TYJ 820U (82)     | T  | 92.4/81.7    |
| R43     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 100.8/78.6   |
| R44     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 100.8/82.7   |
| R45     | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 100.8/79.9   |
| R46     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 103.8/82.7   |
| R47     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 106.9/83.4   |
| R48     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 107.5/81.6   |
| R49     | 7030004710 | S.RES ERJ3GEYJ 475 V (4.7M) | T  | 105.4/86.4   |
| R51     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 122.8/83.2   |
| R52     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 108.2/83.4   |
| R53     | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 118.8/76.3   |
| R54     | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 120.1/76.3   |
| R55     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 124.2/80.6   |
| R56     | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | T  | 112.6/76.3   |
| R57     | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | T  | 114/76.3     |
| R58     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 110.1/81.6   |
| R61     | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | T  | 117.4/76.3   |
| R62     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 115.3/84.5   |
| R63     | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 121.3/80.6   |
| R64     | 7030003820 | S.RES ERJ3GEYJ 155 V (1.5M) | T  | 111.8/83.5   |
| R65     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 118.3/85.8   |
| R66     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 113.9/85.8   |
| R67     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 124.8/87.7   |
| R68     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 124.8/89.1   |
| R69     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 150.9/58.1   |
| R70     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 141/66.1     |
| R71     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 148.5/58.3   |
| R72     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 141/64.8     |
| R81     | 7030010910 | S.RES ERJ1TYJ 150U (15)     | T  | 36.1/14.9    |
| R82     | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | T  | 33.6/9.7     |
| R83     | 7030003710 | S.RES ERJ3GEYJ 184 V (180K) | T  | 49.6/12.4    |
| R84     | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | T  | 51.8/8.8     |
| R85     | 7030003660 | S.RES ERJ3GEYJ 683 V (68K)  | T  | 51/12.4      |
| R87     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 46.8/6.5     |
| R88     | 7030003840 | S.RES ERJ3GEYJ 225 V (2.2M) | T  | 51.8/7.4     |
| R89     | 7030003860 | S.RES ERJ3GE JPW V          | T  | 49.6/6.4     |
| R90     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 51.8/6       |
| R101    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 16.9/46.6    |
| R102    | 7030003390 | S.RES ERJ3GEYJ 391 V (390)  | T  | 17.6/44.7    |
| R103    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 21.6/46.9    |
| R105    | 7030003390 | S.RES ERJ3GEYJ 391 V (390)  | T  | 22.9/45.4    |
| R106    | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 21/44.7      |
| R107    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 25.4/45.4    |
| R108    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 28.2/45.4    |
| R110    | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 21/43.4      |
| R112    | 7540000130 | ABS 2P-50A-301              | T  |              |
| R114    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 35.6/56.4    |
| R131    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 35/83        |
| R132    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 29.6/86.5    |
| R133    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 30.3/59.2    |
| R134    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 29.6/90.4    |
| R135    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 30.3/62.9    |
| R136    | 7030012240 | S.RES ERJ1TYJ 471U (47)     | T  | 27.3/59.1    |
| R137    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 25.9/77.4    |
| R138    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 27.4/72      |
| R139    | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 27.4/73.2    |
| R140    | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 25.9/76.1    |
| R151    | 7410000950 | S.ARR EXB-V8 102JV          | T  | 139.9/87.9   |
| R152    | 7410000950 | S.ARR EXB-V8 102JV          | T  | 142          |

## [CTRL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                            | M. | H/V LOCATION |
|---------|------------|----------------------------------------|----|--------------|
| R223    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)             | T  | 172.5/59     |
| R224    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)             | T  | 171.7/57.7   |
| R226    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)             | T  | 153.7/79.2   |
| R227    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)            | T  | 173.5/71.6   |
| R228    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)             | T  | 173.1/75.4   |
| R229    | 7030003860 | S.RES ERJ3GE JPW V                     | T  | 163.1/45.9   |
| R230    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)              | T  | 156.4/79.4   |
| R231    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)             | T  | 142.2/69.8   |
| R232    | 7030010910 | S.RES ERJ1TVJ 150U (15)                | T  | 162.8/22.5   |
| R241    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 181.3/73     |
| R242    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 183.9/73.7   |
| R243    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 185.1/73.7   |
| R244    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 188/73       |
| R245    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 180.3/83.2   |
| R246    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 182.1/84     |
| R247    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 183.4/84     |
| R248    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 188.2/84     |
| R261    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K)            | T  | 157.7/12.2   |
| R263    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)             | T  | 147.4/16.6   |
| R264    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)             | T  | 144.6/16.6   |
| R265    | 7030003400 | S.RES ERJ3GEYJ 471 V (470)             | T  | 157.2/15.4   |
| R266    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 134.1/19.8   |
| R267    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 129.9/19.8   |
| R268    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 132.7/19.8   |
| R269    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 128.2/19.8   |
| R270    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)             | T  | 146/16.6     |
| R271    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)             | T  | 148.8/16.6   |
| R272    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)              | T  | 155.7/16.7   |
| R273    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 135.5/19.8   |
| R274    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 136.9/19.8   |
| R275    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 131.3/19.8   |
| R276    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 126.8/19.8   |
| R277    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)              | T  | 175.2/17.1   |
| R282    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)             | T  | 110.2/12.3   |
| R291    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)              | T  | 166.1/48.6   |
| R292    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)              | T  | 165.2/45.8   |
| R293    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)             | T  | 106.2/11.4   |
| R298    | 7030003860 | S.RES ERJ3GE JPW V                     | T  | 111/74.4     |
| R507    | 7030003860 | S.RES ERJ3GE JPW V                     | T  | 108.6/52.1   |
| R508    | 7030003860 | S.RES ERJ3GE JPW V                     | T  | 106.9/56.2   |
| C1      | 4030005040 | S.CER C2012 CH 1H 271J-T               | T  | 90.8/56.9    |
| C2      | 4010005530 | CER HM60SJ SL 020C 500V                |    |              |
| C3      | 4010005530 | CER HM60SJ SL 020C 500V                |    |              |
| C5      | 4610001850 | S.TRI TZB4R200AB10R00 (TZBX4R200BA110) | T  | 102.2/54.9   |
| C6      | 4030007110 | S.CER C1608 CH 1H 680J-T               | T  | 100/49.6     |
| C8      | 4030011540 | S.CER C1608 CH 1H 750J-T               | T  | 99.6/59.9    |
| C9      | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 104.9/48.9   |
| C10     | 4030006880 | S.CER C1608 JB 1H 472K-T               | T  | 105.1/56.9   |
| C11     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 116.7/52.1   |
| C12     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 116.2/58.4   |
| C13     | 4510008540 | S.ELE EEE1CA100SR                      | T  | 119.8/51.6   |
| C14     | 4510008540 | S.ELE EEE1CA100SR                      | T  | 120.6/58.4   |
| C15     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 120.4/48.1   |
| C16     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 120.4/43.3   |
| C21     | 4010005540 | CER HM60SJ SL 030C 500V                |    |              |
| C22     | 4030007070 | S.CER C1608 CH 1H 330J-T               | T  | 97.8/66.4    |
| C23     | 4030007070 | S.CER C1608 CH 1H 330J-T               | T  | 95.1/71.9    |
| C24     | 4030007070 | S.CER C1608 CH 1H 330J-T               | T  | 96.5/66.4    |
| C25     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 98.2/63      |
| C26     | 4030007120 | S.CER C1608 CH 1H 820J-T               | T  | 97.1/70.1    |
| C27     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 100.3/74.8   |
| C28     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 110.2/67.6   |
| C29     | 4510008540 | S.ELE EEE1CA100SR                      | T  | 113.3/66.7   |
| C30     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 124.4/74.9   |
| C31     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 130.2/62.8   |
| C32     | 4550007710 | S.TAN TEESVB2 1A 476M8R                | T  | 127.6/58.1   |
| C33     | 4030007170 | S.CER C1608 CH 1H 221J-T               | T  | 127.2/75.5   |
| C34     | 4030007170 | S.CER C1608 CH 1H 221J-T               | T  | 130.8/81.2   |
| C35     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 125.6/83.4   |
| C42     | 4010005520 | CER HM60SJ SL 010C 500V                |    |              |
| C43     | 4030011570 | S.CER CM105 CH 101G 50AT               | T  | 97.3/84.6    |
| C44     | 4030016550 | S.CER CM105 CH 151G 50AT               | T  | 96.7/75.1    |
| C47     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 100.8/84.1   |
| C48     | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 100.8/81.3   |
| C49     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 105.7/83.4   |
| C50     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 99.8/77.1    |
| C51     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 124.2/83.2   |
| C52     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 109.4/83.5   |
| C53     | 4030007170 | S.CER C1608 CH 1H 221J-T               | T  | 121.3/83.2   |
| C54     | 4030007170 | S.CER C1608 CH 1H 221J-T               | T  | 111/85.7     |
| C55     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 118.3/84.5   |
| C56     | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 124/85.8     |
| C57     | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 113.9/87.2   |
| C59     | 4030006880 | S.CER C1608 JB 1H 472K-T               | T  | 110.6/83.5   |
| C60     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 115.4/76.3   |
| C81     | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 32.9/11.6    |
| C83     | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 51.8/10.2    |
| C84     | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 52.4/12.4    |
| C85     | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 53.7/8       |
| C86     | 4030007130 | S.CER C1608 CH 1H 101J-T               | T  | 39/11.7      |
| C102    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 13.9/17.7    |
| C103    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 36.6/54      |
| C105    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 13.8/69.8    |
| C108    | 4030007070 | S.CER C1608 CH 1H 330J-T               | T  | 19.4/70.1    |
| C109    | 4030011540 | S.CER C1608 CH 1H 750J-T               | T  | 13.8/65.4    |
| C110    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 65.4/91.3    |
| C111    | 4030007120 | S.CER C1608 CH 1H 820J-T               | T  | 14.9/63.1    |
| C112    | 4030007030 | S.CER C1608 CH 1H 150J-T               | T  | 14.6/57.1    |
| C114    | 4030007090 | S.CER C1608 CH 1H 470J-T               | T  | 19.3/57.1    |
| C115    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 26.6/45.4    |
| C117    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 38.6/35.9    |

## [CTRL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                             | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------------|----|--------------|
| C118    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 76.9/16.5    |
| C135    | 4030018790 | S.CER       | C3225 JB 2E 104K-T          | T  | 59.6/84.1    |
| C136    | 4030018790 | S.CER       | C3225 JB 2E 104K-T          | T  | 59.2/61.6    |
| C137    | 4030006860 | S.CER       | C1608 JB 1H 102K-T          | T  | 32.5/83      |
| C138    | 4030006860 | S.CER       | C1608 JB 1H 102K-T          | T  | 35/66.5      |
| C139    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 33.7/83      |
| C140    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 33.7/66.5    |
| C141    | 4030006880 | S.CER       | C1608 JB 1H 472K-T          | T  | 32.5/66.5    |
| C142    | 4030018960 | S.CER       | C3216 JB 1C 106MT-N         | T  | 25.1/86.1    |
| C143    | 4030018960 | S.CER       | C3216 JB 1C 106MT-N         | T  | 26.2/64.1    |
| C151    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/89.1     |
| C152    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/88.3   |
| C153    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/87.5     |
| C154    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/86.7   |
| C155    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/85.9     |
| C156    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/85.1   |
| C157    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/84.3     |
| C158    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/83.5   |
| C159    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/89.9   |
| C160    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/90.7     |
| C161    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/91.5   |
| C162    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/92.3     |
| C163    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/93.1   |
| C164    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/93.9     |
| C165    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/94.7   |
| C201    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 146.1/58.3   |
| C202    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 147.3/58.3   |
| C203    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 149.7/58.3   |
| C204    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 152.1/58.3   |
| C205    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 159/57.4     |
| C206    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 145.7/76.1   |
| C207    | 4510008870 | S.ELE       | EEE1AA471UP                 | T  | 154.3/43.8   |
| C208    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 174.4/59.7   |
| C209    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 164.1/36.6   |
| C210    | 4030007020 | S.CER       | C1608 CH 1H 120J-T          | T  | 163.1/69.7   |
| C211    | 4030007020 | S.CER       | C1608 CH 1H 120J-T          | T  | 162.4/67.1   |
| C212    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 167.7/89.5   |
| C213    | 4510008510 | S.ELE       | EEE1CA471P                  | T  | 169/29.8     |
| C215    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 150/88.1     |
| C221    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 161.8/69.7   |
| C222    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 160.1/30.8   |
| C223    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 104.6/38     |
| C241    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/56     |
| C242    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/51.2   |
| C243    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/46.4   |
| C244    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/41.6   |
| C245    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/36.8   |
| C246    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/32     |
| C247    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/27.2   |
| C248    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/22.4   |
| C251    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 174.5/86.1   |
| C261    | 4510008540 | S.ELE       | EEE1CA100SR                 | T  | 147/38.8     |
| C262    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 147/35.6     |
| C266    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 122/12.9     |
| C267    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 126.8/15.8   |
| C268    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 132.7/15.8   |
| C269    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 136.9/15.8   |
| C270    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 129.9/15.8   |
| C271    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 135.5/15.8   |
| C272    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134.1/15.8   |
| C273    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.3/15.8   |
| C274    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 128.2/15.8   |
| C281    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 168.4/11.8   |
| C282    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 142.5/10.4   |
| C283    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 168.7/19.3   |
| C284    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 172/19.3     |
| RL101   | 6330000800 | REL         | G5A-237P DC12V              |    |              |
| RL102   | 6330001770 | REL         | SIP-1A-12Y                  |    |              |
| RL103   | 6330001770 | REL         | SIP-1A-12Y                  |    |              |
| RL104   | 6330001460 | REL         | FTR-F1CA012V                |    |              |
| RL105   | 6330001460 | REL         | FTR-F1CA012V                |    |              |
| CP1     | 6910009670 | S.CHE       | HK3-S-T                     | T  | 111.6/45.9   |
| J3      | 6510017150 | CON         | TMP-S01X-C1                 |    |              |
| J101    | 6510017150 | CON         | TMP-S01X-C1                 |    |              |
| J102    | 6510017150 | CON         | TMP-S01X-C1                 |    |              |
| J103    | 6510017150 | CON         | TMP-S01X-C1                 |    |              |
| J151    | 6510022591 | S.CON       | 22FMN-BMTTR-A-TBT(LF)(SN)   | T  | 111.6/92.7   |
| J241    | 6510022031 | S.CON       | 10B-ZR-SM4-TF(LF)(SN)       | T  | 180.2/42.9   |
| J261    | 6510022621 | S.CON       | 10FMN-BMTTR-A-TBT(LF)(SN)   | T  | 132.3/8.4    |
| J262    | 6510022581 | S.CON       | 24FMN-BMTTR-A-TBT(LF)(SN)   | T  | 158.2/8.4    |
| J291    | 6510018971 | S.CON       | B4B-PH-SM4-TB(LF)(SN)       | T  | 171.8/46.8   |
| W1      | 7120000490 | JUM         | ERD25T0                     |    |              |
| W2      | 7120000490 | JUM         | ERD25T0                     |    |              |
| EP131   | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 31/79.6      |
| EP132   | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 24.3/54.9    |
| EP263   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 159.7/15.7   |
| EP264   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 162.5/17.8   |
| EP265   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 167.7/16.5   |
| EP267   | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 142.5/8.4    |
| EP268   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 165.7/16     |
| EP269   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 106.2/9      |
| EP270   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 110.2/10.2   |



## [TUNER UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| Q1      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 124.5/89     |
| Q2      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 104.5/78.3   |
| Q3      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 77.6/60.7    |
| Q4      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 72.1/60.7    |
| Q5      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 66.6/60.7    |
| Q6      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 61.1/60.7    |
| Q7      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 57/60.7      |
| Q8      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 53.2/60.7    |
| Q9      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 53/78        |
| Q10     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 108.9/81     |
| Q11     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 91/78.2      |
| Q12     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 114.4/81     |
| Q13     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 95.5/78.2    |
| Q14     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 119.4/81     |
| Q15     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 100/78.2     |
| Q16     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 49.8/70.2    |
|         |            |                                   |    |              |
| D1      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 124.5/85     |
| D2      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 103/75.7     |
| D3      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 77.6/56.7    |
| D4      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 72.1/56.7    |
| D5      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 66.6/56.7    |
| D6      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 61.1/56.7    |
| D7      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 57/56.7      |
| D8      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 53.2/56.7    |
| D9      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 49/76.2      |
| D10     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 108.9/77.1   |
| D11     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 89.5/75.7    |
| D12     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 114.4/77.1   |
| D13     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 94/75.7      |
| D14     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 119.4/77.1   |
| D15     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 98.5/75.7    |
| D16     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 49.8/66.2    |
|         |            |                                   |    |              |
| L3      | 6110003600 | COI LA-555                        |    |              |
| L4      | 6110003590 | COI LA-554                        |    |              |
| L5      | 6110003020 | COI LA-489                        |    |              |
| L6      | 6110003030 | COI LA-490                        |    |              |
| L7      | 6110003020 | COI LA-489                        |    |              |
| L8      | 6110003030 | COI LA-490                        |    |              |
| L9      | 6140004520 | COI LR-511                        |    |              |
| L10     | 6140004510 | COI LR-510                        |    |              |
| L11     | 6140002700 | COI LR-307 (T130-2)               |    |              |
| L12     | 6140002700 | COI LR-307 (T130-2)               |    |              |
| L13     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L14     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L15     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L16     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L17     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L18     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L19     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L20     | 6180003291 | COI BM27-400-6A-LF                |    |              |
|         |            |                                   |    |              |
| R46     | 7410000950 | S.ARR EXB-V8V 102JV               | T  | 106.8/88.5   |
| R47     | 7410000950 | S.ARR EXB-V8V 102JV               | T  | 110.8/88.5   |
| R48     | 7410000950 | S.ARR EXB-V8V 102JV               | T  | 94.8/88.5    |
| R49     | 7410000950 | S.ARR EXB-V8V 102JV               | T  | 98.8/88.5    |
|         |            |                                   |    |              |
| C3      | 4010005130 | CER DEC1X3J470JC4B (DE0910SL470J) |    |              |
| C4      | 4010004790 | CER DEC1X3J680JC4B (DE1210SL680J) |    |              |
| C11     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 123.3/82.7   |
| C12     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 124.6/87     |
| C13     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 109/84       |
| C17     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 124.5/93.7   |
| C19     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 89/91.3      |
| C21     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 102.1/71.7   |
| C22     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 120.3/5.4    |
| C31     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 76.5/54.7    |
| C32     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 77.8/58.7    |
| C33     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 100/84       |
| C34     | 4010008550 | CER DEA1X3F390JC3B (DE0607SL390J) |    |              |
| C35     | 4010008550 | CER DEA1X3F390JC3B (DE0607SL390J) |    |              |
| C36     | 4010004800 | CER DEC1X3J820JC4B (DE1210SL820J) |    |              |
| C37     | 4010004780 | CER DEC1X3J560JC4B (DE1010SL560J) |    |              |
| C38     | 4010004830 | CER DEC1X3J151JC4B (DE1510SL151J) |    |              |
| C39     | 4010008560 | CER DEA1X3F151JA3B (DE1107SL151J) |    |              |
| C40     | 4010008690 | CER DEA1X3F101JA3B                |    |              |
| C41     | 4010004820 | CER DEC1X3J121JC4B (DE1410SL121J) |    |              |
| C42     | 4010004790 | CER DEC1X3J680JC4B (DE1210SL680J) |    |              |
| C43     | 4010004790 | CER DEC1X3J680JC4B (DE1210SL680J) |    |              |
| C44     | 4620000160 | VAR KV-150-05 150P                |    |              |
| C45     | 4620000160 | VAR KV-150-05 150P                |    |              |
| C46     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 71/54.7      |
| C47     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 72.3/58.7    |
| C48     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 98.7/84      |
| C51     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 65.5/54.7    |
| C52     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 66.8/58.7    |
| C53     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 97.5/84      |
| C61     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 60/54.7      |

## [TUNER UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| C62     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 61.3/58.7    |
| C63     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 96.2/84      |
| C71     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 55.8/54.7    |
| C72     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 57.1/58.7    |
| C73     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 95/84        |
| C81     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 52/54.7      |
| C82     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 53.3/58.7    |
| C83     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 93.7/84      |
| C91     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 51.2/74.5    |
| C92     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 51/77.8      |
| C93     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 91.2/84      |
| C101    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 107.7/75.2   |
| C102    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 109/79       |
| C103    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 110.2/84     |
| C111    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 88.6/71.7    |
| C112    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 102.6/5.4    |
| C113    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 105.2/84     |
| C121    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 113.2/75.2   |
| C122    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 114.5/79     |
| C123    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 111.5/84     |
| C131    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 93.1/71.7    |
| C132    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 107.4/5.4    |
| C133    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 106.5/84     |
| C141    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 118.2/75.2   |
| C142    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 119.5/79     |
| C143    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 112.7/84     |
| C151    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 97.6/71.7    |
| C152    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 115.3/5.4    |
| C153    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 107.7/84     |
| C161    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 48.7/64.2    |
| C162    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 50/68.2      |
| C163    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 92.5/84      |
|         |            |                                 |    |              |
| RL1     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL2     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL3     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL4     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL5     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL6     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL7     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL8     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL9     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL10    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL11    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL12    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL13    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL14    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL15    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL16    | 6330001610 | REL NY-12W-K-IE                 |    |              |
|         |            |                                 |    |              |
| J3      | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J4      | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J5      | 6510022591 | S.CON 22FMN-BMTTR-A-TBT(LF)(SN) | T  | 102.9/93.3   |
|         |            |                                 |    |              |
| MF1     | 2710000800 | MOT MP24ZA                      |    |              |
| MF2     | 2710000800 | MOT MP24ZA                      |    |              |
|         |            |                                 |    |              |
| W1      | 8900018420 | CAB OPC-1889                    |    |              |
|         |            |                                 |    |              |
| EP2     | 6910014730 | S.BEA MPZ2012S331A-T            | T  | 87.1/91.6    |
| EP4     | 6910014730 | S.BEA MPZ2012S331A-T            | T  | 122.7/92.1   |

## [FRONT UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| W1      | 8900018460 | CAB OPC-1950 (P1,N10,L60) <TJM>   |    |              |
| W2      | 8900009231 | CAB OPC-908A (P1,N10,L60) <TJM>   |    |              |
| W3      | 8900017820 | CAB OPC-852A (P1,N16,L60) <TJM>   |    |              |
| W4      | 8900009231 | CAB OPC-908A (P1,N10,L60) <TJM>   |    |              |
| W5      | 8900009231 | CAB OPC-908A (P1,N10,L60) <TJM>   |    |              |
| W6      | 8900009231 | CAB OPC-908A (P1,N10,L60) <TJM>   |    |              |
| W7      | 8900018480 | CAB OPC-1952 (P0.5,N30,L65) <TJM> |    |              |
| W8      | 8900018480 | CAB OPC-1952 (P0.5,N30,L65) <TJM> |    |              |
|         |            |                                   |    |              |
| EP1     | 6910020500 | E.O RMS20-250-201-1B (-1P/E)      |    |              |
| EP2     | 6910015650 | E.O S-G2218-3#01 (MOUNT PLATE)    |    |              |
| EP3     | 6910015650 | E.O S-G2218-3#01 (MOUNT PLATE)    |    |              |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                      | M. | H/V LOCATION |
|---------|------------|----------------------------------|----|--------------|
| IC1     | 1130011510 | S.IC BU2099FV-E2                 | B  | 146.1/95.4   |
| IC11    | 1130011880 | S.IC CD4051BPWR                  | B  | 46.3/40.8    |
| IC12    | 1130011880 | S.IC CD4051BPWR                  | B  | 96.3/37.2    |
| IC13    | 1130011880 | S.IC CD4051BPWR                  | B  | 81/39.9      |
| IC51    | 1130011551 | S.IC RX-4581NB-F                 | B  | 105.1/66.7   |
| IC61    | 1130012620 | S.IC SN74AHC11G86DCKR            | B  | 109.5/82.4   |
| IC101   | 1140014421 | S.IC M30622M6P-535GP(SX-3009B-1) | B  | 131.3/39.6   |
| IC151   | 1110005731 | S.IC S-80928CNMC-G8Y-G           | B  | 82.9/61.6    |
| IC171   | 1130013470 | S.IC CD4071BNSR                  | B  | 292.9/50.9   |
| IC304   | 1120003080 | S.IC ADD8505WRUZ-REEL7 <FE>      | B  | 196.5/74     |
| IC305   | 1120003080 | S.IC ADD8505WRUZ-REEL7 <FE>      | B  | 196.5/66.3   |
| IC406   | 1180003360 | S.REG R1211N002B-TR-F            | B  | 139.2/78.3   |
| IC431   | 1110002700 | S.IC NJM2904M-TE1-#FMZB          | B  | 52.6/97.2    |
| IC452   | 1130014580 | S.IC LS230673P00                 | B  | 167.4/77.4   |
| IC603   | 1180003370 | S.REG BD6067GU-E2                | B  | 269.5/70.7   |
| IC604   | 1180003370 | S.REG BD6067GU-E2                | B  | 249.4/70.7   |
|         |            |                                  |    |              |
| Q1      | 1590003770 | S.TRA KRA302E-RTK/P              | B  | 9.7/95.3     |
| Q2      | 1590003680 | S.TRA KRC402 RTK/P               | B  | 12.7/94.9    |
| Q3      | 1590003680 | S.TRA KRC402 RTK/P               | B  | 76.3/89.8    |
| Q31     | 1590003680 | S.TRA KRC402 RTK/P               | B  | 45.5/53.3    |
| Q51     | 1590003680 | S.TRA KRC402 RTK/P               | B  | 107.1/58     |
| Q52     | 1510000771 | S.TRA 2SA1586-GR(TE85L,F)        | B  | 102.6/58.4   |
| Q61     | 1520000651 | S.TRA 2SB1201S-TL-E              | B  | 101.7/89.2   |
| Q62     | 1530003900 | S.TRA KTC4075 BL-RTK/P           | B  | 103.9/82.6   |
| Q101    | 1590003680 | S.TRA KRC402 RTK/P               | B  | 148/62.5     |
| Q102    | 1590003680 | S.TRA KRC402 RTK/P               | B  | 148/65.1     |
| Q103    | 1560001260 | S.FET 2SK3018 T106               | B  | 13.2/97.4    |
| Q181    | 1560001260 | S.FET 2SK3018 T106               | B  | 120.7/62.4   |
| Q182    | 1510000771 | S.TRA 2SA1586-GR(TE85L,F)        | B  | 118.6/60     |
| Q401    | 1560001660 | S.FET RUF015N02 TL               | B  | 137.1/82.1   |
| Q403    | 1590003680 | S.TRA KRC402 RTK/P               | B  | 113.8/72     |
| Q404    | 1550000160 | S.FET CPH3313-TL-E               | B  | 117.6/71.8   |
| Q405    | 1590003770 | S.TRA KRA302E-RTK/P              | B  | 120.4/92.5   |
| Q406    | 1590003680 | S.TRA KRC402 RTK/P               | B  | 123.2/93.9   |
|         |            |                                  |    |              |
| D31     | 1750001710 | S.DIO RB751V-40 TE-17            | B  | 37.1/54.7    |
| D32     | 1750001180 | S.DIO KDS122 RTK/P               | B  | 75/69.5      |
| D33     | 1750001180 | S.DIO KDS122 RTK/P               | B  | 75/66.9      |
| D51     | 1750001320 | S.DIO KDS4148U RTK/P             | B  | 101.6/61     |
| D61     | 1730002591 | S.ZEN MAZ8033GHL                 | B  | 101.8/82.7   |
| D101    | 1750001710 | S.DIO RB751V-40 TE-17            | B  | 134.6/28.6   |
| D401    | 1750000880 | S.DIO RB551V-30TE-17             | B  | 131.7/76.7   |
| D402    | 1750001180 | S.DIO KDS122 RTK/P               | B  | 128/82.2     |
| D403    | 1750001180 | S.DIO KDS122 RTK/P               | B  | 128/79.2     |
| D404    | 1750001180 | S.DIO KDS122 RTK/P               | B  | 128/91.2     |
| D405    | 1750001180 | S.DIO KDS122 RTK/P               | B  | 128/88.2     |
| D406    | 1750001180 | S.DIO KDS122 RTK/P               | B  | 128/85.2     |
| D407    | 1750001320 | S.DIO KDS4148U RTK/P             | B  | 118.1/94.2   |
| D601    | 1790001450 | S.DIO RB160L-40 TE-25            | B  | 263.3/80.6   |
| D602    | 1790001450 | S.DIO RB160L-40 TE-25            | B  | 242.4/80.5   |
| D603    | 1730002531 | S.ZEN NNCD6.2G-T1-A              | B  | 285.5/8.9    |
|         |            |                                  |    |              |
| X101    | 6050011550 | S.XTA CR-747 SMD-49TA 9.8304 MHz | B  | 110.9/39.6   |
|         |            |                                  |    |              |
| L51     | 6200005011 | S.COI NLV25T-100J                | B  | 98.1/56.3    |
| L151    | 6200005011 | S.COI NLV25T-100J                | B  | 198.5/88.9   |
| L152    | 6200005011 | S.COI NLV25T-100J                | B  | 199/102.1    |
| L401    | 6200013500 | S.COI CDRH4D16NP-680MC 68U       | B  | 135.5/86.7   |
| L402    | 6200001981 | S.COI NLV25T-100J                | B  | 123.8/74.1   |
| L602    | 6200013510 | S.COI CDRH4D16NP-220MC 22U       | B  | 261.5/75.2   |
| L603    | 6200013510 | S.COI CDRH4D16NP-220MC 22U       | B  | 239.9/75.4   |
|         |            |                                  |    |              |
| R1      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)       | B  | 9.9/98       |
| R2      | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 63.8/54.5    |
| R3      | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 63.8/88.7    |
| R4      | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 26.7/77      |
| R5      | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 65.2/50      |
| R6      | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 65.2/84.5    |
| R7      | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 28.9/79.2    |
| R8      | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 9.5/92.5     |
| R9      | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 9.5/86.2     |
| R11     | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K)      | B  | 10/40.6      |
| R13     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 33.2/47.2    |
| R14     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 35.7/48.2    |
| R15     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 33.2/49.2    |
| R16     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 35.7/50.2    |
| R17     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 58.7/33.7    |
| R18     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 59.9/33.7    |
| R19     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 61.1/33.7    |
| R20     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 62.3/33.7    |
| R21     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 9/37.6       |
| R22     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 11/37.1      |
| R23     | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 100.4/30.4   |
| R24     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 98.3/43.9    |
| R25     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 97/43.9      |
| R26     | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 81.3/32      |
| R27     | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 83.8/32      |
| R31     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 67.7/70      |
| R32     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 67.7/71.2    |
| R36     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 42.4/83.1    |
| R37     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 70.5/71.2    |
| R39     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 71/72.6      |
| R40     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 71.2/68.2    |
| R41     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 71.2/67      |
| R42     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)       | B  | 43.2/54.1    |
| R51     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 109.1/57.8   |
| R52     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)      | B  | 105.1/58.1   |
| R53     | 7030003640 | S.RES ERJ3GEYJ 473 V (4.7K)      | B  | 104.1/61.4   |

## [DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R54     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 106.1/61.4   |
| R61     | 7030003640 | S.RES ERJ3GEYJ 473 V (4.7K) | B  | 111.8/82.4   |
| R62     | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | B  | 106.6/81.7   |
| R63     | 7030003660 | S.RES ERJ3GEYJ 683 V (68K)  | B  | 106.6/84.4   |
| R64     | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 103.3/79.6   |
| R65     | 7030008240 | S.RES ERJ12Y0R00U           | B  | 94.5/85.8    |
| R71     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 288/79.5     |
| R72     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 290.5/79.5   |
| R73     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 289.2/79.5   |
| R74     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 291.7/79.5   |
| R75     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 286.7/73.8   |
| R76     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 289.2/72.8   |
| R77     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 286.7/71.8   |
| R78     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 289.2/70.8   |
| R79     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 286.7/69.8   |
| R80     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 289.2/68.8   |
| R81     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 283/37.7     |
| R82     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 304.5/66.7   |
| R83     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 270.5/100.5  |
| R84     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 254.7/100.5  |
| R85     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 239/100.5    |
| R86     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 226.4/100.2  |
| R87     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/36.7   |
| R88     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 142.9/36     |
| R89     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 143/34.5     |
| R90     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/35.2   |
| R91     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/38.2   |
| R92     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 143/37.5     |
| R93     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/42.2   |
| R94     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 143/33       |
| R101    | 7030004730 | S.RES ERJ3GEYF 222 V (2.2K) | B  | 130.1/27.6   |
| R102    | 7030003640 | S.RES ERJ3GEYJ 473 V (4.7K) | B  | 132.1/28.2   |
| R104    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 123.5/28.7   |
| R105    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 122.7/30.8   |
| R106    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 114.3/39.5   |
| R107    | 7030003640 | S.RES ERJ3GEYJ 473 V (4.7K) | B  | 129.4/53     |
| R108    | 7030003640 | S.RES ERJ3GEYJ 473 V (4.7K) | B  | 130.6/53     |
| R109    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 125.2/53     |
| R110    | 7030003640 | S.RES ERJ3GEYJ 473 V (4.7K) | B  | 134.7/50.4   |
| R111    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 128/28.3     |
| R113    | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | B  | 274.3/13.6   |
| R115    | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | B  | 273/13.6     |
| R118    | 7030003640 | S.RES ERJ3GEYJ 473 V (4.7K) | B  | 273.8/11.7   |
| R119    | 7030003640 | S.RES ERJ3GEYJ 473 V (4.7K) | B  | 273.7/9.7    |
| R121    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 132.5/53.2   |
| R122    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 133.2/50.5   |
| R123    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 134/53.2     |
| R124    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 135.5/53.2   |
| R125    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 136.2/50.4   |
| R126    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 137/53.2     |
| R127    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 137.7/50.4   |
| R128    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 138.5/53.2   |
| R129    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/46.7   |
| R130    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 142.9/46     |
| R131    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/45.2   |
| R132    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 142.9/44.5   |
| R133    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 142.9/43     |
| R134    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/43.7   |
| R135    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/33.7   |
| R141    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 61/44.6      |
| R142    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/43.9      |
| R143    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 61/45.9      |
| R144    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 61/47.1      |
| R145    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/48.7      |
| R146    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/50        |
| R147    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/51.2      |
| R148    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/52.5      |
| R149    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/53.7      |
| R151    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | B  | 86.7/62.4    |
| R152    | 7030003620 | S.RES ERJ3GEYJ 333 V (33K)  | B  | 86.7/59.6    |
| R153    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 85.4/63.6    |
| R154    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 208.2/100.4  |
| R155    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 208.2/99.2   |
| R156    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 204.4/100    |
| R157    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 204.4/101.2  |
| R161    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 190/91.2     |
| R162    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 191.2/91.2   |
| R171    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 291/45.2     |
| R172    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 296/45.2     |
| R173    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 291/43.9     |
| R174    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 296/43.9     |
| R175    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 291/41.2     |
| R176    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 296/41.2     |
| R177    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 292.9/41.9   |
| R178    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 294.1/41.9   |
| R181    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 116.5/59.9   |
| R182    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 121.6/59.9   |

## [DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R317    | 7030012010 | S.RES ERJ3GEYJ 112V (1.1K)  | B  | 207.7/62.2   |
| R318    | 7030011770 | S.RES ERA3YED 512V (5.1K)   | B  | 207.7/61     |
| R319    | 7030012020 | S.RES ERJ3GEYJ 911V (910)   | B  | 207.7/59.7   |
| R320    | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 207.7/58.5   |
| R321    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | B  | 207.7/57.2   |
| R322    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 176.2/90     |
| R323    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 177.5/90     |
| R324    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 178.7/90     |
| R327    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 182.4/91.5   |
| R328    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 157.2/86     |
| R330    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 160.2/90.7   |
| R331    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 163.9/90.7   |
| R332    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 167.6/90.3   |
| R333    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 171.3/90.3   |
| R334    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | B  | 203.7/81     |
| R335    | 7030012030 | S.RES ERJ3GEYJ 912V (9.1K)  | B  | 202.4/79.7   |
| R336    | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | B  | 202.4/78.5   |
| R337    | 7030003300 | S.RES ERJ3GEYJ 680 V (68)   | B  | 202.9/77.2   |
| R338    | 7030003510 | S.RES ERJ3GEYJ 392 V (3.9K) | B  | 202.9/76     |
| R339    | 7030004770 | S.RES ERJ3GEYF 113 V (11K)  | B  | 202.9/74.7   |
| R340    | 7030011190 | S.RES ERA3YEB 103V (10K)    | B  | 202.4/73.5   |
| R341    | 7030003300 | S.RES ERJ3GEYJ 680 V (68)   | B  | 202.4/72.2   |
| R342    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | B  | 202.4/71     |
| R343    | 7030004770 | S.RES ERJ3GEYF 113 V (11K)  | B  | 202.4/69.7   |
| R344    | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | B  | 202.9/68.5   |
| R345    | 7030012040 | S.RES ERJ3GEYJ 242V (2.4K)  | B  | 202.9/67.2   |
| R346    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 203.7/65.1   |
| R347    | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | B  | 203.7/63.8   |
| R348    | 7030006591 | S.RES ERA3YED 511V (510)    | B  | 203.7/62.5   |
| R349    | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | B  | 203.7/61.2   |
| R350    | 7030007731 | S.RES ERA3YED 241V (240)    | B  | 203.7/59.9   |
| R351    | 7030006041 | S.RES ERA3YED 622V (6.2K)   | B  | 203.7/58.6   |
| R352    | 7030005361 | S.RES ERA3YED 751V (750)    | B  | 203.7/57.3   |
| R353    | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 203.7/56     |
| R354    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 181.2/82.9   |
| R356    | 7030003450 | S.RES ERJ3GEYJ 122 V (1.2K) | B  | 200/60       |
| R357    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 178.5/83.9   |
| R359    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 200/61.5     |
| R360    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 183.2/81.4   |
| R361    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 153/77.7     |
| R364    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 155.8/79.8   |
| R366    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 155.8/81.2   |
| R370    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 189.7/75     |
| R371    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 155.7/75     |
| R372    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 189.7/72.5   |
| R375    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 191.1/68.6   |
| R376    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 195.9/56.8   |
| R377    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 47.9/96.9    |
| R379    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 145.9/78.3   |
| R380    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 153/73.5     |
| R384    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 153/70.7     |
| R385    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 155.7/70     |
| R389    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 183.6/91.5   |
| R391    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 173.3/66.7   |
| R392    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 174.5/66.7   |
| R393    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 185.5/61.5   |
| R394    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 186.2/58.7   |
| R395    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 186.9/61.5   |
| R396    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 187.6/58.7   |
| R397    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 188.3/61.5   |
| R398    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 174.8/58.7   |
| R399    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 175.5/61.5   |
| R400    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 176.9/61.5   |
| R401    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 176.2/58.7   |
| R402    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 177.6/58.7   |
| R403    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 178.3/61.5   |
| R404    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 114.4/69.2   |
| R405    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 126.4/94.5   |
| R407    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 160.1/64.2   |
| R408    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 163.9/64.2   |
| R409    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 167.6/64.2   |
| R410    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 171.3/64.2   |
| R411    | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | B  | 126.5/72.2   |
| R412    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 122.5/78.5   |
| R413    | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | B  | 120.5/79.2   |
| R414    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 117.6/75.6   |
| R415    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 117.8/91.3   |
| R416    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 114.5/74.3   |
| R417    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 117.6/68.7   |
| R418    | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | B  | 117.8/92.5   |
| R419    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 142/76.8     |
| R431    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 48.5/101.8   |
| R432    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 51.3/101.8   |
| R433    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 54/101.8     |
| R488    | 7030005200 | S.RES ERJ3GEYJ 752 V (7.5K) | B  | 71.8/77.1    |
| R490    | 7030003660 | S.RES ERJ3GEYJ 683 V (68K)  | B  | 74.4/77.1    |
| R500    | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 200/58.7     |
| R601    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 276.7/73.4   |
| R602    | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | B  | 275.2/73.4   |
| R603    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | B  | 276.6/71     |
| R604    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 256.2/73.9   |
| R605    | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | B  | 254.6/73.9   |
| R606    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | B  | 255.3/71.9   |
| R611    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 277.5/75.7   |
| R614    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 257/76       |
| R619    | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 253.7/70.7   |
| R621    | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 253.7/69.5   |
| R623    | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 273.7/70.7   |
| R626    | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 273.7/69     |
| R631    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 247/59       |
| R1001   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | B  | 226.4/95.5   |
| R1002   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 226.4/83.7   |
| R1003   | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | B  | 226.4/72     |
| R1004   | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | B  | 225/95.5     |

## [DISPLAY UNIT]

| REF NO. | PARTS NO.  |       | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-------|-----------------------------|----|--------------|
| R1005   | 7030003540 | S.RES | ERJ3GEYJ 682 V (6.8K)       | B  | 242.7/99     |
| R1006   | 7030003480 | S.RES | ERJ3GEYJ 222 V (2.2K)       | B  | 240.2/99     |
| R1007   | 7030003520 | S.RES | ERJ3GEYJ 472 V (4.7K)       | B  | 240.2/91.2   |
| R1008   | 7030003580 | S.RES | ERJ3GEYJ 153 V (15K)        | B  | 241.8/85.1   |
| R1009   | 7030003540 | S.RES | ERJ3GEYJ 682 V (6.8K)       | B  | 258.5/99     |
| R1010   | 7030003480 | S.RES | ERJ3GEYJ 222 V (2.2K)       | B  | 256/99       |
| R1011   | 7030003520 | S.RES | ERJ3GEYJ 472 V (4.7K)       | B  | 256/91.2     |
| R1012   | 7030003580 | S.RES | ERJ3GEYJ 153 V (15K)        | B  | 256/83.2     |
| R1013   | 7030003540 | S.RES | ERJ3GEYJ 682 V (6.8K)       | B  | 274.5/99     |
| R1014   | 7030003480 | S.RES | ERJ3GEYJ 222 V (2.2K)       | B  | 272/99       |
| R1015   | 7030003520 | S.RES | ERJ3GEYJ 472 V (4.7K)       | B  | 272/91.2     |
| R1016   | 7030003580 | S.RES | ERJ3GEYJ 153 V (15K)        | B  | 273.8/85.6   |
| R1017   | 7030003540 | S.RES | ERJ3GEYJ 682 V (6.8K)       | B  | 284.3/37.7   |
| R1018   | 7030003540 | S.RES | ERJ3GEYJ 682 V (6.8K)       | B  | 303.7/69.4   |
| R1019   | 7030003480 | S.RES | ERJ3GEYJ 222 V (2.2K)       | B  | 305.2/72     |
| R1020   | 7030003480 | S.RES | ERJ3GEYJ 222 V (2.2K)       | B  | 315/37       |
| R1021   | 7030003450 | S.RES | ERJ3GEYJ 122 V (1.2K)       | B  | 90.2/104     |
| R1022   | 7030003390 | S.RES | ERJ3GEYJ 391 V (390)        | B  | 303.4/75     |
| R1023   | 7030003420 | S.RES | ERJ3GEYJ 681 V (680)        | B  | 114.3/104.2  |
| R1024   | 7030003520 | S.RES | ERJ3GEYJ 472 V (4.7K)       | B  | 316.7/72     |
| R1025   | 7030003520 | S.RES | ERJ3GEYJ 472 V (4.7K)       | B  | 300.2/35.7   |
| R1026   | 7030003390 | S.RES | ERJ3GEYJ 391 V (390)        | B  | 306.4/75     |
| R1027   | 7030003430 | S.RES | ERJ3GEYJ 821 V (820)        | B  | 149.4/104    |
| R1028   | 7030003580 | S.RES | ERJ3GEYJ 153 V (15K)        | B  | 300.2/34.5   |
| R1029   | 7030003390 | S.RES | ERJ3GEYJ 391 V (390)        | B  | 319.5/75     |
| R1030   | 7030003420 | S.RES | ERJ3GEYJ 681 V (680)        | B  | 202.3/103.3  |
| R1100   | 7030003400 | S.RES | ERJ3GEYJ 471 V (470)        | B  | 10/99.5      |
| R1101   | 7030003520 | S.RES | ERJ3GEYJ 472 V (4.7K)       | B  | 44/46.7      |
| R1102   | 7030003480 | S.RES | ERJ3GEYJ 222 V (2.2K)       | B  | 28.1/77      |
| R1103   | 7030003580 | S.RES | ERJ3GEYJ 153 V (15K)        | B  | 54/77.3      |
| R1104   | 7030003450 | S.RES | ERJ3GEYJ 122 V (1.2K)       | B  | 23.7/87.5    |
| R1105   | 7030003400 | S.RES | ERJ3GEYJ 471 V (470)        | B  | 23.7/88.8    |
| R1106   | 7030003390 | S.RES | ERJ3GEYJ 391 V (390)        | B  | 40.5/50.5    |
| R1107   | 7030003400 | S.RES | ERJ3GEYJ 471 V (470)        | B  | 44.5/94.2    |
| R1108   | 7030003390 | S.RES | ERJ3GEYJ 391 V (390)        | B  | 48.2/49.3    |
| R1109   | 7030003480 | S.RES | ERJ3GEYJ 222 V (2.2K)       | B  | 63.8/84.5    |
| R1110   | 7030003520 | S.RES | ERJ3GEYJ 472 V (4.7K)       | B  | 63.8/75.9    |
| R1111   | 7030003580 | S.RES | ERJ3GEYJ 153 V (15K)        | B  | 63.8/67.2    |
| R1112   | 7030003480 | S.RES | ERJ3GEYJ 222 V (2.2K)       | B  | 63.8/50      |
| R1113   | 7030003520 | S.RES | ERJ3GEYJ 472 V (4.7K)       | B  | 63.8/41.5    |
|         |            |       |                             |    |              |
| C1      | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 148.9/91.2   |
| C11     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 24.3/43.1    |
| C12     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 71/28.7      |
| C13     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 39.3/37.9    |
| C14     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 39.3/39.2    |
| C15     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 39.3/40.4    |
| C16     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 39.3/41.7    |
| C17     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 100.5/40.1   |
| C18     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 84.1/46.5    |
| C19     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 49.2/37.3    |
| C20     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 53.4/37.5    |
| C22     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 53.4/38.7    |
| C24     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 53.4/39.9    |
| C25     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 95.4/30.4    |
| C26     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 53.4/41.1    |
| C27     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 97.8/30.4    |
| C28     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 99/30.4      |
| C29     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 94.5/43.9    |
| C30     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 95.8/43.9    |
| C31     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 29.5/62.8    |
| C32     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 82.6/32      |
| C33     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 85.1/32      |
| C34     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 82.5/46.5    |
| C35     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 81.3/46.5    |
| C36     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 80/46.5      |
| C37     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 78.8/46.5    |
| C38     | 4030006880 | S.CER | C1608 JB 1H 472K-T          | B  | 57.9/57.7    |
| C51     | 4030019500 | S.CER | GRM21BB31A106KE18 (GRM40 B) | B  | 101.6/62.7   |
| C52     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 100.2/64.3   |
| C61     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 109.4/84.4   |
| C62     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 106.6/80.2   |
| C71     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 225/92.5     |
| C72     | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 301/67.5     |
| C73     | 4030006900 | S.CER | C1608 JB 1H 103K-T          | B  | 291.8/68     |
| C74     | 4030006900 | S.CER | C1608 JB 1H 103K-T          | B  | 300.3/69.8   |
| C101    | 4030007020 | S.CER | C1608 CH 1H 120J-T          | B  | 115.7/38.1   |
| C102    | 4030007020 | S.CER | C1608 CH 1H 120J-T          | B  | 115.7/41.2   |
| C103    | 4030006900 | S.CER | C1608 JB 1H 103K-T          | B  | 130.1/29     |
| C104    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 121.3/40.5   |
| C105    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 140.4/52.7   |
| C106    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 141.9/40.8   |
| C107    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 126.6/29.4   |
| C111    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 272.5/7      |
| C141    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 58.4/55.1    |
| C151    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 85.4/60.9    |
| C152    | 4030008880 | S.CER | C1608 JB 1H 223K-T          | B  | 80.4/61.9    |
| C153    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 199.9/99.8   |
| C154    | 4030019500 | S.CER | GRM21BB31A106KE18 (GRM40 B) | B  | 194.5/86.5   |
| C155    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 196.6/88.3   |
| C156    | 4550007710 | S.TAN | TEESVB2 1A 476M8R           | B  | 195.2/81.7   |
| C157    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 198.6/85.3   |
| C158    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 194.7/88.3   |
| C159    | 4030006860 | S.CER | C1608 JB 1H 102K-T          | B  | 198.6/84     |
| C160    | 4030006860 | S.CER | C1608 JB 1H 102K-T          | B  | 202.5/91.5   |
| C161    | 4550007710 | S.TAN | TEESVB2 1A 476M8R           | B  | 204.1/87.9   |
| C162    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 202.5/90.2   |
| C171    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 286.7/48     |
| C172    | 4030006860 | S.CER | C1608 JB 1H 102K-T          | B  | 296/42.7     |
| C173    | 4030006860 | S.CER | C1608 JB 1H 102K-T          | B  | 291/42.7     |
| C174    | 4030011600 | S.CER | C1608 JB 1E 104K-T          | B  | 301.9/27.1   |



## [DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                          | M. | H/V LOCATION |
|---------|------------|--------------------------------------|----|--------------|
| C301    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 206.2/82.2   |
| C305    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 203.7/54.7   |
| C308    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 164.9/87.5   |
| C309    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 174.1/87.2   |
| C310    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 177/83.2     |
| C311    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 155.8/84.1   |
| C312    | 4030017490 | S.CER C1608 JB 1A 105K-T             | B  | 190.6/65.7   |
| C313    | 4030017490 | S.CER C1608 JB 1A 105K-T             | B  | 194.3/78.2   |
| C314    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 177.7/77.4   |
| C315    | 4030017490 | S.CER C1608 JB 1A 105K-T             | B  | 155.7/76.4   |
| C316    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 196.7/60.5   |
| C317    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 153/76.3     |
| C318    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 177.6/73     |
| C320    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 164.9/67.2   |
| C321    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 168.9/67.2   |
| C401    | 4030019090 | S.CER C2012 JB 1C 225M-T             | B  | 192/60.7     |
| C402    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 191.6/58     |
| C403    | 4030006860 | S.CER C1608 JB 1H 102K-T             | B  | 191.6/59.2   |
| C405    | 4030018980 | S.CER C1608 JB 1H 104K-T             | B  | 194.4/59.2   |
| C406    | 4030006860 | S.CER C1608 JB 1H 102K-T             | B  | 194.4/58     |
| C411    | 4030006860 | S.CER C1608 JB 1H 102K-T             | B  | 162.7/57.2   |
| C412    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 183.7/58     |
| C413    | 4030006860 | S.CER C1608 JB 1H 102K-T             | B  | 183.7/59.2   |
| C414    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 162.7/58.4   |
| C418    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 143.1/78.5   |
| C419    | 4030011810 | S.CER C1608 JB 1A 224K-T             | B  | 144.5/78.5   |
| C420    | 4030017490 | S.CER C1608 JB 1A 105K-T             | B  | 183.7/60.4   |
| C422    | 4030009580 | S.CER C1608 JB 1H 681K-T             | B  | 140.1/74.9   |
| C423    | 4030019090 | S.CER C2012 JB 1C 225M-T             | B  | 135.3/77.3   |
| C424    | 4030019090 | S.CER C2012 JB 1C 225M-T             | B  | 133.9/80.6   |
| C425    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 131/91.2     |
| C426    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 131/88.2     |
| C427    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 131/85.2     |
| C428    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 131/82.2     |
| C429    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 131/79.2     |
| C430    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 128.4/72     |
| C431    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 125.8/82.2   |
| C432    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 125.8/79.2   |
| C433    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 125.8/91.2   |
| C434    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 125.8/88.2   |
| C435    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 125.8/85.2   |
| C436    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 124.5/79.2   |
| C437    | 4030018980 | S.CER C1608 JB 1H 104K-T             | B  | 124.5/91.2   |
| C438    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 120.8/72     |
| C439    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 117.6/74.3   |
| C440    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 49.1/96.9    |
| C606    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 278.2/73.4   |
| C607    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 257.7/73.8   |
| C608    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 265.4/70.8   |
| C609    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 245.5/70.7   |
| C613    | 4030016990 | S.CER GRM32RR11H105KA01L (GRM42-2 R) | B  | 270.2/76.2   |
| C614    | 4030018980 | S.CER C1608 JB 1H 104K-T             | B  | 269.3/73.3   |
| C616    | 4030016990 | S.CER GRM32RR11H105KA01L (GRM42-2 R) | B  | 250.1/75.2   |
| C617    | 4030018980 | S.CER C1608 JB 1H 104K-T             | B  | 249.2/73.1   |
| C653    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 267/70       |
| C654    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 247.2/70     |
| C1001   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 273.2/99     |
| C1002   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 257.2/99     |
| C1003   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 241.5/99     |
| C1004   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 223.7/95.5   |
| C1006   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 305.2/70.7   |
| C1007   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 281.7/37.7   |
| C1101   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 65.2/88.7    |
| C1102   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 29.5/77      |
| C1103   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 65.2/54.5    |
| J4      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN)      | B  | 296/70.3     |
| J21     | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN)      | B  | 63.8/29.4    |
| J31     | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN)      | B  | 58.6/70.7    |
| J33     | 6510018971 | S.CON B4B-PH-SM4-TB(LF)(SN)          | B  | 38.8/87.8    |
| J107    | 6510026080 | CON XM7A-0441                        |    |              |
| J113    | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN)      | B  | 309.8/29.5   |
| J114    | 6510018971 | S.CON B4B-PH-SM4-TB(LF)(SN)          | B  | 280.7/10.7   |
| J141    | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN)      | B  | 53.6/49.7    |
| J301    | 6510021722 | S.CON 30FLT-SM2-TB(LF)(SN)(M)        | B  | 176.9/96.5   |
| J407    | 6510026740 | S.CON IMSA-9637S-60Y922              | B  | 177.4/52.1   |
| J601    | 6510026730 | S.CON IMSA-9637S-08Y902              | B  | 208.5/48.6   |
| J603    | 6510022611 | S.CON 16FMN-BMTTR-A-TBT(LF)(SN)      | B  | 27.6/52.7    |
| J604    | 6510021722 | S.CON 30FLT-SM2-TB(LF)(SN)(M)        | B  | 196.7/96.1   |
| DS51    | 5040003420 | S.LED SMLE12BC7T T86                 | T  | 9.7/40.7     |
| DS1001  | 5040003390 | S.LED FR1111C-TR                     | T  | 90.1/104     |
| DS1002  | 5040002930 | S.LED SML-512MW T86                  | T  | 296.1/73.9   |
| DS1003  | 5040002930 | S.LED SML-512MW T86                  | T  | 111.1/104    |
| DS1004  | 5040002930 | S.LED SML-512MW T86                  | T  | 309.6/73.9   |
| DS1005  | 5040003400 | S.LED SMLE12WBC7W1AR                 | T  | 149.6/104    |
| DS1006  | 5040003380 | S.LED FY1111C-TR                     | T  | 194.6/104    |
| DS1007  | 5040002930 | S.LED SML-512MW T86                  | T  | 323.6/73.9   |
| DS1100  | 5040002930 | S.LED SML-512MW T86                  | T  | 9.7/99.6     |
| DS1101  | 5040003390 | S.LED FR1111C-TR                     | T  | 9.7/98.3     |
| DS1102  | 5040003390 | S.LED FR1111C-TR                     | T  | 27.7/87      |
| DS1103  | 5040002930 | S.LED SML-512MW T86                  | T  | 27.7/88.3    |
| DS1104  | 5040002930 | S.LED SML-512MW T86                  | T  | 30.3/48.6    |

## [DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION          | M. | H/V LOCATION |
|---------|------------|----------------------|----|--------------|
| DS1105  | 5040002930 | S.LED SML-512MW T86  | T  | 45.7/88.3    |
| DS1106  | 5040002930 | S.LED SML-512MW T86  | T  | 48.7/48.6    |
| S1001   | 2260002740 | S.SWI LS8J2M-T       | T  | 228.9/101.2  |
| S1002   | 2260002740 | S.SWI LS8J2M-T       | T  | 228.9/89.6   |
| S1003   | 2260002740 | S.SWI LS8J2M-T       | T  | 228.9/78.1   |
| S1004   | 2260002740 | S.SWI LS8J2M-T       | T  | 228.9/66.5   |
| S1005   | 2260002740 | S.SWI LS8J2M-T       | T  | 228.9/53.5   |
| S1006   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/103    |
| S1007   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/95.1   |
| S1008   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/87.3   |
| S1009   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/79.4   |
| S1010   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/71.6   |
| S1011   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/63.7   |
| S1012   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/103    |
| S1013   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/95.1   |
| S1014   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/87.3   |
| S1015   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/79.4   |
| S1016   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/71.6   |
| S1017   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/63.7   |
| S1018   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/103    |
| S1019   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/95.1   |
| S1020   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/87.3   |
| S1021   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/79.4   |
| S1022   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/71.6   |
| S1023   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/63.7   |
| S1024   | 2260002740 | S.SWI LS8J2M-T       | T  | 277.5/53.5   |
| S1025   | 2260002740 | S.SWI LS8J2M-T       | T  | 295.8/69.4   |
| S1026   | 2260002740 | S.SWI LS8J2M-T       | T  | 295.8/32.3   |
| S1027   | 2260002740 | S.SWI LS8J2M-T       | T  | 286.8/2.3    |
| S1028   | 2260002740 | S.SWI LS8J2M-T       | T  | 309.8/69.4   |
| S1029   | 2260002740 | S.SWI LS8J2M-T       | T  | 309.8/32.3   |
| S1030   | 2260002740 | S.SWI LS8J2M-T       | T  | 323.8/69.4   |
| S1031   | 2260002740 | S.SWI LS8J2M-T       | T  | 323.8/32.3   |
| S1101   | 2260002740 | S.SWI LS8J2M-T       | T  | 10/95.2      |
| S1102   | 2260002740 | S.SWI LS8J2M-T       | T  | 10/83.7      |
| S1103   | 2260002740 | S.SWI LS8J2M-T       | T  | 28/83.7      |
| S1104   | 2260002740 | S.SWI LS8J2M-T       | T  | 30.6/44.2    |
| S1105   | 2260002740 | S.SWI LS8J2M-T       | T  | 46/83.7      |
| S1106   | 2260002740 | S.SWI LS8J2M-T       | T  | 49/44.2      |
| S1107   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/88.8    |
| S1108   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/80.2    |
| S1109   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/71.6    |
| S1110   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/63      |
| S1111   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/54.4    |
| S1112   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/45.8    |
| S1113   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/37.2    |
| S1201   | 2260002740 | S.SWI LS8J2M-T       | T  | 91.7/12.7    |
| S1202   | 2260002740 | S.SWI LS8J2M-T       | T  | 91.7/6.1     |
| S1203   | 2260002740 | S.SWI LS8J2M-T       | T  | 113.2/12.7   |
| S1204   | 2260002740 | S.SWI LS8J2M-T       | T  | 113.2/6.1    |
| S1205   | 2260002740 | S.SWI LS8J2M-T       | T  | 134.7/12.7   |
| S1206   | 2260002740 | S.SWI LS8J2M-T       | T  | 134.7/6.1    |
| S1207   | 2260002740 | S.SWI LS8J2M-T       | T  | 156.2/12.7   |
| S1208   | 2260002740 | S.SWI LS8J2M-T       | T  | 156.2/6.1    |
| S1209   | 2260002740 | S.SWI LS8J2M-T       | T  | 213.6/6.1    |
| S1210   | 2260002740 | S.SWI LS8J2M-T       | T  | 177.7/12.7   |
| S1211   | 2260002740 | S.SWI LS8J2M-T       | T  | 177.7/6.1    |
| S1212   | 2260002740 | S.SWI LS8J2M-T       | T  | 223.8/6.1    |
| S1213   | 2260002740 | S.SWI LS8J2M-T       | T  | 199.2/12.7   |
| S1214   | 2260002740 | S.SWI LS8J2M-T       | T  | 199.2/6.1    |
| S1215   | 2260002740 | S.SWI LS8J2M-T       | T  | 218.6/12.7   |
| EP2     | 6910020190 | UNI L5S30853P00      |    |              |
| EP11    | 6910014730 | S.BEA MPZ2012S331A-T | B  | 6.5/38.3     |
| EP12    | 6910014730 | S.BEA MPZ2012S331A-T | B  | 14.5/36.9    |
| EP31    | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 68/72.6      |
| EP32    | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 68.5/68.2    |
| EP33    | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 68.5/67      |
| EP40    | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 54/75.5      |
| EP41    | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 54/74.2      |
| EP42    | 6910014690 | S.BEA MPZ1608S221A-T | B  | 42/55.6      |
| EP43    | 6910014690 | S.BEA MPZ1608S221A-T | B  | 54.7/58.4    |
| EP101   | 6910014690 | S.BEA MPZ1608S221A-T | B  | 139.7/56.1   |
| EP1051  | 6910014690 | S.BEA MPZ1608S221A-T | B  | 196.4/92.5   |
| EP152   | 6910014690 | S.BEA MPZ1608S221A-T | B  | 197.6/92.5   |
| EP161   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 188.5/91.2   |
| EP162   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 192.8/91.2   |
| EP163   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 199.7/92.2   |
| EP401   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 143.3/89.3   |
| EP402   | 6910020910 | S.BEA MPZ1608S300AT  | B  | 131.7/73.8   |
| EP403   | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 111.9/71.6   |
| EP404   | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 126.4/76     |
| EP405   | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 123.4/76     |
| EP602   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 257.4/64.8   |
| EP603   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 234.7/66.6   |
| EP605   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 266.6/74.3   |
| EP606   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 245.4/74.2   |
| EP607   | 6910014690 | S.BEA MPZ1608S221A-T | B  | 181.6/61.1   |
| EP608   | 6910014690 | S.BEA MPZ1608S221A-T | B  | 183.2/83.8   |
| EP611   | 6910020910 | S.BEA MPZ1608S300AT  | B  | 266.2/78.1   |
| EP612   | 6910020910 | S.BEA MPZ1608S300AT  | B  | 245.8/77.9   |

**[MIC UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| L1      | 6200003261 | S.COI NLV32T-101J               | T  | 9/15         |
| L2      | 6200003261 | S.COI NLV32T-101J               | T  | 2.7/15       |
| L3      | 6200003261 | S.COI NLV32T-101J               | T  | 6/15         |
| C1      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 8.2/9.1      |
| C2      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 11.5/16.3    |
| C3      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 8.2/5.7      |
| C4      | 4030007130 | S.CER C1608 CH 1H 101J-T        | T  | 20.2/1.6     |
| C5      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 16.5/16.3    |
| C6      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 22.3/10.4    |
| C7      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 13.6/10.6    |
| C8      | 4030007090 | S.CER C1608 CH 1H 470J-T        | T  | 9.5/9.1      |
| J1      | 6510000191 | CON FM214-8SS(P)-1              | T  | 4/6.5        |
| J2      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  |              |
| EP2     | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 17.7/14.9    |
| EP3     | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 21.1/10.4    |
| EP4     | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 9.7/4.5      |
| EP5     | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 12/14.5      |
| EP6     | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 16/10.9      |
| EP7     | 6910015130 | S.BEA MMZ1608D 301BT            | T  | 12.1/2       |
| EP8     | 6910015130 | S.BEA MMZ1608D 301BT            | T  | 12.1/3.3     |
| EP9     | 6910015130 | S.BEA MMZ1608D 301BT            | T  | 18.2/2.3     |
| EP10    | 6910015130 | S.BEA MMZ1608D 301BT            | T  | 17/2.4       |
| EP11    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 9/12.4       |
| EP12    | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 8.5/3.1      |

**[JACK UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| R1      | 7030006240 | S.RES ERJ12YJ181U (180)         | T  | 8.1/18.1     |
| R2      | 7030006240 | S.RES ERJ12YJ181U (180)         | T  | 8.2/26.5     |
| R486    | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)      | T  | 6.1/7.6      |
| R487    | 7310004300 | S.TRI EVM-3SSX50 B13            | T  | 11/8         |
| C1      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 2.5/10.4     |
| C2      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 5.2/13.2     |
| C101    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 3.7/32.5     |
| C102    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 3.7/31       |
| J1      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 3.7/21.8     |
| J2      | 6510023891 | CON S-G4617#01F                 | T  |              |
| J102    | 6510023900 | CON LGR4619-7000                | T  |              |
| EP1     | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 4.4/11.1     |
| EP2     | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 2.8/13.2     |
| EP3     | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 4/13.2       |
| EP101   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 7.2/32.5     |
| EP102   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 7.2/31       |

**[VR-A UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| R1      | 7210002970 | VAR RV-314(RK0972210 10KB/10KB) |    |              |
| R2      | 7210002970 | VAR RV-314(RK0972210 10KB/10KB) |    |              |
| R3      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 6.5/12.3     |
| R4      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 6.5/13.6     |
| R5      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 43.4/12.3    |
| R6      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 43.4/13.6    |
| R33     | 7030003860 | S.RES ERJ3GE JPW V              | T  | 34.2/8.3     |
| R34     | 7030003860 | S.RES ERJ3GE JPW V              | T  | 32.9/8.3     |
| R35     | 7030003860 | S.RES ERJ3GE JPW V              | T  | 31.6/8.3     |
| R38     | 7030003860 | S.RES ERJ3GE JPW V              | T  | 31.6/11.1    |
| C1      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 39.9/13.6    |
| C2      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 39.9/12.3    |
| C3      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 10/13.6      |
| C4      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 10/12.3      |
| J32     | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 35/4         |
| J33     | 6510022611 | S.CON 16FMN-BMTTR-A-TBT(LF)(SN) | T  | 17/4         |
| EP34    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 40.7/8.3     |
| EP35    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 39.4/8.3     |
| EP36    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 38.1/8.3     |
| EP37    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 36.8/8.3     |
| EP38    | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 35.5/8.3     |
| EP39    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 30.3/8.3     |
| EP43    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 28.5/8.3     |
| EP44    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 27.2/8.3     |
| EP45    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 25.9/8.3     |

**[VR-B UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| R1      | 7210002970 | VAR RV-314(RK0972210 10KB/10KB) |    |              |
| R2      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 44/9.8       |
| R3      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 44/11.1      |
| J1      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 25.1/4.3     |
| S1      | 2250000410 | ENC TP90D96E20-30F-2178-1       |    |              |

**[VR-C UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| R1      | 7210001130 | VAR RK097111T005A (10KB)        |    |              |
| R2      | 7210001130 | VAR RK097111T005A (10KB)        |    |              |
| R3      | 7210001130 | VAR RK097111T005A (10KB)        |    |              |
| R4      | 7210001130 | VAR RK097111T005A (10KB)        |    |              |
| R11     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 22/10.6      |
| R12     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 19/10.6      |
| R13     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 13/10.6      |
| R14     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 16/10.6      |
| C11     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 20.5/10.6    |
| C12     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 17.6/10.6    |
| C13     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 11.5/10.6    |
| C14     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 14.5/10.6    |
| J1      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 14.7/5.4     |

**[RIT UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| J1      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 4/9          |
| S1      | 2250000650 | ENC EVEGC2F2524B                |    |              |


M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

**[DCDC UNIT]**

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| IC101   | 1180003100 | S.REG BD9302FP-E2                 | T  | 51.2/22.5    |
| IC201   | 1190002450 | S.IC BD9851FEV-E2                 | T  | 11/12.7      |
| Q201    | 1550000230 | S.FET SSM3J117TU(TE85L)           | T  | 22.8/15.8    |
| D101    | 1750000960 | S.DIO RB081L-20                   | T  | 59.9/21.7    |
| D102    | 1750000960 | S.DIO RB081L-20                   | T  | 42.4/21.7    |
| D201    | 1790001450 | S.DIO RB160L-40 TE-25             | T  | 23.4/27.3    |
| L101    | 6200010881 | S.COI CDRH124NP-330MC             | T  | 64/11.8      |
| L102    | 6200013280 | S.COI SLF10145T-330M1R6-PF        | T  | 67.2/24.2    |
| L103    | 6200013280 | S.COI SLF10145T-330M1R6-PF        | T  | 35.1/24.2    |
| L201    | 6200011551 | S.COI CDRH6D28NP-270NC            | T  | 7.4/28.5     |
| L202    | 6200011300 | S.COI EXCML16A270U                | T  | 22.6/31.5    |
| L203    | 6180003501 | S.COI SLF6028T-100M1R3-PF         | T  | 21.5/20.6    |
| L204    | 6200011300 | S.COI EXCML16A270U                | T  | 19.7/16.5    |
| R101    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)        | T  | 52.6/30.8    |
| R102    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)        | T  | 49.8/30.8    |
| R103    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K)       | T  | 55.4/32.1    |
| R104    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)        | T  | 47/30.8      |
| R105    | 7030005451 | S.RES ERA3YED 153V (15K)          | T  | 52.6/29.5    |
| R106    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)        | T  | 57.4/28.7    |
| R107    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)        | T  | 44.9/28.7    |
| R108    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 60.1/30.8    |
| R109    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 44.2/30.8    |
| R110    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)       | T  | 47/32.1      |
| R111    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)       | T  | 58/30.8      |
| R201    | 7030005691 | S.RES ERA3YED 123V (12K)          | T  | 23.8/8.4     |
| R202    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 22.5/8.4     |
| R203    | 7030007230 | S.RES ERA3YED 102V (1K)           | T  | 20.5/6.4     |
| R204    | 7030006461 | S.RES ERA3YED 152V (1.5K)         | T  | 20.5/9       |
| R205    | 7030005981 | S.RES ERA3YED 333V (33K)          | T  | 15.6/9.6     |
| R206    | 7030003700 | S.RES ERJ3GEYJ 154 V (150K)       | T  | 21.3/12.3    |
| R207    | 7030005451 | S.RES ERA3YED 153V (15K)          | T  | 19.2/10.3    |
| R208    | 7030005321 | S.RES ERA3YED 103V (10K)          | T  | 18.5/8.2     |
| R209    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 19.2/11.6    |
| R210    | 7030003740 | S.RES ERJ3GEYJ 334 V (330K)       | T  | 23.2/13      |
| C101    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 55.4/30.8    |
| C102    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 49.6/32.1    |
| C103    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 55.4/29.5    |
| C104    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 47/29.5      |
| C105    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 47/28.2      |
| C106    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 55.4/28.2    |
| C107    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 52.4/28.2    |
| C108    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 49.8/29.5    |
| C109    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 55.7/17.2    |
| C110    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 46.6/17.2    |
| C111    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 52.7/17.2    |
| C112    | 4510009700 | S.ELE EEEFK1C101P                 | T  | 47.4/10      |
| C113    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 59.1/27.7    |
| C114    | 4030018960 | S.CER C3216 JB 1C 106MT-N         | T  | 52.8/13.9    |
| C115    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 41.5/27.7    |
| C116    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 60.8/27.7    |
| C117    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 43.3/27.7    |
| C201    | 4510009700 | S.ELE EEEFK1C101P                 | T  | 7.7/20.8     |
| C202    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 14/26        |
| C203    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 18.6/24.7    |
| C204    | 4030018960 | S.CER C3216 JB 1C 106MT-N         | T  | 19.1/26.4    |
| C205    | 4030018960 | S.CER C3216 JB 1C 106MT-N         | T  | 17.2/16.5    |
| C206    | 4030010020 | S.CER C1608 JB 1H 122K-T          | T  | 20.5/7.7     |
| C207    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 16.9/10.1    |
| C208    | 4030008860 | S.CER C1608 JB 1H 153K-T          | T  | 19.2/12.9    |
| C209    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 23.2/11.7    |
| C210    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 6.4/8.9      |
| C211    | 4030019090 | S.CER C2012 JB 1C 225M-T          | T  | 12.4/26.3    |
| C212    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 5.6/13.4     |
| C213    | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 5/11.4       |
| C214    | 4030018960 | S.CER C3216 JB 1C 106MT-N         | T  | 19.1/28.6    |
| J1      | 6910020210 | CON IMSA-9180S-12Z900             |    |              |
| F1      | 5210001050 | S.FUS ICP-S0.5TN                  | T  | 51.5/41.1    |
| EP101   | 6910014730 | S.BEA MPZ2012S331A-T              | T  | 61.7/31      |
| EP102   | 6910014730 | S.BEA MPZ2012S331A-T              | T  | 40.9/31      |
| EP103   | 6910014730 | S.BEA MPZ2012S331A-T              | T  | 71.3/16.1    |
| EP201   | 6910014730 | S.BEA MPZ2012S331A-T              | T  | 19.2/31.5    |
| EP202   | 6910014730 | S.BEA MPZ2012S331A-T              | T  | 12.4/31      |


M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount



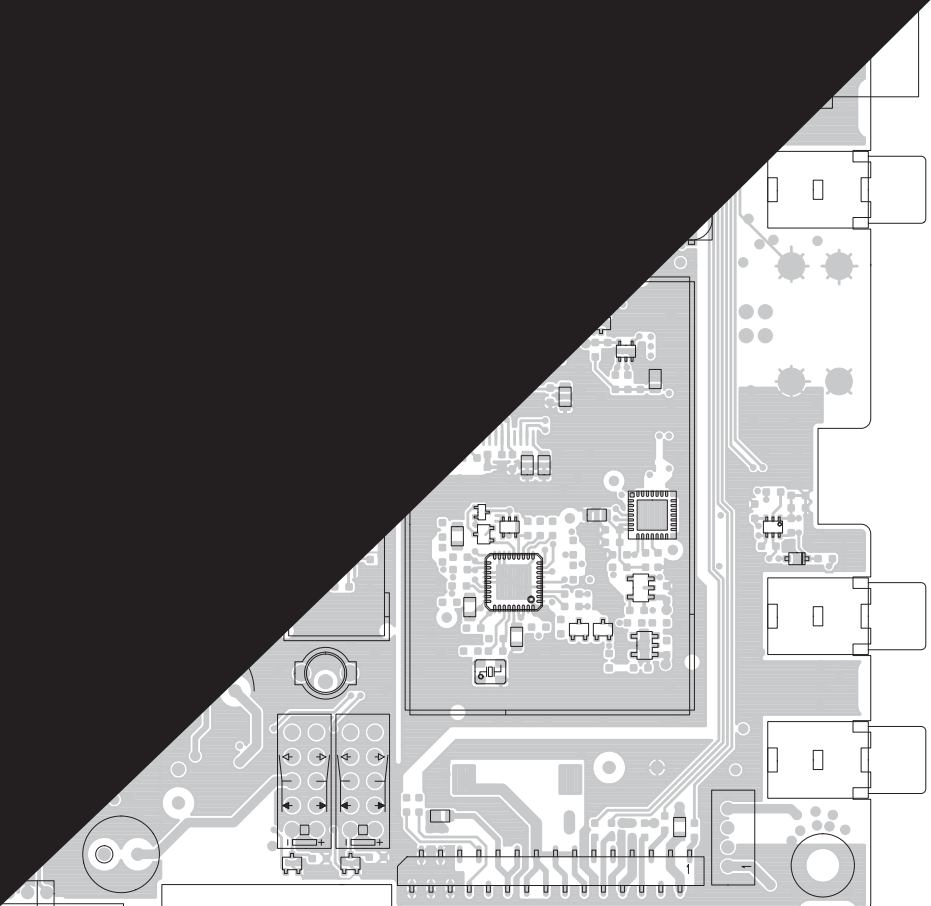

C T E E D D R D D R V D 4

1

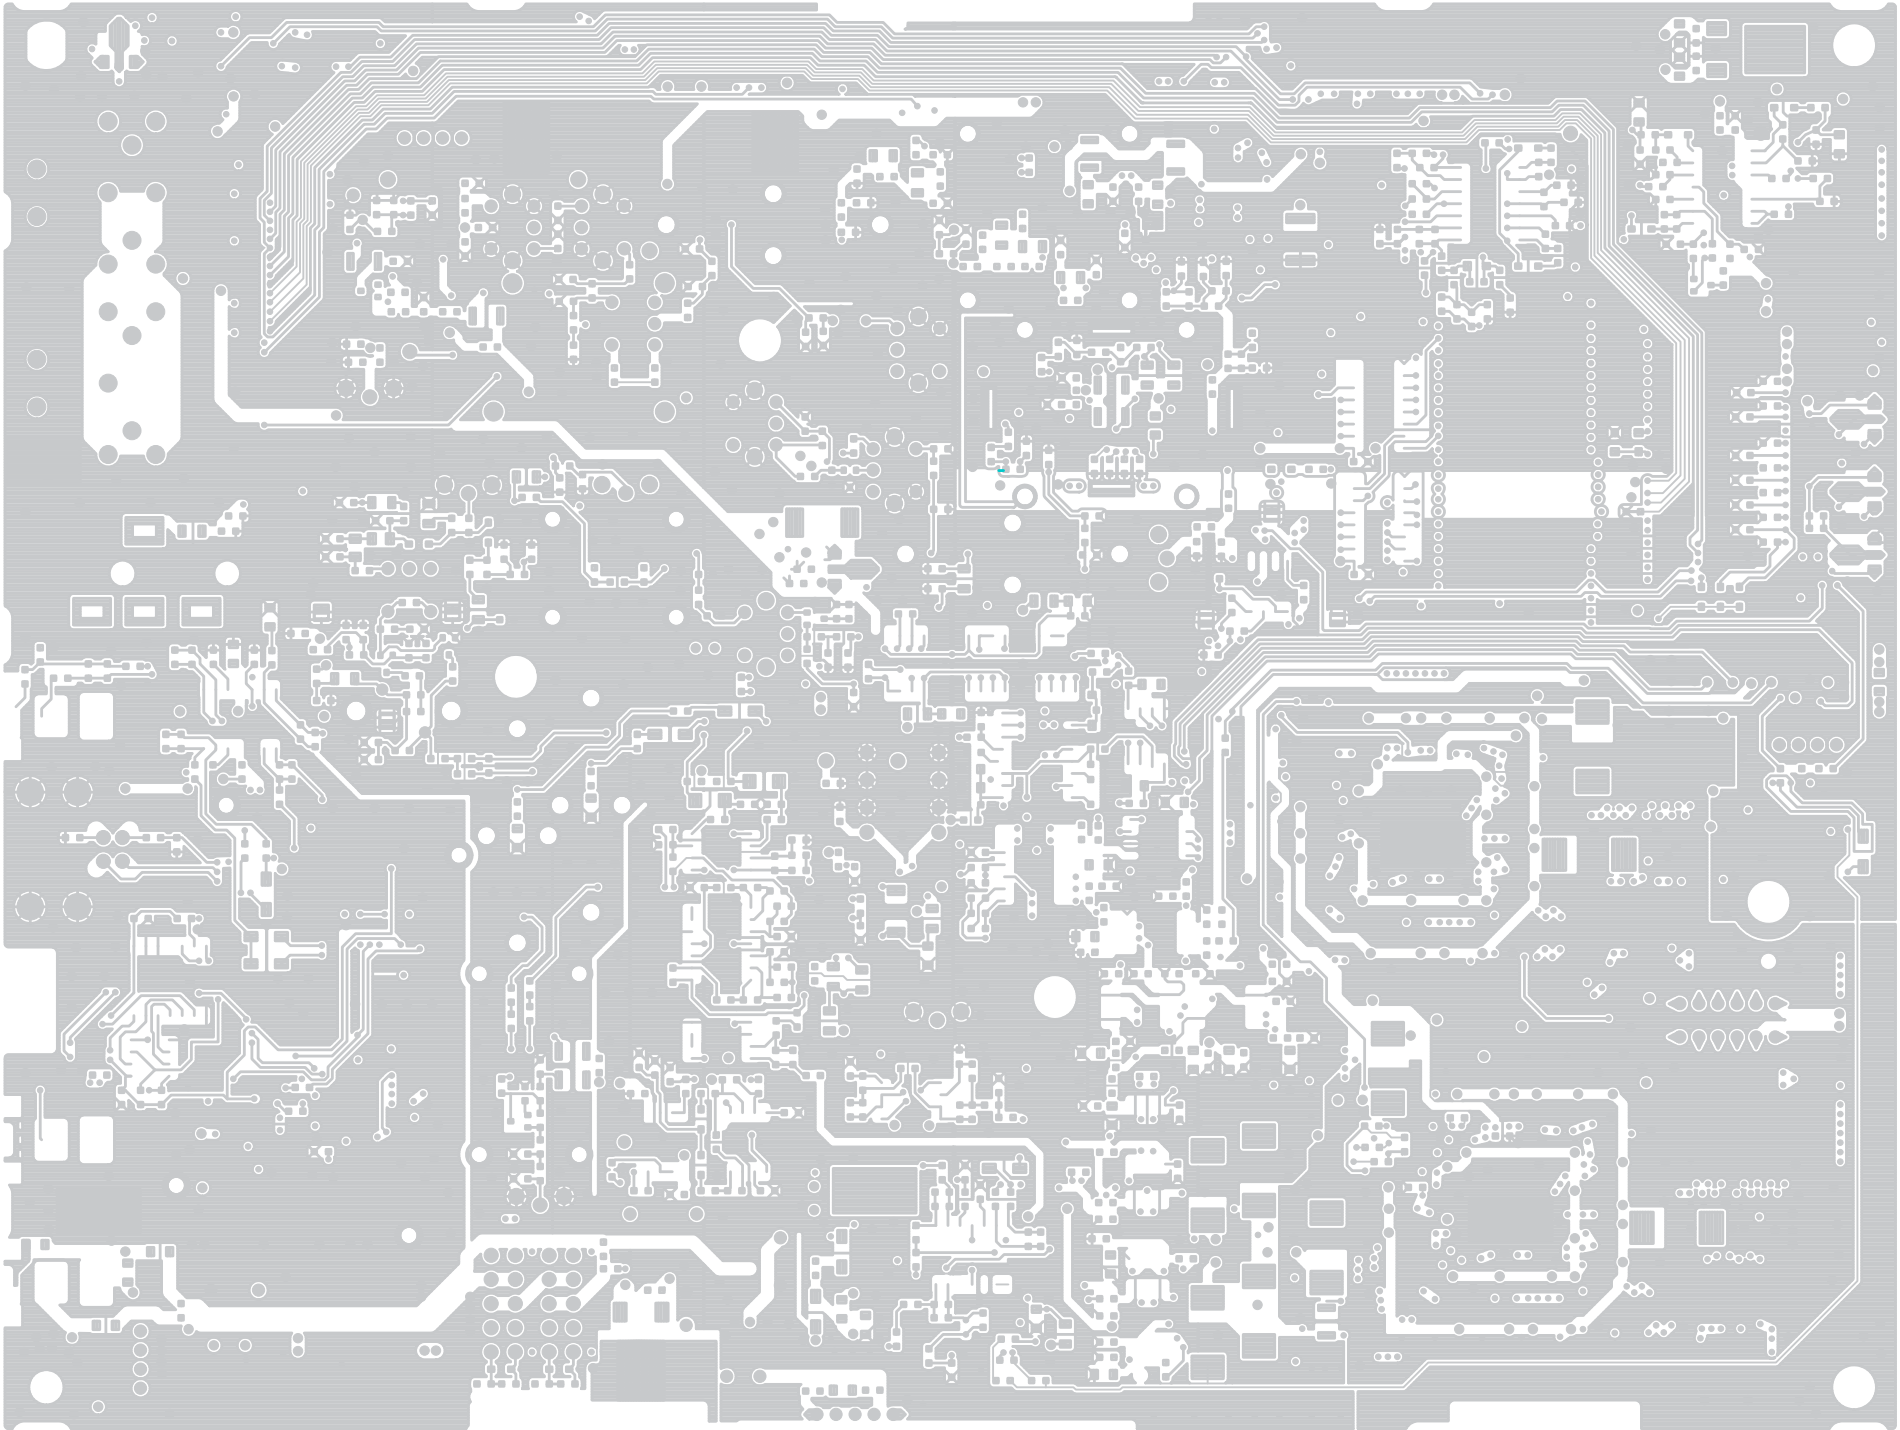


A detailed micrograph of the J2 B7025B chip. The chip is a square integrated circuit with a complex internal circuit pattern. Various components are labeled, including 'J2 B7025B' in the center, 'MIC' (microphone) on the right, and 'V0', 'V5', 'V1.0', and 'V5' along the left edge. The chip is mounted on a printed circuit board (PCB) with a grid pattern.




The combination of this side and the bottom side shows the board layout in the same configuration as the actual P.C.Board.

- **DISPLAY UNIT  
(BOTTOM VIEW)**

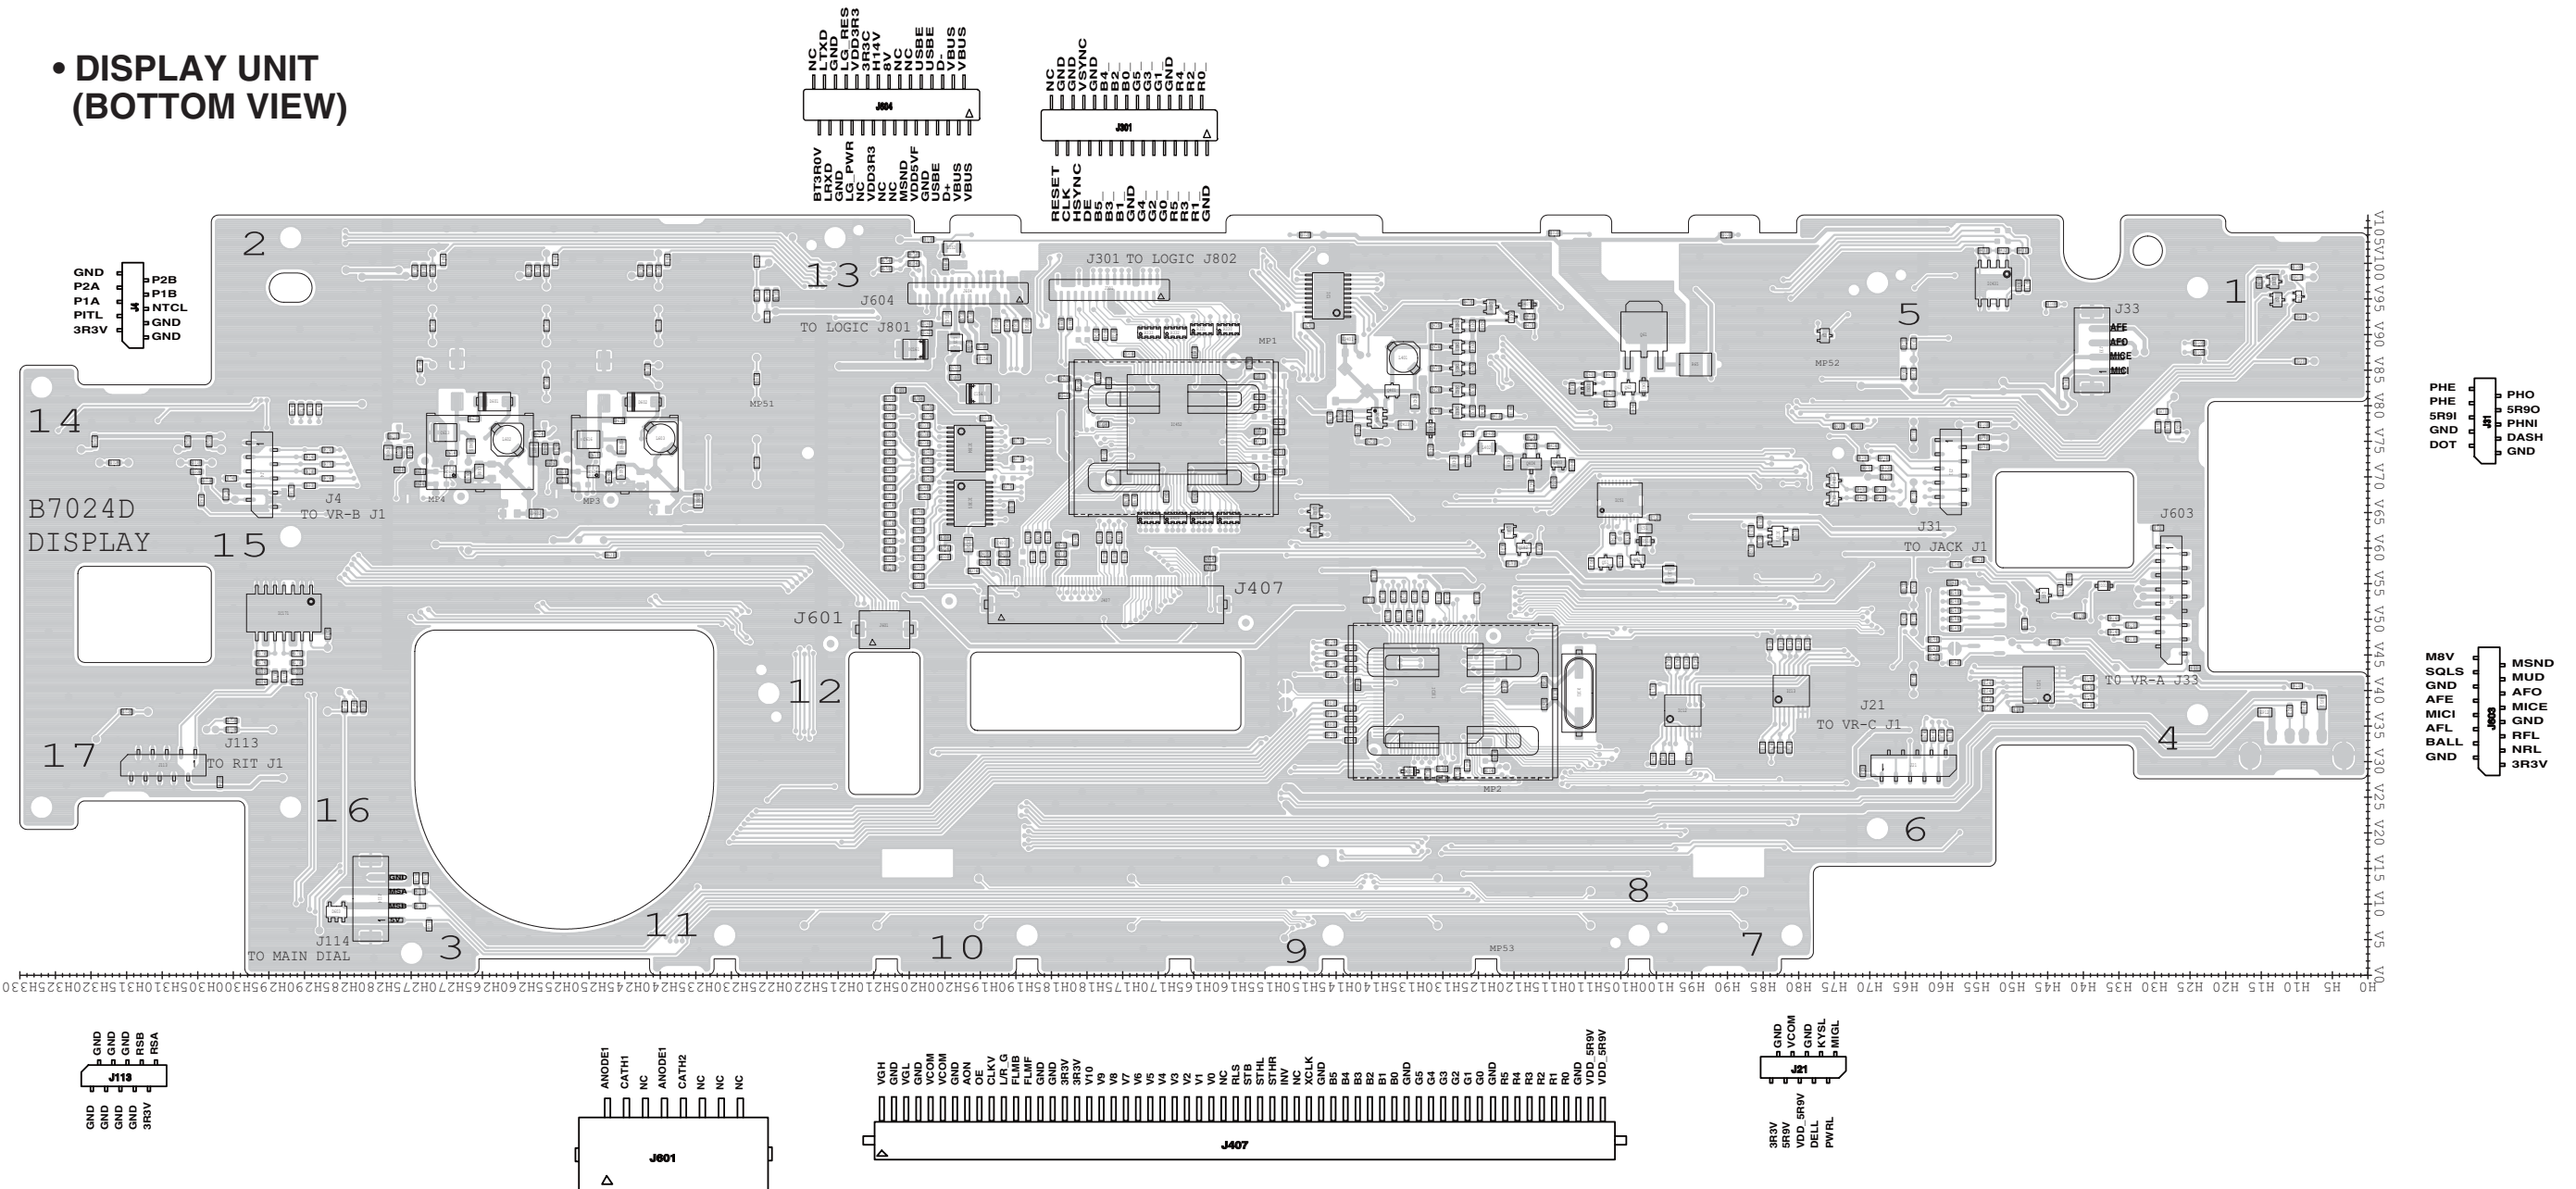

- **MIC BOARD  
(BOTTOM VIEW)**



**MAIN UNIT (1/6)**













46









# SERVICE MANUAL

HF/50 MHz TRANSCEIVER

## IC-7600

---

---

---

---

---

S-14523XZ-C1  
Mar. 2009

Icom Inc.

---

## INTRODUCTION

This service manual describes the latest technical information for the **IC-7600** HF/50 MHz TRANSCEIVER TRANSCEIVER at the time of publication.

| MODEL   | VERSION | TX OUTPUT POWER |
|---------|---------|-----------------|
| IC-7600 | [USA]   | 100 W           |
|         | [EUR]   |                 |
|         | [EUR-1] |                 |
|         | [ESP]   |                 |
|         | [KOR]   |                 |
|         | [TPE]   |                 |
|         | [CHN]   |                 |
|         | [ITR]   |                 |
|         | [FRA]   |                 |
|         | [EXP]   |                 |

## CAUTION

**NEVER** connect the transceiver to an AC outlet or to a DC power supply that uses more than specified. This will ruin the transceiver.

**DO NOT** expose the transceiver to rain, snow or any liquids.

**DO NOT** reverse the polarities of the power supply when connecting the transceiver.

**DO NOT** apply an RF signal of more than 20 dBm (100 mW) to the antenna connector. This could damage the transceiver's front-end.

To upgrade quality, any electrical or mechanical parts and internal circuits are subject to change without notice or obligation.



## ORDERING PARTS

Be sure to include the following four points when ordering replacement parts:

1. 10-digit Icom parts numbers
2. Component name
3. Equipment model name and unit name
4. Quantity required

### <ORDER EXAMPLE>

|            |                 |         |            |          |
|------------|-----------------|---------|------------|----------|
| 1130013010 | SN74AHC1G08DCK3 | IC-7600 | LOGIC UNIT | 1 piece  |
| 8930079060 | 3073 DC PLATE   | IC-7600 | CHASSIS    | 2 pieces |

Addresses are provided on the inside back cover for your convenience.

## REPAIR NOTES

1. Make sure that the problem is internal before disassembling the transceiver.
2. **DO NOT** open the transceiver until the transceiver is disconnected from its power source.
3. **DO NOT** force any of the variable components. Turn them slowly and smoothly.
4. **DO NOT** short any circuits or electronic parts. An insulated tuning tool **MUST** be used for all adjustments.
5. **DO NOT** keep power ON for a long time when the transceiver is defective.
6. **DO NOT** transmit power into a Standard Signal Generator or a Sweep Generator.
7. **ALWAYS** connect a 50 dB to 60 dB attenuator between the transceiver and a Deviation Meter or Spectrum Analyzer when using such test equipment.
8. **READ** the instructions of test equipment thoroughly before connecting a test equipment to the transceiver.

---

## TABLE OF CONTENTS

---

### SECTION 1 SPECIFICATIONS

### SECTION 2 INSIDE VIEWS

### SECTION 3 CIRCUIT DESCRIPITON

|     |                                          |     |
|-----|------------------------------------------|-----|
| 3-1 | RECEIVER CIRCUITS . . . . .              | 3-1 |
| 3-2 | TRANSMITTER CIRCUITS . . . . .           | 3-3 |
| 3-3 | FREQUENCY SYNTHESIZER CIRCUITS . . . . . | 3-6 |
| 3-4 | VOLTAGE BLOCK DIAGRAM . . . . .          | 3-8 |
| 3-5 | CPU PORT ALLOCATIONS. . . . .            | 3-9 |

### SECTION 4 ADJUSTMENT PROCEDURES

|     |                                                       |      |
|-----|-------------------------------------------------------|------|
| 4-1 | PREPARATION . . . . .                                 | 4-1  |
| 4-2 | REFERENCE FREQUENCY SIGNAL LEVEL ADJUSTMENT . . . . . | 4-3  |
| 4-3 | PLL UNIT ADJUSTMENT . . . . .                         | 4-3  |
| 4-4 | PA UNIT ADJUSTMENT . . . . .                          | 4-6  |
| 4-5 | CTRL UNIT ADJUSTMENT. . . . .                         | 4-8  |
| 4-6 | MAIN ADJUSTMENT. . . . .                              | 4-9  |
| 4-7 | MAIN UNIT (SCOPE) ADJUSTMENT . . . . .                | 4-13 |
| 4-8 | RF UNIT ADJUSTMENT . . . . .                          | 4-15 |
| 4-9 | SOFTWARE ADJUSTMENT . . . . .                         | 4-17 |

### SECTION 5 PARTS LIST

### SECTION 6 MECHANICAL PARTS

### SECTION 7 BOARD LAYOUTS

### SECTION 8 GENERAL WIRING

### SECTION 9 BLOCK DIAGRAM

### SECTION 10 VOLTAGE DIAGRAM

|                                                                           |       |
|---------------------------------------------------------------------------|-------|
| LOGIC UNIT . . . . .                                                      | 10-1  |
| DISPLAY UNIT (Incl. VR-A, VR-B, VR-C, MIC, JACK and RIT BOARDS) . . . . . | 10-5  |
| MAIN UNIT. . . . .                                                        | 10-8  |
| PLL UNIT. . . . .                                                         | 10-14 |
| RF UNIT. . . . .                                                          | 10-17 |
| TUNER UNIT . . . . .                                                      | 10-19 |
| FILTER UNIT . . . . .                                                     | 10-20 |
| CTRL UNIT . . . . .                                                       | 10-21 |
| BPF UNIT. . . . .                                                         | 10-24 |
| DCDC UNIT . . . . .                                                       | 10-24 |
| BPF UNIT. . . . .                                                         | 10-24 |
| PREAMP BOARD . . . . .                                                    | 10-25 |
| PA UNIT . . . . .                                                         | 10-25 |



## ■ General

- Frequency coverage : (unit: MHz)
  - Receive 0.030–60.000<sup>\*1\*2</sup>
  - Transmit
    - 1.800–1.999<sup>\*2</sup>, 3.500–3.999<sup>\*2</sup>,
    - 5.33050<sup>\*3</sup>, 5.34650<sup>\*3</sup>, 5.36650<sup>\*3</sup>,
    - 5.37150<sup>\*3</sup>, 5.40350<sup>\*3</sup>,
    - 7.000–7.300<sup>\*2</sup>, 10.100–10.150<sup>\*2</sup>,
    - 14.000–14.350<sup>\*2</sup>, 18.068–18.168<sup>\*2</sup>,
    - 21.000–21.450<sup>\*2</sup>, 24.890–24.990<sup>\*2</sup>,
    - 28.000–29.700<sup>\*2</sup>, 50.000–54.000<sup>\*2</sup>
- <sup>\*1</sup>Some frequency bands are not guaranteed.
- <sup>\*2</sup>Depending on version. <sup>\*3</sup>USA version only.
- Mode : USB, LSB, CW, RTTY, PSK, AM, FM
- No. of memory channels : 101 (99 regular, 2 scan edges)
- Antenna connector type : SO-239 × 2 and phono jack (RCA; 50 Ω impedance)
- Temperature range : 0°C to +50°C (+32°F to +122°F)
- Frequency stability : Less than ±0.5 ppm 5 min. after power ON. (0°C to +50°C; +32°F to +122°F)
- Frequency resolution : 1 Hz
- Power supply : 13.8 V DC ±15% (negative ground)
- Power consumption
  - Transmit : Max. power 23 A
  - Receive : Standby 3.0 A
  - Max. audio 3.5 A
- Dimensions : 340(W) × 116(H) × 279.3(D) mm (projections not included)
- Weight (approx.) : 10.0 kg; 22 lb
- ACC 1 connector : 8-pin DIN connector
- ACC 2 connector : 7-pin DIN connector
- CI-V connector : 2-conductor 3.5 (d) mm (1/8")
- Display : 5.8-inch (diagonal) TFT color LCD

## ■ Transmitter

- Output power (continuously adjustable)
  - SSB/CW/RTTY/FM : Less than 2 to 100 W
  - AM : Less than 1 to 30 W
- Modulation system
  - SSB : Digital PSN modulation
  - AM : Digital Low power modulation
  - FM : Digital Phase modulation
- Spurious emission
  - HF bands : Less than –50 dB
  - 50 MHz band : Less than –63 dB
- Carrier suppression : More than 40 dB
- Unwanted sideband suppression : More than 55 dB
- ΔTX variable range : ±9.999 kHz
- Microphone connector : 8-pin connector (600 Ω)
- ELEC-KEY connector : 3-conductor 6.35(d) mm (1/4")
- KEY connector : 3-conductor 6.35(d) mm (1/4")
- SEND connector : Phono jack (RCA)
- ALC connector : Phono jack (RCA)

## ■ Receiver

- Receive system : Double superheterodyne system
- Intermediate frequencies
  - 1st : 64.455 MHz
  - 2nd : 36 kHz
- Sensitivity (typical)
  - SSB, CW, RTTY : 0.15 μV (1.80–29.99 MHz)<sup>\*1</sup>
  - (10 dB S/N) BW=2.4 kHz : 0.12 μV (50.0–54.0 MHz)<sup>\*2</sup>
  - AM (10 dB S/N) : 6.3 μV (0.1–1.799 MHz)<sup>\*1</sup>
  - BW=6 kHz : 2 μV (1.80–29.99 MHz)<sup>\*1</sup>
  - 1.6 μV (50.0–54.0 MHz)<sup>\*2</sup>
  - FM (12 dB SINAD) : 0.5 μV (28.0–29.99 MHz)<sup>\*1</sup>
  - BW=15 kHz : 0.3 μV (50.0–54.0 MHz)<sup>\*2</sup>
- <sup>\*1</sup>Pre-amp 1 is ON. <sup>\*2</sup>Pre-amp 2 is ON.
- Squelch sensitivity (Pre-amp: ON)
  - SSB : Less than 3.2 μV
  - FM : Less than 0.3 μV
- Selectivity (IF filter shape is set to SHARP.)
  - SSB (BW: 2.4 kHz) : More than 2.4 kHz/–6 dB
  - Less than 3.8 kHz/–60 dB
  - CW (BW: 500 Hz) : More than 500 Hz/–6 dB
  - Less than 900 Hz/–60 dB
  - RTTY (BW: 350 Hz) : More than 350 Hz/–6 dB
  - Less than 650 Hz/–60 dB
  - AM (BW: 6 kHz) : More than 6.0 kHz/–6 dB
  - Less than 15.0 kHz/–60 dB
  - FM (BW: 15 kHz) : More than 12.0 kHz/–6 dB
  - Less than 20.0 kHz/–60 dB
- Spurious and image rejection ratio : More than 70 dB (except IF through on 50 MHz band)
- AF output power : More than 2.0 W at 10% distortion with an 8 Ω load
- RIT variable range : ±9.999 kHz
- PHONES connector : 3-conductor 6.35 (d) mm (1/4")
- External SP connector : 2-conductor 3.5 (d) mm (1/8")/8 Ω
- DSP ANF attenuation : More than 30 dB (with 1 kHz single tone)
- DSP NR attenuation : More than 6 dB (noise rejection in SSB)

## ■ Antenna tuner

- Matching impedance range
  - HF bands : 16.7 to 150 Ω unbalanced (Less than VSWR 3:1)
  - 50 MHz band : 20 to 125 Ω unbalanced (Less than VSWR 2.5:1)
- Minimum operating input power : 8 W (HF bands)
- 15 W (50MHz band)
- Tuning accuracy : VSWR 1.5:1 or less
- Insertion loss : Less than 1.0 dB (after tuning at RF power 100W)


Spurious signals may be displayed on the spectrum scope screen regardless of the transceiver's state (Tx or Rx). They are generated in the scope circuit. This does not indicate a transceiver malfunction.

All stated specifications are typical and subject to change without notice or obligation.


## SECTION 2

## INSIDE VIEWS

### • MAIN UNIT

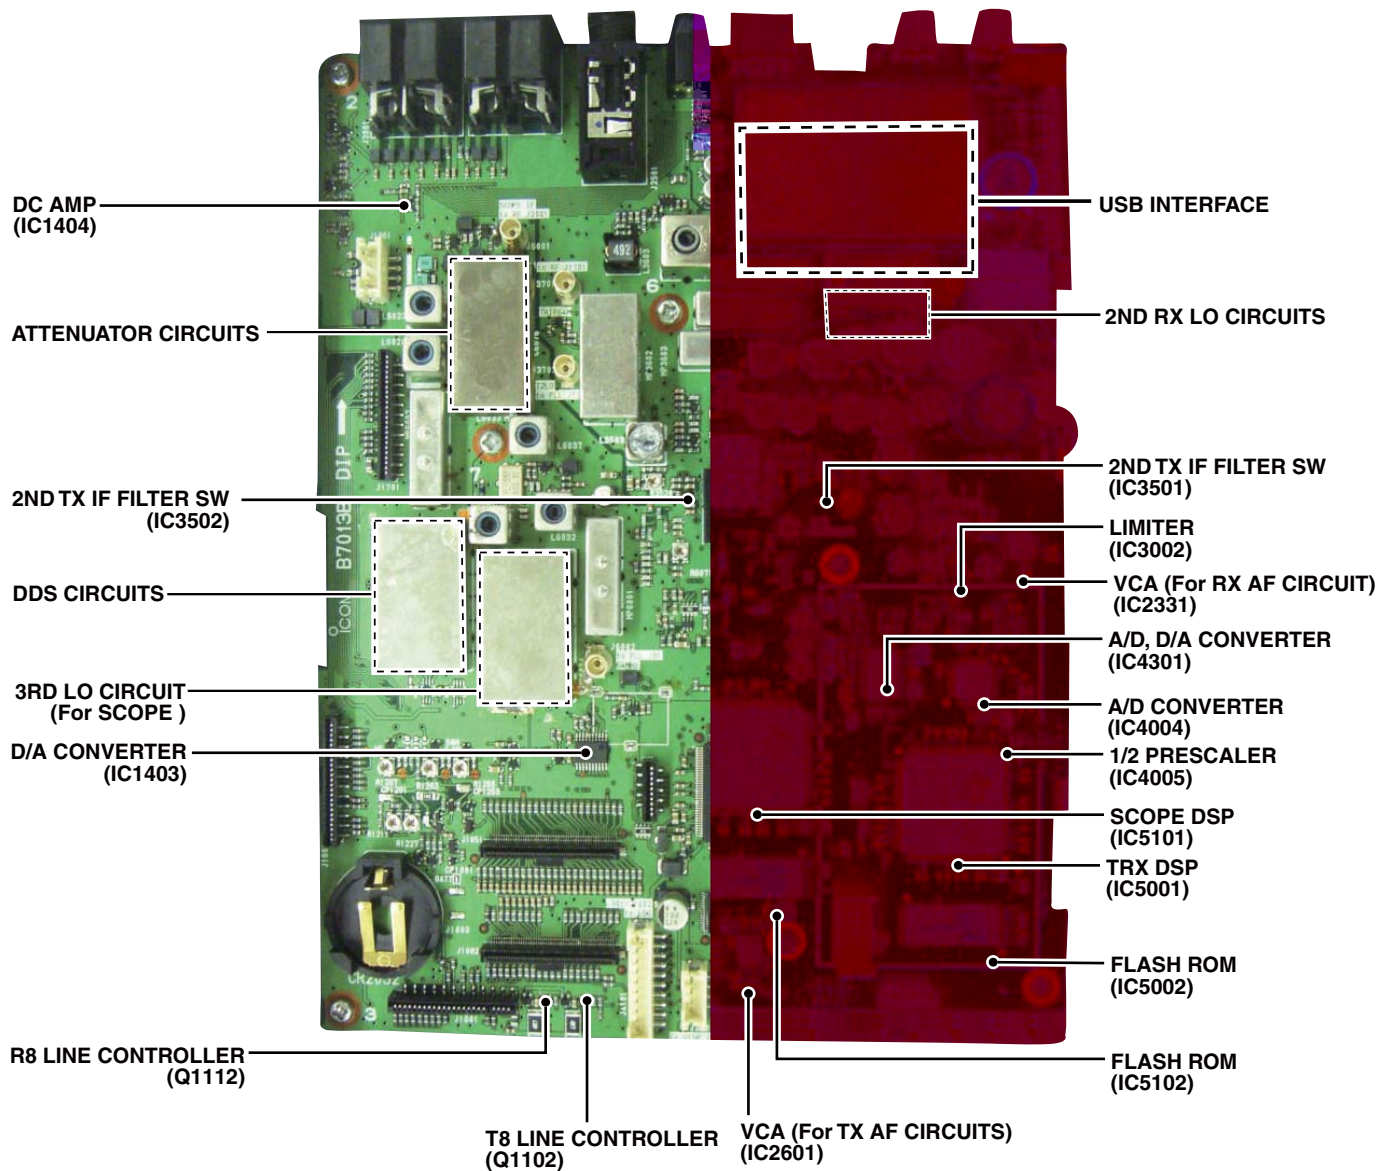


• CTRL UNIT

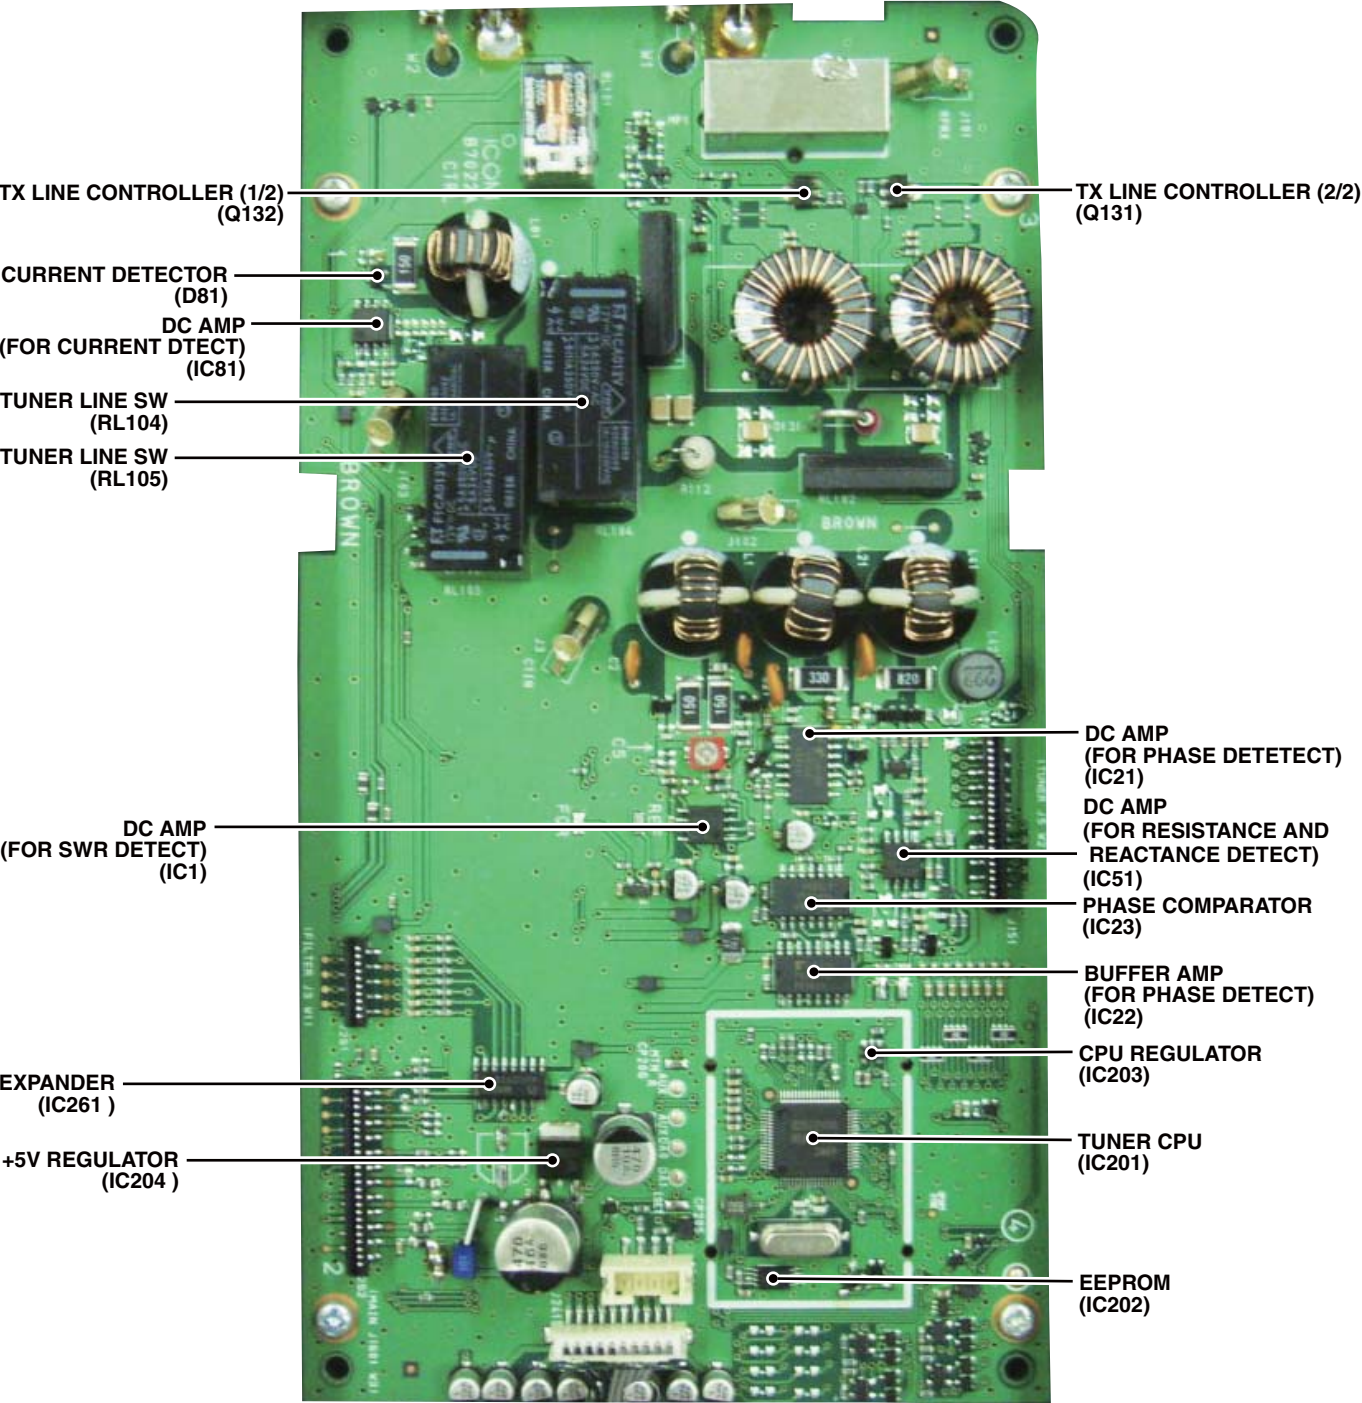





• PA UNIT

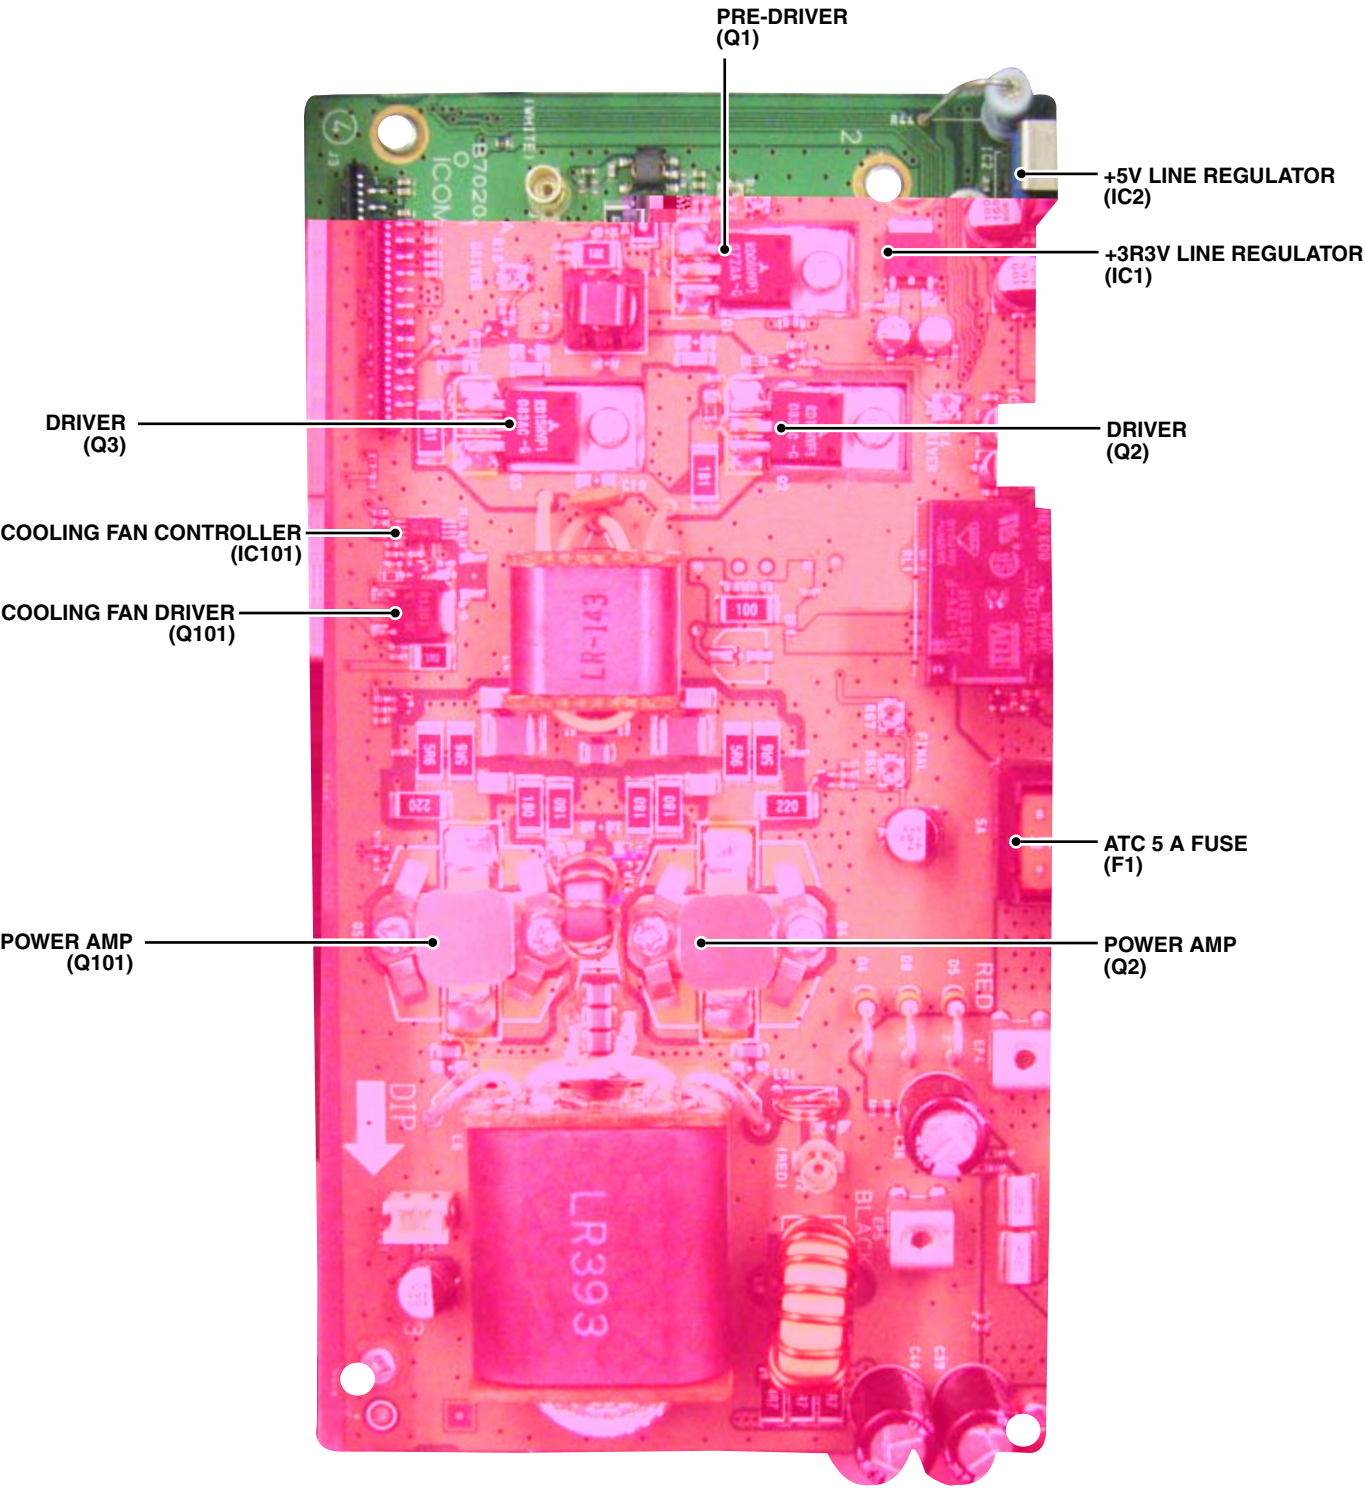

- PLL UNIT

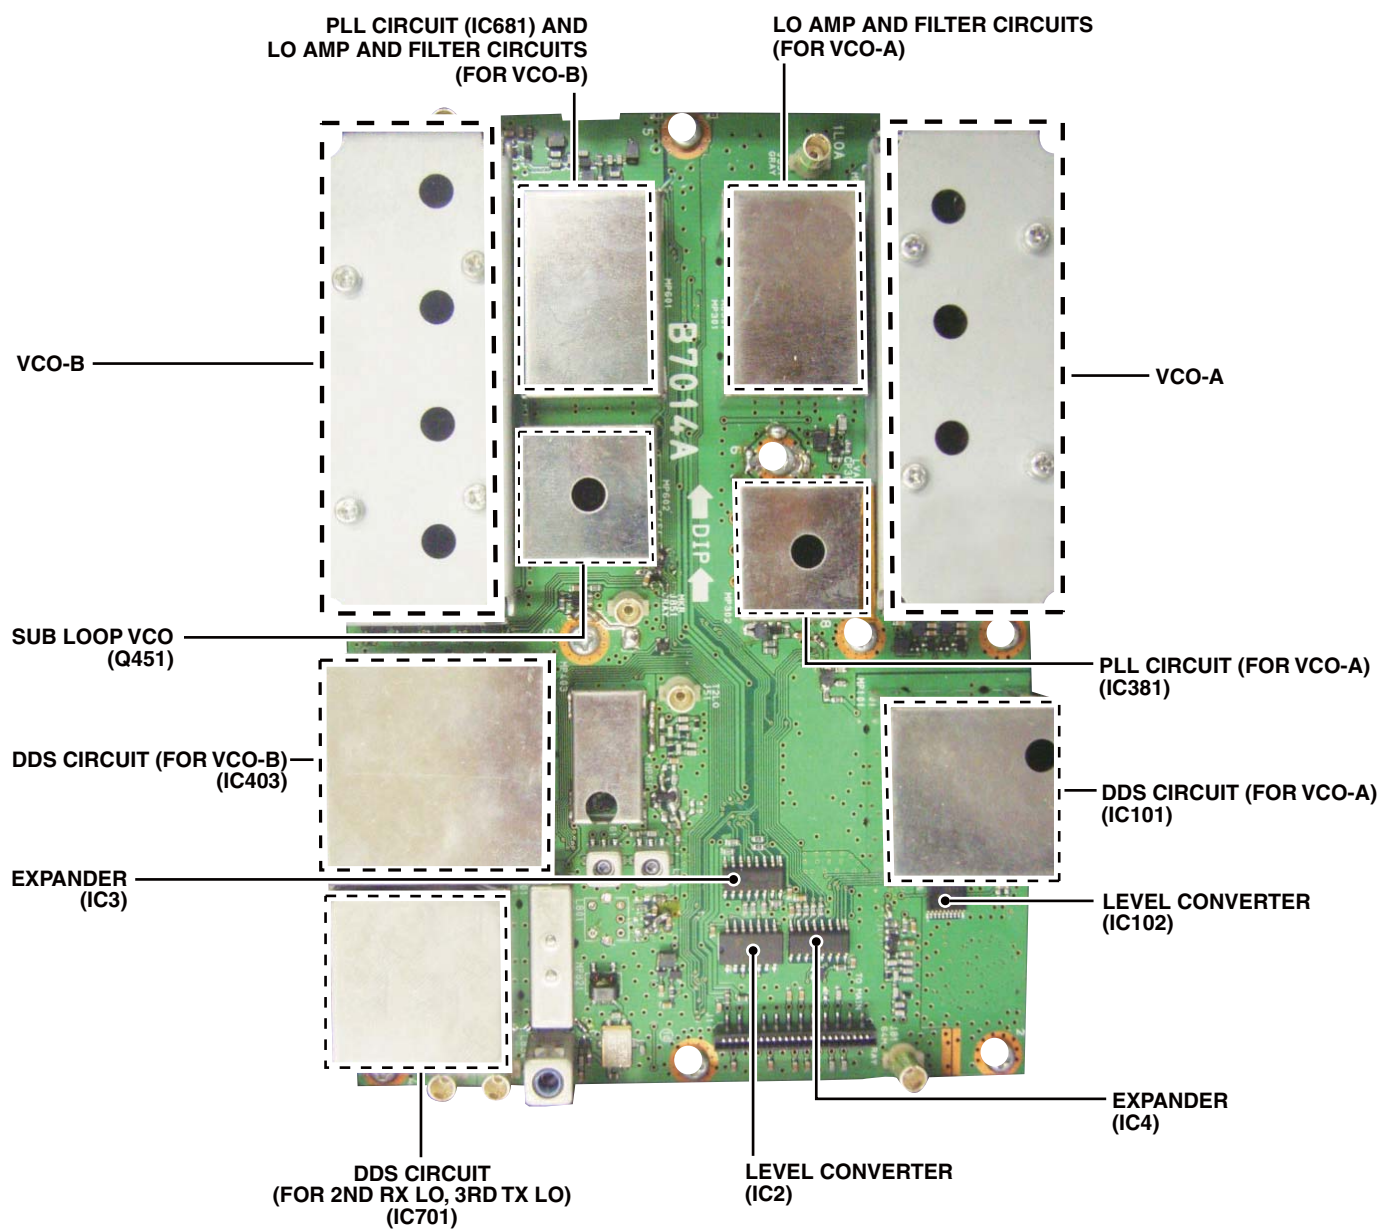

• RF UNIT

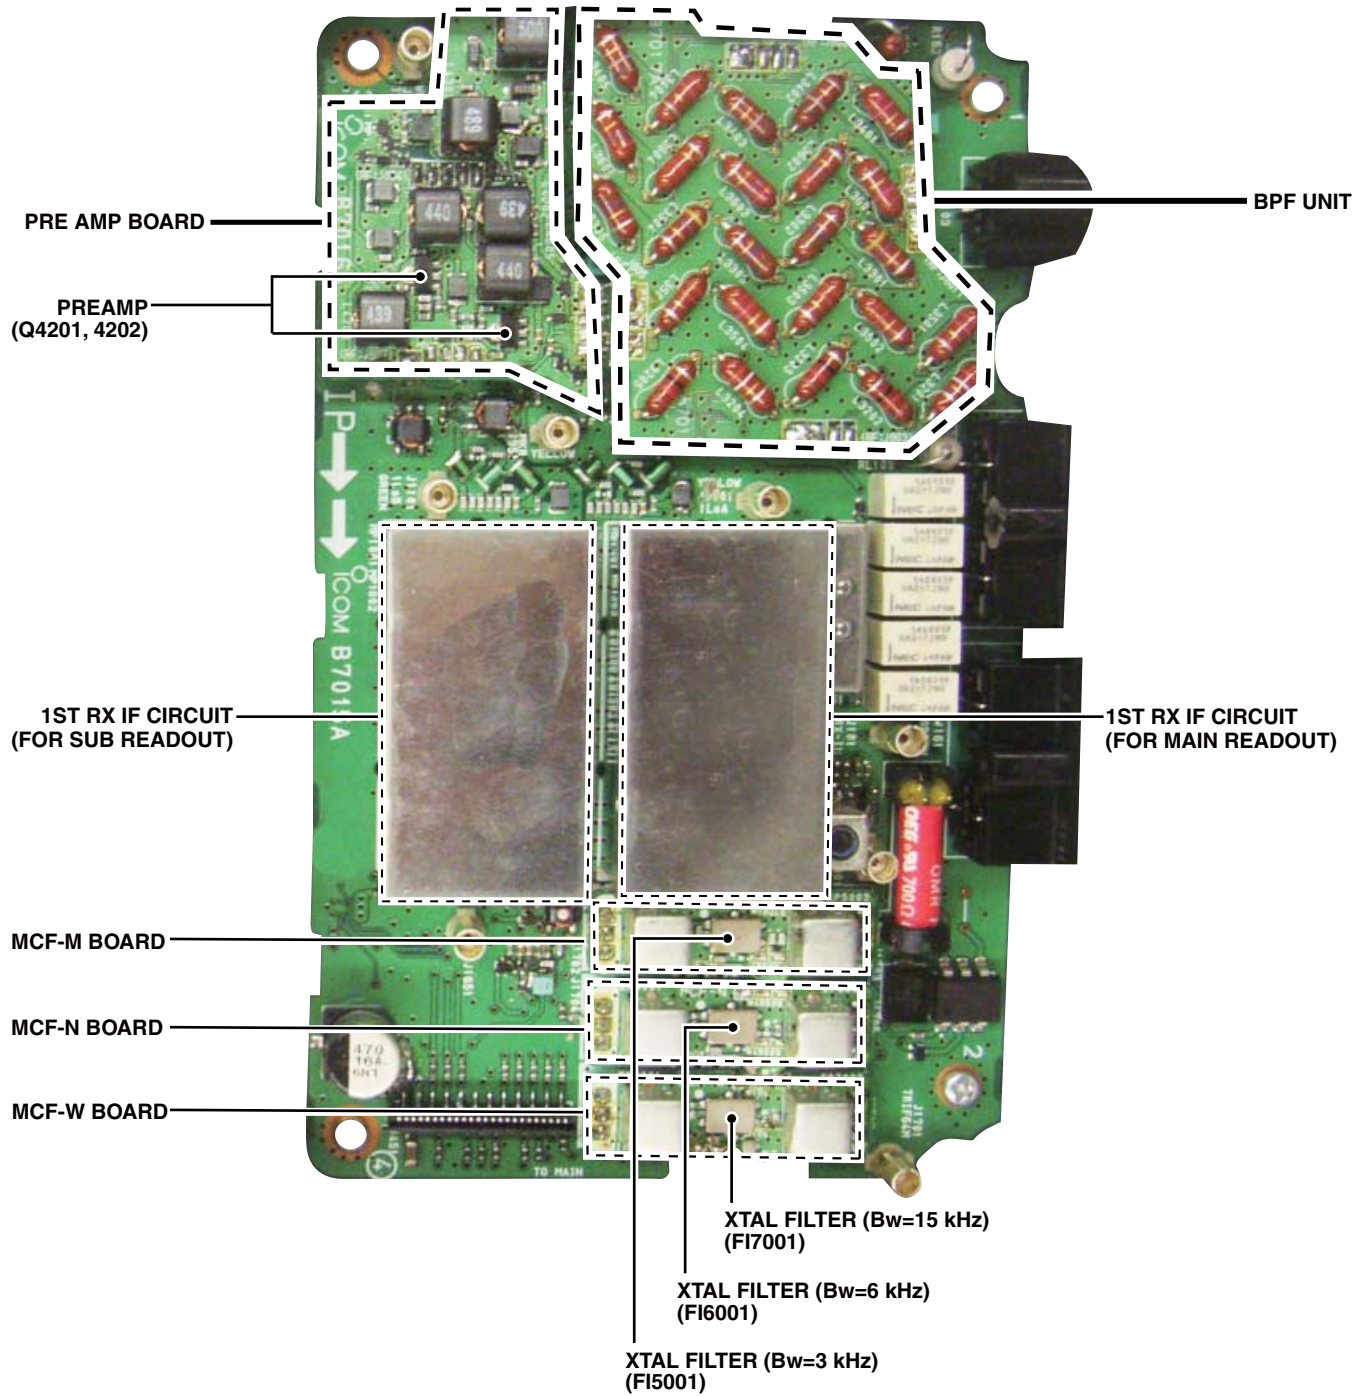



### 3-1 RECEIVER CIRCUITS

#### ANTENNA SWITCHING CIRCUIT AND ANTENNA MATCHING CIRCUITS (CTRL AND TUNER UNITS)

RX signals from the antenna connector; [ANT1] (J5) or [ANT2] (J6) are passed through the antenna switch (RL101) and current detector (D81), and applied to the RF UNIT via the tuner switches (RL104 and RL105), RX line switch (RL103) and LPF.

If the automatic antenna tuning function is activated, the RX signals from the current detection circuit (D81, 301, 302) are applied to the antenna tuning network on the TUNER UNIT to match the transceiver to the connected antenna automatically.

The RX signals from the TUNER UNIT are applied to the RF UNIT via the RX line switch (RL103) and LPF.

#### ATTENUATOR CIRCUITS (RF UNIT)

The RX signals from the CTRL UNIT are passed through the RECEIVE ANTENNA IN/OUT CONNECTOR switches (RL104, 105) and RX line cut switch (RL101), then passed through or bypassed the attenuator circuits, according to the setting.

The combination of attenuator (or bypass) that the RX signals are passed through determines the entire attenuation level; 0 dB, 6 dB, 12 dB or 18 dB.

The RX signals which are passed through or bypassed the attenuator circuits are applied to the BPF circuits.

#### BPF CIRCUITS (RF UNIT AND BPF BOARD)

The RX signals from the attenuator circuits are passed through an LPF or one of BPFs correspond to the operating frequency, to remove unwanted out-of-band signals.

The table below shows filter which the RX signals are passed in each frequency range.

| Name of BPF    | Frequency range                             | Located on |
|----------------|---------------------------------------------|------------|
| B0             | 0.03–1.599999 MHz                           | RF UNIT    |
| B1             | 1.6–1.999999 MHz                            | BPF BOARD  |
| B2             | 2.0–2.999999 MHz                            | BPF BOARD  |
| B3             | 3.0–3.999999 MHz                            | BPF BOARD  |
| B4             | 4.0–5.999999 MHz                            | BPF BOARD  |
| B5             | 6.0–7.999999 MHz                            | BPF BOARD  |
| B6             | 8–10.999999 MHz                             | RF UNIT    |
| B7             | 11–14.999999 MHz                            | RF UNIT    |
| B8             | 15–21.999999 MHz                            | RF UNIT    |
| B9             | 22–29.999999 MHz                            | RF UNIT    |
| B10 (for RX)   | 50–54 MHz                                   | RF UNIT    |
| B10W           | 30–49.999999 MHz<br>54.000001–59.999999 MHz | RF UNIT    |
| B10TX (for TX) | 50–54 MHz                                   | RF UNIT    |

The filtered RX signals are applied to the PREAMP BOARD.


#### PREAMPLIFIERS (PREAMP BOARD)

The RX signals from the BPF circuits are applied to or bypassed the preamplifier.

When the PREAMP FUNCTION is activated, the RX signals are amplified by one of preamplifiers (Q4201, Q4202 or Q4203).

The amplified or bypassed RX signals are applied to the RF UNIT again.

#### • RF CIRCUITS

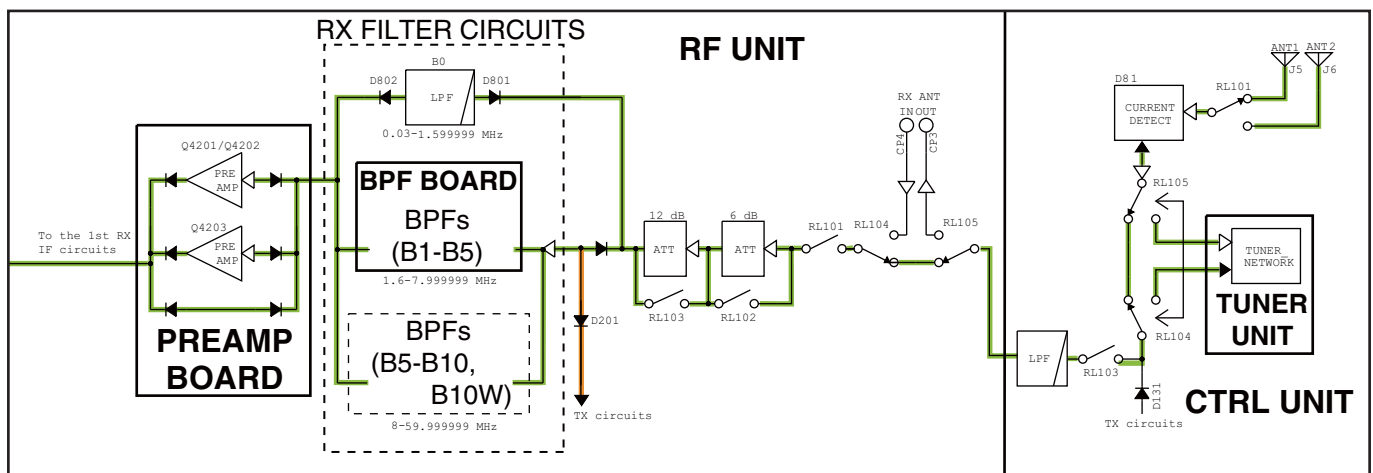

## 1ST RX IF CIRCUITS (RF UNIT)

The RX signals from the PREAMP BOARD are applied to the splitter (L904) to divide the received signals for dualwatch operation.

The separated RX signals are passed through the LPF which removes unwanted signals (60 MHz and higher), and amplified by the RF AMP (Main readout; Q1201, 1202/Sub readout; Q1001, 1002), then applied to the 1st RX IF mixer (Main readout; Q1203–1206/Sub readout; Q1003–1006).

The RX signals are converted into the 1st RX IF signal by being mixed with 1st RX LO signals (64.485–124.455 MHz) from the PLL UNIT.

The converted 1st RX IF signals are passed through the 2-staged attenuator (Main readout; D1201–1203/Sub

readout; D1001–1003) which adjusts the balance of both 1st RX IF signals, and amplified by 1st RX IF AMP (Main readout; Q1208/Sub readout; Q1008).


These amplified 1st RX IF signals are combined by the hybrid combiner (L1018), and applied to the 1st IF filter circuits.

The combined 1st IF signal is passed through one of the 1st IF filters on the MCF-N/-M/-W BOARDS which has different passband widths. The filter to be passed through is according to the IF filter setting.

The filtered 1st RX IF signal is applied to the RF UNIT again, and passed through the LPF and amplified by the RX IF AMP (MAIN UNIT: 3601–3603).

The amplified 1st RX IF signal is then applied to the 2nd RX IF circuits.

### • 1ST RX IF CIRCUITS

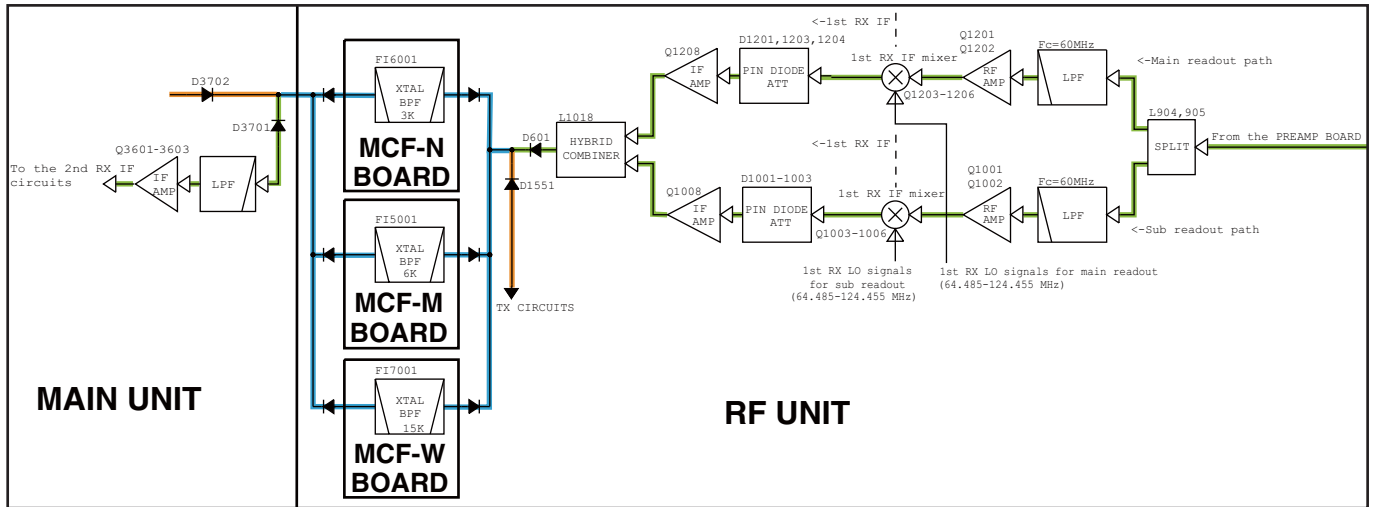

## 2ND RX IF CIRCUITS (MAIN UNIT)

The 1st RX IF signal from the 1st RX IF circuits is divided into two paths, and each signal is applied to the 2nd RX IF mixers (Image reduction mixer; D3202/D3201) to be converted into the 2nd RX IF signal, by being mixed with the 2nd RX LO signal (64.494 MHz) from the PLL UNIT.

The image reduction mixer removes image frequency components by using LO signals which are 90 degrees phase-shifted from each other.

The converted 2nd RX IF signals are amplified independently by the buffer (Q3202/Q3201) and IF AMP (IC3203).

These amplified 2nd RX IF signals are 90 degrees phase-shifted from each other by the phase shifter (IC3202; pins 8-10, pins 12–14). These phase shifted 2nd RX IF signals are combined by the combiner (IC3202; pins 5–7) to be converted into the 3rd RX IF signal.

The converted 3rd RX IF signal is amplified by the 3rd IF AMP (IC3201), and passed through the limiter (IC3002) and balance-unbalance converter (Balun; IC4001/IC4002), then applied to the demodulator circuits.

## DEMODULATOR CIRCUITS AND DSP (MAIN UNIT)


The 3rd RX IF signal from the 3rd RX IF circuits is applied to the A/D converter (IC4004) to be converted into the digital signal.

The converted digital signal is applied to the DSP (IC5001), and demodulated and processed.

The demodulated signal is applied to the D/A converter (IC4301) to be converted into the analog signal, then applied to the buffer amplifier (IC4401; pins 1–3).

The buffer amplified AF signals are applied to the RX AF circuits.

### • 2ND RX IF, 3RD RX IF AND DEMODULATOR CIRCUITS

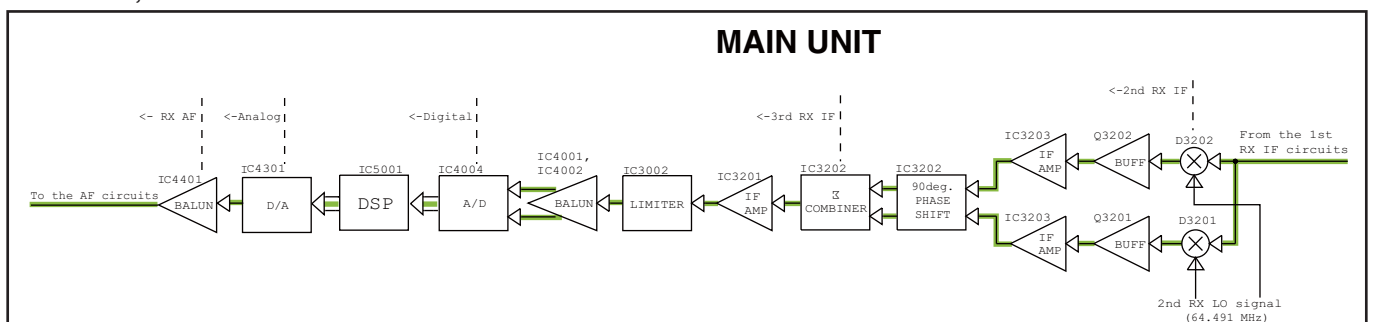


## RX AF CIRCUITS (MAIN UNIT)

The AF signals from the buffer amplifier are applied to the AF AMP (IC2301) via the squelch gate (Q2361). The amplified AF signals are applied to the Voltage Controlled Amplifier (VCA; IC2231) to be adjusted its level (=audio output level).

The level-adjusted AF signals are applied to the AF power AMP (IC2312) via the LPF (Q2312).

The power-amplified AF signals are passed through the AF mute switch (RL2302), then applied to the internal speaker or external speaker jack (J2302) on the rear panel or headphone jack (JACK BORD J2) on the front panel.

### • RX AF CIRCUITS

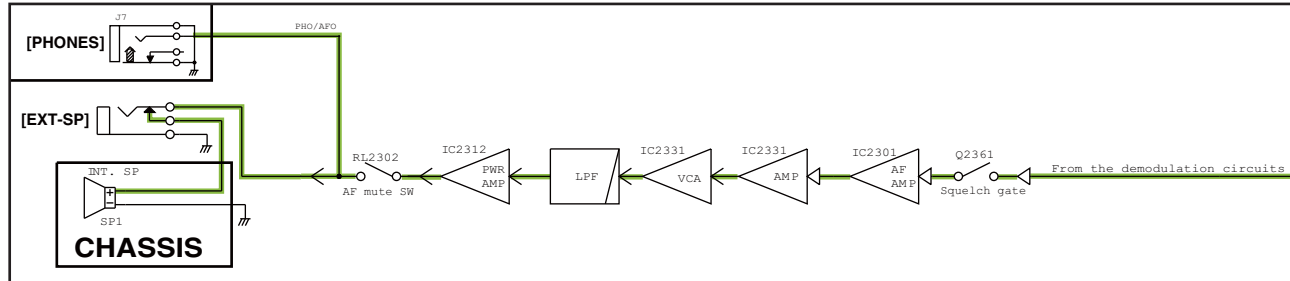

## 3-2 TRANSMITTER CIRCUITS

### TX AF CIRCUITS (MAIN UNIT)

The audio signals from the microphone (MIC signals) are applied to the MAIN UNIT via the MICROPHONE CONNECTOR (MIC BOARD; J1), and applied to the Voltage Controlled Amplifier (VCA; IC2601).

The applied MIC signals are amplified by internal MIC AMP, and adjusted its level (=MIC gain) by internal VCA circuit.

The level-adjusted MIC signals are passed through the MIC line selector (IC4101), and amplified by the AF AMP (IC4205), then applied to the modulation circuits.

The signals from the external equipment connected to the accessory socket [ACC1] on the rear panel, are directly applied to the AF AMP (IC4205) via the MIC line selector (IC4101).

The amplified MIC signals are applied to the modulation circuits.

### MODULATION CIRCUITS AND DSP (MAIN UNIT)


The MIC signals from the TX AF circuits are applied to the Balance-Unbalance converter (Balun; IC4201, 4204), and the converted MIC signals are applied to the A/D converter (IC4301) to be converted into the digital signal.

The converted digital signal is applied to the DSP (IC5001) and modulated and processed.

The modulated signal is converted into the analog signal by the D/A converter (IC4301), and passed through the balun (IC4401) to be converted into the 3rd TX IF signal.

The converted 3rd TX IF signal is applied to the 3rd TX IF circuits.

### • TX AF AND MODULATION CIRCUITS

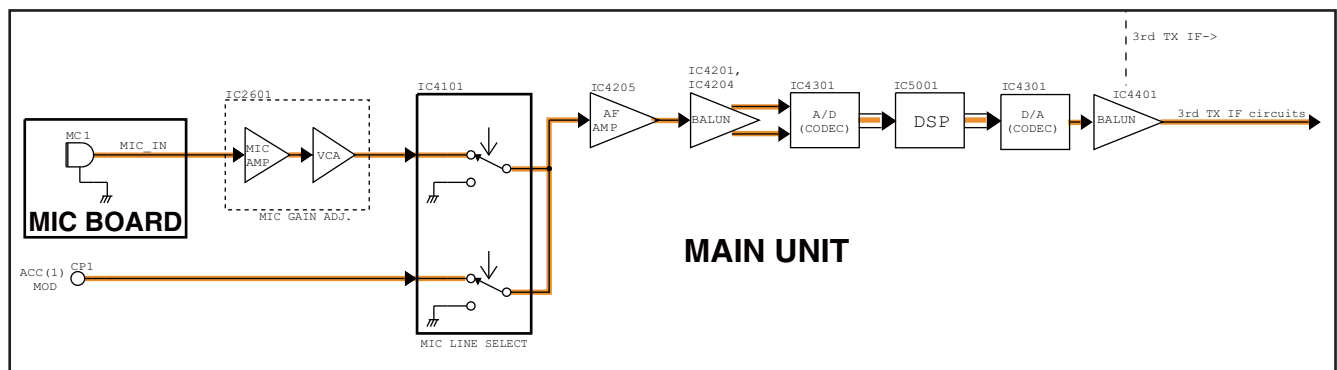




### 3RD TX IF AND 2ND TX IF CIRCUITS (MAIN UNIT)

The 3rd TX IF signal from the modulation circuits is applied to the 3rd TX mixer (IC3402) via the LPF (IC3401) to be converted into the 2nd TX IF signal, by being mixed with the 3rd TX LO signal from the PLL UNIT. The converted 2nd TX IF signal is amplified by the IF AMP (Q3501), passed through the one of 2nd TX filters (FI3501; for FM, AM mode or FI3502; for SSB, CW, RTTY, PSK mode) via the filter switches (IC3501 and IC3502).

The filtered 2nd TX IF signal is amplified by the 2nd TX IF AMP (Q3504), and applied to the 2nd TX mixer (D3703) via the attenuator to be converted into the 1st TX IF signal, by being mixed with the 2nd TX LO signal from the PLL UNIT.

The converted 1st TX IF signal is applied to the 1st TX IF circuits on the RF UNIT via the attenuator and IF switch (D3702).

#### • 3RD AND 2ND TX IF CIRCUITS

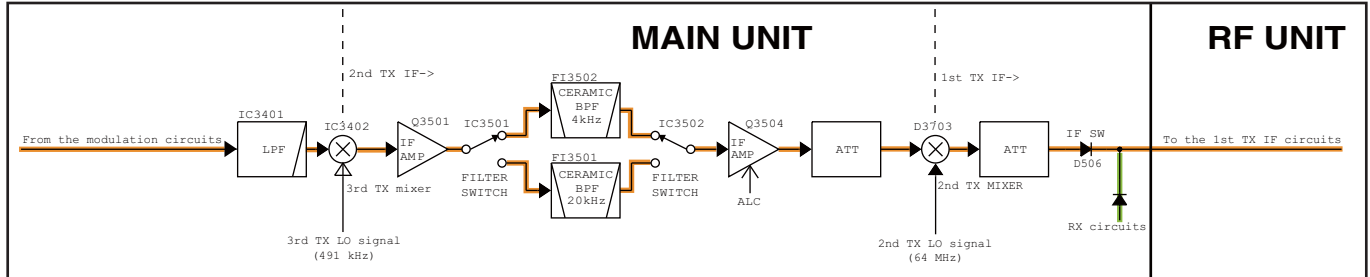

### 1ST TX IF CIRCUITS (RF UNIT AND MCF-W BOARD)

The 1st TX IF signal from the 2nd TX IF circuits is passed through the 1st TX IF filter (MCF-W BOARD; FI7001) to remove unwanted signals in wide bandwidth. The filtered 1st TX IF signal is passed through the TX/RX switch (D1551), amplified by the IF AMP (Q1551), and applied to the 1st TX mixer (D1451) via the LPF to be converted into the TX signal (TX frequency itself), by being mixed with the 1st TX LO signals from the PLL UNIT.

The converted TX signal is passed through the LPF, and amplified by the RF AMP (IC1401), then applied to the BPF circuits via the attenuator.


### BPF CIRCUITS


The TX signal from the 1st TX IF circuits is passed through an LPF or one of BPFs according to the transmitting frequency, to remove unwanted signals contained in the TX signal.

Refer to the table on page 4-1 for the filter which the TX signal is passed through.

The filtered TX signal is applied to the TX amplifier circuits via the HPF and TX line switch (D201).

#### • 1ST TX IF CIRCUITS

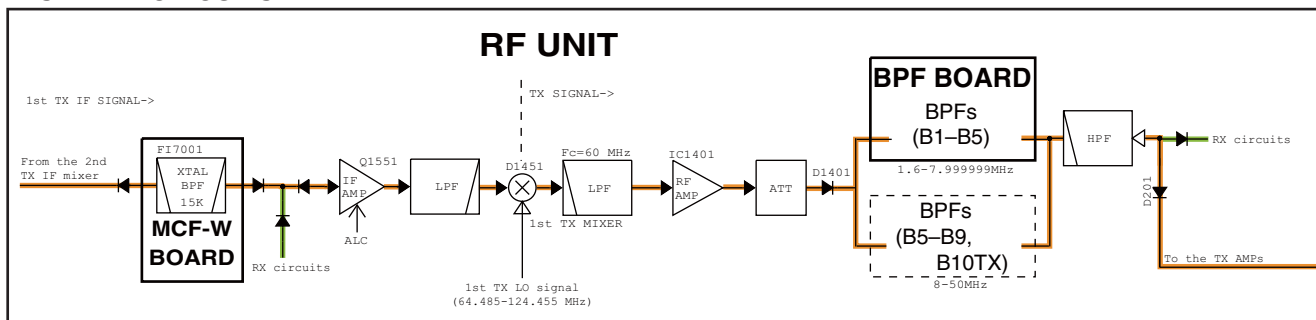

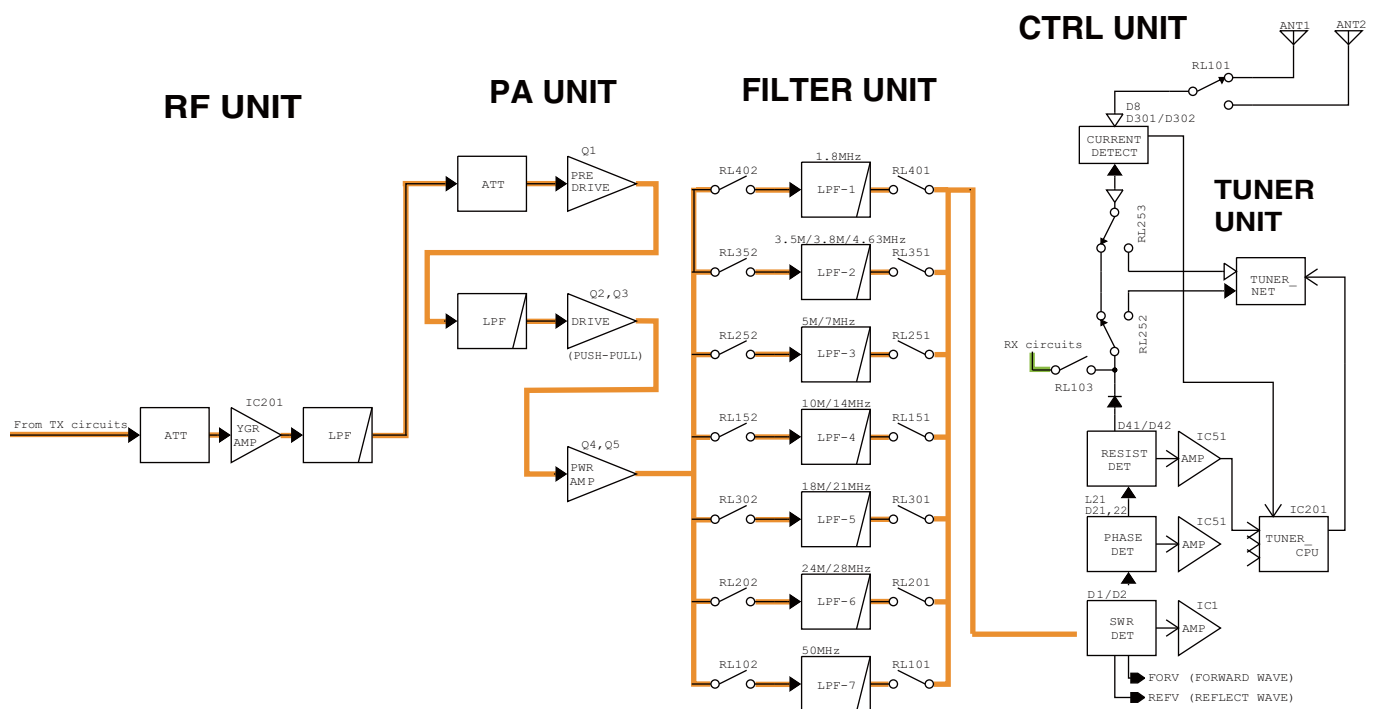

### 3-3 FREQUENCY SYNTHESIZER (PLL UNIT) REFERENCE FREQUENCY OSCILLATOR CIRCUIT

The crystal oscillator (X51) oscillates the 32 MHz reference frequency signal. This reference signal is applied to the Local Oscillator (LO) circuits via the buffer (Q51) and LPF (L53, C55–57).

#### 2ND TX LO CIRCUIT

The 32 MHz reference signal from the reference frequency oscillator circuit is doubled by the doubler (Q61) and passed through the double-tuned filter (L61, 62) to extract the 64 MHz of 2nd harmonic component. The extracted 64 MHz signal is applied to the RF UNIT via the buffer (Q71) and the BPF as the 2nd TX LO signal.

#### 3RD TX LO CIRCUIT

Using the 32 MHz reference clock signal from the reference frequency oscillator circuit, the 491 kHz 3rd TX LO signal is directly generated by 10-bit DDS (IC701) and D/A converter (R701–720). The generated 491 kHz signal is passed through the BPF and amplified by Q702, then applied to the RF UNIT.

The generated 491 kHz signal from Q702 is also used to generate the 2nd RX LO signal, by being applied to the 2nd RX LO circuit.

#### 2ND RX LO CIRCUIT

The 64 MHz reference signal from the double-tuned filter (L61, 62) and the 491 kHz signal from the 3rd TX LO circuit is mixed by the 2nd RX LO mixer (D821, L821, 822), to generate the 2nd RX LO signal.

The generated 2nd RX LO signal is filtered by the crystal filter (F1831) and amplified by Q831, then applied to the RF UNIT as the 2nd RX LO signal.

#### 1ST RX (Main readout)/TX LO CIRCUITS

The 32 MHz reference signal from the reference frequency oscillator circuit is amplified by Q152, and applied to the DDS (IC101) as the reference clock signal. The DDS (IC101) generates the PLL reference frequency signal, using applied reference clock signal.

The generated PLL reference frequency signal is filtered by the ceramic BPF (F1101) and LPF, amplified by Q151, then applied to the PLL IC (IC381) via LPF as the main loop reference frequency signal.

The reference frequency signal is used for phase comparison of oscillating signals from the VCO-A (Q201, 221, 251, 271). The resulting signal of phase comparison is converted into the lock voltage which controls the oscillation frequency of VCO-A (Q201, 221, 251, 271), by being passed through the passive loop filter.

The output signals of the VCO-A (Q201, 221, 251, 271) are buffer-amplified by Q301, filtered by the BPF, and amplified by IC320, then filtered by the LPF for harmonic removal.

The filtered VCO output signals are passed through the BPF and LO mute switch (Q361, D361, 362), then applied to the RF UNIT as the 1st RX LO (for Main readout)/TX LO signals.

A portion of VCO output signals from the LPF are fed back to the PLL (IC381) for the phase-locked loop.

#### VCOs (VCO-A)

Q201, Q221, Q251 and Q271 compose four oscillators, and each VCO generates the 1st RX/TX LO signals. These VCO employ high "Q" components as resonator (L202, 222, 252, 272) for high C/N characteristic and wide oscillation frequency range.

The table below shows the oscillation frequency range of VCO-A and the RX frequency range.

| Composed by | RX Frequency range | Oscillation frequency range (1st LO) |
|-------------|--------------------|--------------------------------------|
| Q271        | 0.03–7.999999 MHz  | 64.485–72.454999 MHz                 |
| Q251        | 8–19.999999 MHz    | 72.455–84.454999 MHz                 |
| Q221        | 20–44.999999 MHz   | 84.455–109.454999 MHz                |
| Q201        | 45–60 MHz          | 109.455–124.455 MHz                  |



## 1ST RX (Sub readout) LO CIRCUITS (SUB LOOP)

The 32 MHz reference signal from the reference frequency oscillator circuit is amplified to the C-MOS level by Q403, and applied to the DDS (IC403) as the reference clock signal.

The DDS (IC403) generates the DDS reference frequency signal by using the reference clock signal. The DDS reference frequency signal is converted its waveform by the D/A converter (R401–424), filtered by FI401 to remove unwanted components, and amplified to C-MOS level by IC402, then applied to the phase comparator of DDS (IC403).

The applied DDS reference frequency signal is used for the phase comparison of oscillating signal from the SUB LOOP VCO (Q451). The resulting signal of phase comparison is converted into the lock voltage which controls the oscillation frequency of SUB LOOP VCO (Q451), by being passed through the passive loop filter.

The output signal of SUB LOOP VCO (Q451) is amplified by the buffer (Q452), and applied to the PLL IC (IC681) as the PLL reference frequency signal.

A portion of sub loop VCO (Q451) is applied to the phase comparator of DDS (IC403) via the splitter (R459–461) and AMP (Q402), for the phase-locked loop.

## 1ST RX (Sub readout) LO CIRCUITS (MAIN LOOP)

The applied PLL reference frequency signal is used for the phase comparison of oscillating signal from the VCO-B (Q501, 521, 551, 571). The resulting signal of phase comparison is converted into the lock voltage which controls the oscillation frequency of VCO-B (Q501, 521, 551, 571), by being passed through the passive loop filter.

The output signals of the VCO-B (Q501, 521, 551, 571) are buffer-amplified by Q601, filtered by the BPF, and amplified by IC620, then filtered by the LPF for harmonic removal. The filtered VCO output signals are passed through the BPF and LO mute switch (Q661, D661, 662), then applied to the RF UNIT as the 1st RX LO (for Sub readout) signals.

A portion of VCO output signals from the LPF are fed back to the PLL (IC681) for the phase-locked loop.


## VCOs (VCO-B)

Q501, Q521, Q551 and Q571 compose four oscillators, and each VCO generates the 1st RX LO signals. These VCO employ high "Q" components as resonator (L502, 522, 552, 572) for high C/N characteristic and wide oscillation frequency range.

The table below shows the oscillation frequency range of VCO-B and the RX frequency range.


| Composed by | RX Frequency range | Oscillation frequency range (1st LO) |
|-------------|--------------------|--------------------------------------|
| Q571        | 0.03–7.999999 MHz  | 64.485–72.454999 MHz                 |
| Q551        | 8–19.999999 MHz    | 72.455–84.454999 MHz                 |
| Q521        | 20–44.999999 MHz   | 84.455–109.454999 MHz                |
| Q501        | 45–60 MHz          | 109.455–124.455 MHz                  |

## • FREQUENCY SYNTHESIZER CIRCUITS

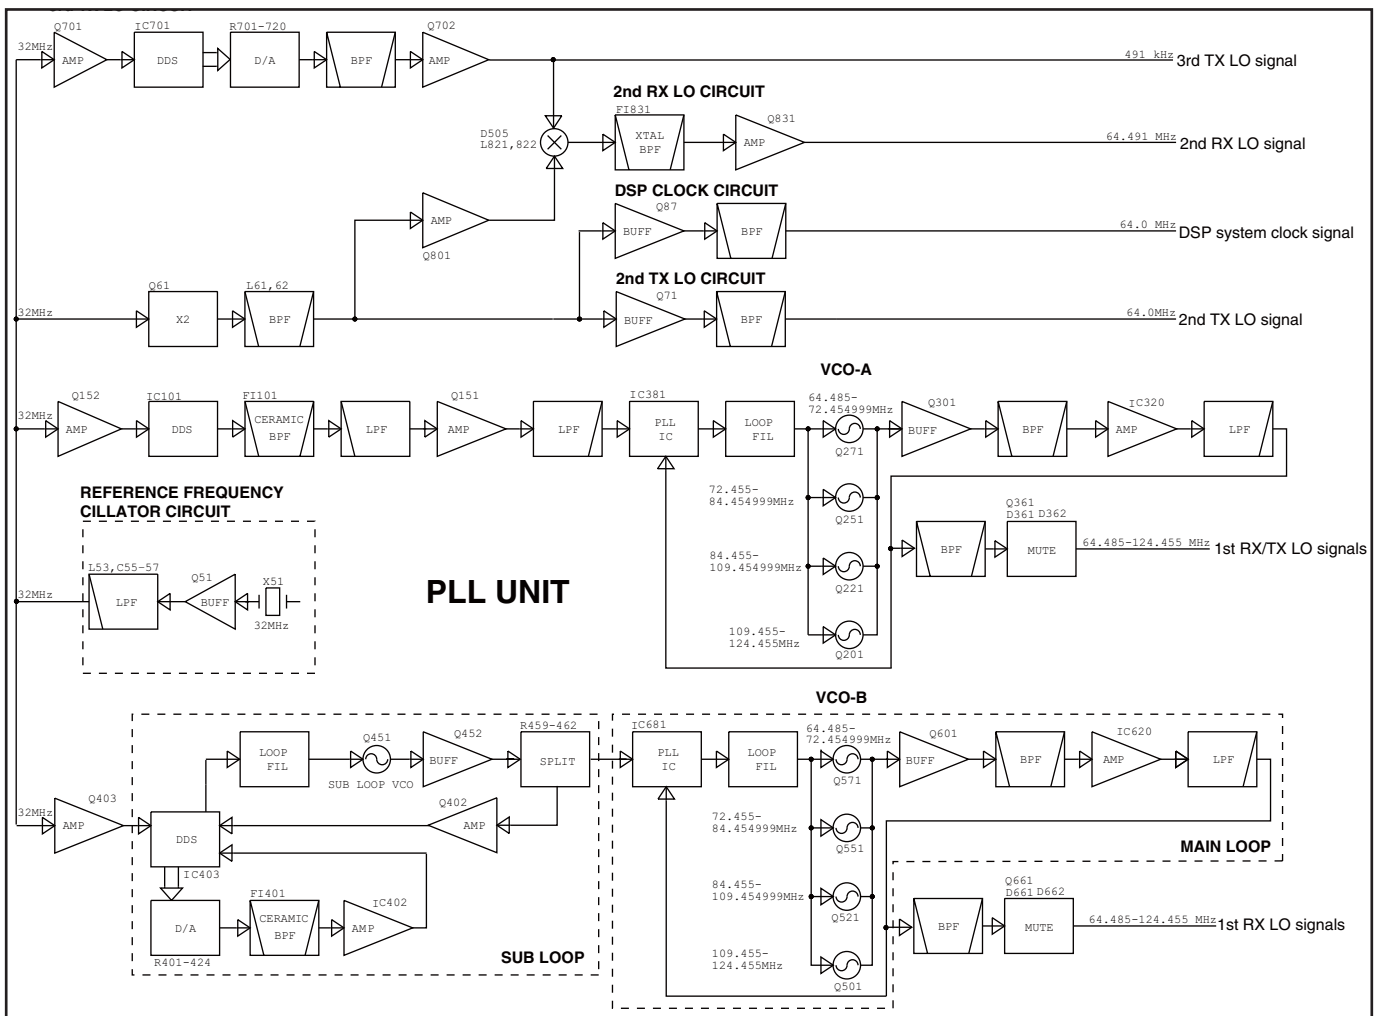

### 3-4 VOLTAGE BLOCK DIAGRAM

Voltage from the power supply is routed to the whole of the transceiver via regulators and switches.

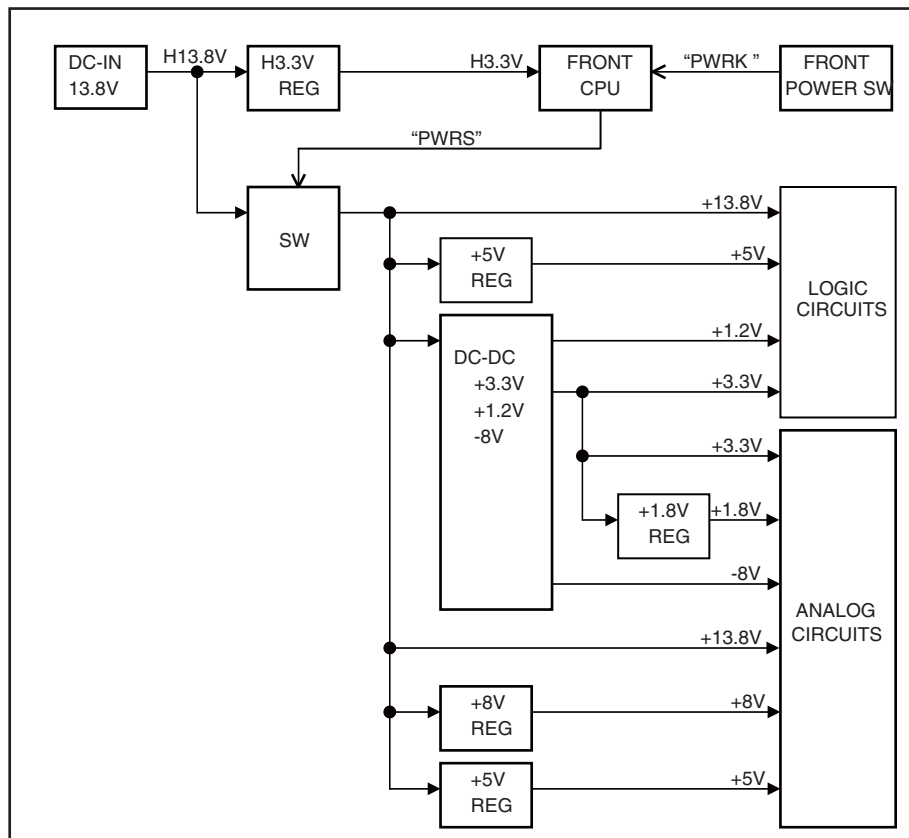

### 3-5 CPU PORT ALLOCATIONS

#### • MAIN CPU (LOGIC UNIT: IC604)

| Pin No. | Line Name    | Description                                                                 | I/O |
|---------|--------------|-----------------------------------------------------------------------------|-----|
| 5–20    | H8_A0–H8_A13 | DSP address bus.                                                            | O   |
| 21      | UNLKA        | PLL unlock detect signal input for VCO-A.<br>H=Unlock detected.             | I   |
| 22      | UNLKB        | PLL unlock detect signal input for VCO-B.<br>H=Unlock detected.             | I   |
| 23      | ECK          | EEPROM (HN58X2464T1) clock.                                                 | O   |
| 24      | EDT          | EEPROM (HN58X2464T1) data.                                                  | I/O |
| 26      | USCK         | USB HUB (USB2502) clock.                                                    | O   |
| 27      | USDA         | USB HUB (USB2502) data.                                                     | O   |
| 28      | UPWS         | USB HUB (USB2502) power control.<br>H=USB power ON.                         | O   |
| 29      | VBUS         | VBUS connection detect for USB HUB (USB2502).<br>H=USB connection detected. | I   |
| 30      | RTKI         | RTTY keying input.<br>H="Space" input.                                      | I   |
| 31      | TRVI         | Transverter input (from [ACC2]).<br>L=A transverter is connected.           | I   |
| 33      | SDAT         | Scope DDS/PLL/DSP data.                                                     | O   |
| 34      | SST2         | Scope PLL(ADF4630-8) strobe.                                                | O   |
| 35      | EXRL1        | External SEND relay output.<br>H=Relay ON                                   | O   |
| 36      | EXRL2        | External SEND relay output.<br>H=Relay ON                                   | O   |
| 37      | H8_CS6#      | Dual-port SRAM chip select signal.<br>L=Selected.                           | O   |
| 38      | H8_CS7#      | Expander chip select signal.<br>L=Selected.                                 | O   |
| 42      | PCK/CON0     | DDS clock.                                                                  | O   |
| 43      | PDAT/CON1    | DDS data.                                                                   | O   |
| 44      | CON2         | DDS mode control.                                                           | O   |
| 45      | PSL          | PLL strobe.                                                                 | O   |
| 46      | METV         | External meter voltage.<br>(PWM, 7800 Hz, 12 bit resolution)                | O   |
| 47      | PST          | PLL strobe output.                                                          | O   |
| 48      | ESTA         | External tuner "START" signal output.<br>L=Tuning start.                    | O   |
| 49      | EKEY         | External tuner "KEY" signal input.<br>L=While tuning/tune NG.               | I   |
| 51      | MCK          | Scope PLL clock.                                                            | O   |
| 52      | MDAT         | Scope PLL data.                                                             | O   |
| 53      | TCON         | External tuner connection detect.                                           | I   |
| 54      | CTXD         | CI-V (UART) output.                                                         | O   |
| 55      | CRXD/CBSY    | CI-V (UART) input/CI-V bus busy input.<br>L=Data "1" /Busy.                 | I   |
| 56      | DSPCK        | DSP clock.                                                                  | O   |
| 57      | DSPR         | DSP data.                                                                   | O   |
| 59      | SST1         | Chip select signal for scope DDS (AD9834).<br>L=Selected.                   | O   |
| 60      | SPS0         | Scope DDS (AD9834) frequency register shift signal.                         | O   |
| 61      | SCK          | Scope DDS/PLL/DSP clock.                                                    | O   |
| 63–80   | H8_D0–H8_D15 | DSP data bus.                                                               | I/O |
| 81      | RTD          | DSP RTTY/BPSK/QPSK (H) decode data.                                         | I   |
| 82      | TND          | QPSK (L) decode data.                                                       | I   |

| Pin No. | Line Name | Description                                                              | I/O |
|---------|-----------|--------------------------------------------------------------------------|-----|
| 83      | NSQ       | Input noise pulse.                                                       | I   |
| 84      | H8_WAIT#  | Bus control "Wait" signal.                                               | I   |
| 85      | TRAS      | SEND signal.                                                             | O   |
| 87      | H8_LWR#   | (Bus control) "L" write signal.<br>L=While writing.                      | O   |
| 88      | H8_HWR#   | (Bus control) "H" write signal.<br>L=While writing.                      | O   |
| 89      | H8_RD#    | (Bus control) Read signal.<br>L=While reading.                           | O   |
| 90      | H8_AS#    | (Bus control) Address strobe.                                            | O   |
| 94      | SENI      | PTT/ACC SEND signal.<br>H=While transmitting.                            | I   |
| 104     | CTFL      | CW TX status.                                                            | I   |
| 105     | RXS       | RX circuits power ON.<br>L=While receiving.                              | O   |
| 106     | TXS       | TX circuits power ON.<br>L=While transmitting.                           | O   |
| 107     | SQS       | Squelch signal For [ACC1].<br>H=While the squelch is open.               | O   |
| 108     | USQLS     | For USB audio squelch (for RX AF mute).<br>L=While the squelch is open.  | O   |
| 109     | SQLS      | Squelch signal (for RX AF mute).<br>L=While the squelch is open.         | O   |
| 113     | FORL      | Forward wave detect voltage. (A/D)                                       | I   |
| 114     | REFL      | Reflected wave detect voltage. (A/D)                                     | I   |
| 115     | ALCL      | ALC meter voltage input. (A/D)                                           | I   |
| 116     | IDL       | Drive AMP current (ID) detect voltage. (A/D)                             | I   |
| 117     | VDL       | Drive AMP voltage (VD). (A/D)                                            | I   |
| 118     | THML      | Temperature detect voltage from the thermal sensor on the PA UNIT. (A/D) | I   |
| 119     | SKYS      | Straight key/electronic keyer input. (A/D)<br>L=Key down.                | I   |
| 120     | AVXL      | AF signals peak level detect. (A/D)                                      | I   |
| 121     | DX1       | TX/RX DSP data.                                                          | I   |
| 122     | SHSK0     | Hand shake signal for Scope DSP.<br>H=Data output enable.                | I   |
| 123     | SHSK1     | Firm-up command for Scope DSP.                                           | I   |
| 124     | DX1S      | Scope DSP data.                                                          | I   |
| 125     | UNLKS     | Scope PLL (ADF4630) unlock detect signal.<br>L=Unlock detected.          | I   |
| 126     | THRI      | Internal tuner through signal.<br>H=Tuner through.                       | I   |
| 133     | LTXD      | Data output (UART) for the communication with front CPU.                 | O   |
| 134     | LRXD      | Data input (UART) for the communication with front CPU.                  | I   |
| 135     | DSKY      | DSP CW/RTTY keying signal.<br>L=Key down/space.                          | O   |
| 137     | PWRS      | Transceiver power ON/OFF control.<br>H=Power ON.                         | O   |
| 140     | IKEY      | Internal tuner "KEY" input (UART).<br>L=Tuner ON.                        | I   |
| 142     | ISTA      | Internal tuner "START" signal (UART).                                    | O   |



• FRONT CPU (LOGIC UNIT: IC101)

| Pin No. | Line Name | Description                                              | I/O |
|---------|-----------|----------------------------------------------------------|-----|
| 1       | CNTV      | TFT contrast control. (D/A) (1–2.3 V)                    | O   |
| 2       | PWRD      | POWER LED control. (0 V=Light OFF, 3.3 V=Light ON.)      | O   |
| 3       | LDAT      | Expander (BU2099) data.                                  | O   |
| 4       | LST       | Expander (BU2099) strobe.                                | O   |
| 5       | RTCK      | Expander (BU2099) clock.                                 | O   |
| 8       | RTCCE     | Clock IC (RX-4581) chip enable.                          | O   |
| 9       | MOND      | [MONITOR] LED control signal.                            | O   |
| 16      | RTCIRQ    | Clock IC (RX-4581) interlude control.                    | I   |
| 19      | RSB       | RIT dial (24x4 pulses) phase-B input.                    | I   |
| 20      | RSA       | RIT dial (24x4 pulses) phase-A input.                    | I   |
| 21      | MSB       | Main dial (250x4 pulses) phase-B input.                  | I   |
| 22      | MSA       | Main dial (250x4 pulses) phase-A input.                  | I   |
| 23      | TMD       | Timer LED control. H=Light ON.                           | O   |
| 24      | LEDV      | LED brightness control. (PWM, 600 Hz)                    | O   |
| 25      | BKLS      | LCD backlight ON/OFF. H=Backlight ON.                    | O   |
| 26      | CFLV      | CFL backlight brightness control. (PWM, 600 Hz)          | O   |
| 28      | PHNI      | Headphone connection detect. H=Connection detected.      | I   |
| 29      | DTXD      | Flash read data.                                         | O   |
| 30      | DRXD      | Flash write data.                                        | I   |
| 31      | SLOS      | Flash write clock. H=While writing.                      | O   |
| 32      | DBP1      | Flash write "BUSY."                                      | O   |
| 33      | LTXD      | Data output (UART) for the communication with main CPU.  | O   |
| 34      | LRXD      | Data input (UART) for the communication with main CPU.   | I   |
| 35      | DOTK      | Ele-key input. (Dot)                                     | I   |
| 36      | DSHK      | Ele-key input. (Dash)                                    | I   |
| 37      | SQSS      | Squelch signal to the [MICROPHONE JACK]. H=Squelch open. | O   |
| 38      | RTCDT     | Clock IC (RX-4581) data.                                 | I/O |
| 40      | TRAK      | [TRANSMIT] input. (Pull-up)                              | I   |
| 41      | F1K       | [F-1] input. (Pull-up)                                   | I   |
| 42      | F2K       | [F-2] input. (Pull-up)                                   | I   |
| 43      | F3K       | [F-3] input. (Pull-up)                                   | I   |
| 44      | LOE       | Expander (BU2099) output enable.                         | O   |
| 45      | F4K       | [F-4] input. (Pull-up)                                   | I   |
| 46      | F5K       | [F-5] input. (Pull-up)                                   | I   |
| 47      | F6K       | [F-6] input. (Pull-up)                                   | I   |
| 49      | SSBK      | [SSB] input. (Pull-up)                                   | I   |
| 50      | CWK       | [CW] input. (Pull-up)                                    | I   |
| 51      | RTYK      | [RTTY/PSK] input. (Pull-up)                              | I   |
| 52      | AMK       | [AM/FM] input. (Pull-up)                                 | I   |
| 53      | FILK      | [FILTER] input. (Pull-up)                                | I   |
| 55      | EXTK      | [EXIT/SET] input. (Pull-up)                              | I   |
| 56      | PLYK      | [PLAY key input. (Pull-up)                               | I   |
| 57      | RECK      | [REC] input. (Pull-up)                                   | I   |
| 58      | XFCK      | [XFC] input. (Pull-up)                                   | I   |
| 65      | MPRK      | [MP-R] input. (Pull-up)                                  | I   |
| 66      | MWK       | [MW] input. (Pull-up)                                    | I   |
| 67      | UPK       | [▲] input. (Pull-up)                                     | I   |

| Pin No. | Line Name  | Description                                                  | I/O |
|---------|------------|--------------------------------------------------------------|-----|
| 68      | DWK        | [▼] input. (Pull-up)                                         | I   |
| 69      | MPWK       | [MP-W] input. (Pull-up)                                      | I   |
| 70      | VMK        | [V/M] input. (Pull-up)                                       | I   |
| 71      | ATK        | [AUTO TUNE] input. (Pull-up)                                 | I   |
| 72      | TSK        | [TS] input. (Pull-up)                                        | I   |
| 73      | PWRK       | [POWER] input. (Pull-up)                                     | I   |
| 76      | FPWRS      | Analog circuit control signal. H=Transceiver power ON.       | I/O |
| 83, 84  | PB2B, PB2A | Input ports for [PBT2] (outer control).                      | I   |
| 85, 86  | PB1B, PB1A | Input ports for [PBT1] (inner control).                      | I   |
| 87      | LG_RES     | Logic circuits reset signal. H=Reset.                        | O   |
| 88      | LG_PWR     | Logic circuits power control signal. H=Transceiver power ON. | O   |
| 89      | MUDL       | [MIC GAIN] input. (A/D)                                      | I   |
| 90      | AS4        | Voltage from the analog SW (CD4501). (A/D) (0–3.3 V)         | I   |
| 91      | AS3        | Voltage from the analog SW (CD4501). (A/D) (0–3.3 V)         | I   |
| 93      | AS1        | Voltage from the analog SW (CD4501). (A/D) (0–3.3 V)         | I   |
| 98      | ASL2       | Analog SW (CD4501) control signal.                           | O   |
| 99      | ASL1       | Analog SW (CD4501) control signal.                           | O   |
| 100     | ASL0       | Analog SW (CD4501) control signal.                           | O   |

## SECTION 4 ADJUSTMENT PROCEDURE

### 4-1 PREPARATION

#### ■ REQUIRED EQUIPMENTS

| EQUIPMENT                                  | GRADE AND RANGE                                                                                             | EQUIPMENT            | GRADE AND RANGE                                                                                     |
|--------------------------------------------|-------------------------------------------------------------------------------------------------------------|----------------------|-----------------------------------------------------------------------------------------------------|
| Short plug                                 | Modified 3.5 mm (1/8") monoral plug<br>(See the illust on the page 4-17)                                    | Audio generator (AG) | Frequency range : 300–3000 Hz<br>Output level : 1–500 mV                                            |
| RF voltmeter<br>(50 $\Omega$ terminated)   | Measuring range : 20–200 mV<br>Frequency range : 0.1–50 MHz                                                 | AC Millivoltmeter    | Measuring range : 10 mV to 10 V                                                                     |
| RF power meter<br>(50 $\Omega$ terminated) | Measuring range : 5–120 W<br>Frequency range : 0.1–50 MHz<br>SWR : Less than 1.2 : 1                        | Digital multimeter   | Measuring range : 0–10 V (Voltage)<br>1–30 A (Current)<br>Input impedance : More than 50 k $\Omega$ |
| Frequency counter                          | Frequency range : 0.1–100 MHz<br>Frequency accuracy : $\pm 1$ ppm or better<br>Input level : Less than 1 mW | External speaker     | Input impedance : 8 $\Omega$<br>Capacity : More than 2 W                                            |
| Standard signal generator (SSG)            | Frequency range : 0.1–100 MHz<br>Output level : 0.1 mV to 32 mV<br>(–127 to –17 dBm)                        | Spectrum Analyzer    | Frequency range : At least 90 MHz<br>Bandwidth : 100 kHz                                            |
|                                            |                                                                                                             | Dummy Loads          | Impedance : 50 $\Omega$ /120 W<br>and<br>100 $\Omega$ /120 W                                        |

#### ■ REMOVING COVERS



Some adjustments require removal the covers to expose PCB.

**CAUTION:** Turn the power OFF and disconnect the DC power cable from the transceiver before performing any work on the transceiver. Otherwise, there is danger of electric shock and/or equipment damage.

- Remove the two screws from the carrying handle and remove the handle from the transceiver.
- Remove the 6 screws from the top of the transceiver and the 4 screws from the sides, then lift up the top cover.
- Turn the transceiver upside-down.

**CAUTION: NEVER HOLD THE MAIN DIAL OR ANY OTHER KNOBS** when the transceiver is being turned upside down. This may damage the transceiver.



- Remove 6 screws from the bottom, then lift up the bottom cover.
- Remove the 11 screws, and disconnect the speaker cable, then remove the top shielding plate. <fig.1>
- Remove the 6 screws, then remove the bottom shielding plate. <fig.2>

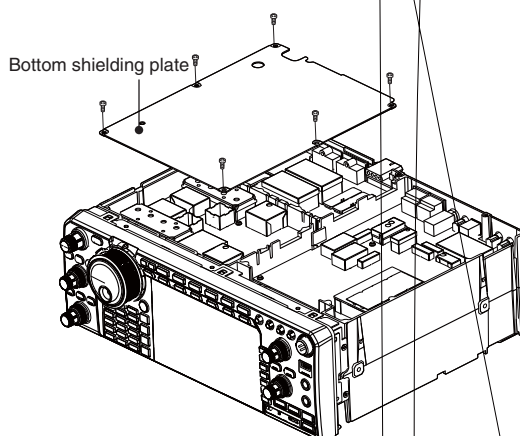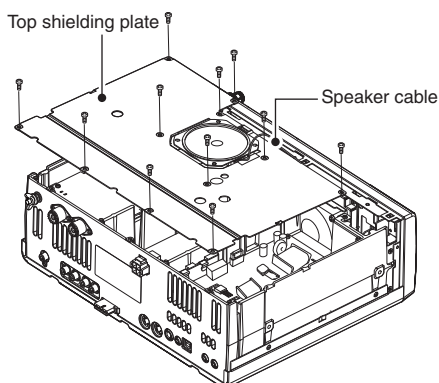

4-2 REFERENCE FREQUENCY SIGNAL LEVEL ADJUSTMENT

| ADJUSTMENT                       |   | ADJUSTMENT CONDITION | OPERATION                                                                            | ADJUSTMENT POINT         | VALUE         |
|----------------------------------|---|----------------------|--------------------------------------------------------------------------------------|--------------------------|---------------|
| REFERENCE FREQUENCY SIGNAL LEVEL | 1 | • Receiving          | 1) Connect a RF Voltmeter to J81.<br>2) Adjust the reference frequency signal level. | L61, L62<br>(repeatedly) | Maximum level |

<Viewing from the BOTTOM side>

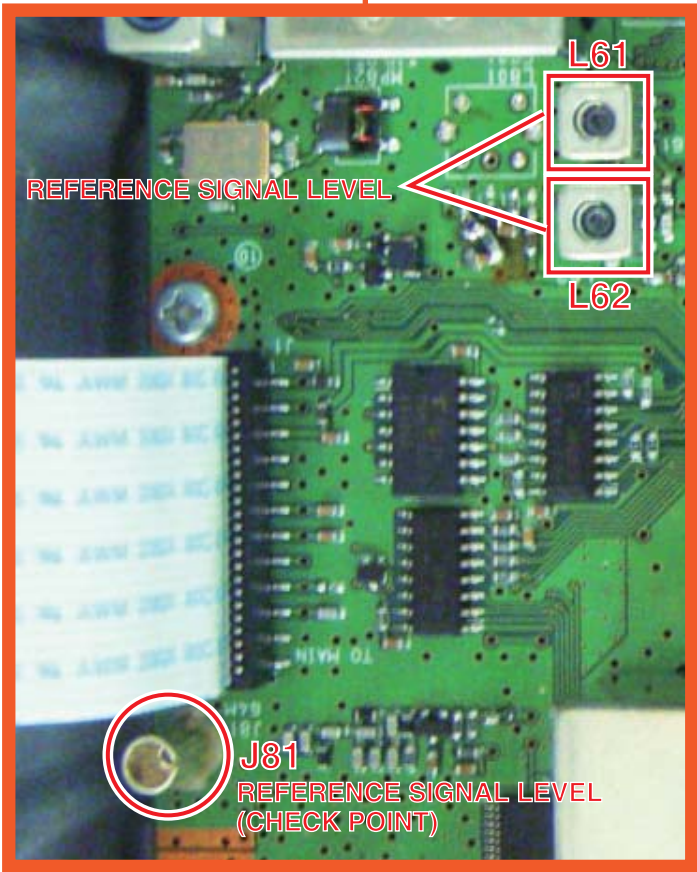
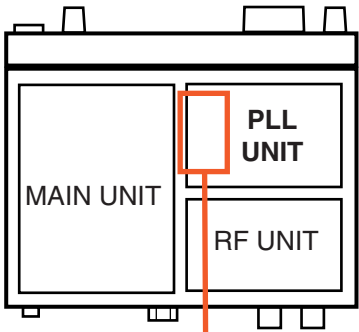




### 4-3 PLL UNIT ADJUSTMENT

| ADJUSTMENT                | ADJUSTMENT CONDITION                                         | OPERATION                                                                        | ADJUSTMENT POINT | VALUE                |
|---------------------------|--------------------------------------------------------------|----------------------------------------------------------------------------------|------------------|----------------------|
| <b>VCO-A LOCK VOLTAGE</b> | 1 • Frequency : 7.999999 MHz<br>• Mode : USB<br>• Receiving  | 1) Connect a Digital multimeter to <b>CP301</b> .<br>2) Adjust the lock voltage. | C278             | 4.3 V<br>(4.2–4.4 V) |
|                           | 2 • Frequency : 19.999999 MHz<br>• Mode : USB<br>• Receiving |                                                                                  | C258             |                      |
|                           | 3 • Frequency : 44.999999 MHz<br>• Mode : USB<br>• Receiving |                                                                                  | C228             |                      |
|                           | 4 • Frequency : 60.000000 MHz<br>• Mode : USB<br>• Receiving |                                                                                  | C208             |                      |



<Viewing from the BOTTOM side>

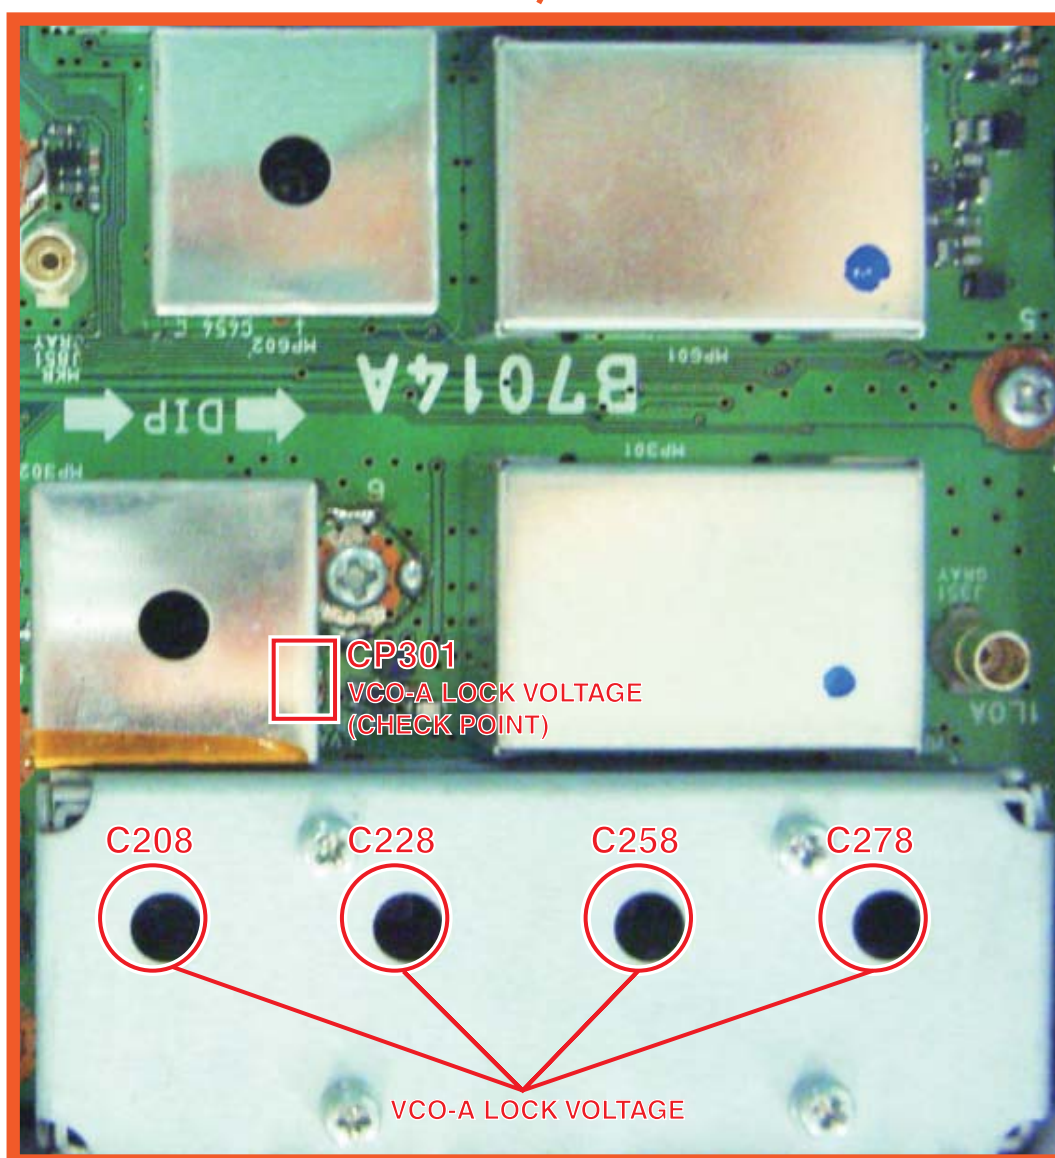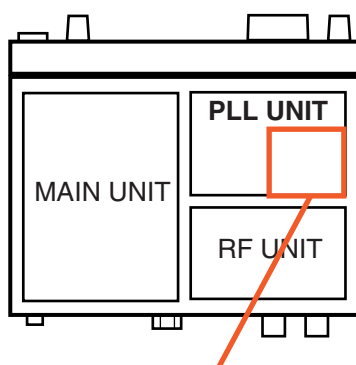

#### 4-3 PLL UNIT ADJUSTMENT (continued)

| ADJUSTMENT                | ADJUSTMENT CONDITION                                                                                                                                               | OPERATION                                                                        | ADJUSTMENT POINT | VALUE                |
|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------|------------------|----------------------|
| <b>LPL B LOCK VOLTAGE</b> | 1 <ul style="list-style-type: none"> <li>• Frequency : 0.030000 MHz (Sub band)</li> <li>• Mode : USB</li> <li>• [DUALWATCH] : "ON"</li> <li>• Receiving</li> </ul> | 1) Connect a Digital multimeter to <b>CP401</b> .<br>2) Adjust the lock voltage. | C454             | 2.0 V<br>(1.9–2.1 V) |
| <b>VCO-B LOCK VOLTAGE</b> | 1 <ul style="list-style-type: none"> <li>• Frequency : 7.999999 MHz (Sub band)</li> <li>• Mode : USB</li> <li>• Receiving</li> </ul>                               | 1) Connect a Digital multimeter to <b>CP601</b> .<br>2) Adjust the lock voltage. | C578             | 4.3 V<br>(4.2–4.4 V) |
|                           | 2 <ul style="list-style-type: none"> <li>• Frequency : 19.999999 MHz (Sub band)</li> <li>• Mode : USB</li> <li>• Receiving</li> </ul>                              |                                                                                  | C558             |                      |
|                           | 3 <ul style="list-style-type: none"> <li>• Frequency : 44.999999 MHz (Sub band)</li> <li>• Mode : USB</li> <li>• Receiving</li> </ul>                              |                                                                                  | C508             |                      |
|                           | 4 <ul style="list-style-type: none"> <li>• Frequency : 60.000000 MHz (Sub band)</li> <li>• Mode : USB</li> <li>• Receiving</li> </ul>                              |                                                                                  | C528             |                      |



<Viewing from the BOTTOM side>

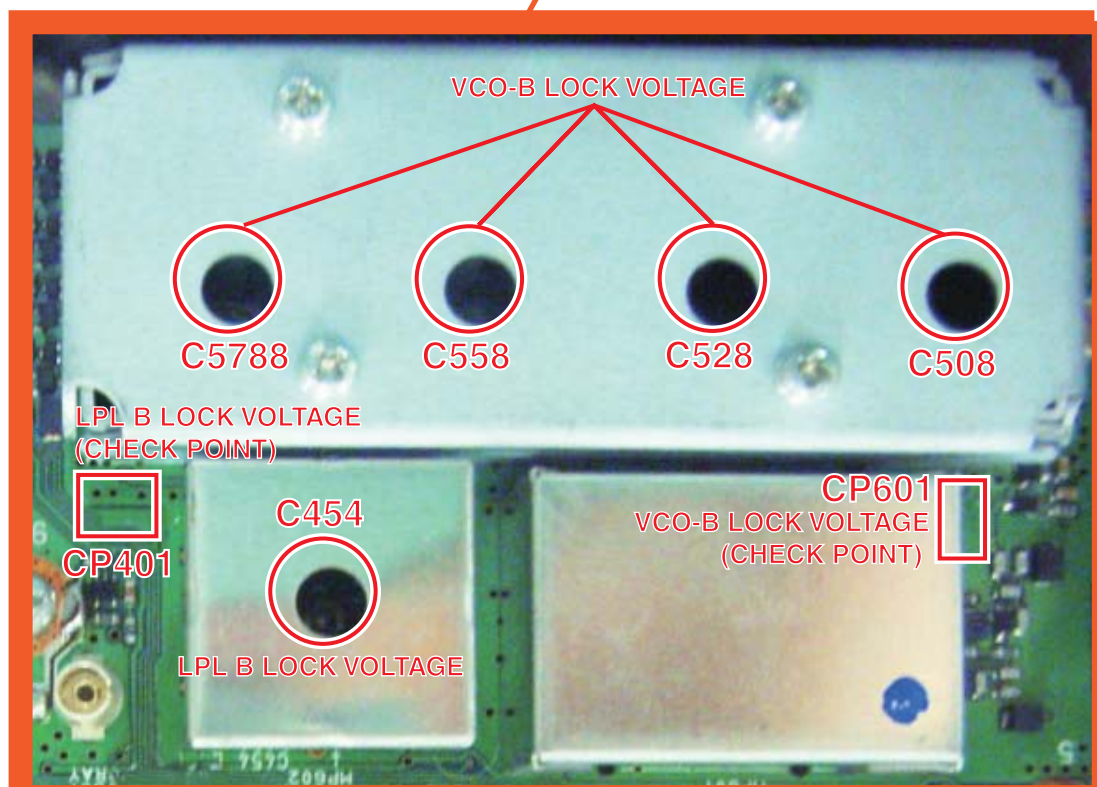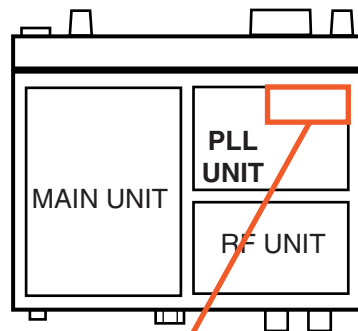

#### 4-3 PLL UNIT ADJUSTMENT (continued)

| ADJUSTMENT  | ADJUSTMENT CONDITION                                                                                                                | OPERATION                                                                         | ADJUSTMENT POINT | VALUE         |
|-------------|-------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------|------------------|---------------|
| R2 LO LEVEL | 1 <ul style="list-style-type: none"> <li>• Frequency : 14.100 MHz (Main band)</li> <li>• Mode : USB</li> <li>• Receiving</li> </ul> | 1) Connect a Spectrum Analyzer to <b>J831</b> .<br>2) Adjust the LO signal level. | L834             | Maximum level |

<Viewing from the BOTTOM side>

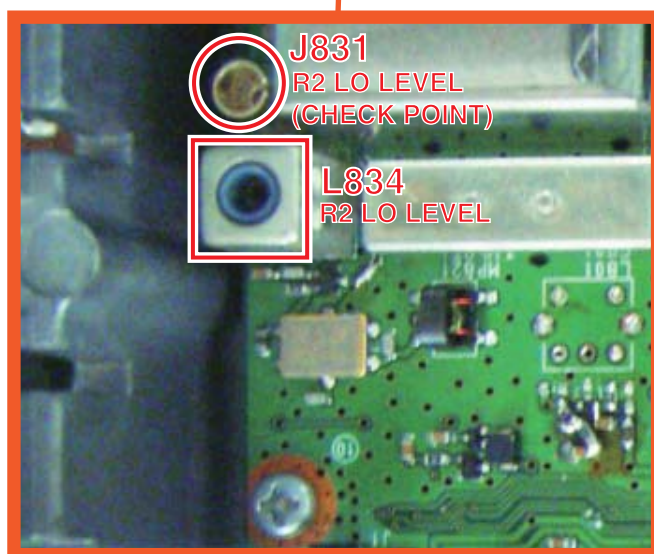
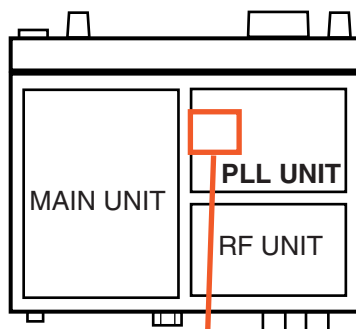




#### 4-4 PA UNIT ADJUSTMENT

| ADJUSTMENT                      | ADJUSTMENT CONDITION                       | OPERATION                                                                                                                               | ADJUSTMENT POINT                                                                                                                                                                   | VALUE                                                                  |
|---------------------------------|--------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------|
| <b>IDLING<br/>(Preparation)</b> | "IDLING" must be adjusted by cold-started. |                                                                                                                                         |                                                                                                                                                                                    |                                                                        |
|                                 | 1                                          | —                                                                                                                                       | 1) Set 5 variable resistors to the preset point.<br>2) Disconnect the power cable from the transceiver, and connect an DC Ammeter (30 A) between the power supply and transceiver. | R4,<br>R14,<br>R16,<br>R65,<br>R67<br><br>Max.<br>counter<br>clockwise |
| <b>IDLING<br/>(PRE-DRIVER)</b>  | 2                                          | <ul style="list-style-type: none"> <li>• Frequency : 14.100 MHz</li> <li>• Mode : CW</li> <li>• Push [TRANSMIT] to transmit.</li> </ul> | 1) Connect a Digital multimeter to <b>CP1</b> and adjust the voltage.<br>2) Measure the current, and note it as the initial value.                                                 | R4<br><br>0.5 V<br>(0.4–0.6 V)                                         |
| <b>IDLING<br/>(DRIVER)</b>      | 3                                          | <ul style="list-style-type: none"> <li>• Frequency : 14.100 MHz</li> <li>• Mode : CW</li> <li>• Push [TRANSMIT] to transmit.</li> </ul> | • Adjust the current.                                                                                                                                                              | R14<br><br>+1.0 A<br>more than<br>"Step 2"                             |
|                                 | 4                                          |                                                                                                                                         | • Adjust the current.                                                                                                                                                              | R16<br><br>+1.0 A<br>more than<br>"Step 3"                             |
| <b>IDLING<br/>(FINAL AMP)</b>   | 5                                          | <ul style="list-style-type: none"> <li>• Frequency : 14.100 MHz</li> <li>• Mode : CW</li> <li>• Push [TRANSMIT] to transmit.</li> </ul> | • Adjust the current.                                                                                                                                                              | R65<br><br>+1.0 A<br>more than<br>"Step 4"                             |
|                                 | 6                                          |                                                                                                                                         | • Adjust the current.                                                                                                                                                              | R67<br><br>+1.0 A<br>more than<br>"Step 5"                             |
|                                 | 7                                          | Apply slight vibration to the PA UNIT, and verify that the current is stable against the vibration.                                     |                                                                                                                                                                                    |                                                                        |


<Viewing from the TOP side>

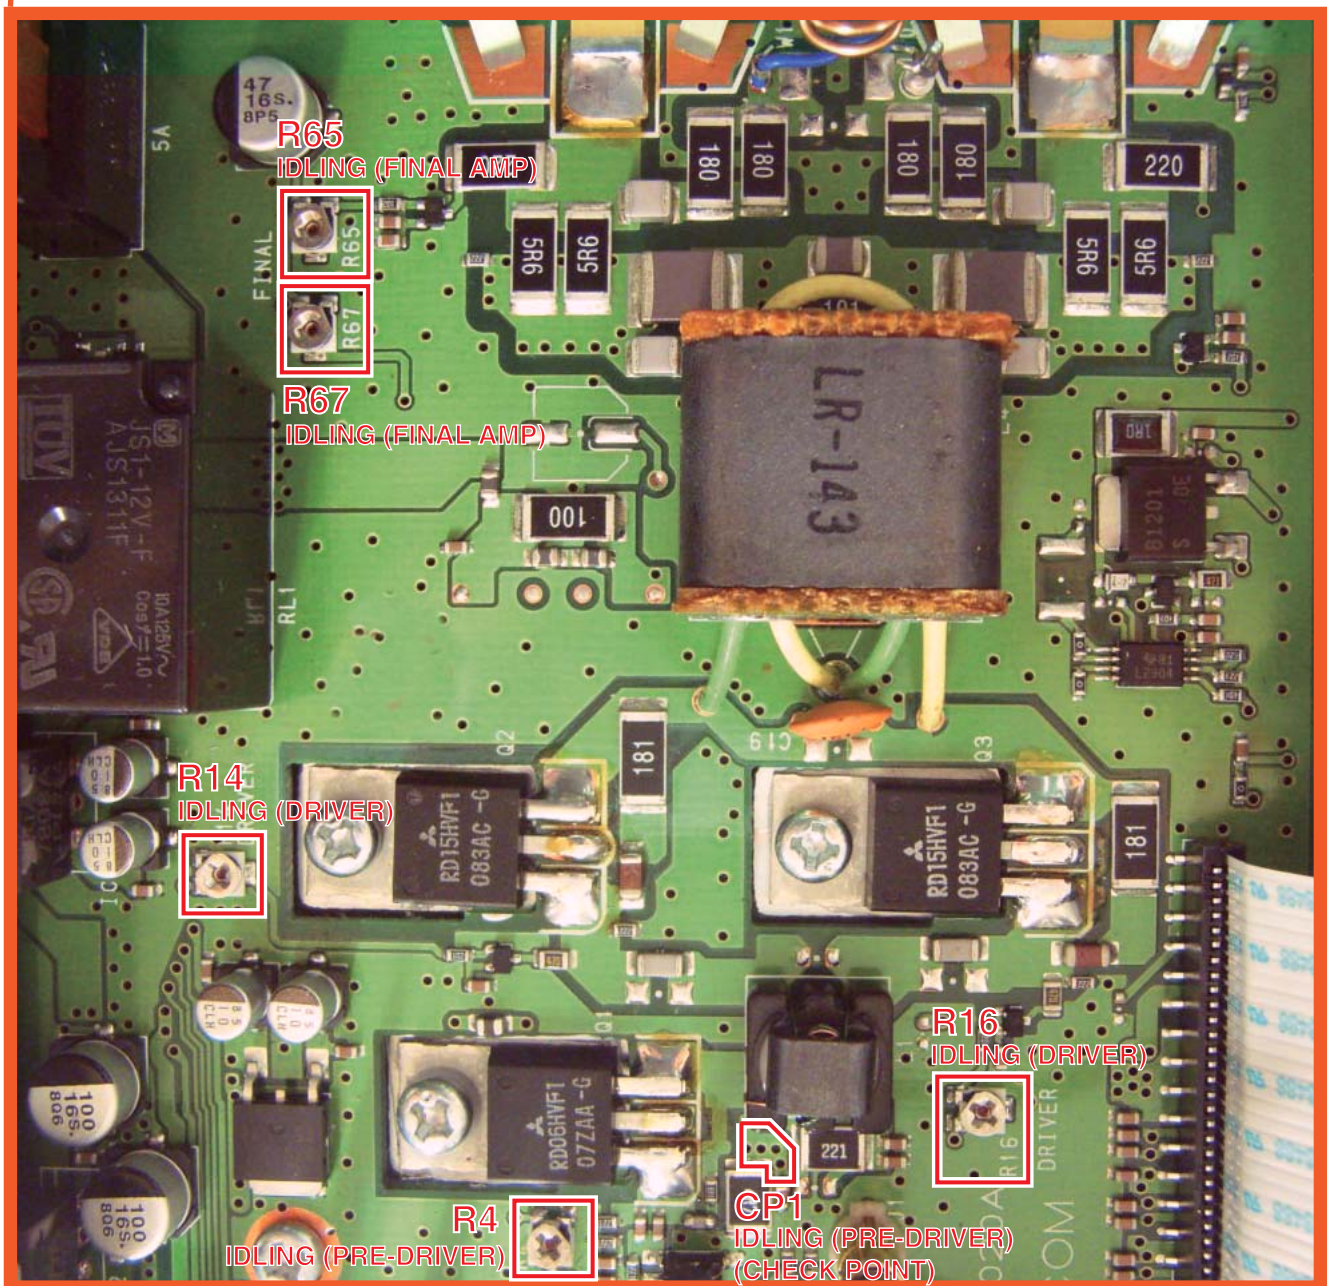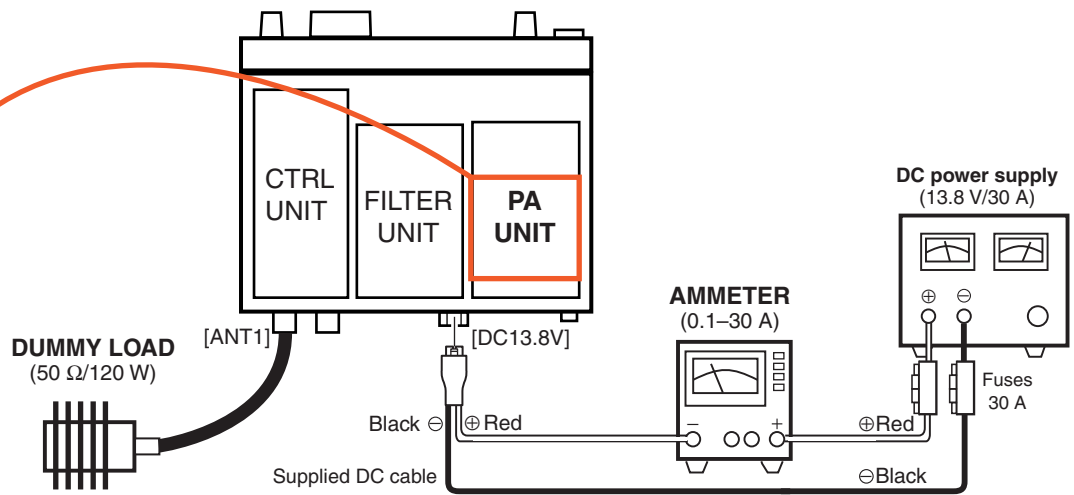

4-5 CTRL UNIT ADJUSTMENT

| ADJUSTMENT   | ADJUSTMENT CONDITION                                                                                                                                           | OPERATION                                                                                                                                                         | ADJUSTMENT POINT | VALUE           |
|--------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|-----------------|
| TUNER PRESET | <ul style="list-style-type: none"><li>• Frequency : 50.0 MHz</li><li>• Mode : RTTY</li><li>• [TUNER] : "THROUGH"</li><li>• Transmitting (Max. power)</li></ul> | <ol style="list-style-type: none"><li>1) Connect a 50 Ω dummy load to [ANT1].</li><li>2) Connect the voltmeter to "REF."</li><li>3) Adjust the voltage.</li></ol> | C5               | Minimum voltage |

<Viewing from the TOP side>


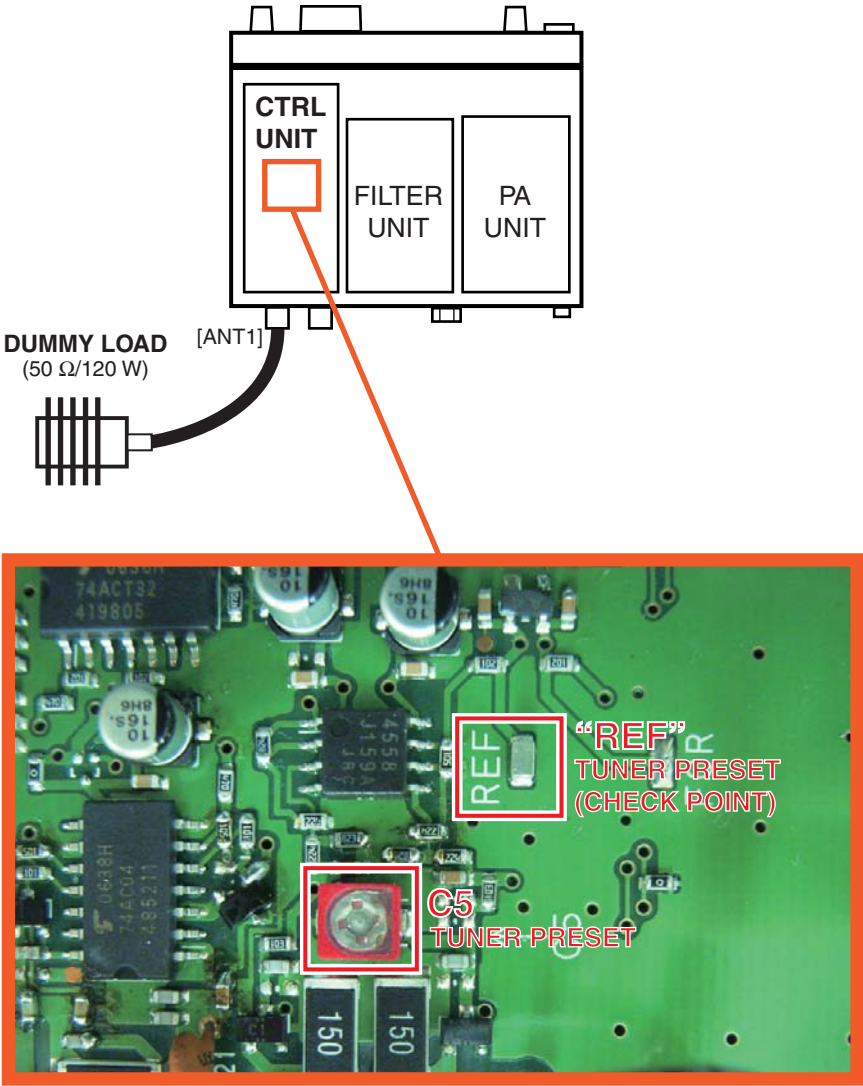




## 4-6 MAIN UNIT ADJUSTMENT

| ADJUSTMENT                       |   | ADJUSTMENT CONDITION                                                                       | OPERATION                                                                                                                                                                                                                         | ADJUSTMENT POINT | VALUE                |
|----------------------------------|---|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|----------------------|
| PRESET                           | 1 | • Receiving                                                                                | 1) Turn the transceiver OFF.<br>2) Reset the CPU. (While pushing and holding both [F-INP] and [MW], turn the power ON.)                                                                                                           | —                | —                    |
|                                  | 2 |                                                                                            | • Set the variable resistor to 3 o'clock position (viewing from REAR).                                                                                                                                                            | R1211            | 3 o'clock position   |
|                                  | 3 |                                                                                            | 1) Connect a Digital multimeter to the <b>CP1201</b> .<br>2) Adjust the voltage.                                                                                                                                                  | R1227            | 0.5 V<br>(0.3–0.7 V) |
| <b>TX PEAK<br/>-Preparation-</b> | 1 | • Frequency : 14.1 MHz<br>• Mode : USB<br>• Transmitting (Max. power)                      | 1) Connect an AC Millivoltmeter and Audio Generator to the [MIC] connector on the FRONT panel, and set it as;<br>Frequency : 1.5 kHz<br>Level : 1 mV<br>2) Connect an RF Power meter to [ANT1].                                   | —                | —                    |
| <b>-Adjustment-</b>              | 2 |                                                                                            | • Adjust the TX output power. (If ALC is activated during adjustment, reduce the MIC gain.)                                                                                                                                       | L3503            | Max. TX power        |
| <b>TX TOTAL GAIN</b>             | 1 | • Frequency : 14.1 MHz<br>• Mode : USB<br>• [MIC GAIN] : Center position<br>• Transmitting | 1) Connect an AC Millivoltmeter and Audio Generator to the [MIC] connector on the FRONT panel, and set it as;<br>Frequency : 1.5 kHz<br>Level : 1 mV<br>2) Connect an RF Power meter to [ANT1].<br>3) Adjust the TX output power. | R3520            | 50 W                 |
| <b>TX HIGH POWER (HF BAND)</b>   | 1 | • Frequency : 14.100 MHz<br>• Mode : RTTY<br>• Transmitting                                | 1) Connect an RF Power meter to [ANT1].<br>2) Adjust the TX output power.                                                                                                                                                         | R1267            | 103 W                |
| <b>(50 MHz BAND)</b>             | 2 | • Frequency : 50.100 MHz<br>• Mode : RTTY<br>• Transmitting                                | 1) Connect an RF Power meter to [ANT1].<br>2) Adjust the TX output power.                                                                                                                                                         | R1262            | 100 W                |

<Viewing from the BOTTOM side>

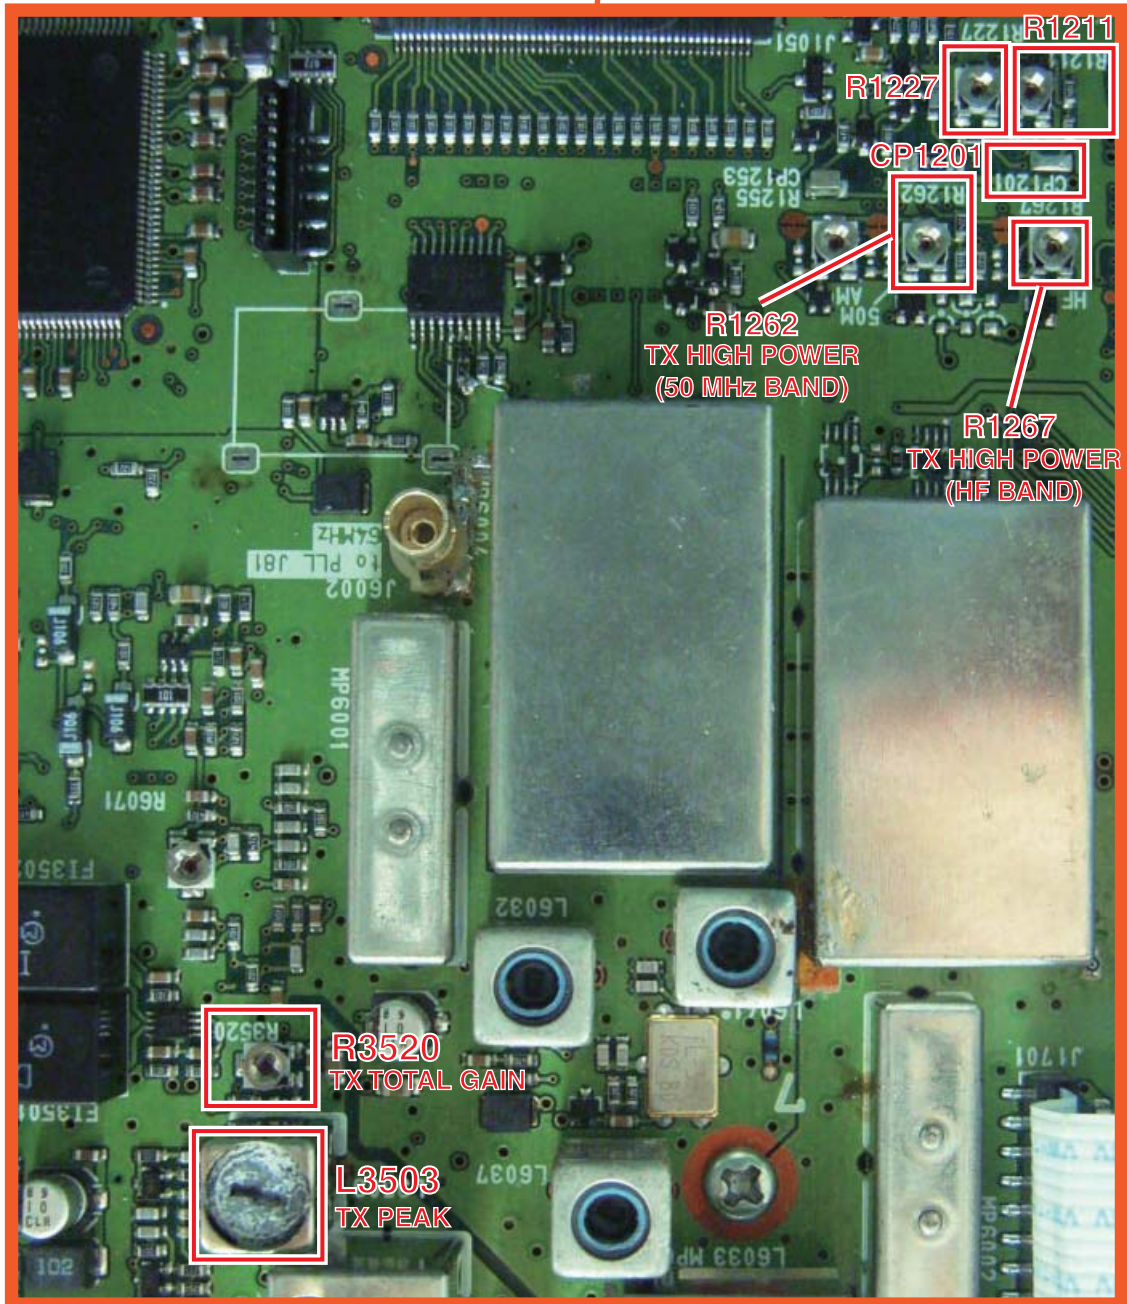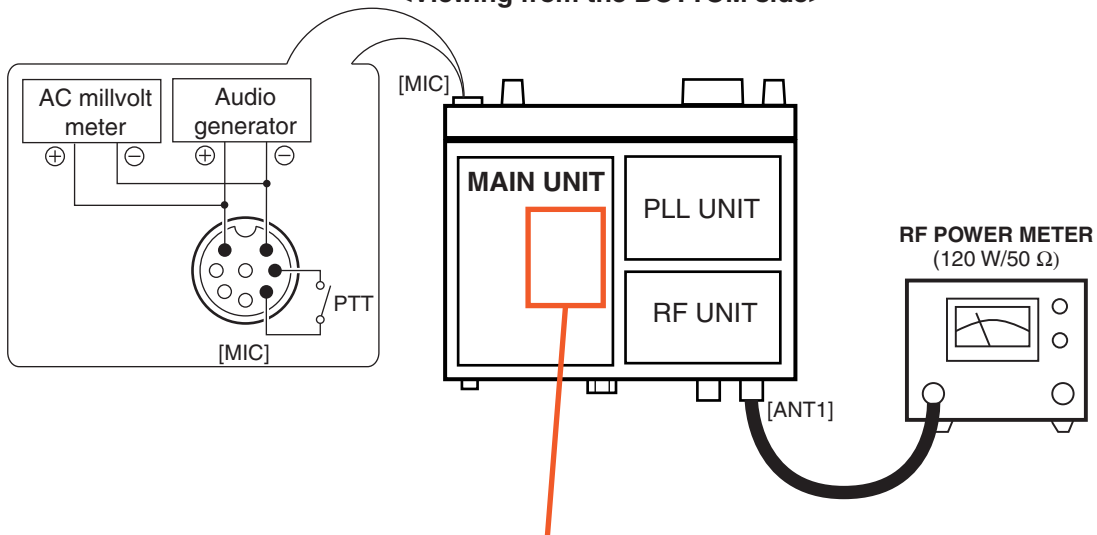


#### 4-6 MAIN UNIT ADJUSTMENT (continued)


| ADJUSTMENT                  |   | ADJUSTMENT CONDITION                                                                                                                               | OPERATION                                                                                                                                                                                                                                   | ADJUSTMENT POINT              | VALUE                   |
|-----------------------------|---|----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-------------------------|
| <b>AM CARRIER POWER</b>     | 1 | <ul style="list-style-type: none"> <li>• Frequency : 14.100 MHz</li> <li>• Mode : AM</li> <li>• MIC input : OFF</li> <li>• Transmitting</li> </ul> | 1) Connect an RF Power meter to [ANT1].<br>2) Adjust the TX output power.                                                                                                                                                                   | R1255                         | 30 W                    |
| <b>Id-APC -Preparation-</b> | 1 | <ul style="list-style-type: none"> <li>• Frequency : 54.000 MHz</li> <li>• Mode : RTTY</li> <li>• Transmitting</li> </ul>                          | 1) Connect <b>CP1253</b> to GND.<br>2) Turn <b>R1211</b> to max. clockwise, then turn it to 90° position.<br>3) Disconnect the power cable from the transceiver, and connect an DC Ammeter (30 A) between the power supply and transceiver. | —                             | —                       |
| <b>-Adjustment-</b>         | 2 |                                                                                                                                                    | 1) Connect an RF Power meter (or Dummy Load) to [ANT1].<br>2) Adjust the driving current.                                                                                                                                                   | R1211<br>(Clockwise rotation) | 23.5 A                  |
|                             | 3 | • Disconnect <b>CP1253</b> from the GND.                                                                                                           |                                                                                                                                                                                                                                             |                               |                         |
| <b>RX SENSITIVITY</b>       | 1 | <ul style="list-style-type: none"> <li>• Frequency : 14.150 MHz</li> <li>• Mode : USB</li> <li>• Receiving</li> </ul>                              | 1) Connect an SSG to [ANT1], and set it as.<br>Frequency : 14.1515 MHz<br>Level : 0 dBμ <sup>†</sup> (107 dBm)<br>Modulation : None<br>2) Connect an AC Millivoltmeter to <b>[EXP-SP]</b> .<br>3) Adjust the sensitivity.                   | L3602                         | Max. audio output level |
| <b>IMAGE RESPONSE</b>       | 1 | <ul style="list-style-type: none"> <li>• Frequency : 14.150 MHz</li> <li>• Mode : USB</li> <li>• Receiving</li> </ul>                              | 1) Connect an SSG to <b>J3701</b> , and set it as.<br>Frequency : 64.530 MHz<br>Level : +50 dBμ <sup>†</sup> (–57 dBm)<br>Modulation : None<br>2) Connect an AC Millivoltmeter to <b>[EXP-SP]</b> .<br>3) Adjust the image response.        | R3216, C3006<br>(Repeatedly)  | Min. audio output level |

<sup>†</sup>; The output level of the standard signal generator (SSG) is indicated as the SSG's terminated circuit.




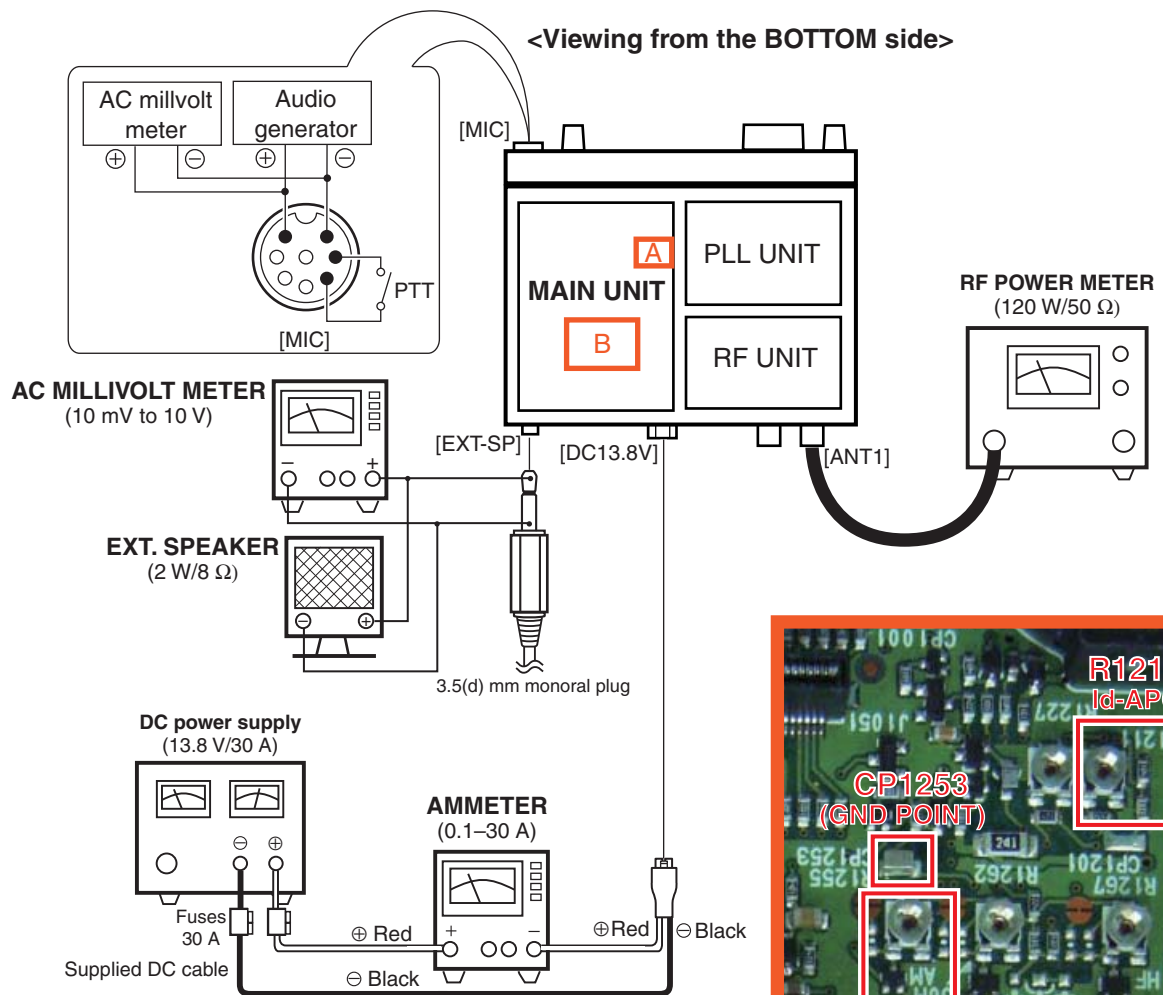

**A**

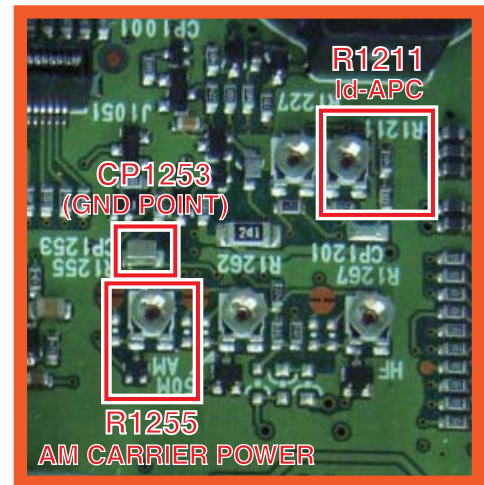

**B**

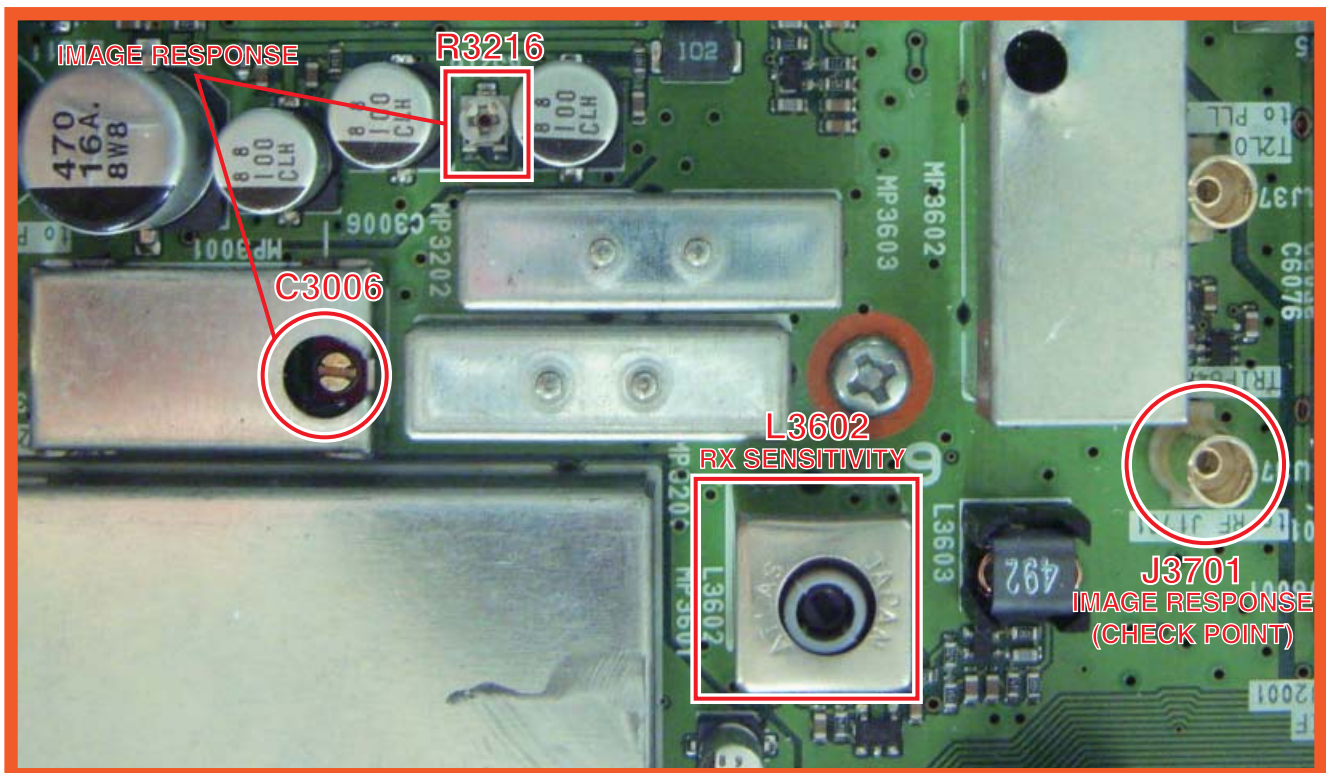


#### 4-7 MAIN UNIT ADJUSTMENT (SCOPE CIRCUIT)


| ADJUSTMENT    | ADJUSTMENT CONDITION | OPERATION                                                                                                                                                                                                    | ADJUSTMENT POINT                                                                       | VALUE                                |
|---------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------|--------------------------------------|
| SCOPE DISPLAY | 1                    | <ul style="list-style-type: none"> <li>Frequency : 14.200 MHz (Main band)</li> <li>Mode : CW</li> <li>[DUALWATCH] : "OFF"</li> <li>[P.AMP] : "OFF"</li> <li>[ATT] : "OFF"</li> <li>[SCOPE] : "ON"</li> </ul> | L6032→L6037→L6041→L6023→L6028→C6076 (in sequence) and L6023, L6028, C6076 (repeatedly) | Maximum waveform on the SCOPE screen |
|               | 2                    | <ul style="list-style-type: none"> <li>[SCOPE ATT] : "OFF"</li> <li>[SPAN] : "±25 kHz"</li> <li>Receiving</li> </ul>                                                                                         | C6076                                                                                  | Minimum waveform on the SCOPE screen |
|               | 3                    | <ul style="list-style-type: none"> <li>Connect an SSG to [ANT1] and set as;</li> <li>Frequency : 14.200 MHz</li> <li>Modulation : None</li> <li>Level : +54 dBμ<sup>†</sup> (-53 dBm)</li> </ul>             | L6023, L6028 (repeatedly)                                                              | Maximum waveform on the SCOPE screen |
| SCOPE GAIN    | 1                    | <ul style="list-style-type: none"> <li>Receiving</li> </ul>                                                                                                                                                  | R6071                                                                                  | (See fig.1)                          |
| SCOPE ATT     | 1                    | <ul style="list-style-type: none"> <li>[SCOPE ATT] : "30 dB"</li> <li>Receiving</li> </ul>                                                                                                                   | R6043                                                                                  | (See fig.2)                          |

<sup>†</sup>; The output level of the standard signal generator (SSG) is indicated as the SSG's terminated circuit.

<fig. 1>


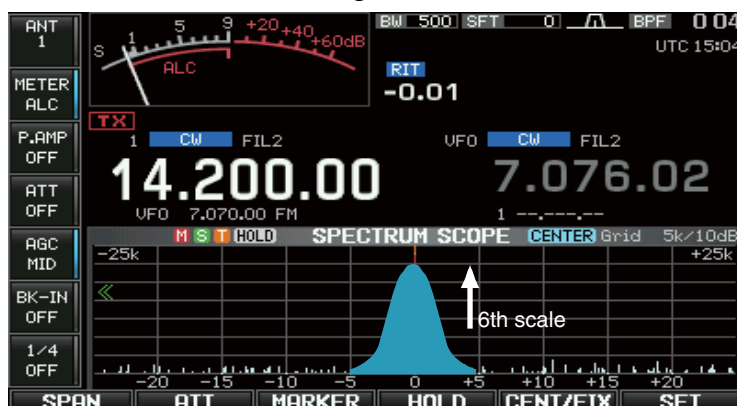


<fig. 2>



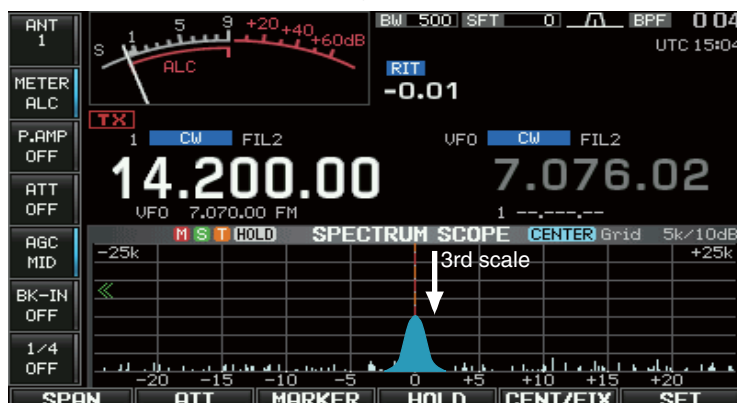




<Viewing from the BOTTOM side>

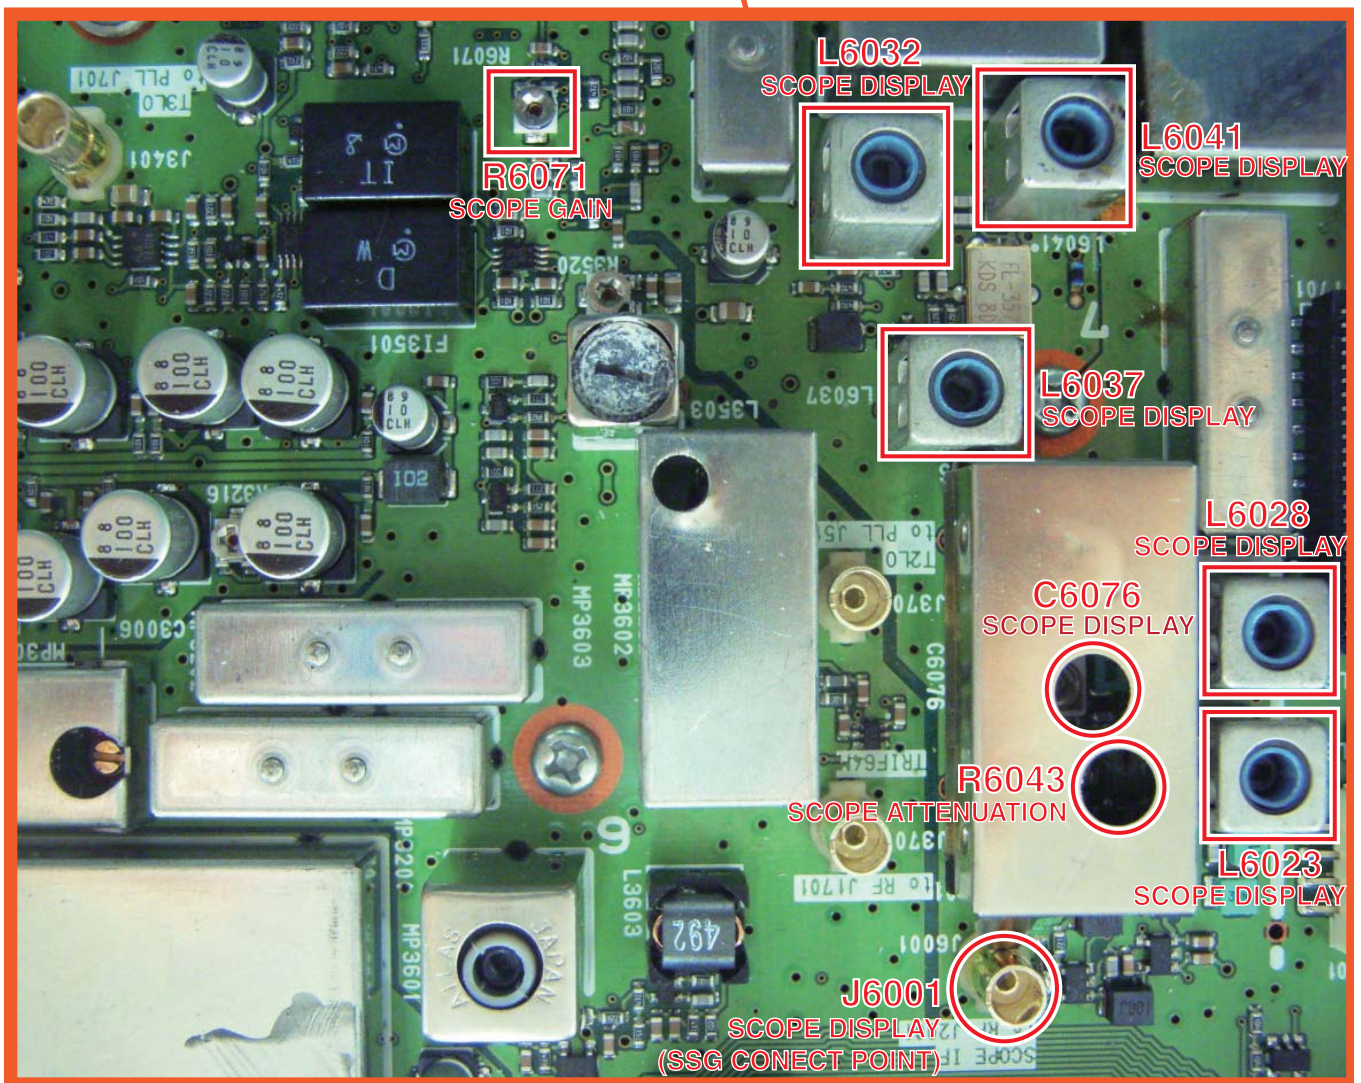
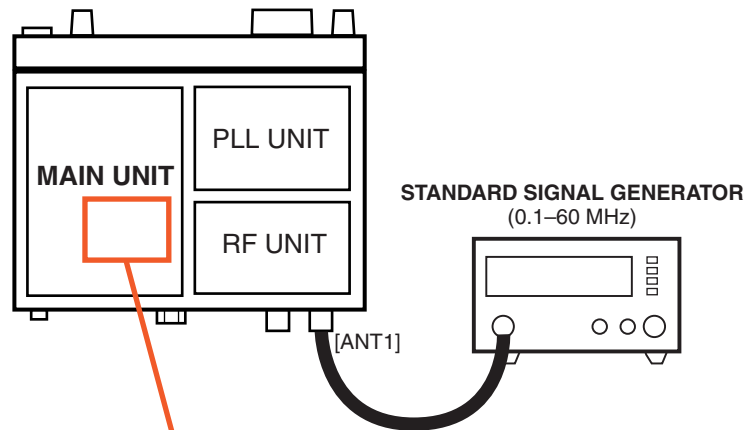


## 4-8 RF UNIT ADJUSTMENT
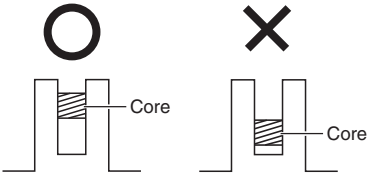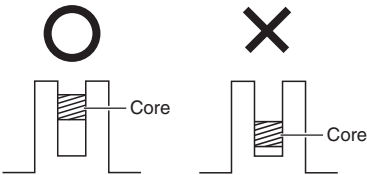
| ADJUSTMENT                        | ADJUSTMENT CONDITION                                                                                                                                                                                                                                                                                                                                      | OPERATION                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | ADJUSTMENT POINT                                         | VALUE                                  |
|-----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------|----------------------------------------|
| <b>PRESET</b>                     | <ul style="list-style-type: none"> <li>Frequency : 14.100000 MHz</li> <li>Mode : CW</li> <li>[DUALWATCH] : "OFF"</li> <li>[ATT] : "OFF"</li> <li>[RF/SQL] : Center position</li> <li>[RF POWER] : "MAX"</li> <li>Transmitting</li> </ul>                                                                                                                  | <ul style="list-style-type: none"> <li>Set 2 trimmer capacitors to the preset position as illustrated below.</li> </ul>  <p>Center line</p>                                                                                                                                                                                                                                                   | C1238, C1036                                             | (as shown)                             |
| <b>TX PEAK</b>                    | <ul style="list-style-type: none"> <li>Frequency : 14.100000 MHz</li> <li>Mode : USB</li> <li>[MIC GAIN] : Center position</li> <li>Transmitting (Max. power)</li> </ul>                                                                                                                                                                                  | <ol style="list-style-type: none"> <li>Connect a RF Voltmeter to <b>J201</b>.</li> <li>Adjust the output voltage.</li> </ol>                                                                                                                                                                                                                                                                                                                                                   | L1553                                                    | Maximum voltage                        |
| <b>RX SENSITIVITY (MAIN BAND)</b> | <ol style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>Frequency : 14.100000 MHz (Main band)</li> <li>Mode : USB</li> <li>[FIL] : 2.4 kHz</li> <li>[TWIN-PBT] : "Center" (Push [PBT-CLR] for 1 sec.)</li> <li>[P.AMP1] : "ON"</li> <li>Receiving</li> </ul> </li> </ol>                                                           | <ol style="list-style-type: none"> <li>Connect an SSG to [ANT1] and set as;<br/> Frequency : 14.101500 MHz<br/> Modulation : None<br/> Level : 0 dBμ<sup>†</sup> (−107 dBm)</li> <li>Connect an AC Millivoltmeter and a speaker to [EXT-SP].</li> <li>Adjust the receive sensitivity by tuning the core.</li> </ol> <p>L1211 has two peak points. Tune the core in the upper portion.</p>   | L1211, C1238<br>(L1211: Peak point in the upper portion) | Max. sensitivity (Minimum noise level) |
| <b>(SUB BAND)</b>                 | <ol style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>Frequency : 14.100000 MHz (Sub band)</li> <li>Mode : USB</li> <li>[DUALWATCH] : "ON"</li> <li>[FIL] : 2.4 kHz</li> <li>[TWIN-PBT] : "Center" (Push [PBT-CLR] for 1 sec.)</li> <li>[P.AMP1] : "ON"</li> <li>[BALANCE] : "SUB MAX"</li> <li>Receiving</li> </ul> </li> </ol> | <ol style="list-style-type: none"> <li>Connect an SSG to [ANT1] and set as;<br/> Frequency : 14.100000 MHz<br/> Modulation : None<br/> Level : 0 dBμ<sup>†</sup> (−107 dBm)</li> <li>Connect an AC Millivoltmeter and a speaker to [EXT-SP].</li> <li>Adjust the receive sensitivity by tuning the core.</li> </ol> <p>L1011 has two peak points. Tune the core in the upper portion.</p>  | L1011, C1036<br>(L1011: Peak point in the upper portion) | Max. sensitivity (Minimum noise level) |
| <b>MIXER BALANCE (MAIN BAND)</b>  | <ol style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>Frequency : 1.907500 MHz (Main and sub bands)</li> <li>[DUALWATCH] : "ON"</li> </ul> </li> </ol>                                                                                                                                                                           | <ol style="list-style-type: none"> <li>Connect a Spectrum Analyzer to J1651.</li> <li>Adjust the leaking LO signal level.</li> </ol>                                                                                                                                                                                                                                                                                                                                           | R1206, R1207                                             | Minimum leaking level                  |
| <b>(SUB BAND)</b>                 | <ol style="list-style-type: none"> <li> <ul style="list-style-type: none"> <li>[FIL] : 2.4 kHz</li> <li>[TWIN-PBT] : "Center" (Push [PBT-CLR] for 1 sec.)</li> <li>[P.AMP1] : "ON"</li> <li>Receiving</li> </ul> </li> </ol>                                                                                                                              | <ul style="list-style-type: none"> <li>Adjust the leaking LO signal level.</li> </ul>                                                                                                                                                                                                                                                                                                                                                                                          | R1006, R1007                                             |                                        |

<sup>†</sup>; The output level of the standard signal generator (SSG) is indicated as the SSG's terminated circuit.



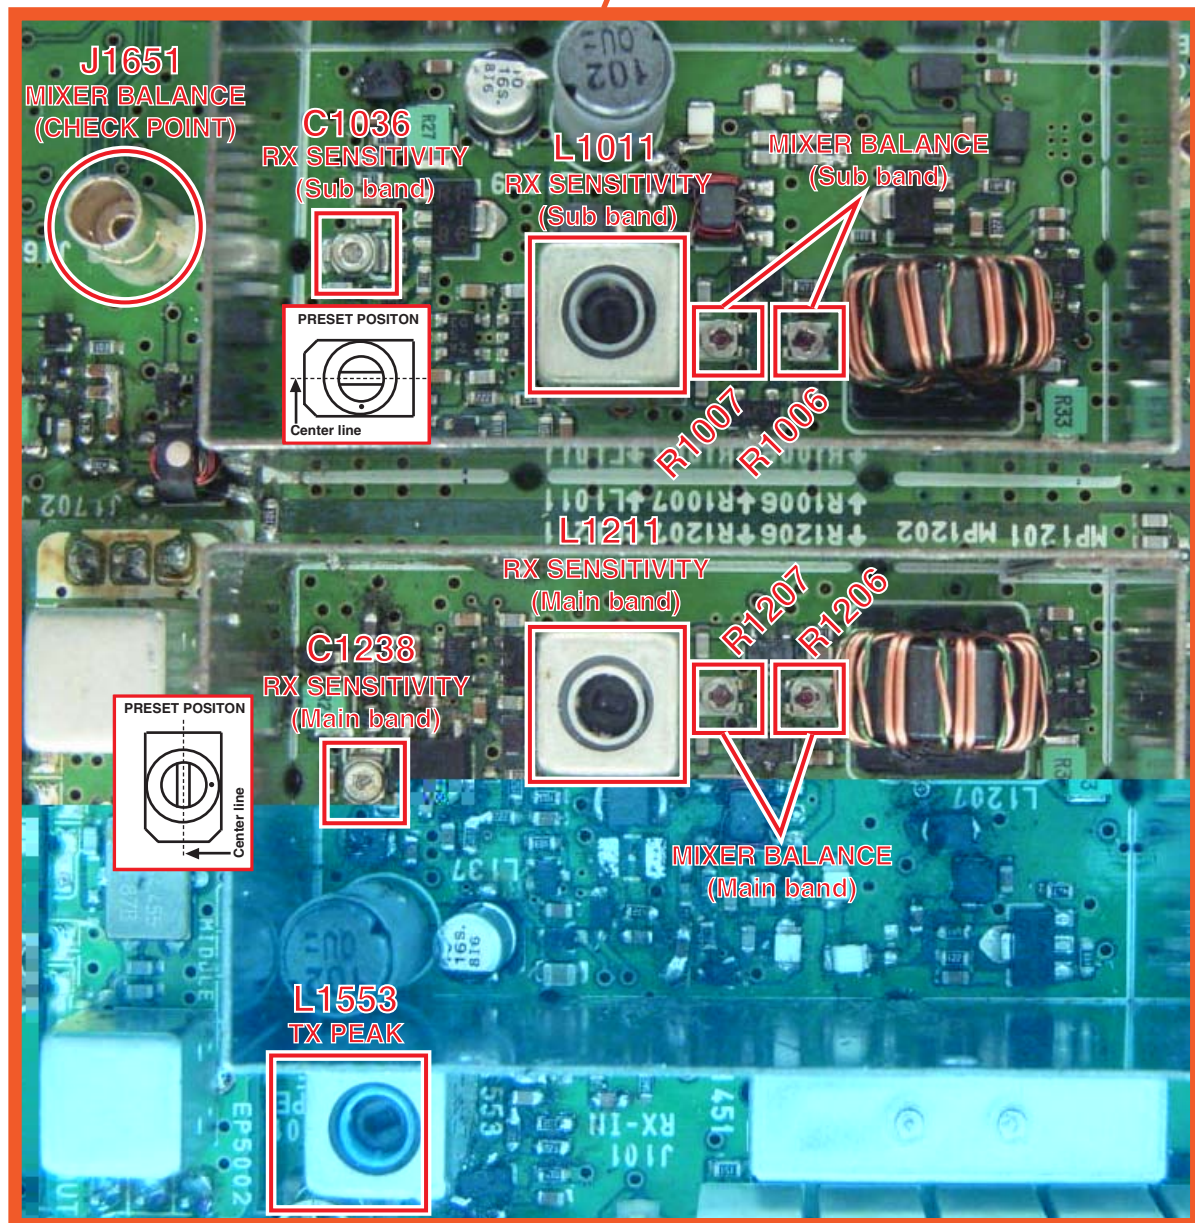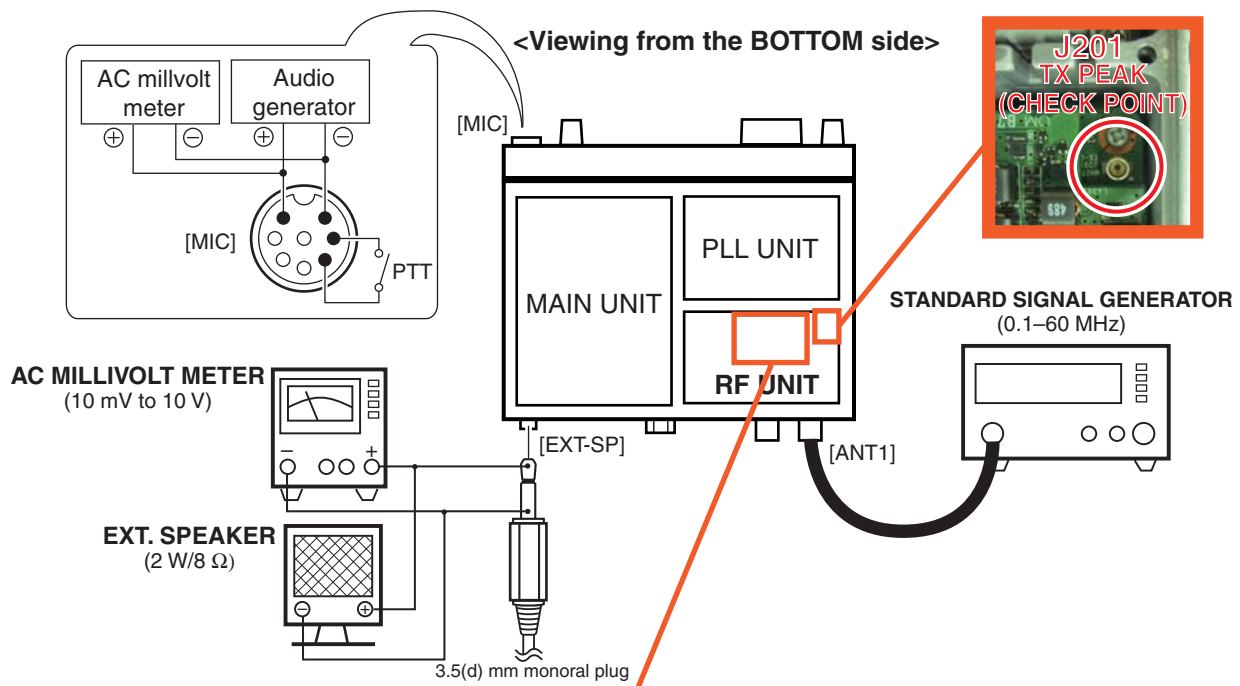


## 4-9 SOFTWARE ADJUSTMENT

### ■ ENTERING ADJUSTMENT MODE

- 1) Turn the transceiver OFF.
- 2) Connect a short plug (See the illust below) to [REMOTE].
- 3) While pushing and holding both [SSB] and [CW], turn the transceiver power ON.  
(“ADJUST MODE” appears on the display as below.)

#### <FRONT VIEW>

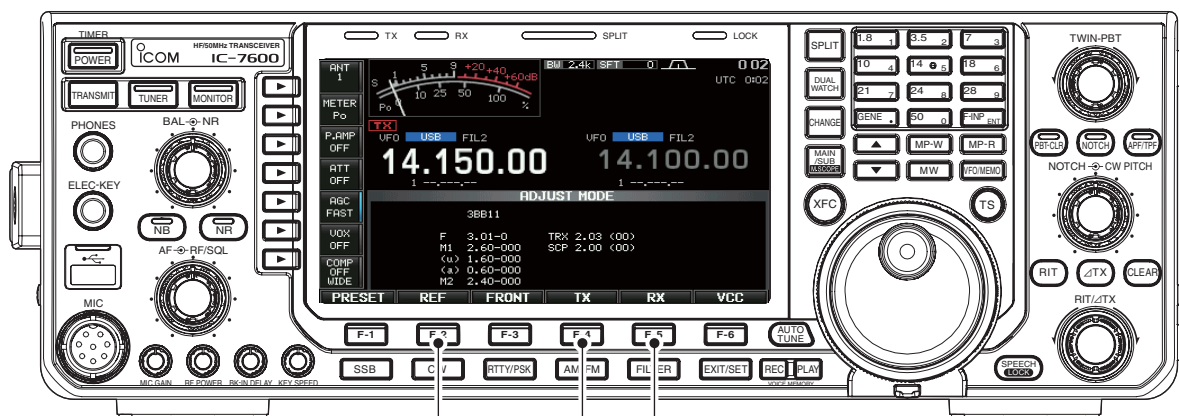


REFERENCE  
FREQUENCY  
ADJUSTMENT  
(page 4-22)

RECEIVE  
ADJUSTMENT (page 4-20)


TRANSMIT  
ADJUSTMENT (page 4-18)

**CAUTION:** When a TX adjustment item is selected, the transceiver transmits automatically. Disconnect the SSG from the antenna connector if connected, and connect a dummy load (50  $\Omega$ /120 W).

#### <REAR VIEW>

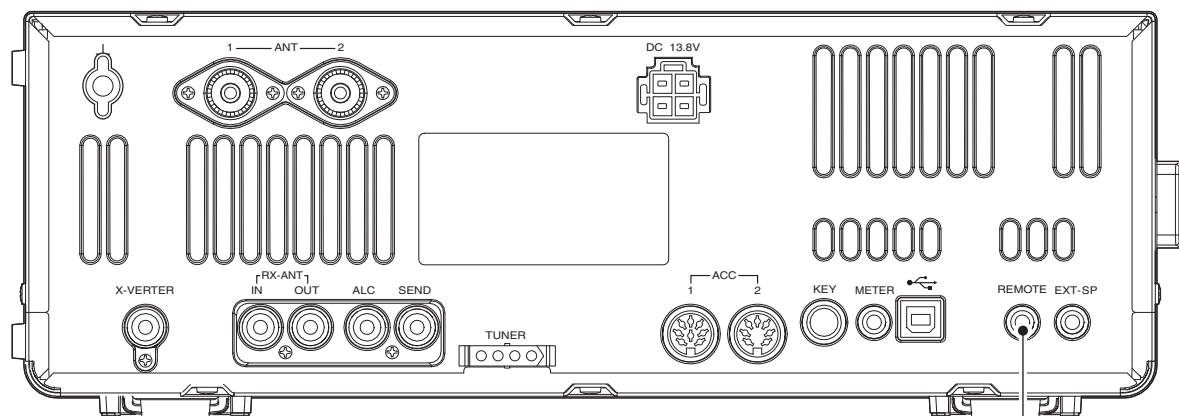

#### • Short plug

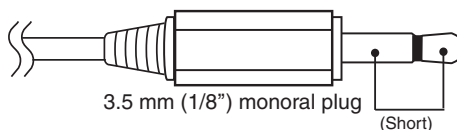

#### 4-9-1 SOFTWARE ADJUSTMENT (TRANSMIT)

Push [F-4] (TX) to enter the TRANSMIT ADJUSTMENT MODE.







#### 4-9-1 SOFTWARE ADJUSTMENT (TRANSMIT) (continued)

| ADJUSTMENT                  |   | ADJUSTMENT<br>ITEM            | OPERATION                                                                                                                                                                                                                                                                                                                                                                                            | VALUE |
|-----------------------------|---|-------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|
| PREPARATION                 | 1 | —                             | 1) Connect an Audio Generator and AC Millivoltmeter to the [MIC] connector on the FRONT panel, and set it as;<br>Frequency : 1.5 kHz<br>Level : 10 mV<br>2) Connect an RF Power meter (terminated) to [ANT1].<br>3) Connect a Dummy Load (SWR=2; 100 Ω) to [ANT2].<br>4) Disconnect the power cable from the transceiver, and connect an DC Ammeter (30 A) between the power supply and transceiver. | —     |
| POWER METER<br>(HF BAND)    | 1 | [POWER HF/50M 0%]             | • Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                                                                  | —     |
|                             | 2 | [POWER HF Tuner]              | 1) Adjust the TX power using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                      | 10 W  |
|                             | 3 | [POWER HF 10%]                | 1) Adjust the TX power using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                      | 10 W  |
|                             | 4 | [POWER HF 50%]                | 1) Adjust the TX power using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                      | 50 W  |
|                             | 5 | [POWER HF APC Low Volt]       | 1) Adjust the TX power using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                      | 80 W  |
|                             | 6 | [POWER HF 100%]               | 1) Adjust the TX power using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                      | 100 W |
| POWER METER<br>(50MHz BAND) | 1 | [POWER 50M Tuner]             | 1) Adjust the TX power using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                      | 10 W  |
|                             | 2 | [POWER 50M 10%]               | 1) Adjust the TX power using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                      | 10 W  |
|                             | 3 | [POWER 50M 50%]               | 1) Adjust the TX power using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                      | 50 W  |
|                             | 4 | [POWER 50M 100%]              | 1) Adjust the TX power using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                      | 99 W  |
| POWER-DOWN<br>SETTING       | 1 | [POWER for Power Down HF/50M] | 1) Adjust the TX power using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                      | 50 W  |
| ALC METER                   | 1 | [ALC]                         | • Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                                                                  | —     |
| DRIVE GAIN                  | 1 | [DRIVE]                       | • Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                                                                  | —     |
| Vd METER                    | 1 | [Vd 13.8V]                    | • Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                                                                  | —     |
| Id METER                    | 1 | [Id 0A]                       | • Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                                                                                  | —     |
|                             | 2 | [Id 10A]                      | 1) Adjust the driving current using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                               | 10 A  |
|                             | 3 | [Id 15A]                      | 1) Adjust the driving current using MAIN DIAL.<br>2) Push [F-6] (SET).                                                                                                                                                                                                                                                                                                                               | 15 A  |
| SWR METER                   | 1 | [SWR]                         | • Push [F-6] (SET).<br>(Returns to "ADJUSTMENT MODE.")                                                                                                                                                                                                                                                                                                                                               | —     |

## 4-9-2 SOFTWARE ADJUSTMENTS (RECEIVE)

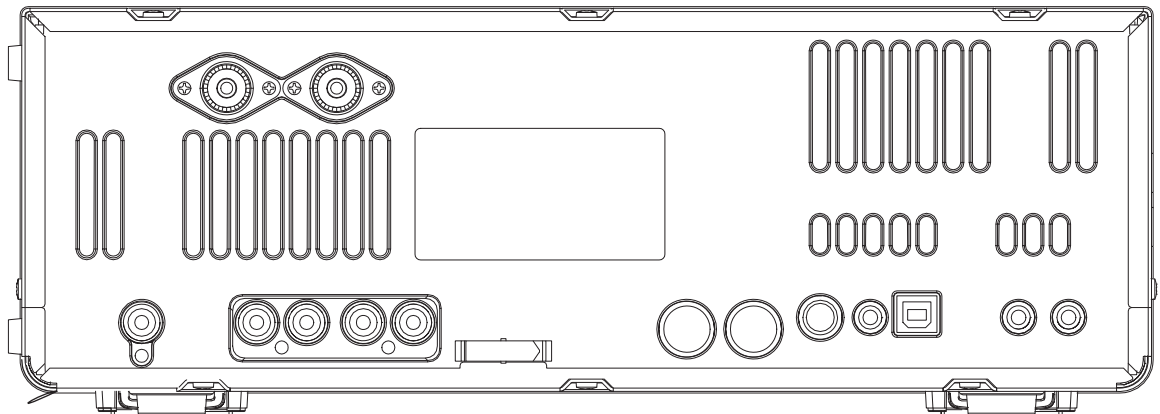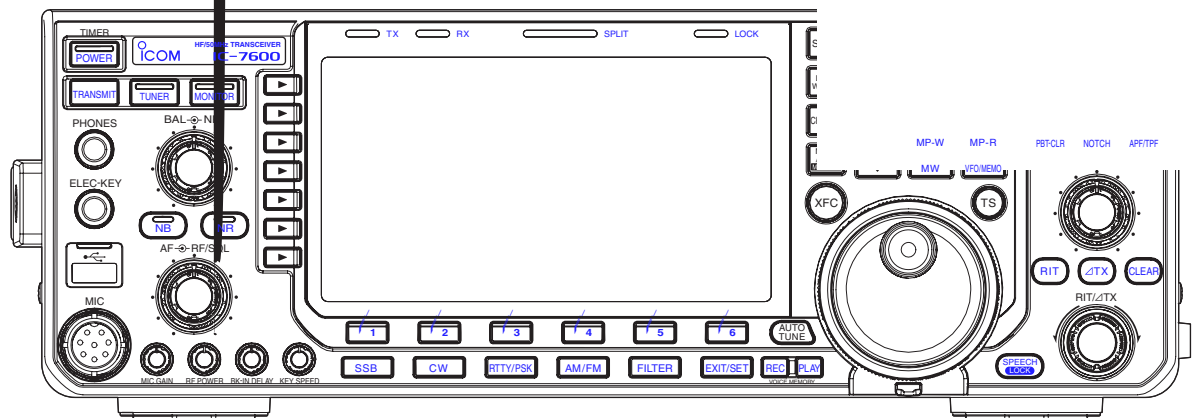

#### 4-9-2 SOFTWARE ADJUSTMENT (RECEIVE) (continued)

| ADJUSTMENT                       |   | ADJUSTMENT ITEM         | OPERATION                                                                                                                                                                                                                                                                                                      | VALUE  |
|----------------------------------|---|-------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|
| <b>PREPARATION</b>               |   | —                       | 1) Connect an SSG to [ANT1] and set it as;<br>Frequency : 14.1515 MHz<br>Modulation : None<br>Level : OFF (initially)<br>2) Connect an AC Millivoltmeter to [EXT-SP].                                                                                                                                          | —      |
| <b>TOTAL GAIN (Pre-AMP: OFF)</b> | 1 | [Total Gain HF PRE OFF] | 1) Set the SSG as;<br>Level : +60 dBμ <sup>†</sup> (−47 dBm)<br>2) Set the audio output level to 0 dB as the reference.<br>3) Set the SSG as;<br>Level : "OFF"<br>4) Adjust the AF output level using MAIN DIAL, then push [F-6] (SET).                                                                        | −30 dB |
| <b>(Pre-AMP: ON)</b>             | 2 | [Total Gain HF PRE ON]  | • Adjust the AF output level using MAIN DIAL, then push [F-6] (SET).                                                                                                                                                                                                                                           |        |
| <b>EXTERNAL AGC</b>              | 1 | [AGC (RX-DSP)]          | 1) Set the SSG as;<br>Level : +70 dBμ <sup>†</sup> (−37 dBm)<br>2) Push [F-6] (SET).                                                                                                                                                                                                                           | —      |
| <b>S-METER</b>                   | 1 | [HF S0 LEVEL]           | 1) Set the SSG as;<br>Level : "OFF"<br>2) Push [F-6] (SET). (the beep "Pi" sounds)<br><b>NEVER CHANGE</b> the SSG output level until the two short beeps "PiPi" sound. The two short beeps will sound after 0.5 sec. from 1st single beep "Pi" sounds.                                                         | —      |
|                                  | 2 | [HF S9 LEVEL]           | 1) Set the SSG as;<br>Level : +34 dBμ <sup>†</sup> (−73 dBm)<br>2) Push [F-6] (SET). (the beep "Pi" sounds)<br><b>NEVER CHANGE</b> the SSG output level until the two short beeps "PiPi" sound. The two short beeps will sound after 1 sec. from 1st single beep "Pi" sounds.                                  | —      |
|                                  | 3 | [S9+60 LEVEL]           | 1) Set the SSG as;<br>Level : +94 dBμ <sup>†</sup> (−13 dBm)<br>2) Push [F-6] (SET). (the beep "Pi" sounds)<br><b>NEVER CHANGE</b> the SSG output level until the two short beeps "PiPi" sound. The two short beeps will sound after 0.5 sec. from 1st single beep "Pi" sounds.<br>(Returns to "ADJUST MODE.") | —      |

<sup>†</sup>; The output level of the standard signal generator (SSG) is indicated as the SSG's terminated circuit.




4-9-3 SOFTWARE ADJUSTMENT (FREQUENCY)

Push [F-2] (REF) to enter the RECEIVE ADJUSTMENT MODE.



| ADJUSTMENT          | ADJUSTMENT ITEM | OPERATION                                                                                                                                                          | VALUE         |
|---------------------|-----------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| REFERENCE FREQUENCY | 1               | 1) Connect a Frequency Counter to <b>J81</b> (PLL UNIT).<br>2) Adjust the reference frequency using MAIN DIAL.<br>3) Push [F-6] (SET). (Returns to "ADJUST MODE.") | 64.000000 MHz |

CONNECTION FOR THE FREQUENCY ADJUSTMENT

<FRONT VIEW>

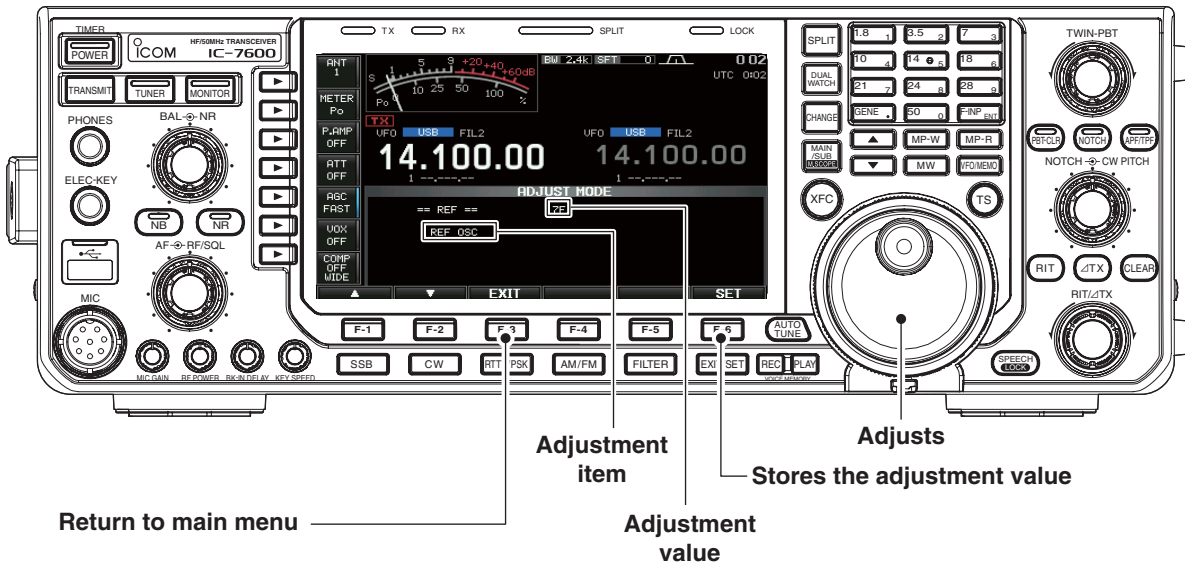

<Viewing from the BOTTOM side>

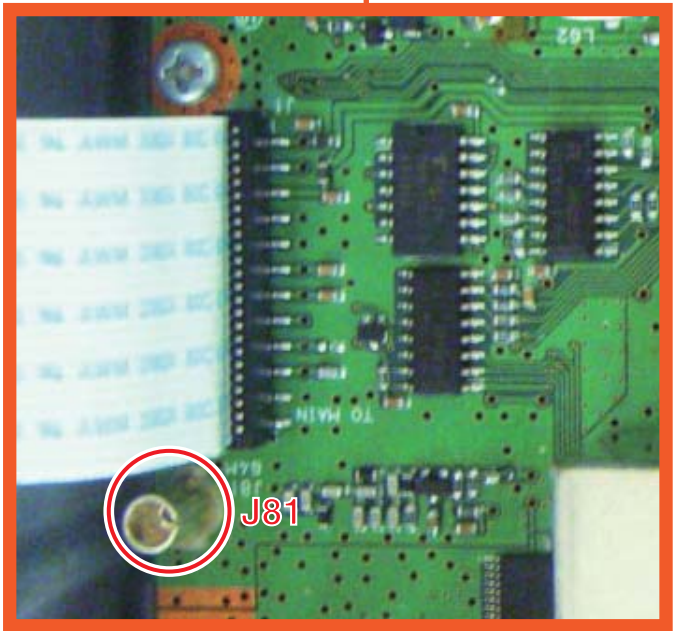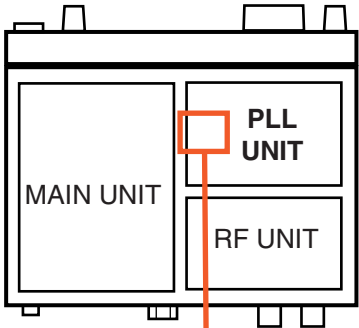


4-9-4 SOFTWARE ADJUSTMENT (TUNER)  
■ ENTERING TUNER REFERENCE ADJUSTMENT MODE

- 1) Turn the transceiver OFF.
- 2) Connect a 50 Ω Dummy Load to [ANT1].
- 3) Connect a short plug (see the illust below) to [REMOTE].
- 4) While pushing and holding both [FILTER] and [SET/EXIT], turn the transceiver power ON.


| ADJUSTMENT      | ADJUSTMENT ITEM    | OPERATION                                                                                                                      | VALUE |
|-----------------|--------------------|--------------------------------------------------------------------------------------------------------------------------------|-------|
| TUNER REFERENCE | 1<br>[== TUNER ==] | 1) Push [F-6] (START) key.<br>2) 10 sec. (approx.) after, verify that "* * * OK * * *" is displayed.<br>3) Turn the power OFF. | —     |

■ CONNECTION FOR THE TUNER REFERENCE ADJUSTMENT



<FRONT VIEW>

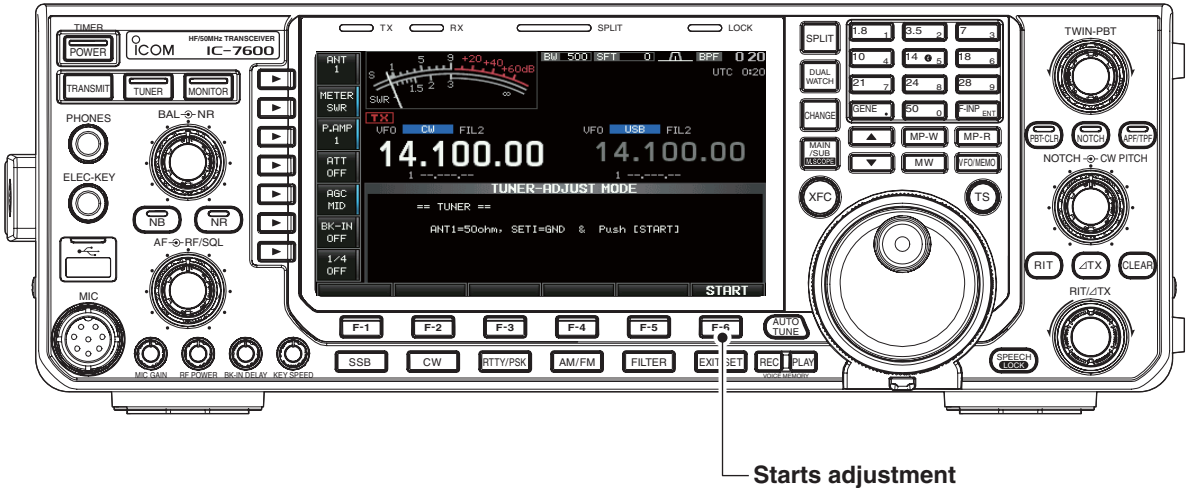

DUMMY LOAD  
(50 Ω/120 W)



<REAR VIEW>

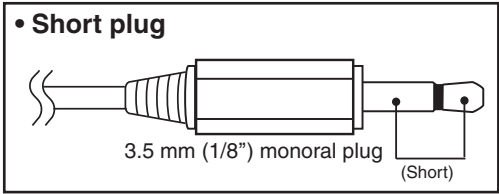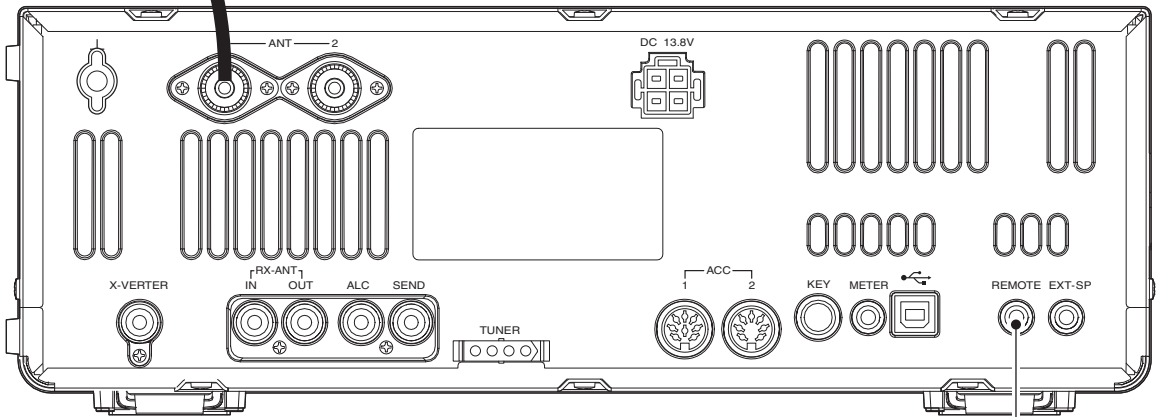

## SECTION 5

## PARTS LIST

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                        | M. | H/V LOCATION |
|---------|------------|------------------------------------|----|--------------|
| IC1     | 1130013750 | S.IC EM639165TS-7G                 | T  | 109/62.6     |
| IC2     | 1130013750 | S.IC EM639165TS-7G                 | T  | 84.1/62.6    |
| IC21    | 1130015113 | S.IC JS28F128J3D-75(SX-3073A-3)    | T  | 103.2/37.1   |
| IC51    | 1130011591 | S.IC IDT70V24L15PFG                | B  | 119.8/87.1   |
| IC53    | 1110005731 | S.IC S-80928CNMC-G8Y-G             | B  | 65.8/89.4    |
| IC54    | 1130007431 | S.IC TC7S14FU(TE85R,F)             | B  | 61/88.6      |
| IC55    | 1130012600 | S.IC SN74AHC1G04DCKR               | B  | 58.1/87.9    |
| IC102   | 1130013010 | S.IC SN74AHC1G08DCK3               | T  | 115.7/35.5   |
| IC103   | 1140014730 | S.IC HD6417751RBG240V              | T  | 70.8/30.7    |
| IC105   | 1130015120 | S.IC CY22393FXC(SX-3073F)          | B  | 97.8/18      |
| IC201   | 1130013750 | S.IC EM639165TS-7G                 | T  | 8.9/79.8     |
| IC202   | 1130013750 | S.IC EM639165TS-7G                 | B  | 14.8/80.1    |
| IC203   | 1140011571 | S.IC HD64404BTDV                   | T  | 40.7/80.6    |
| IC208   | 1130014030 | S.IC BD6516F-E2                    | T  | 65.8/95.2    |
| IC209   | 1190001920 | S.IC AK5355-VT-E2                  | B  | 90.8/6.7     |
| IC210   | 1190001920 | S.IC AK5355-VT-E2                  | B  | 76.7/6.7     |
| IC211   | 1190001910 | S.IC AK4384-VT-E2                  | B  | 65.9/6.7     |
| IC604   | 1140014710 | S.IC HD64F2370VFQ34V               | B  | 140.3/66.4   |
| IC605   | 1140015050 | S.IC XC9572XL-10TQG100C (SX-3073E) | B  | 131.9/35.3   |
| IC607   | 1130013010 | S.IC SN74AHC1G08DCK3               | T  | 142.8/87     |
| IC608   | 1130013010 | S.IC SN74AHC1G08DCK3               | T  | 148.5/87     |
| IC609   | 1130005252 | S.IC TC74HC08AF(EL,F)              | T  | 119/77.2     |
| IC610   | 1130014800 | S.IC R1EX24064ATA00A               | T  | 148/64.6     |
| IC661   | 1130012600 | S.IC SN74AHC1G04DCKR               | T  | 147.8/77.7   |
| IC721   | 1130010111 | S.IC TC7WH04FU(TE12L,F)            | B  | 150.5/43.3   |
| IC851   | 1180003100 | S.REG BD9302FP-E2                  | T  | 179.5/87.9   |
| IC871   | 1180003100 | S.REG BD9302FP-E2                  | T  | 180.1/52.2   |
| IC901   | 1110003870 | S.IC NJM2058M-TE1-#ZZZB            | B  | 141.1/6.6    |
| IC902   | 1110003870 | S.IC NJM2058M-TE1-#ZZZB            | B  | 124.1/6.6    |
| Q725    | 1510000771 | S.TRA 2SA1586-GR(TE85L,F)          | B  | 155/39       |
| Q727    | 1530003900 | S.TRA KTC4075 BL-RTK/P             | B  | 155.1/41.5   |
| Q731    | 1590003680 | S.TRA KRC402 RTK/P                 | B  | 147.9/36.7   |
| Q1031   | 1560001221 | S.FET ECH8301-TL-E                 | T  | 190.2/30.4   |
| D51     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/27.1    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]         |    |              |
| D52     | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       | T  | 52.5/23.6    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [FRA]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D53     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/25.3    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
| D54     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/28.8    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [FRA]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D55     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/20.1    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D56     | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       | T  | 52.5/21.8    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [TPE]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [FRA]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D57     | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/18.3    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]         |    |              |
| D58     | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [USA]         | T  | 52.5/16.6    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [KOR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]         |    |              |
| D59     | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         | T  | 52.5/14.8    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]       |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ESP]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [CHN]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]         |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EXP]         |    |              |
| D60     | 1750001320 | S.DIO KDS4148U RTK/P               | T  | 56.3/27.1    |
| D61     | 1750001320 | S.DIO KDS4148U RTK/P               | T  | 56.3/23.6    |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| D62     | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 56.3/25.3    |
| D63     | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 56.3/28.8    |
| D66     | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 56.3/18.3    |
| D67     | 1750001320 | S.DIO KDS4148U RTK/P [EUR]      | T  | 56.3/16.6    |
|         | 1750001320 | S.DIO KDS4148U RTK/P [EUR-1]    |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [ITR]      |    |              |
|         | 1750001320 | S.DIO KDS4148U RTK/P [FRA]      |    |              |
| D68     | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 56.3/14.8    |
| D101    | 1750001320 | S.DIO KDS4148U RTK/P            | B  | 66.5/18.7    |
| D102    | 1750001320 | S.DIO KDS4148U RTK/P            | B  | 68.2/18.7    |
| D206    | 1790000980 | S.DIO MA742(TX)                 | T  | 45.8/95.6    |
| D207    | 1790000980 | S.DIO MA742(TX)                 | T  | 49.2/95.6    |
| D711    | 1750001320 | S.DIO KDS4148U RTK/P            | B  | 154.5/63.6   |
| D715    | 1790001241 | S.DIO MA2S7280GL                | B  | 154.5/65.2   |
| D727    | 1750001320 | S.DIO KDS4148U RTK/P            | B  | 155.1/43.7   |
| D731    | 1750001180 | S.DIO KDS122 RTK/P              | B  | 145/36.7     |
| D732    | 1750001180 | S.DIO KDS122 RTK/P              | B  | 150.8/36.6   |
| D851    | 1750000960 | S.DIO RB081L-20                 | T  | 188.1/88.1   |
| D852    | 1750000960 | S.DIO RB081L-20                 | T  | 171/86.2     |
| D871    | 1750000960 | S.DIO RB081L-20                 | T  | 171.4/52.2   |
| D872    | 1750000960 | S.DIO RB081L-20                 | T  | 188.7/52.2   |
| D901    | 1790000980 | S.DIO MA742(TX)                 | B  | 161.5/33.9   |
| D902    | 1790000980 | S.DIO MA742(TX)                 | B  | 176.5/33.9   |
| D903    | 1790000980 | S.DIO MA742(TX)                 | B  | 164/33.9     |
| D904    | 1790000980 | S.DIO MA742(TX)                 | B  | 166.5/33.9   |
| D905    | 1790000980 | S.DIO MA742(TX)                 | B  | 169/33.9     |
| D906    | 1790000980 | S.DIO MA742(TX)                 | B  | 171.5/33.9   |
| D907    | 1790000980 | S.DIO MA742(TX)                 | B  | 174/33.9     |
| D909    | 1790000980 | S.DIO MA742(TX)                 | T  | 120.5/11.1   |
| D910    | 1790000980 | S.DIO MA742(TX)                 | T  | 120.5/13.6   |
| D911    | 1790000980 | S.DIO MA742(TX)                 | T  | 101.3/6.3    |
| D912    | 1790000980 | S.DIO MA742(TX)                 | T  | 101.3/3.8    |
| D913    | 1790000980 | S.DIO MA742(TX)                 | B  | 159.6/31.1   |
| X101    | 6050011610 | S.XTA CR-751 SMD-49 25.000 MHz  | T  | 97.8/18.1    |
| X201    | 6050010680 | S.XTA CR-628 SMD-49 24.576 MHz  | T  | 36.8/63.7    |
| X202    | 6050011910 | S.XTA CR-780 DSX530G 48 MHz     | T  | 37.6/97.5    |
| X601    | 6050011810 | S.XTA CR-755 SMD-49 15.9744 MHz | T  | 126.6/65.3   |
| L801    | 6200005011 | S.COI NLV25T-100J               | T  | 63/8         |
| L803    | 6200005011 | S.COI NLV25T-100J               | B  | 157.1/32.2   |
| L851    | 6200013280 | S.COI SLF10145T-330M1R6-PF      | T  | 196.3/89.3   |
| L852    | 6200013280 | S.COI SLF10145T-330M1R6-PF      | T  | 164.1/83.7   |
| L853    | 6200010881 | S.COI CDRH124NP-330MC           | T  | 192.9/77.3   |
| L871    | 6200013280 | S.COI SLF10145T-330M1R6-PF      | T  | 164.6/53.5   |
| L872    | 6200013280 | S.COI SLF10145T-330M1R6-PF      | T  | 196.9/49.9   |
| L873    | 6200010881 | S.COI CDRH124NP-330MC           | T  | 193.4/62     |
| R1      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 107.7/24.3   |
| R51     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 130.2/45.4   |
| R52     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 63.2/89.4    |
| R53     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 109.6/87.6   |
| R54     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 129.3/88.4   |
| R61     | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)      | T  | 53.6/30.4    |
| R62     | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)      | T  | 56.6/30.4    |
| R91     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 53.6/43.8    |
| R92     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 56.6/37.6    |
| R93     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 56/50.4      |
| R94     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 55.2/47.4    |
| R95     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 56.4/47.4    |
| R96     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 57.6/47.4    |
| R97     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 57.2/50.4    |
| R98     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 59.6/50.4    |
| R99     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 58.8/47.4    |
| R102    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 71/19        |
| R103    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 68.6/19      |
| R104    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 54.8/50.4    |
| R105    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 58.4/50.4    |
| R106    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 71/19        |
| R107    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 67.4/19      |
| R108    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 69.8/19      |
| R109    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 69.8/16      |
| R110    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 71/16        |
| R111    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 72.2/19      |
| R112    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 68.6/16      |
| R113    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 65/16        |
| R114    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 66.2/16      |
| R115    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 66.2/19      |
| R116    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 65/19        |
| R117    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)       | T  | 63.8/19      |
| R118    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 63.8/16      |
| R119    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 61.4/19      |
| R120    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 56.6/24.4    |
| R121    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 60.2/16      |
| R122    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 61.4/16      |
| R123    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 60.2/19      |
| R125    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 67.4/16      |
| R126    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 69.8/19      |
| R128    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 72.2/16      |
| R129    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 73.4/19      |
| R130    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 73.4/19      |
| R131    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 75.1/19      |
| R132    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | B  | 72.2/19      |
| R133    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 73.4/16      |
| R134    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)       | T  | 77.6/19      |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

S.=Surface mount



## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R135    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 78.8/19      |
| R136    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 84/19        |
| R139    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 60/47.4      |
| R140    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 66.2/47.5    |
| R141    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 62.5/47.5    |
| R142    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 73.6/47.5    |
| R143    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 81/47.5      |
| R144    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 69.9/47.5    |
| R145    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 77.3/47.5    |
| R146    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 87.2/47.4    |
| R147    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 88.5/47.4    |
| R148    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 84.7/47.5    |
| R149    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 87.6/19.5    |
| R150    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 87.6/23.2    |
| R151    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 87.6/26.9    |
| R152    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 87.6/30.6    |
| R153    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 83.1/32.7    |
| R154    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 83.2/35.2    |
| R155    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 83.2/38.9    |
| R156    | 7410000990 | S.ARR EXB-V8V 470JV (47)    | T  | 83.2/42.6    |
| R157    | 7410000800 | S.ARR EXB-V8V 103JV (10K)   | T  | 115.8/29.9   |
| R158    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 115.9/38.6   |
| R159    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 115.9/32.4   |
| R161    | 7030003300 | S.RES ERJ3GEYJ 680 V (68)   | B  | 101.2/14.4   |
| R164    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 94.3/17      |
| R171    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/25.6    |
| R172    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/26.8    |
| R173    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/28      |
| R174    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/31.6    |
| R175    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/29.2    |
| R176    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 53.6/32.8    |
| R177    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/32.8    |
| R178    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/30.4    |
| R179    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 53.6/34      |
| R180    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/34      |
| R181    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 53.6/35.2    |
| R182    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/31.6    |
| R183    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/36.4    |
| R184    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/34      |
| R185    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/35.2    |
| R186    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/35.2    |
| R187    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | B  | 56.6/32.8    |
| R188    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 56.6/36.4    |
| R189    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 53.6/42.6    |
| R190    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/42.6    |
| R191    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.6/43.8    |
| R201    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 23.3/71.5    |
| R202    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 23.3/72.7    |
| R203    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 32.9/63.3    |
| R204    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 31.7/63.3    |
| R205    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 30.5/63.3    |
| R206    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26.5/73.9    |
| R207    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 29.3/63.3    |
| R208    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 34.1/63.3    |
| R209    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 28.1/66.3    |
| R210    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 54.9/73.4    |
| R211    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 54.9/75.8    |
| R212    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 54.9/74.6    |
| R213    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 57.9/78.2    |
| R218    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 30.3/95.7    |
| R219    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 47.3/75.7    |
| R220    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 44/84.5      |
| R221    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 54.9/82.9    |
| R225    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44/79.3      |
| R226    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44/78        |
| R227    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 48.4/65.6    |
| R228    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 48.4/62.6    |
| R229    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 49.6/65.6    |
| R230    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 47.2/62.6    |
| R231    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 48.4/65.6    |
| R232    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44.7/75.7    |
| R233    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 47.2/65.6    |
| R234    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 47.2/65.6    |
| R235    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 46/62.6      |
| R236    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 46/65.6      |
| R237    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 43.4/75.7    |
| R238    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 46/65.6      |
| R239    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 44.8/62.6    |
| R240    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44.8/65.6    |
| R241    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 42.1/75.7    |
| R242    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 44.8/65.6    |
| R243    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 40.8/75.7    |
| R244    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 51.4/95.7    |
| R245    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 57.4/95.7    |
| R246    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 58.6/98.7    |
| R247    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/84.5    |
| R248    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.2/95.7    |
| R249    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 61/95.7      |
| R250    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 59.8/95.7    |
| R251    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 57.4/98.7    |
| R252    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 59.8/98.7    |
| R253    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 47.6/95.7    |
| R254    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 58.6/95.7    |
| R255    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 61/98.7      |
| R256    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/81.9    |
| R257    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 55/95.7      |
| R258    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/80.6    |
| R259    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 55/98.7      |
| R260    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/79.3    |
| R261    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 52.6/98.7    |
| R262    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/78      |
| R263    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 43.5/95.7    |
| R264    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/86.4    |
| R265    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 51.4/98.7    |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R266    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 53.8/98.7    |
| R267    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 52.6/95.7    |
| R268    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44.7/95.7    |
| R269    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 53.8/95.7    |
| R270    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.2/98.7    |
| R271    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 46.4/95.7    |
| R272    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 32.7/95.7    |
| R273    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 27.7/98.7    |
| R274    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 38.2/78      |
| R275    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 33.9/95.7    |
| R276    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 27.7/95.7    |
| R277    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 35.3/95.7    |
| R278    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 28.9/98.7    |
| R279    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 38.2/79.3    |
| R280    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 31.5/95.7    |
| R281    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 37.5/83.8    |
| R282    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 38.8/83.8    |
| R283    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 32.5/98.7    |
| R284    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 32.5/95.7    |
| R285    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 38.2/80.6    |
| R286    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 30.1/98.7    |
| R287    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 30.1/95.7    |
| R288    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 31.3/98.7    |
| R289    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 31.3/95.7    |
| R290    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 38.2/81.9    |
| R291    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 28.9/95.7    |
| R292    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44/83.2      |
| R293    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44/81.9      |
| R294    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 44/80.6      |
| R295    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 41.4/83.2    |
| R296    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26.5/70.3    |
| R297    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26.5/66.7    |
| R298    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 34.1/66.3    |
| R299    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26.5/67.9    |
| R300    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 23.3/66.7    |
| R301    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 32.9/66.3    |
| R302    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 23.3/65.5    |
| R303    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 31.7/66.3    |
| R304    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 23.3/67.9    |
| R305    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26.5/69.1    |
| R306    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26.5/72.7    |
| R307    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 23.3/70.3    |
| R308    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 30.5/66.3    |
| R309    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 23.3/69.1    |
| R310    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 54.9/77      |
| R311    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 36.5/95.7    |
| R312    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 57.9/77      |
| R315    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26.5/65.5    |
| R316    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26.5/64.3    |
| R317    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 23.3/64.3    |
| R318    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 38.9/95.7    |
| R319    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 37.7/95.7    |
| R320    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26.5/95.7    |
| R322    | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 44.9/99.3    |
| R323    | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 48.3/99.3    |
| R324    | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 46.1/99.3    |
| R325    | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 49.5/99.3    |
| R330    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 66.4/100.2   |
| R331    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 65.1/100.2   |
| R332    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 87.3/5.4     |
| R333    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 94.2/8       |
| R334    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 90.9/8       |
| R335    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 87.3/9.5     |
| R336    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 73.2/5.4     |
| R337    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 80.1/8       |
| R338    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 76.8/8       |
| R339    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 73.2/9.5     |
| R340    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 62.5/9.5     |
| R341    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 67.9/11.3    |
| R344    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 68.7/2.1     |
| R347    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 42.3/95.7    |
| R348    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 41/95.7      |
| R350    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 29.1/95.7    |
| R351    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 26.5/71.5    |
| R361    | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 42.4/96.6    |
| R362    | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 43.7/96.6    |
| R601    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 149.4/82.4   |
| R602    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 150.6/82.4   |
| R606    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/64.6   |
| R607    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | B  | 126.6/65.8   |
| R608    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 126.5/62.2   |
| R609    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 132.6/83.1   |
| R610    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 133.8/83.1   |
| R611    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 135/83.1     |
| R612    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 136.2/83.1   |
| R613    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 137.4/83.1   |
| R614    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 138.6/83.1   |
| R615    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 139.8/83.1   |
| R618    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 139.8/86     |
| R619    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 138.6/86     |
| R620    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 137.4/86     |
| R621    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 136.2/86     |
| R622    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 135/86       |
| R623    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 133.8/86     |
| R624    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 132.6/86     |
| R626    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | B  | 148.2/82.4   |
| R627    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 153/82.4     |
| R628    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 151.8/82.4   |
| R629    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.2/82.4   |
| R630    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 116.1/50.2   |
| R631    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 116.1/51.2   |
| R632    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 116.1/50     |
| R633    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 116.1/48.8   |
| R634    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 116.1/47.6   |



## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R635    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 116.1/46.4   |
| R636    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 145/87.4     |
| R637    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 150.7/87.4   |
| R639    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 151.9/90.7   |
| R640    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 147.1/97.7   |
| R641    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 145.9/97.7   |
| R642    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 144.7/97.7   |
| R643    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | B  | 154.4/67.6   |
| R644    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 154.4/66.4   |
| R645    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 154.5/54.9   |
| R646    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 129.2/51.9   |
| R647    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 131.6/51.9   |
| R648    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 132.8/51.9   |
| R649    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 134/51.9     |
| R650    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 135.2/51.9   |
| R651    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 136.4/51.9   |
| R652    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 137.6/51.9   |
| R653    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 138.8/51.9   |
| R654    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 149.9/52     |
| R655    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 148.7/52     |
| R657    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 145.8/82.4   |
| R660    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 155.4/82.4   |
| R661    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 147.8/81.9   |
| R662    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/63.4   |
| R663    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 131.4/82.4   |
| R664    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 147/82.4     |
| R665    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 126.6/75     |
| R666    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 126.6/73.6   |
| R668    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/68.4   |
| R669    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 139.8/82.4   |
| R670    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.5/53.7   |
| R671    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.5/52.5   |
| R672    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/77.4   |
| R674    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.5/58.5   |
| R675    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.5/57.3   |
| R677    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/58.6   |
| R679    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/61     |
| R681    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/59.8   |
| R683    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/77.4   |
| R684    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.4/68.8   |
| R685    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.4/70     |
| R687    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 126.6/72.4   |
| R691    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 113.6/77.7   |
| R692    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 129.3/24.6   |
| R693    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 130.5/24.6   |
| R694    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 144.6/82.4   |
| R695    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 143.4/82.4   |
| R696    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 126.9/24.6   |
| R697    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 131.7/24.6   |
| R698    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 143.9/52     |
| R699    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 128.1/24.6   |
| R700    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 142.2/82.4   |
| R701    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 154.5/56.1   |
| R711    | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | B  | 154.5/62.1   |
| R712    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 154.5/60.9   |
| R721    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 151.4/47.4   |
| R722    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 150.2/47.4   |
| R723    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 149/47.4     |
| R724    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 152.9/41.9   |
| R725    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 157.1/39.3   |
| R726    | 7030003590 | S.RES ERJ3GEYJ 183 V (18K)  | B  | 157.1/42     |
| R727    | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 152.8/39.3   |
| R731    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 144.9/39.8   |
| R732    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 149.4/39.9   |
| R733    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 144.9/38.6   |
| R734    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 150.9/38.5   |
| R801    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 106.6/88.4   |
| R802    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 107.1/81.3   |
| R803    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 105.4/88.4   |
| R804    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 105.9/81.3   |
| R805    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 104.2/88.4   |
| R806    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 104.7/81.3   |
| R807    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 103.5/81.3   |
| R808    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 103/88.4     |
| R809    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 102.3/81.3   |
| R810    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 101.8/88.4   |
| R811    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 101.1/81.3   |
| R812    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 100.6/88.4   |
| R813    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 99.4/88.4    |
| R814    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 99.1/81.3    |
| R815    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 98.2/88.4    |
| R816    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 97.9/81.3    |
| R817    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 97/88.4      |
| R818    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 96.7/81.3    |
| R819    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 95.5/81.3    |
| R822    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 93.1/81.3    |
| R823    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 91.9/81.3    |
| R851    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 181.8/97.1   |
| R852    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 181.8/95.9   |
| R853    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 177.9/95.9   |
| R854    | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | T  | 184.4/95.9   |
| R855    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 175/95.9     |
| R856    | 7030005451 | S.RES ERA3YED 153V (15K)    | T  | 181.8/94.7   |
| R857    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 186.7/94.2   |
| R858    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 173.1/94.2   |
| R861    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 187/97.1     |
| R862    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 172.4/97.1   |
| R871    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 177.5/43.9   |
| R872    | 7030003590 | S.RES ERJ3GEYJ 183 V (18K)  | T  | 181.9/42.1   |
| R873    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 174.9/43.9   |
| R874    | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | T  | 185.8/43.8   |
| R875    | 7030005451 | S.RES ERA3YED 153V (15K)    | T  | 177.5/45.2   |
| R876    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 173/45.8     |
| R877    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 183.9/45.1   |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                       | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------|----|--------------|
| R881    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 173/43.2     |
| R882    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 187.3/42.5   |
| R903    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 147.9/8.6    |
| R904    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 146.8/7.1    |
| R906    | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K) | B  | 146/9.4      |
| R908    | 7030003540 | S.RES       | ERJ3GEYJ 682 V (6.8K) | B  | 147.9/9.9    |
| R909    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 146.8/11.2   |
| R910    | 7030003860 | S.RES       | ERJ3GE JPW V          | T  | 132.8/22.8   |
| R911    | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K) | B  | 148.4/5.3    |
| R912    | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K) | B  | 148.4/7.2    |
| R913    | 7030003410 | S.RES       | ERJ3GEYJ 561 V (560)  | B  | 136.2/13.3   |
| R914    | 7030003690 | S.RES       | ERJ3GEYJ 124 V (120K) | B  | 146/2.7      |
| R915    | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K) | B  | 136.2/10.7   |
| R916    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 147.2/5.3    |
| R917    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 146/5.3      |
| R918    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 135/10.7     |
| R919    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 136.2/8.1    |
| R920    | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 150.8/5.3    |
| R921    | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 135/8.1      |
| R922    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 132.8/5.5    |
| R923    | 7030003460 | S.RES       | ERJ3GEYJ 152 V (1.5K) | B  | 132.8/2.9    |
| R924    | 7030003470 | S.RES       | ERJ3GEYJ 182 V (1.8K) | B  | 131.6/4.4    |
| R925    | 7030003500 | S.RES       | ERJ3GEYJ 332 V (3.3K) | B  | 130.4/5.5    |
| R926    | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | B  | 129/2.9      |
| R927    | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | B  | 135/2.9      |
| R928    | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | B  | 136.2/5.5    |
| R929    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 136.2/2.9    |
| R930    | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)  | T  | 143.1/13.7   |
| R931    | 7030003560 | S.RES       | ERJ3GEYJ 103 V (10K)  | B  | 132.8/8.1    |
| R932    | 7030003460 | S.RES       | ERJ3GEYJ 152 V (1.5K) | B  | 132.8/10.7   |
| R933    | 7030003470 | S.RES       | ERJ3GEYJ 182 V (1.8K) | B  | 131.6/9.2    |
| R934    | 7030003500 | S.RES       | ERJ3GEYJ 332 V (3.3K) | B  | 130.4/8.1    |
| R935    | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K) | B  | 129/10.7     |
| R936    | 7030003380 | S.RES       | ERJ3GEYJ 331 V (330)  | T  | 143.9/12.5   |
| R937    | 7030003410 | S.RES       | ERJ3GEYJ 561 V (560)  | B  | 118/10.5     |
| R938    | 7030003700 | S.RES       | ERJ3GEYJ 154 V (150K) | B  | 119.2/10.5   |
| R939    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 143.9/11.3   |
| R940    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 119.2/7.9    |
| R941    | 7030003410 | S.RES       | ERJ3GEYJ 561 V (560)  | B  | 118/2.7      |
| R942    | 7030003550 | S.RES       | ERJ3GEYJ 822 V (8.2K) | B  | 119.2/2.7    |
| R943    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | T  | 143.9/10.1   |
| R944    | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K) | B  | 119.2/5.3    |
| R945    | 7030008240 | S.RES       | ERJ12Y0R00U           | T  | 148.4/24.1   |
| R946    | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 138/8.8      |
| R947    | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 141.2/8.8    |
| R948    | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 121.6/8.4    |
| R949    | 7030003320 | S.RES       | ERJ3GEYJ 101 V (100)  | T  | 124.8/8.4    |
| R953    | 7030003860 | S.RES       | ERJ3GE JPW V          | B  | 132.1/19     |
| R1001   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 161.9/26.1   |
| R1002   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 165.1/29.4   |
| R1003   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 165.5/26.1   |
| R1004   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 166.5/29.4   |
| R1005   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 166.9/26.1   |
| R1006   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 167.8/29.4   |
| R1007   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 168.3/26.1   |
| R1008   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 169.2/29.4   |
| R1009   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 169.7/26.1   |
| R1010   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 170.5/29.4   |
| R1011   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 171.1/26.1   |
| R1012   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 171.8/29.4   |
| R1013   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 172.5/26.1   |
| R1014   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 173.1/29.5   |
| R1015   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 173.9/26.5   |
| R1016   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 174.4/29.7   |
| R1017   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 175.3/27     |
| R1018   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 176/30.3     |
| R1019   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 176.7/27.3   |
| R1020   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 177.9/30     |
| R1021   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 178.1/27.4   |
| R1022   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 179.5/26.7   |
| R1023   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 180.5/29.6   |
| R1024   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 180.9/26.4   |
| R1025   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 181.8/29.6   |
| R1026   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 182.3/26.1   |
| R1027   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 183.1/29.6   |
| R1028   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 183.7/26.1   |
| R1029   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 184.4/29.6   |
| R1031   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 188/25       |
| R1032   | 7030003680 | S.RES       | ERJ3GEYJ 104 V (100K) | T  | 188.5/28     |
| R1033   | 7030003670 | S.RES       | ERJ3GEYJ 823 V (82K)  | T  | 190.1/26.2   |
| R1101   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 155.9/8.5    |
| R1102   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 156.2/11.8   |
| R1103   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 157.3/8.5    |
| R1104   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 158/11.8     |
| R1105   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 158.7/8.5    |
| R1106   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 159.4/11.8   |
| R1107   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 160.1/8.5    |
| R1108   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 160.8/11.8   |
| R1109   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 161.5/8.5    |
| R1110   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 162.2/11.8   |
| R1111   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 162.9/8.5    |
| R1112   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 163.6/11.8   |
| R1113   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 164.3/8.5    |
| R1114   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 165/11.8     |
| R1115   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 165.7/8.5    |
| R1116   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 166.4/11.8   |
| R1117   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 167.1/8.5    |
| R1118   | 7030003440 | S.RES       | ERJ3GEYJ 102 V (1K)   | T  | 168/16.1     |
| R1119   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 164/15.6     |
| R1120   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 165.2/16.1   |
| R1121   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 166.4/16.1   |
| R1122   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 167.6/16.1   |
| R1123   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 168.8/15.3   |
| R1124   | 7030003200 | S.RES       | ERJ3GEYJ 100 V (10)   | T  | 170/16.1     |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R1125   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 171.2/16.1   |
| R1126   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 172.4/16.1   |
| R1127   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 173.6/16.1   |
| R1128   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 174.8/16.1   |
| R1129   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 176/16.1     |
| R1130   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 177.2/16.1   |
| R1131   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 172.8/8.5    |
| R1132   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 173.5/11.8   |
| R1133   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 174.2/8.5    |
| R1134   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 174.9/11.8   |
| R1135   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 175.6/8.5    |
| R1136   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 176.3/11.8   |
| R1137   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 177/8.5      |
| R1138   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 177.7/11.8   |
| R1139   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 178.4/8.5    |
| R1140   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 179.1/11.8   |
| R1141   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 179.8/8.5    |
| R1142   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 180.5/11.8   |
| R1143   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 181.2/8.5    |
| R1144   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 181.9/11.8   |
| R1145   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 182.6/8.5    |
| R1146   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 183.3/11.8   |
| R1147   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 184/8.5      |
| R1148   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 184.7/11.8   |
|         |            |                             |    |              |
| C1      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 98.1/55.4    |
| C2      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 101/55.4     |
| C3      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 105.7/55.4   |
| C4      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 108.3/55.4   |
| C5      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 120.2/55.4   |
| C6      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 108.2/69.8   |
| C7      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 103.4/69.8   |
| C8      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 73.5/55.4    |
| C9      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 76.1/55.4    |
| C10     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 80.8/55.4    |
| C11     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 83.4/55.4    |
| C12     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 95.3/55.4    |
| C13     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 83.3/69.8    |
| C14     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 78.5/69.8    |
| C21     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 106.7/49.9   |
| C22     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 104.2/24.3   |
| C23     | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 101.2/24.3   |
| C51     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 118.5/77.6   |
| C52     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 121.1/77.6   |
| C53     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 129.3/85.8   |
| C61     | 4030009990 | S.CER C1608 CH 1H 200J-T    | T  | 131.4/45.4   |
| C62     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 63.9/91.8    |
| C63     | 4030008880 | S.CER C1608 JB 1H 223K-T    | B  | 66.1/87.1    |
| C64     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 60.9/90.5    |
| C65     | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 57.9/89.8    |
| C66     | 4550007470 | S.TAN F931A107MNMBA         | B  | 54.4/96.1    |
| C101    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 101.2/17     |
| C102    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 62.6/19      |
| C103    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 67/39.8      |
| C104    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 60.8/50.4    |
| C105    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74/30.3      |
| C106    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 66.3/26.9    |
| C107    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 67.5/26.9    |
| C108    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 70.4/33.9    |
| C109    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74.6/26.9    |
| C110    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 67.5/33.7    |
| C111    | 4030019500 | GRM21BB31A106KE18 (GRM40 B) | T  | 76.1/16.8    |
| C112    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 77.6/16.4    |
| C113    | 4030019500 | GRM21BB31A106KE18 (GRM40 B) | T  | 80.4/17.8    |
| C114    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 78.8/16.4    |
| C115    | 4030019500 | GRM21BB31A106KE18 (GRM40 B) | T  | 82.4/17.8    |
| C116    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 84/16.4      |
| C117    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 68.2/39.8    |
| C118    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 66.8/30.3    |
| C119    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 61.7/27.8    |
| C120    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 73.4/33.7    |
| C121    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74.6/33.7    |
| C122    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 71.7/33.9    |
| C123    | 4030006860 | S.CER C1608 JB 1H 102K-T    | B  | 61.7/32.5    |
| C124    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 66.3/33.7    |
| C125    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 69.1/33.9    |
| C126    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 66.8/31.6    |
| C127    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 73.4/39.8    |
| C128    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 79.9/27.3    |
| C129    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 66.8/29      |
| C130    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74.6/39.8    |
| C131    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 79.9/32.5    |
| C132    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 79.9/33.7    |
| C133    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74/31.6      |
| C134    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 64.7/21.5    |
| C135    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 62.6/16      |
| C136    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 73.4/26.9    |
| C137    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 67.3/21.5    |
| C138    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 61.7/35.2    |
| C139    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 79.9/26.1    |
| C140    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 74/29        |
| C141    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 115.9/37.4   |
| C142    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 115.9/39.8   |
| C143    | 4550007470 | S.TAN F931A107MNMBA         | B  | 84.4/18.1    |
| C201    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 1.7/91.3     |
| C202    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 1.7/88.2     |
| C203    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 1.7/84.9     |
| C204    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 1.7/80.9     |
| C205    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 1.7/69       |
| C206    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 16.1/81      |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                    | M. | H/V LOCATION |
|---------|------------|-------------|--------------------|----|--------------|
| C207    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | T  | 16.1/85.8    |
| C208    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 19.6/68.1    |
| C209    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 22/80.9      |
| C210    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 22/84.9      |
| C211    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 22/88.2      |
| C212    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 16.2/92.2    |
| C213    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 7.6/85.8     |
| C214    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 7.6/81       |
| C215    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 48.2/69.6    |
| C216    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 49/92.4      |
| C217    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/79.3    |
| C218    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46/86.4      |
| C219    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 43.4/86.4    |
| C220    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 47.3/86.4    |
| C221    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 42.4/92.5    |
| C222    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 44.7/69.6    |
| C223    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 50.8/69.6    |
| C224    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 53.1/75.6    |
| C225    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/81.9    |
| C226    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/83.2    |
| C227    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 40.1/86.4    |
| C228    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/84.5    |
| C229    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 37.8/69.6    |
| C230    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 39.5/75.7    |
| C231    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/75.4    |
| C232    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/78      |
| C233    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/80.5    |
| C234    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 38.8/86.4    |
| C235    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.5/92.5    |
| C236    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/76.7    |
| C237    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/78      |
| C238    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/79.3    |
| C239    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 53.1/76.8    |
| C240    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/83.2    |
| C241    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/84.5    |
| C242    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/85.7    |
| C243    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/87      |
| C244    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46.6/80.6    |
| C245    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 46/75.7      |
| C246    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 35.6/81.9    |
| C247    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 38.2/75.7    |
| C248    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 37.5/86.4    |
| C249    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 44.7/86.4    |
| C250    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 37.8/67      |
| C251    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 40.4/67      |
| C252    | 4030006990 | S.CER       | C1608 CH 1H 080D-T | T  | 36.6/95      |
| C253    | 4030006990 | S.CER       | C1608 CH 1H 080D-T | T  | 39.2/95      |
| C254    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | T  | 52/65.6      |
| C255    | 4510008520 | S.ELE       | EEE1CA470SP        | T  | 57.1/68.5    |
| C256    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | T  | 60.1/89      |
| C257    | 4510007130 | S.ELE       | EEFCD 0J 470R      | T  | 58.1/86      |
| C258    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 39.8/92.5    |
| C259    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 52.5/80.9    |
| C276    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 45.7/97.5    |
| C277    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 49/97.5      |
| C278    | 4510008500 | S.ELE       | EEE1CA101WP        | T  | 66.7/83      |
| C283    | 4510008550 | S.ELE       | EEE1HA010SR        | T  | 65.5/89      |
| C284    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 94.2/5.4     |
| C285    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 96.5/3.7     |
| C286    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 91.7/3.7     |
| C287    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 88.8/2.1     |
| C288    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 86.9/3.7     |
| C289    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 91.4/2.1     |
| C290    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 80.1/5.4     |
| C291    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 82.1/3.7     |
| C292    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 77.3/3.7     |
| C293    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 77.3/2.1     |
| C294    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 72.5/3.7     |
| C295    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 74.7/2.1     |
| C296    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 62.5/5.4     |
| C297    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 62.9/3.7     |
| C298    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 65.7/2.1     |
| C299    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 67.7/3.7     |
| C361    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 42.4/99.3    |
| C362    | 4030007050 | S.CER       | C1608 CH 1H 220J-T | T  | 43.7/99.3    |
| C603    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 126.6/71     |
| C604    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 126.6/69.8   |
| C605    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 128/51.9     |
| C606    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 154.5/73.6   |
| C607    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 147.5/52     |
| C608    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 131/74.8     |
| C609    | 4510008540 | S.ELE       | EEE1CA100SR        | T  | 135.8/74.8   |
| C610    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | T  | 130.9/78.3   |
| C611    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | T  | 136.8/78.3   |
| C612    | 4030007010 | S.CER       | C1608 CH 1H 100D-T | T  | 129.9/68.9   |
| C613    | 4030007010 | S.CER       | C1608 CH 1H 100D-T | T  | 129.9/66.3   |
| C614    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 126.6/67     |
| C616    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 141/82.7     |
| C617    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 138.6/82.7   |
| C618    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 137.4/82.7   |
| C619    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 136.2/82.7   |
| C620    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 135/82.7     |
| C621    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 133.8/82.7   |
| C622    | 4030006990 | S.CER       | C1608 JB 1H 103K-T | B  | 132.6/82.7   |
| C626    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | T  | 146.2/87.4   |
| C627    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | T  | 151.9/85.9   |
| C628    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | T  | 113.6/72.6   |
| C629    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | T  | 150.2/67.1   |
| C630    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 122.4/32     |
| C631    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 125.7/24.6   |
| C632    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 132.9/24.6   |
| C633    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 141.4/40.5   |
| C634    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 141.4/37.5   |
| C635    | 4030011600 | S.CER       | C1608 JB 1E 104K-T | B  | 134.4/44.7   |



## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| C636    | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 125.2/46.1   |
| C656    | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 145.1/52     |
| C661    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 149.7/77.5   |
| C698    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 144/54.4     |
| C711    | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 154.5/59.7   |
| C721    | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 152.9/44.5   |
| C731    | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 147.8/38.6   |
| C732    | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 144.9/41     |
| C801    | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 83.3/88.1    |
| C802    | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 80.6/88.3    |
| C803    | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 82.2/76.8    |
| C804    | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 79.8/76.8    |
| C805    | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 78.4/76.9    |
| C806    | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 76.9/76.9    |
| C807    | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 75.6/78      |
| C808    | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 75.8/88.3    |
| C809    | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 72.7/88.3    |
| C810    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 67.4/95.1    |
| C811    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 152.5/28.9   |
| C812    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 65.7/9       |
| C851    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 184.4/97.1   |
| C852    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 175/97.1     |
| C853    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 184.8/94.7   |
| C854    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 175/94.7     |
| C855    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 184.8/93.4   |
| C856    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 175/93.4     |
| C857    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 181.8/93.4   |
| C858    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 178/94.5     |
| C859    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 184.7/82.7   |
| C860    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 174.3/82.7   |
| C861    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 181.3/82.8   |
| C862    | 4550007900 | S.TAN F931E476MNC                 | T  | 178.9/74.8   |
| C863    | 4030018970 | S.CER C3225 JB 1C 226MT-N         | T  | 177.1/80.6   |
| C864    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 169.7/94.1   |
| C865    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 190/94.4     |
| C866    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 197.7/96.2   |
| C867    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 161.9/96.9   |
| C868    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 197.7/98     |
| C869    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 188.2/94.4   |
| C870    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 171.5/94.1   |
| C871    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 174.9/42.6   |
| C872    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 184.7/42.5   |
| C873    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 174.9/45.2   |
| C874    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 182.1/43.4   |
| C875    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 174.9/46.5   |
| C876    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 182.1/44.7   |
| C877    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 178.1/46.5   |
| C878    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 180.7/46     |
| C879    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 174.9/57.7   |
| C880    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 185.3/57.7   |
| C881    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 178.7/57.7   |
| C882    | 4550007900 | S.TAN F931E476MNC                 | T  | 179.4/66     |
| C883    | 4030018970 | S.CER C3225 JB 1C 226MT-N         | T  | 182.6/59.9   |
| C884    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 187.2/46     |
| C885    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 169.5/46.2   |
| C886    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 161.2/45     |
| C887    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 195.3/41.4   |
| C888    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 161.9/95.1   |
| C889    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 161.2/43.2   |
| C890    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 171.3/46.2   |
| C891    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 185.5/46     |
| C892    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 195.3/43.1   |
| C893    | 4030018970 | S.CER C3225 JB 1C 226MT-N         | T  | 181.7/80.6   |
| C894    | 4030018970 | S.CER C3225 JB 1C 226MT-N         | T  | 177.6/59.9   |
| C895    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 189/46       |
| C896    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 190.7/46     |
| C897    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 167.9/91.7   |
| C898    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 167.9/89.9   |
| C904    | 4030019320 | S.CER C1608 X7R 1C 105K-T         | B  | 149.4/11.2   |
| C906    | 4030009880 | S.CER C1608 JB 1H 82K-T           | B  | 149.6/2.7    |
| C907    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 124.9/13.5   |
| C908    | 4030009880 | S.CER C1608 JB 1H 82K-T           | B  | 150.8/2.7    |
| C909    | 4030007160 | S.CER C1608 CH 1H 181J-T          | B  | 147.2/2.7    |
| C910    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 131/2.6      |
| C911    | 4030009490 | S.CER C1608 JB 1H 821K-T          | B  | 129/5.5      |
| C912    | 4030009490 | S.CER C1608 JB 1H 821K-T          | B  | 130.4/2.9    |
| C913    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 131/7.4      |
| C914    | 4030009490 | S.CER C1608 JB 1H 821K-T          | B  | 129/8.1      |
| C915    | 4030009490 | S.CER C1608 JB 1H 821K-T          | B  | 130.4/10.7   |
| C916    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 105.5/7.4    |
| C917    | 4510008540 | S.ELE EEE1CA100SR                 | T  | 105.5/2.6    |

## [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                   | M. | H/V LOCATION |
|---------|------------|-------------------------------|----|--------------|
| C918    | 4030011600 | S.CER C1608 JB 1E 104K-T      | T  | 138/7.6      |
| C919    | 4030011600 | S.CER C1608 JB 1E 104K-T      | T  | 141.2/7.6    |
| C920    | 4510008540 | S.ELE EEE1CA100SR             | T  | 137.2/4.1    |
| C921    | 4510008540 | S.ELE EEE1CA100SR             | T  | 142/4.1      |
| C922    | 4030011600 | S.CER C1608 JB 1E 104K-T      | T  | 121.6/7.2    |
| C923    | 4030011600 | S.CER C1608 JB 1E 104K-T      | T  | 124.8/7.2    |
| C924    | 4510008540 | S.ELE EEE1CA100SR             | T  | 120.8/3.7    |
| C925    | 4510008540 | S.ELE EEE1CA100SR             | T  | 125.6/3.7    |
| C1002   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 159.3/26.1   |
| C1003   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 156.7/26.1   |
| C1004   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 158/26.1     |
| C1005   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 160.6/26.1   |
| C1006   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 161.9/26.1   |
| C1007   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 155.4/26.1   |
| C1008   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 186.5/34.8   |
| C1009   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 180.5/29.6   |
| C1010   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 179.5/26.1   |
| C1011   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 178.2/30     |
| C1012   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 175.3/26.1   |
| C1013   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 174.4/29.7   |
| C1014   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 173.9/26.1   |
| C1015   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 173.1/29.5   |
| C1016   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 172.5/26.1   |
| C1017   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 171.1/26.1   |
| C1018   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 170.4/29.6   |
| C1019   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 169.7/26.1   |
| C1020   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 169/29.4     |
| C1021   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 168.3/26.1   |
| C1022   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 167.6/29.4   |
| C1023   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 166.9/26.1   |
| C1024   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 166.2/29.4   |
| C1025   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 165.5/26.1   |
| C1026   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 164/30.6     |
| C1027   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 153.6/30.5   |
| C1031   | 4030006900 | S.CER C1608 JB 1H 103K-T      | T  | 191.4/26.2   |
| C1101   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 179.1/11.8   |
| C1102   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 178.4/8.5    |
| C1103   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 177.7/11.8   |
| C1104   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 176.3/11.8   |
| C1105   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 177.2/16.1   |
| C1106   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 176/16.1     |
| C1107   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 174.8/16.1   |
| C1108   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 173.6/16.1   |
| C1109   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 172.4/16.1   |
| C1110   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 171.2/16.1   |
| C1111   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 170/16.1     |
| C1112   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 168.8/15.3   |
| C1113   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 167.6/16.1   |
| C1114   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 166.4/16.1   |
| C1115   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 162.8/16.1   |
| C1116   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 167.1/8.5    |
| C1117   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 166.4/11.8   |
| C1118   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 165.7/8.5    |
| C1119   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 165/11.8     |
| C1120   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 162.9/8.5    |
| C1121   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 162.2/11.8   |
| C1122   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 161.5/8.5    |
| C1123   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 160.1/8.5    |
| C1124   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 159.4/11.8   |
| C1125   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 158.7/8.5    |
| C1126   | 4030006860 | S.CER C1608 JB 1H 102K-T      | B  | 158/11.8     |
| J801    | 6510021722 | S.CON 30FLT-SM2-TB(LF)(SN)(M) | T  | 99.9/85      |
| J802    | 6510021722 | S.CON 30FLT-SM2-TB(LF)(SN)(M) | T  | 80/85        |
| J901    | 6510018921 | S.CON B8B-PH-SM4-TB(LF)(SN)   | T  | 150.9/11.5   |
| J1001   | 6510024151 | S.CON 50FY-BMT-TB(LF)(SN)     | T  | 170.2/21.3   |
| J1002   | 6510022191 | S.CON B3B-PH-SM4-TB(LF)(SN)   | T  | 192.5/19.1   |
| J1101   | 6510024151 | S.CON 50FY-BMT-TB(LF)(SN)     | T  | 170.2/3.6    |
| S51     | 2260002740 | S.SWI LS8J2M-T                | T  | 73.1/75.9    |
| W605    | 7120000470 | JUM ERDS2T0                   |    |              |
| EP203   | 6910012350 | S.BEA MMZ1608Y 102BT          | T  | 50.8/65.6    |
| EP204   | 6910012350 | S.BEA MMZ1608Y 102BT          | T  | 57.5/89      |
| EP801   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 82.1/88.8    |
| EP802   | 6910014690 | S.BEA MPZ1608S221A-T          | T  | 80.5/88.4    |
| EP803   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 81.7/80.7    |
| EP804   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 79.9/80.7    |
| EP805   | 6910014690 | S.BEA MPZ1608S221A-T          | T  | 78.4/80.8    |
| EP806   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 76.8/80.8    |
| EP807   | 6910012350 | S.BEA MMZ1608Y 102BT          | T  | 75.3/81.1    |
| EP808   | 6910012350 | S.BEA MMZ1608Y 102BT          | T  | 75.8/88.4    |
| EP809   | 6910012350 | S.BEA MMZ1608Y 102BT          | T  | 74/81.1      |
| EP810   | 6910012350 | S.BEA MMZ1608Y 102BT          | T  | 73.9/88.4    |
| EP811   | 6910012350 | S.BEA MMZ1608Y 102BT          | T  | 72.7/88.4    |
| EP814   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 64.2/93.8    |
| EP851   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 166.8/95.1   |
| EP852   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 194.6/96.7   |
| EP853   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 165.2/96.9   |
| EP854   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 192.1/97.8   |
| EP871   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 192.8/42.6   |
| EP872   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 163.6/46     |
| EP873   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 190.2/41.5   |
| EP874   | 6910014730 | S.BEA MPZ2012S331A-T          | T  | 165.4/44.4   |
| EP1001  | 6910014640 | S.BEA MPZ2012S221A-T          | B  | 188/24.7     |
| EP1002  | 6910014690 | S.BEA MPZ1608S221A-T          | T  | 155.4/26.1   |
| EP1003  | 6910014690 | S.BEA MPZ1608S221A-T          | T  | 156.7/26.1   |
| EP1004  | 6910014690 | S.BEA MPZ1608S221A-T          | T  | 158/26.1     |

# [LOGIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION          | M. | H/V LOCATION |
|---------|------------|----------------------|----|--------------|
| EP1006  | 6910014690 | S.BEA MPZ1608S221A-T | T  | 160.6/26.1   |
| EP1007  | 6910014690 | S.BEA MPZ1608S221A-T | T  | 163.1/26.1   |
| EP1008  | 6910014690 | S.BEA MPZ1608S221A-T | T  | 179.1/29.9   |
| EP1009  | 6910014690 | S.BEA MPZ1608S221A-T | T  | 185.1/26.1   |

# [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| IC1201  | 1110003870 | S.IC NJM2058M-TE1-#ZZZB         | B  | 43.2/129.3   |
| IC1301  | 1110003870 | S.IC NJM2058M-TE1-#ZZZB         | B  | 18.8/131.1   |
| IC1401  | 1130011530 | S.IC CD74HC4094M96              | B  | 54.9/96.2    |
| IC1402  | 1130011530 | S.IC CD74HC4094M96              | B  | 54.9/108.1   |
| IC1403  | 1130012000 | S.IC M62352AGP C60Q             | T  | 58.6/95      |
| IC1404  | 1120002830 | S.IC NJM2125F-TE1-#FZZB         | T  | 168.4/132.6  |
| IC2001  | 1110003870 | S.IC NJM2058M-TE1-#ZZZB         | B  | 174.6/75.2   |
| IC2101  | 1190002261 | S.IC USB2502-AEZG               | T  | 162.7/34.5   |
| IC2102  | 1130013010 | S.IC SN74AHC1G08DCK3            | T  | 162.3/40.3   |
| IC2103  | 1180003480 | S.REG NJU7772F33-TE1-#ZZZB      | T  | 176/33.9     |
| IC2104  | 1180003480 | S.REG NJU7772F33-TE1-#ZZZB      | T  | 176.4/27.9   |
| IC2121  | 1190002730 | S.IC CP2102-GMR <MAC>           | T  | 177.2/41.5   |
| IC2131  | 1130007021 | S.IC TC7S66FU(Te85L,F)          | T  | 174.4/58.6   |
| IC2132  | 1190002240 | S.IC PCM2901E/2K                | T  | 160.5/53.1   |
| IC2201  | 1130005252 | S.IC TC74HC08AF(EL,F)           | B  | 182/47.2     |
| IC2202  | 1130005721 | S.IC TC7W04F(Te12L,F)           | B  | 184.1/39.6   |
| IC2301  | 1110003870 | S.IC NJM2058M-TE1-#ZZZB         | B  | 97.7/18.9    |
| IC2312  | 1110003091 | IC LA4425A-E                    |    |              |
| IC2331  | 1110006300 | S.IC NJM2172V-TE1-#ZZZB         | T  | 92.6/10.2    |
| IC2362  | 1120002830 | S.IC NJM2125F-TE1-#FZZB         | T  | 100.6/19.3   |
| IC2601  | 1110006300 | S.IC NJM2172V-TE1-#ZZZB         | T  | 11.6/63.4    |
| IC3001  | 1130012900 | S.IC TC74LCX00FT (EL)           | T  | 144.2/38.8   |
| IC3002  | 1130013110 | S.IC KIC7W53FK-RTK/P            | T  | 89/22.1      |
| IC3201  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 124/41.4     |
| IC3202  | 1110006190 | S.IC NJM074M-TE1-#ZZZB          | B  | 124/51.6     |
| IC3203  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 124/61.2     |
| IC3301  | 1110005100 | S.IC NJM072BM-TE1-#ZZZB         | B  | 129.8/30.7   |
| IC3303  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 121.2/30.7   |
| IC3401  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 104.1/35.1   |
| IC3402  | 1110005461 | S.IC TA4107F(Te12L,F)           | T  | 108.3/48.8   |
| IC3501  | 1130013110 | S.IC KIC7W53FK-RTK/P            | T  | 107.8/59.6   |
| IC3502  | 1130013110 | S.IC KIC7W53FK-RTK/P            | T  | 109.4/76.3   |
| IC3651  | 1180003210 | S.REG NJM2831F                  | T  | 167.8/80.1   |
| IC3715  | 1110006420 | S.IC UPC2708TB-E3-A             | T  | 144/101.5    |
| IC4001  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 79.3/21.6    |
| IC4002  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 79.2/12.2    |
| IC4003  | 1180003490 | S.REG NJM2871BF04-TE1-#ZZZB     | T  | 63.8/9.1     |
| IC4004  | 1190002920 | S.IC PCM4202PFB                 | T  | 65.9/19.5    |
| IC4005  | 1130013440 | S.IC SN74LVC2G74DCTR            | T  | 58.4/12.9    |
| IC4101  | 1130005971 | S.IC TC74HC4053AF(F) S          | B  | 90.8/71.4    |
| IC4201  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 78.3/52.8    |
| IC4202  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 71.1/44.9    |
| IC4204  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 80/44.9      |
| IC4205  | 1110001901 | S.IC UPC4570G2-E1-A             | B  | 79.4/73.4    |
| IC4301  | 1190002650 | S.IC AK4620BVP-E2/P             | T  | 67.3/37.7    |
| IC4302  | 1110004770 | S.IC BU9480F-E2                 | B  | 78.1/62.7    |
| IC4401  | 1110007390 | S.IC NJM2114M-TE1-#ZZZB         | B  | 79.3/31.5    |
| IC4402  | 1110003870 | S.IC NJM2058M-TE1-#ZZZB         | B  | 91.2/59.9    |
| IC4501  | 1130015150 | S.IC CY22381FXC(SX-3073G)       | B  | 66.4/89.1    |
| IC4502  | 1130011930 | S.IC SN74LVC1G04DCKR            | T  | 67.3/86.7    |
| IC5001  | 1140014800 | S.IC TMS320C6726BRFP266         | T  | 41.5/23.4    |
| IC5002  | 1130015210 | S.IC EN29LV04A0-70SCP(SX-3073C) | T  | 17.4/23.1    |
| IC5101  | 1140014320 | S.IC TMS320C6720BRFP200         | T  | 50.8/62.9    |
| IC5102  | 1130015220 | S.IC EN29LV04A0-70SCP(SX-3073D) | T  | 26.7/62.7    |
| IC6001  | 1120002830 | S.IC NJM2125F-TE1-#FZZB         | T  | 151.2/113.4  |
| IC6002  | 1180000720 | S.IC AN79L05M-(E1)              | B  | 110.4/90.9   |
| IC6003  | 1190002880 | S.IC AD9834CRUZ-REEL7 <FE>      | T  | 80.6/128     |
| IC6004  | 1190002890 | S.IC ADF4360-8BCPZRL7 <FE>      | T  | 79.7/106     |
| IC6005  | 1110006131 | S.IC UPC4094G2-E1-A             | B  | 104.6/81     |
| IC6006  | 1110006131 | S.IC UPC4094G2-E1-A             | B  | 96.1/81      |
| IC6007  | 1190002900 | S.IC ADS7886SDCKR               | T  | 84/76        |
| IC6008  | 1130013440 | S.IC SN74LVC2G74DCTR            | T  | 92.3/107.7   |
| IC6009  | 1110006131 | S.IC UPC4094G2-E1-A             | B  | 88.7/81      |
| IC6010  | 1130011930 | S.IC SN74LVC1G04DCKR            | T  | 71.5/106.9   |
| IC6020  | 1130011930 | S.IC SN74LVC1G04DCKR            | T  | 92.3/112.3   |
| Q1101   | 1540000550 | S.TRA 2SD1664 T100Q             | B  | 4.6/92.4     |
| Q1102   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 7.9/96.5     |
| Q1103   | 1540000550 | S.TRA 2SD1664 T100Q             | B  | 4.6/99.1     |
| Q1111   | 1540000550 | S.TRA 2SD1664 T100Q             | B  | 4.6/106.7    |
| Q1112   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 7.9/104.1    |
| Q1201   | 1560001260 | S.FET 2SK3018 T106              | T  | 42.9/125.7   |
| Q1202   | 1590003780 | S.TRA KRA304E-RTK/P             | T  | 45.2/126     |
| Q1241   | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 36.3/123     |
| Q1242   | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 39.1/123     |
| Q1243   | 1510000510 | S.TRA 2SA1576A T106R            | B  | 20.9/120.8   |
| Q1251   | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 43.3/119.7   |
| Q1252   | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 47.5/119.1   |
| Q1253   | 1590003790 | S.TRA KRC404E RTK/P             | T  | 59/120.2     |
| Q1254   | 1560001260 | S.FET 2SK3018 T106              | T  | 59.1/110.5   |
| Q1255   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 56.1/110.6   |
| Q1256   | 1590003680 | S.TRA KRC402 RTK/P              | T  | 59.3/126.5   |
| Q1257   | 1590003680 | S.TRA KRC402 RTK/P              | T  | 59.3/135.6   |
| Q1401   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 57.2/101.7   |
| Q2001   | 1590003680 | S.TRA KRC402 RTK/P              | T  | 166.9/145.3  |
| Q2031   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 172.1/148.3  |
| Q2041   | 1540000451 | S.TRA 2SD1623T-TD-E             | B  | 187.3/146    |
| Q2042   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 179.8/145.3  |
| Q2043   | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 184.7/148    |
| Q2051   | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 162.6/145.3  |

# [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                             | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------------|----|--------------|
| Q2101   | 1590003770 | S.TRA       | KRA302E-RTK/P               | T  | 159.4/41.8   |
| Q2102   | 1590003680 | S.TRA       | KRC402 RTK/P                | T  | 159.6/39.5   |
| Q2201   | 1590001650 | S.TRA       | XP4601(TX)                  | T  | 189.8/40.3   |
| Q2301   | 1590003680 | S.TRA       | KRC402 RTK/P                | T  | 145.7/5.2    |
| Q2302   | 1590003680 | S.TRA       | KRC402 RTK/P                | T  | 139.6/5.2    |
| Q2311   | 1540000471 | S.TRA       | 2SD1801S-TL-E               | B  | 132.5/9.5    |
| Q2312   | 1560001330 | S.FET       | RSR025N03                   | T  | 109.1/16     |
| Q2361   | 1550000010 | S.FET       | 2SJ364-Q (TX)               | T  | 101.5/26.6   |
| Q3001   | 1530002601 | S.TRA       | 2SC4215-O(TE85R,F)          | B  | 145.3/32.9   |
| Q3201   | 1530003450 | S.TRA       | 2SC4835-R(TX)               | T  | 120.3/74.8   |
| Q3202   | 1530003450 | S.TRA       | 2SC4835-R(TX)               | T  | 126.8/74.8   |
| Q3501   | 1580000751 | S.FET       | 3SK294(TE85L,F)             | T  | 108.6/55.6   |
| Q3502   | 1590003680 | S.TRA       | KRC402 RTK/P                | T  | 99.9/60.5    |
| Q3504   | 1560000561 | S.FET       | 2SK882-GR(TE85L,F)          | B  | 114.1/85.7   |
| Q3601   | 1530003021 | S.TRA       | 2SC4402-3-TL-E              | B  | 152.7/82.8   |
| Q3602   | 1530003021 | S.TRA       | 2SC4402-3-TL-E              | B  | 159.2/81     |
| Q3603   | 1530003842 | S.TRA       | 2SC5501A-4-TR-E             | T  | 162.4/86.6   |
| Q6003   | 1530003900 | S.TRA       | KTC4075 BL-RTK/P            | T  | 150.3/119    |
| Q6004   | 1530003240 | S.TRA       | 2SC4536 QS-T1               | T  | 134/110.5    |
| Q6005   | 1560000561 | S.FET       | 2SK882-GR(TE85L,F)          | B  | 110.5/100.4  |
| Q6006   | 1530003340 | S.TRA       | 2SC3357-T1 RF               | T  | 96.2/132.1   |
| Q6007   | 1560000561 | S.FET       | 2SK882-GR(TE85L,F)          | T  | 114.8/104.4  |
| Q6008   | 1590003680 | S.TRA       | KRC402 RTK/P                | T  | 85.5/107.4   |
|         |            |             |                             |    |              |
| D1001   | 1790000660 | S.DIO       | MA728(TX)                   | B  | 27.6/104.3   |
| D1002   | 1790000660 | S.DIO       | MA728(TX)                   | B  | 30.1/104.3   |
| D1101   | 1750001180 | S.DIO       | KDS122 RTK/P                | T  | 7.9/100.3    |
| D1111   | 1750001180 | S.DIO       | KDS122 RTK/P                | T  | 7.9/107.9    |
| D1201   | 1730002341 | S.ZEN       | MAZ8047GML                  | T  | 44.5/128.3   |
| D1202   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 47.2/123.3   |
| D1203   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 39.2/122.8   |
| D1204   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 39.2/135.2   |
| D1205   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 36.3/127     |
| D1206   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 36.8/130.1   |
| D1251   | 1790000660 | S.DIO       | MA728(TX)                   | T  | 44.6/122.8   |
| D1252   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 57.4/112.8   |
| D1302   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 12.2/138.6   |
| D1303   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 23.5/136.6   |
| D1304   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 27.3/126.7   |
| D1401   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 65.2/101.4   |
| D1406   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 17/88        |
| D1407   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 19/88        |
| D1408   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 21/88        |
| D2031   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 172.1/145.1  |
| D2041   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 183.5/145.1  |
| D2101   | 1790000980 | S.DIO       | MA742(TX)                   | T  | 169.5/29.6   |
| D2102   | 1790000980 | S.DIO       | MA742(TX)                   | T  | 172/29.6     |
| D2131   | 1750001180 | S.DIO       | KDS122 RTK/P                | T  | 171.8/61.5   |
| D2201   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 192.3/37     |
| D2301   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 147.2/6.9    |
| D2302   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 141.1/6.9    |
| D2361   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 101.3/24.5   |
| D3201   | 1750000431 | S.DIO       | HSB88WSTR-E                 | T  | 145.5/63     |
| D3202   | 1750000431 | S.DIO       | HSB88WSTR-E                 | T  | 137.7/66.1   |
| D3301   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 126.2/33.1   |
| D3302   | 1750001320 | S.DIO       | KDS4148U RTK/P              | B  | 126.2/28.3   |
| D3701   | 1750000581 | S.DIO       | 1SV307(TPH3,F)              | B  | 155.8/93.6   |
| D3702   | 1750000581 | S.DIO       | 1SV307(TPH3,F)              | B  | 148.5/94.8   |
| D3703   | 1750000431 | S.DIO       | HSB88WSTR-E                 | T  | 135.1/91     |
| D4001   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 78.6/22.5    |
| D4002   | 1750001320 | S.DIO       | KDS4148U RTK/P              | T  | 78.6/20.7    |
| D4101   | 1790001041 | S.ZEN       | MAZ8033GLL                  | B  | 84.1/77.7    |
| D4102   | 1790001041 | S.ZEN       | MAZ8033GLL                  | B  | 97.8/69.9    |
| D6001   | 1750000971 | S.DIO       | CPH5513-TL-E                | T  | 162.4/116.5  |
| D6002   | 1750000441 | S.DIO       | 1SV263-TL-E                 | B  | 161/120.2    |
| D6003   | 1750000971 | S.DIO       | CPH5513-TL-E                | T  | 160.5/122.8  |
| D6004   | 1750000431 | S.DIO       | HSB88WSTR-E                 | T  | 93.4/92.5    |
| D6005   | 1750000431 | S.DIO       | HSB88WSTR-E                 | T  | 118.6/127.1  |
|         |            |             |                             |    |              |
| FI3501  | 2020001070 | CER         | CFWLA455KDFA-B0 (CFWS455D)  |    |              |
| FI3502  | 2020001510 | CER         | CFWLA455KJFA-B0 (CFWS455IT) |    |              |
| FI5001  | 2040000790 | S.LC        | EXCCET103U                  | T  | 37.6/41.4    |
| FI5101  | 2040000790 | S.LC        | EXCCET103U                  | T  | 41.1/81      |
| FI6001  | 2030000290 | S.MON       | DSF753SBF 45 MHz (FL-357)   | T  | 111.9/111    |
|         |            |             |                             |    |              |
| X2101   | 6050012780 | S.XTA       | CR-871 DSX321G 24 MHz       | T  | 160.3/25.2   |
| X2131   | 6050012770 | S.XTA       | CR-870 DSX321G 12 MHz       | T  | 164.4/60.8   |
|         |            |             |                             |    |              |
| L1501   | 6190002000 | S.COI       | SLF12575T-330M3R2-PF        | T  | 163.1/13.9   |
| L1901   | 6200003241 | S.COI       | NLV32T-221J                 | T  | 145.2/141.7  |
| L1902   | 6200003241 | S.COI       | NLV32T-221J                 | T  | 145.2/138.7  |
| L2001   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/138.7    |
| L2002   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/135.6    |
| L2003   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/129.4    |
| L2004   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/132.5    |
| L2005   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/126.3    |
| L2006   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/118      |
| L2007   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 178/114.9    |
| L2311   | 6180003640 | COI         | SZW1012T-142-0.3            |    |              |
| L2331   | 6200002041 | S.COI       | NLV25T-101J                 | B  | 87.9/10.6    |
| L2501   | 6200002041 | S.COI       | NLV25T-101J                 | B  | 179.7/94.9   |
| L2601   | 6200002041 | S.COI       | NLV25T-101J                 | T  | 17.1/68.5    |
| L3001   | 6200001831 | S.COI       | NLV32T-100J                 | B  | 139.7/37.3   |
| L3002   | 6200001831 | S.COI       | NLV32T-100J                 | B  | 139.7/40.3   |
| L3003   | 6200002520 | S.COI       | ELJNC R18K-F                | T  | 147.7/43.3   |
| L3201   | 6200003520 | S.COI       | ELJFB 102K-F                | T  | 125.7/68.9   |
| L3202   | 6140002810 | S.COI       | LR-317                      | T  | 145.5/69     |
| L3203   | 6140002810 | S.COI       | LR-317                      | T  | 145.5/57     |
| L3204   | 6140002810 | S.COI       | LR-317                      | T  | 137.7/60.1   |
| L3205   | 6140002810 | S.COI       | LR-317                      | T  | 137.7/72.1   |



[MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| L3401   | 6200002041 | S.COI NLV25T-101J           | B  | 109.3/47.8   |
| L3402   | 6200002041 | S.COI NLV25T-101J           | B  | 112.3/48.1   |
| L3403   | 6200002041 | S.COI NLV25T-101J           | B  | 112.7/43.5   |
| L3501   | 6200002041 | S.COI NLV25T-101J           | B  | 101.9/54.2   |
| L3502   | 6200003520 | S.COI ELJFB 102K-F          | B  | 105.7/55     |
| L3503   | 6150004090 | COI LS-469 (C-13969)        |    |              |
| L3601   | 6200005011 | S.COI NLV25T-100J           | B  | 163.6/79.4   |
| L3602   | 6190001621 | COI #E544EN-100028          |    |              |
| L3603   | 6140003930 | COI LR-492                  |    |              |
| L3604   | 6200007750 | S.COI LQW2BHN56NJ03L        | B  | 162.5/93.2   |
| L3605   | 6200007770 | S.COI LQW2BHN10J03L         | B  | 159.8/94.1   |
| L3701   | 6140004680 | S.COI LR-528 4KBL           | T  | 128.2/91     |
| L3702   | 6140002810 | S.COI LR-317                | T  | 142.1/91     |
| L3703   | 6200003281 | S.COI NLV25T-2R2J           | B  | 159.7/97.9   |
| L3704   | 6200003281 | S.COI NLV25T-2R2J           | B  | 149.6/86.7   |
| L3705   | 6200003281 | S.COI NLV25T-2R2J           | B  | 154.8/96.8   |
| L3715   | 6200005041 | S.COI NLV25T-220J           | B  | 144.5/100.6  |
| L4001   | 6200001831 | S.COI NLV32T-100J           | B  | 60.4/11.9    |
| L4301   | 6200001831 | S.COI NLV32T-100J           | T  | 58.1/43.6    |
| L4302   | 6200001831 | S.COI NLV32T-100J           | T  | 64.1/31.4    |
| L4303   | 6200001831 | S.COI NLV32T-100J           | T  | 72/66.3      |
| L4501   | 6200001831 | S.COI NLV32T-100J           | T  | 73.3/87.3    |
| L5001   | 6200011900 | S.COI LQH43CN100K03L        | T  | 44/41.9      |
| L5101   | 6200011900 | S.COI LQH43CN100K03L        | T  | 35.7/78.9    |
| L6001   | 6200001831 | S.COI NLV32T-100J           | T  | 157.4/118    |
| L6003   | 6200001831 | S.COI NLV32T-100J           | B  | 85.3/134.6   |
| L6004   | 6200001831 | S.COI NLV32T-100J           | T  | 163.9/120.3  |
| L6005   | 6200001831 | S.COI NLV32T-100J           | B  | 76.3/134.2   |
| L6006   | 6200001831 | S.COI NLV32T-100J           | B  | 161.6/123.3  |
| L6008   | 6200001831 | S.COI NLV32T-100J           | B  | 148.7/117.5  |
| L6009   | 6200005051 | S.COI NLV25T-330J           | B  | 98.5/89.9    |
| L6010   | 6200013650 | S.COI LQW18ANR27G00D        | T  | 74.8/104.3   |
| L6011   | 6200013650 | S.COI LQW18ANR27G00D        | T  | 75.6/107.4   |
| L6012   | 6200001831 | S.COI NLV32T-100J           | T  | 155.8/123.4  |
| L6013   | 6200002041 | S.COI NLV25T-101J           | B  | 103.4/75.7   |
| L6014   | 6200010940 | S.COI C2520C-39NG-A         | T  | 155.9/128.3  |
| L6015   | 6200001831 | S.COI NLV32T-100J           | B  | 83/110.3     |
| L6016   | 6140004680 | S.COI LR-528 4KBL           | T  | 87.4/92.5    |
| L6017   | 6200002041 | S.COI NLV25T-101J           | B  | 90.1/87.6    |
| L6018   | 6200010860 | S.COI C2520C-R10G-A (0.1U)  | T  | 152.3/129.1  |
| L6019   | 6200002911 | S.COI NLV25T-2R2J           | B  | 87.3/121.6   |
| L6020   | 6140004680 | S.COI LR-528 4KBL           | T  | 99.4/92.5    |
| L6021   | 6200004961 | S.COI NLV25T-R33J           | T  | 88.1/122.4   |
| L6022   | 6200001831 | S.COI NLV32T-100J           | B  | 83/107       |
| L6023   | 6150004280 | COI LS-484B (C-14927)       |    |              |
| L6024   | 6200002651 | S.COI NLV25T-R18J           | B  | 76.5/111.3   |
| L6025   | 6200002651 | S.COI NLV25T-R18J           | B  | 79.3/111.3   |
| L6026   | 6200010450 | S.COI C2520C-R82G-A (0.82U) | T  | 139.7/118.6  |
| L6027   | 6200009851 | S.COI NLV25T-R39J           | B  | 91.4/120.4   |
| L6028   | 6150004280 | COI LS-484B (C-14927)       |    |              |
| L6029   | 6200009851 | S.COI NLV25T-R39J           | B  | 94.2/125.7   |
| L6030   | 6200001831 | S.COI NLV32T-100J           | T  | 115.1/99.3   |
| L6031   | 6200002690 | S.COI MLF1608A 1R0M-T       | B  | 139.6/113.7  |
| L6032   | 6150004280 | COI LS-484B (C-14927)       |    |              |
| L6033   | 6140003790 | COI LR-442                  |    |              |
| L6034   | 6200001831 | S.COI NLV32T-100J           | T  | 128/117      |
| L6035   | 6200001831 | S.COI NLV32T-100J           | T  | 128/111.5    |
| L6036   | 6200004961 | S.COI NLV25T-R33J           | T  | 90.5/133.4   |
| L6037   | 6150004280 | COI LS-484B (C-14927)       |    |              |
| L6038   | 6200009851 | S.COI NLV25T-R39J           | B  | 103.4/131.5  |
| L6039   | 6140002810 | S.COI LR-317                | T  | 124.6/127.1  |
| L6040   | 6140002810 | S.COI LR-317                | T  | 113.1/127.1  |
| L6041   | 6150004250 | COI LS-471A (C-14922)       |    |              |
| L6042   | 6200011670 | S.COI LQW18ANR28NG00D       | T  | 110.6/117    |
| L6043   | 6200002651 | S.COI NLV25T-R18J           | T  | 95.2/102     |
| L6044   | 6200002841 | S.COI NLV25T-R22J           | T  | 91.6/101.1   |
| L6045   | 6200002611 | S.COI NLV25T-R47J           | B  | 107/134.4    |
| L6046   | 6200005140 | S.COI MLF1608D R33K-T       | B  | 72.5/118.6   |
| L6047   | 6200003540 | S.COI MLF1608D R22K-T       | B  | 77.3/119.3   |
| R1001   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/114.7   |
| R1002   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/113.2   |
| R1003   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/111.9   |
| R1004   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/110.6   |
| R1005   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/109.3   |
| R1006   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/108     |
| R1007   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/106.7   |
| R1008   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/105.4   |
| R1009   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/109.4   |
| R1010   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/108.1   |
| R1011   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/106.8   |
| R1012   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/105.5   |
| R1013   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/104.2   |
| R1014   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/102.9   |
| R1015   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/101.6   |
| R1016   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/100.3   |
| R1017   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/99      |
| R1018   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/100.2   |
| R1019   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/98.9    |
| R1020   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/97.7    |
| R1021   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/97.6    |
| R1022   | 7030003860 | S.RES ERJ3GE JPW V          | T  | 13.8/96.4    |
| R1023   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/95.1    |
| R1024   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 13.8/93.8    |
| R1025   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/96.3    |
| R1026   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/95      |
| R1027   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/93.7    |
| R1028   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/92.4    |
| R1029   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 25.1/91.1    |
| R1030   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 25.1/104.1   |
| R1031   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 25.1/89.8    |
| R1051   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/116.5   |
| R1052   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/115.2   |

[MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R1053   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/113.9   |
| R1054   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/117.8   |
| R1055   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/116.5   |
| R1056   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/115.2   |
| R1057   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/113.9   |
| R1058   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/112.6   |
| R1059   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/112.6   |
| R1060   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/111.3   |
| R1061   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/110     |
| R1062   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/111.3   |
| R1063   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/110     |
| R1064   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/108.7   |
| R1065   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/107.4   |
| R1066   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/106.1   |
| R1067   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/104.8   |
| R1068   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/103.5   |
| R1069   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/108.7   |
| R1070   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/107.4   |
| R1071   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 33.4/102.2   |
| R1072   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 33.4/100.9   |
| R1073   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 33.4/99.6    |
| R1074   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 33.4/98.3    |
| R1075   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 33.1/97      |
| R1076   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 33.5/95.7    |
| R1077   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 33.5/94.4    |
| R1078   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/93.1    |
| R1079   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/91.8    |
| R1080   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/90.5    |
| R1081   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/106.1   |
| R1082   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/104.8   |
| R1083   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/103.5   |
| R1084   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/102.2   |
| R1085   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/100.9   |
| R1086   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/89.2    |
| R1087   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/99.6    |
| R1088   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/87.9    |
| R1089   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/86.6    |
| R1090   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 34.2/85.3    |
| R1091   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/98.3    |
| R1092   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/97      |
| R1093   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/95.7    |
| R1094   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/94.4    |
| R1095   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/93.1    |
| R1096   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/91.8    |
| R1097   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/90.5    |
| R1098   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 47.1/89.2    |
| R1101   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 8/93.2       |
| R1102   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 5.3/93.2     |
| R1103   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 8/94.5       |
| R1104   | 7030006210 | S.RES ERJ12YJ4R7U (4.7)     | T  | 3.3/98.7     |
| R1105   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 2/96.1       |
| R1106   | 7030003240 | S.RES ERJ3GEYJ 220 V (22)   | B  | 8.9/96.5     |
| R1107   | 7030003240 | S.RES ERJ3GEYJ 220 V (22)   | B  | 8.9/95.2     |
| R1111   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 8/102.2      |
| R1112   | 7030006210 | S.RES ERJ12YJ4R7U (4.7)     | T  | 3.3/106.3    |
| R1113   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 2/103.7      |
| R1201   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 47.4/121.7   |
| R1202   | 7030003840 | S.RES ERJ3GEYJ 225 V (2.2M) | B  | 50.1/122.6   |
| R1203   | 7030011360 | S.RES ERJ8GEYJ 241V (240)   | T  | 49.3/128     |
| R1205   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 39.9/129.3   |
| R1206   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 38.1/129.7   |
| R1207   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 36.1/123.9   |
| R1208   | 7030003620 | S.RES ERJ3GEYJ 333 V (33K)  | T  | 46.5/137.7   |
| R1209   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 43.7/137.7   |
| R1210   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 47.3/134.6   |
| R1211   | 7310005390 | S.TRI EVM-3VXS50 BQ3 (472)  | T  | 44.2/134.9   |
| R1212   | 7030003450 | S.RES ERJ3GEYJ 122 V (1.2K) | B  | 43/135.7     |
| R1213   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 35.6/130.9   |
| R1214   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 47.5/124.8   |
| R1215   | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 37.4/125.4   |
| R1216   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | B  | 35.6/127.7   |
| R1217   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 39.3/126.7   |
| R1218   | 7030003660 | S.RES ERJ3GEYJ 683 V (68K)  | T  | 39.3/128     |
| R1219   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 36.6/125.5   |
| R1220   | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 38.1/132.9   |
| R1221   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 36.8/134.4   |
| R1222   | 7030003740 | S.RES ERJ3GEYJ 334 V (330K) | B  | 49.9/133.1   |
| R1223   | 7510001511 | S.THE NTCG16 4LH 223JT      | T  | 36.2/128.6   |
| R1224   | 7030005681 | S.RES ERA3YKD 473V (47K)    | B  | 53/133.9     |
| R1225   | 7030008121 | S.RES ERA3YED 682V (6.8K)   | B  | 50.7/134.6   |
| R1226   | 7030009861 | S.RES ERA3YED 471V (47K)    | T  | 47.3/130.9   |
| R1227   | 7310005370 | S.TRI EVM-3VXS50 BQ2 (471)  | T  | 44.2/131.2   |
| R1228   | 7030008121 | S.RES ERA3YED 682V (6.8K)   | B  | 50.7/134.4   |
| R1229   | 7030005681 | S.RES ERA3YKD 473V (47K)    | B  | 50.7/129.8   |
| R1241   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 37.4/121     |
| R1242   | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | T  | 39.3/125.4   |
| R1243   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 21.9/124.3   |
| R1244   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 24/125.1     |
| R1245   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 18.7/121.5   |
| R1251   | 7030003310 | S.RES ERJ3GEYJ 820 V (82)   | B  | 41.1/118.7   |
| R1252   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 47/121.6     |
| R1253   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 48.3/123.1   |
| R1254   | 7030009920 | S.RES ERJ3GEYJ 335 V (3.3M) | B  | 50.7/125.9   |
| R1255   | 7310005420 | S.TRI EVM-3VXS50 B15 (104)  | T  | 55.4/121.2   |
| R1256   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 52.9/113.1   |
| R1257   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 52.9/111.3   |
| R1258   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 57.7/114.3   |
| R1259   | 7030003760 | S.RES ERJ3GEYJ 474 V (470K) | B  | 53/125.9     |
| R1260   | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | T  | 53.6/130     |
| R1262   | 7310005430 | S.TRI EVM-3VXS50 BE5 (224)  | T  | 55.4/127.5   |
| R1263   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 54.8/125.9   |
| R1264   | 7030003620 | S.RES ERJ3GEYJ 333 V (33K)  | T  | 56.3/130     |
| R1267   | 7310005430 | S.TRI EVM-3VXS50 BE5 (224)  | T  | 55.4/136.4   |
| R1268   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 56.3/131.3   |

# [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R1272   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 45.7/119.9   |
| R1301   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 18/124.3     |
| R1302   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 19.1/137.8   |
| R1303   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 8.8/139.1    |
| R1304   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 9/136.3      |
| R1305   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 26.6/136.6   |
| R1306   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 27.5/134.2   |
| R1307   | 7030003730 | S.RES ERJ3GEYJ 274 V (270K) | B  | 12.5/136     |
| R1308   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 25.1/135     |
| R1309   | 7030009920 | S.RES ERJ3GEYJ 335 V (3.3M) | B  | 24.9/127.4   |
| R1310   | 7030003820 | S.RES ERJ3GEYJ 155 V (1.5M) | B  | 8.5/132      |
| R1311   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 10.1/133.8   |
| R1312   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | B  | 12.9/132     |
| R1313   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 24.3/133.7   |
| R1314   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | B  | 24.3/131.1   |
| R1315   | 7030003740 | S.RES ERJ3GEYJ 334 V (330K) | B  | 7.8/129.6    |
| R1317   | 7030003820 | S.RES ERJ3GEYJ 155 V (1.5M) | B  | 19.9/124.4   |
| R1318   | 7030003840 | S.RES ERJ3GEYJ 225 V (2.2M) | B  | 25.1/129.8   |
| R1319   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 12.6/128.2   |
| R1401   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 165.7/130.2  |
| R1402   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 168.5/130.2  |
| R1403   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 171.3/130.2  |
| R1404   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 170.9/135.7  |
| R1405   | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 61.9/102.7   |
| R1406   | 7030008061 | S.RES ERA3YED 222V (2.2K)   | B  | 61.5/101.4   |
| R1407   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 11.6/91.6    |
| R1408   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 13/91.6      |
| R1701   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 137.8/139.9  |
| R1702   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 136.5/139.9  |
| R1703   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 135.2/139.9  |
| R1705   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 132.6/139.9  |
| R1706   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 131.3/139.9  |
| R1801   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 50.6/142.5   |
| R1802   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 51.9/142.5   |
| R1803   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 53.2/142.5   |
| R1804   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 54.5/142.5   |
| R1805   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 55.8/142.5   |
| R1806   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 57.1/142.5   |
| R1807   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 58.4/142.5   |
| R1808   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 59.7/142.5   |
| R1809   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 61/142.5     |
| R1810   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 62.3/142.5   |
| R2001   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | T  | 168.8/145.4  |
| R2002   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 173.1/81.7   |
| R2003   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 171.3/81.6   |
| R2004   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 168.3/73.8   |
| R2005   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 177.7/75.9   |
| R2006   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 174.4/69.6   |
| R2007   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 177.4/81.7   |
| R2008   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 181.5/81.7   |
| R2031   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 175.3/145.4  |
| R2032   | 7030003620 | S.RES ERJ3GEYJ 333 V (33K)  | T  | 174/145.4    |
| R2033   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 170.2/145.4  |
| R2034   | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 174/148.1    |
| R2041   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 183.1/148.1  |
| R2042   | 7030003620 | S.RES ERJ3GEYJ 333 V (33K)  | T  | 181.8/148.1  |
| R2043   | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 180.3/148.1  |
| R2044   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 176.6/145.4  |
| R2045   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 189.5/148.1  |
| R2046   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 186.9/148.1  |
| R2051   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 164.5/145.4  |
| R2052   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 164.5/148.1  |
| R2053   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 160.7/145.4  |
| R2062   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 176.6/73.4   |
| R2063   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 177.9/73.4   |
| R2101   | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 160.8/27.3   |
| R2102   | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 168.8/32     |
| R2103   | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 168.8/33.3   |
| R2104   | 7030003240 | S.RES ERJ3GEYJ 220 V (22)   | B  | 168.1/36.5   |
| R2105   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 157/34.1     |
| R2106   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 157.1/35.8   |
| R2107   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 155.3/37.4   |
| R2108   | 7030005691 | S.RES ERA3YED 123V (12K)    | B  | 166.1/29.7   |
| R2109   | 7030003240 | S.RES ERJ3GEYJ 220 V (22)   | B  | 168.8/34     |
| R2110   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 157.1/37.1   |
| R2111   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 168.9/38.1   |
| R2112   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 177.9/30.3   |
| R2113   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 166.8/40.1   |
| R2114   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 165.5/40.1   |
| R2115   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 170.5/67     |
| R2116   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 170.5/69.6   |
| R2117   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 177.5/69.6   |
| R2118   | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | B  | 182.4/72.8   |
| R2121   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 176.5/36.8   |
| R2131   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 174.1/61.3   |
| R2132   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 171.9/61.3   |
| R2133   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 171.2/58.8   |
| R2135   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 179.4/69.6   |
| R2137   | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 160.7/47.8   |
| R2138   | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 163.6/58.6   |
| R2139   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 175.9/55.4   |
| R2140   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 174.6/55.4   |
| R2141   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 173.3/55.4   |
| R2202   | 7030003590 | S.RES ERJ3GEYJ 183 V (18K)  | B  | 189.4/37.8   |
| R2203   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 189.3/38.3   |
| R2205   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 187.9/41.9   |
| R2206   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | T  | 189.8/43.9   |
| R2207   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 180.5/54.2   |
| R2208   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 182.9/35.4   |
| R2209   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 185.1/35.4   |
| R2301   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 149/5.3      |
| R2302   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 142.9/5.3    |
| R2303   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 7.9/70       |
| R2304   | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | B  | 12.7/69.2    |

# [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R2305   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 94.4/5.7     |
| R2308   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 96/9.9       |
| R2311   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 136.4/19.5   |
| R2312   | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 108.1/4.7    |
| R2313   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | B  | 135.7/17.4   |
| R2314   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 99.8/6.8     |
| R2315   | 7030003660 | S.RES ERJ3GEYJ 683 V (68K)  | T  | 99.1/11.3    |
| R2318   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 131/15.2     |
| R2319   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 109.4/12.1   |
| R2320   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 114.1/17.5   |
| R2321   | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 100.9/12.3   |
| R2323   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 109.4/13.5   |
| R2324   | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | B  | 105.6/10     |
| R2325   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 110.1/20.3   |
| R2326   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 96/20.4      |
| R2327   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 98.2/15.7    |
| R2333   | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 64.1/96.9    |
| R2334   | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 64.1/96.9    |
| R2335   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 87.6/10      |
| R2336   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 96/12.9      |
| R2351   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 93.6/24.7    |
| R2352   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 90.5/20.5    |
| R2353   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 95.2/24.7    |
| R2354   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 96.8/25.5    |
| R2361   | 7030003350 | S.RES ERJ3GEYJ 322 V (3.3K) | B  | 103.6/13.4   |
| R2362   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 103.6/21.2   |
| R2363   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 100.8/24.2   |
| R2364   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | B  | 100.8/27.5   |
| R2365   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 98.4/24.7    |
| R2366   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 100.8/28.5   |
| R2367   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 98.4/27.5    |
| R2369   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 100.8/29.8   |
| R2370   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 103.7/25.7   |
| R2371   | 7030003700 | S.RES ERJ3GEYJ 154 V (150K) | T  | 101/22.9     |
| R2372   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 101/21.6     |
| R2373   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 99.5/15.7    |
| R2374   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 103.8/18.3   |
| R2375   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 103.8/21.6   |
| R2401   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 195.6/81.9   |
| R2601   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 4.7/60.2     |
| R2602   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 17.9/60      |
| R2603   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | T  | 17.9/61.3    |
| R2604   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 17.3/66.6    |
| R2605   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | T  | 17.9/65.4    |
| R2607   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 6.5/59.4     |
| R2608   | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | T  | 6/62         |
| R2609   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 6.5/56.8     |
| R3001   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 145.1/26.9   |
| R3002   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | B  | 143.1/127.4  |
| R3003   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 145.1/29.5   |
| R3004   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 143.1/35.8   |
| R3005   | 7030003630 | S.RES ERJ3GEYJ 393 V (39K)  | B  | 143.1/33     |
| R3006   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 144.8/34     |
| R3007   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 144.7/35.8   |
| R3008   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 147.7/37.6   |
| R3009   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 147.7/40.2   |
| R3010   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 146.1/43.4   |
| R3011   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 144.2/44.2   |
| R3013   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 86.5/27.6    |
| R3015   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 92.2/24      |
| R3016   | 7030003860 | S.RES ERJ3GE JPW V          | T  | 92.2/25.3    |
| R3201   | 7030010390 | S.RES ERA3YED 821V (820)    | B  | 116.5/39.6   |
| R3202   | 7030009691 | S.RES ERA3YED 101V (100)    | B  | 114.4/37.7   |
| R3203   | 7030008061 | S.RES ERA3YED 222V (2.2K)   | B  | 118.3/47.2   |
| R3204   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 129.1/48.3   |
| R3205   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 123.8/45.7   |
| R3206   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 126.6/57.5   |
| R3207   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 123.8/57.5   |
| R3208   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 122.6/48.5   |
| R3209   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 121/45.7     |
| R3210   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 118.2/50.7   |
| R3211   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 117.4/45.9   |



## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R3303   | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 132.7/39.3   |
| R3304   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 125.4/35.8   |
| R3305   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 125.4/25.6   |
| R3306   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 122.6/25.6   |
| R3307   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 123.2/37.3   |
| R3308   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 124.6/30.7   |
| R3309   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | B  | 119.2/25.6   |
| R3310   | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 120.1/36.6   |
| R3311   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | B  | 116.7/33.8   |
| R3312   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 121.7/38.8   |
| R3313   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 123.5/36.9   |
| R3401   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 106/41.6     |
| R3402   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 104.7/41.6   |
| R3403   | 7030007230 | S.RES ERA3YED 102V (1K)     | B  | 94.1/33.3    |
| R3405   | 7030007230 | S.RES ERA3YED 102V (1K)     | B  | 95.6/34.6    |
| R3406   | 7030007230 | S.RES ERA3YED 102V (1K)     | B  | 97.7/38.2    |
| R3407   | 7030007230 | S.RES ERA3YED 102V (1K)     | B  | 104.4/38.5   |
| R3408   | 7030007230 | S.RES ERA3YED 102V (1K)     | B  | 109.2/36.9   |
| R3409   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 107.3/41.6   |
| R3410   | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 108.6/41.6   |
| R3411   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 102.2/34.2   |
| R3412   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 105.8/34.3   |
| R3413   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 110.7/48.5   |
| R3414   | 7030003410 | S.RES ERJ3GEYJ 561 V (560)  | B  | 114.2/48.4   |
| R3501   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 109.4/55.5   |
| R3502   | 7030003630 | S.RES ERJ3GEYJ 393 V (39K)  | T  | 108.6/52.4   |
| R3503   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 111.8/56.3   |
| R3504   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 111.8/55     |
| R3505   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 111.8/53.7   |
| R3506   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 108.6/53.7   |
| R3507   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 111.8/57.6   |
| R3508   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 102.6/57.6   |
| R3509   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 112.6/75.4   |
| R3510   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 112.6/78.2   |
| R3511   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 105.4/53.7   |
| R3512   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 111.7/60.4   |
| R3513   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 111.8/82.9   |
| R3514   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 104.1/60.5   |
| R3515   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 107.5/75.4   |
| R3516   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 102/59.8     |
| R3517   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 111.2/83.8   |
| R3518   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | B  | 114.3/83.8   |
| R3519   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 114.6/81.1   |
| R3520   | 7310005400 | S.TRI EVM-3VXS50 BE4 (223)  | T  | 112.1/82.9   |
| R3521   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 110.6/86.5   |
| R3522   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | B  | 110.1/77.2   |
| R3523   | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | B  | 111.6/65.2   |
| R3524   | 7030003500 | S.RES ERJ3GEYJ 332 V (3.3K) | B  | 112.3/68.4   |
| R3601   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 153.8/71     |
| R3602   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 166.6/79.7   |
| R3603   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | B  | 152.3/79.9   |
| R3604   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | B  | 156.5/79.7   |
| R3605   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 156.4/76     |
| R3606   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 166.2/82.5   |
| R3607   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | B  | 162.4/81.9   |
| R3608   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 156.9/82.4   |
| R3609   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | B  | 159.1/84.6   |
| R3610   | 7030003300 | S.RES ERJ3GEYJ 680 V (68)   | B  | 156.8/87.4   |
| R3611   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 161.7/89.3   |
| R3612   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | T  | 164.4/82.8   |
| R3614   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 163.1/84.3   |
| R3616   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 163/84.6     |
| R3617   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 165/88.5     |
| R3618   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 165.6/84.6   |
| R3619   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 165/89.8     |
| R3620   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 157.4/96.8   |
| R3651   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 167.4/77.8   |
| R3701   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 150.5/91.1   |
| R3702   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 124.8/86     |
| R3703   | 7030004030 | S.RES ERJ3GEYJ 5R6 V (5.6)  | B  | 126.4/88     |
| R3704   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 125.7/90.4   |
| R3705   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 132.2/90.3   |
| R3706   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 152.4/95.5   |
| R3707   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 144/92.7     |
| R3708   | 7030004030 | S.RES ERJ3GEYJ 5R6 V (5.6)  | B  | 145.5/90.4   |
| R3709   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 146.9/92.7   |
| R3710   | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 135/89.6     |
| R3711   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 137.4/90.3   |
| R3715   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 138.6/100.1  |
| R3716   | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 140.7/101.8  |
| R3717   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 141/99.8     |
| R3718   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 141.4/99     |
| R4001   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 83.6/24.4    |
| R4002   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 75.2/18.5    |
| R4003   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 82.7/13.2    |
| R4004   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 79.2/17.7    |
| R4005   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 77.3/6.8     |
| R4006   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 83.5/14.3    |
| R4007   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 81.9/22.5    |
| R4008   | 7030006601 | S.RES ERA3YED 272V (2.7K)   | T  | 77.8/12.4    |
| R4009   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 77.8/9.4     |
| R4010   | 7030006601 | S.RES ERA3YED 272V (2.7K)   | T  | 79.2/15.2    |
| R4011   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 77.8/10.7    |
| R4012   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 73.9/12.4    |
| R4013   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 76.6/15.2    |
| R4014   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 78.4/24.4    |
| R4015   | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | T  | 81.9/25.1    |
| R4016   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 73.9/10.9    |
| R4017   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 74.6/14.5    |
| R4018   | 7030003690 | S.RES ERJ3GEYJ 124 V (120K) | T  | 76.3/22.4    |
| R4019   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | T  | 74.8/22.4    |
| R4020   | 7410001090 | S.ARR EXB-V8V 101JV         | T  | 59/17.8      |
| R4021   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 97/54.8      |
| R4022   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 97/56.4      |

## [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R4101   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 78.2/67.6    |
| R4102   | 7030003620 | S.RES ERJ3GEYJ 333 V (33K)  | T  | 93.3/69.2    |
| R4103   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 97.5/73.3    |
| R4104   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | B  | 84.3/80.1    |
| R4105   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 97.5/71.7    |
| R4106   | 7030003620 | S.RES ERJ3GEYJ 333 V (33K)  | B  | 84.5/68.8    |
| R4107   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 84.5/66.2    |
| R4108   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 84.5/70.4    |
| R4109   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 97.8/64.6    |
| R4201   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 75.2/57.3    |
| R4202   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 83.8/54.6    |
| R4203   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 95.2/65.8    |
| R4204   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 76.7/40.4    |
| R4205   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 93.9/63.2    |
| R4206   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 82.6/39.3    |
| R4207   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 91.9/63.2    |
| R4208   | 7030006601 | S.RES ERA3YED 272V (2.7K)   | B  | 71/51.9      |
| R4209   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 71.4/54.4    |
| R4210   | 7030006601 | S.RES ERA3YED 272V (2.7K)   | T  | 82.6/52.8    |
| R4211   | 7030006601 | S.RES ERA3YED 272V (2.7K)   | B  | 73/51.1      |
| R4212   | 7030006601 | S.RES ERA3YED 272V (2.7K)   | T  | 81.2/52.8    |
| R4213   | 7030005321 | S.RES ERA3YED 103V (10K)    | T  | 74.5/45.6    |
| R4214   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 65.4/49.4    |
| R4215   | 7030005321 | S.RES ERA3YED 103V (10K)    | T  | 67.3/45.6    |
| R4216   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 97/61.2      |
| R4217   | 7030005321 | S.RES ERA3YED 103V (10K)    | T  | 78.2/44.7    |
| R4218   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 76/50.8      |
| R4219   | 7030005321 | S.RES ERA3YED 103V (10K)    | T  | 81.1/44.7    |
| R4220   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | B  | 62.5/41.7    |
| R4221   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 73.9/43.5    |
| R4222   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 70.2/45.7    |
| R4223   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 78.2/41.9    |
| R4224   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 81.1/41.9    |
| R4225   | 7030009691 | S.RES ERA3YED 101V (100)    | T  | 71.7/45.7    |
| R4226   | 7030009691 | S.RES ERA3YED 101V (100)    | T  | 68.7/43.5    |
| R4227   | 7030009691 | S.RES ERA3YED 101V (100)    | T  | 76.1/41.9    |
| R4228   | 7030009691 | S.RES ERA3YED 101V (100)    | T  | 79.5/41.9    |
| R4229   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 73/54.4      |
| R4230   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | B  | 65.3/41.7    |
| R4231   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 84.1/72.5    |
| R4232   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 80.7/71.8    |
| R4233   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | T  | 78.8/72.7    |
| R4234   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 84.5/72      |
| R4235   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 81.2/79.5    |
| R4236   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 80.4/66.3    |
| R4241   | 7030003450 | S.RES ERJ3GEYJ 122 V (1.2K) | B  | 71.1/72.4    |
| R4242   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 71.9/76.1    |
| R4301   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 60.1/36.3    |
| R4302   | 7410001090 | S.ARR EXB-V8V 101JV         | T  | 60.2/39      |
| R4303   | 7410001090 | S.ARR EXB-V8V 101JV         | T  | 72.2/62.9    |
| R4401   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 83.5/29.7    |
| R4402   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 83/36.6      |
| R4403   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 94.5/59.7    |
| R4404   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 91.9/59.7    |
| R4405   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 85.4/56.9    |
| R4406   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 74.7/28.4    |
| R4407   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 74.7/29.7    |
| R4408   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 74.7/31.1    |
| R4409   | 7030005341 | S.RES ERA3YED 332V (3.3K)   | T  | 76.5/35.4    |
| R4410   | 7030005341 | S.RES ERA3YED 332V (3.3K)   | T  | 76.5/36.8    |
| R4411   | 7030005341 | S.RES ERA3YED 332V (3.3K)   | T  | 79.3/38.1    |
| R4412   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 90/60.4      |
| R4413   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 79/26.7      |
| R4414   | 7030009961 | S.RES ERA3YED 221V (220)    | T  | 79/27.9      |
| R4415   | 7030009961 | S.RES ERA3YED 221V (220)    | T  | 77.5/31.1    |
| R4416   | 7030005341 | S.RES ERA3YED 332V (3.3K)   | T  | 79.3/35.4    |
| R4417   | 7030009861 | S.RES ERA3YED 471V (470)    | T  | 76.5/34      |
| R4418   | 7030009861 | S.RES ERA3YED 471V (470)    | T  | 76.5/38.1    |
| R4419   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 81.6/60.8    |
| R4420   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 84.5/56.6    |
| R4421   | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | B  | 84.4/63.2    |
| R4422   | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 85.8/59.3    |
| R4423   | 7030003500 | S.RES ERJ3GEYJ 332 V (3.3K) | T  | 89.7/57.1    |
| R4424   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 87.7/56.6    |
| R4425   | 7030003860 | S.RES ERJ3GE JPW V          | T  | 82.4/29.9    |
| R4426   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 87.8/63.8    |
| R4428   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | T  | 89.7/55.8    |
| R4430   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 97/59.6      |
| R4501   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 62.8/88.5    |
| R4502   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 67.3/83.6    |
| R4503   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 69.8/84.4    |
| R4504   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 70.4/87.1    |
| R4505   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 67.3/88.7    |
| R4506   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 69.3/91.3    |
| R4507   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 66.4/90.5    |
| R5001   | 7410000720 | S.ARR EXB-V8V 473JV (47K)   | T  | 27.7/13.3    |
| R5002   | 7410000720 | S.ARR EXB-V8V 473JV (47K)   | T  | 25.4/9.1     |
| R5003   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 46.7/33.3    |
| R5005   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 55.6/30.2    |
| R5006   | 7410000720 | S.ARR EXB-V8V 473JV (47K)   | T  | 54.1/10.8    |
| R5007   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 55.7/32.4    |
| R5008   | 7410000720 | S.ARR EXB-V8V 473JV (47K)   | T  | 18.6/9.1     |
| R5009   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 14.7/9.2     |
| R5010   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 62/13.1      |
| R5011   | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 51.1/26      |
| R5012   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 54.7/28.7    |
| R5013   | 7030003860 | S.RES ERJ3GE JPW V          | T  | 50.7/10.3    |
| R5101   | 7410000720 | S.ARR EXB-V8V 473JV (47K)   | T  | 28.2/48.6    |
| R5102   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 24.2/48.6    |
| R5103   | 7410000720 | S.ARR EXB-V8V 473JV (47K)   | T  | 37/52.7      |
| R5104   | 7410000720 | S.ARR EXB-V8V 473JV (47K)   | T  | 37.1/48.5    |
| R5105   | 7410000720 | S.ARR EXB-V8V 473JV (47K)   | T  | 32.7/44.6    |
| R5401   | 7410001100 | S.ARR EXB-V8V 472JV (4.7K)  | T  | 14.4/37.1    |
| R5402   | 7410001100 | S.ARR EXB-V8V 472JV (4.7K)  | T  | 42.9/84.7    |



[MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R6001   | 7030003700 | S.RES ERJ3GEYJ 154 V (150K) | T  | 144.2/111.3  |
| R6002   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 149.4/109.8  |
| R6003   | 7030003690 | S.RES ERJ3GEYJ 124 V (120K) | T  | 146.5/112.5  |
| R6004   | 7030003690 | S.RES ERJ3GEYJ 124 V (120K) | T  | 148.5/112.1  |
| R6005   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 152.1/111    |
| R6006   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | B  | 76.7/95.4    |
| R6007   | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 73.9/96.1    |
| R6008   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 72.4/110.7   |
| R6009   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | B  | 71.2/95      |
| R6010   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 70.7/98.1    |
| R6011   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 71.6/104.7   |
| R6012   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 159.4/115.3  |
| R6013   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 72.1/102.8   |
| R6014   | 7030010520 | S.ARR ERJ1TYJ 101U (100)    | B  | 113.4/95.8   |
| R6015   | 7410001090 | S.ARR EXB-V8V 101JV         | T  | 81.9/101.7   |
| R6016   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | B  | 72.4/110.1   |
| R6018   | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | T  | 86/131.6     |
| R6019   | 7030003860 | S.RES ERJ3GE JPW V          | T  | 70.3/125.5   |
| R6020   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | B  | 158/118      |
| R6021   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 78.3/102.1   |
| R6023   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 77.8/134.2   |
| R6024   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 76.5/134.2   |
| R6025   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 155.3/118.7  |
| R6026   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | B  | 152.6/118    |
| R6028   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 74.8/105.5   |
| R6029   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 74.3/107.4   |
| R6031   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 106/81.7     |
| R6032   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 101.6/91     |
| R6033   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 85.8/94.5    |
| R6034   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 150.9/117.1  |
| R6035   | 7410001090 | S.ARR EXB-V8V 101JV         | T  | 82.4/122.3   |
| R6036   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 103.2/80.4   |
| R6037   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 101.9/84.7   |
| R6038   | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 148.8/116.5  |
| R6040   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 101.9/83.4   |
| R6041   | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | T  | 83.7/109.7   |
| R6042   | 7030003730 | S.RES ERJ3GEYJ 274 V (270K) | B  | 104.7/86.2   |
| R6043   | 7310005400 | S.TRI EVM-3VSX50 BE4 (223)  | T  | 146.4/116.2  |
| R6044   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 86.7/109     |
| R6045   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 77.4/112.4   |
| R6046   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 101/97.2     |
| R6047   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 95.3/86.2    |
| R6048   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | B  | 101.7/101.5  |
| R6049   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 81.8/113.5   |
| R6050   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 101/103.6    |
| R6051   | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 83.9/113.7   |
| R6052   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 86.7/114.2   |
| R6053   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 94.6/84.2    |
| R6054   | 7410001090 | S.ARR EXB-V8V 101JV         | T  | 87/75.6      |
| R6055   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 98.3/125.8   |
| R6056   | 7030003290 | S.RES ERJ3GEYJ 560 V (56)   | B  | 139.6/116.8  |
| R6057   | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 100.4/124.1  |
| R6058   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 97/81.7      |
| R6059   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 111.6/100    |
| R6060   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 95.1/77.9    |
| R6061   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 135.3/111.3  |
| R6062   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 110.3/102.8  |
| R6063   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 88.6/133.4   |
| R6064   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 101.1/126.8  |
| R6065   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 138.8/110.3  |
| R6066   | 7030003500 | S.RES ERJ3GEYJ 332 V (3.3K) | T  | 130.2/110.1  |
| R6067   | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | T  | 90.6/131     |
| R6068   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 92.7/129.9   |
| R6069   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 98.5/84.2    |
| R6070   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 112.4/100.6  |
| R6071   | 7310005410 | S.TRI EVM-3VSX50 BQ4 (473)  | T  | 98.3/77.4    |
| R6072   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 97.2/135.3   |
| R6073   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 87.1/80.4    |
| R6074   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 80.7/79.5    |
| R6075   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 80.6/80.9    |
| R6076   | 7030009591 | S.RES ERA3YED 472V (4.7K)   | T  | 84.4/79.1    |
| R6077   | 7030003630 | S.RES ERJ3GEYJ 393 V (39K)  | T  | 89.9/78.6    |
| R6079   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 112.9/100    |
| R6081   | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | T  | 89.9/80.4    |
| R6082   | 7030003330 | S.RES ERJ3GEYJ 121 V (120)  | B  | 110.7/126.3  |
| R6083   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | B  | 84.4/82.1    |
| R6085   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | T  | 113.8/106.3  |
| R6086   | 7030003290 | S.RES ERJ3GEYJ 560 V (56)   | B  | 111.4/128.7  |
| R6087   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | T  | 113.8/107.6  |
| R6088   | 7030003330 | S.RES ERJ3GEYJ 121 V (120)  | B  | 109.1/129.4  |
| R6089   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 95.5/112.4   |
| R6090   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 115.2/115.1  |
| R6091   | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | B  | 114.1/117.3  |
| R6092   | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 113.3/115.2  |
| R6093   | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 90.4/110.9   |
| R6094   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 90.4/112.4   |
| R6095   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 95.5/109.8   |
| R6096   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 148.3/114.3  |
| R6097   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 83.3/106.3   |
| R6098   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 95.7/103     |
| R6099   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 95.5/107.1   |
| R6103   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 161.7/129.6  |
| R6106   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 148.8/126.8  |
| R6107   | 7030004030 | S.RES ERJ3GEYJ 5R6 V (5.6)  | B  | 151/129.1    |
| R6108   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 150.2/131.5  |
| R6110   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 137.6/120.2  |
| R6113   | 7030003860 | S.RES ERJ3GE JPW V          | B  | 125/122.5    |
| R6115   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 162.5/112.7  |
| R6116   | 7030004030 | S.RES ERJ3GEYJ 5R6 V (5.6)  | B  | 159.9/113.4  |
| R6117   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 162.7/114.6  |
| R6120   | 7030003860 | S.RES ERJ3GE JPW V          | T  | 76.5/127.4   |
| R6121   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 79.1/134.2   |

[MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| C1001   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 28.3/105.4   |
| C1002   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/93.8    |
| C1003   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.7/95.1    |
| C1004   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/96.4    |
| C1005   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.7/97.7    |
| C1006   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/99      |
| C1007   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.7/100.3   |
| C1008   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/101.6   |
| C1009   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.7/102.9   |
| C1010   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/104.2   |
| C1011   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.7/106.9   |
| C1012   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/108.1   |
| C1013   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 16.6/109.5   |
| C1014   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.4/104.1   |
| C1015   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/106.7   |
| C1016   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/108     |
| C1017   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/109.3   |
| C1018   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/110.6   |
| C1019   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/111.9   |
| C1020   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 28.3/113.2   |
| C1021   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 13.8/110.7   |
| C1051   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/117.8   |
| C1052   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/116.5   |
| C1053   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/115.2   |
| C1054   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/113.9   |
| C1055   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/112.6   |
| C1056   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/111.3   |
| C1057   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/110     |
| C1058   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/108.7   |
| C1059   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/107.4   |
| C1060   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/106.1   |
| C1061   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/104.8   |
| C1062   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/103.5   |
| C1063   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.3/102.2   |
| C1064   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.3/100.9   |
| C1065   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.3/99.6    |
| C1066   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.3/98.3    |
| C1067   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30/97        |
| C1068   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.4/95.7    |
| C1069   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 30.4/94.4    |
| C1070   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/93.1    |
| C1071   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/91.8    |
| C1072   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/90.5    |
| C1073   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/89.2    |
| C1074   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/87.9    |
| C1075   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/86.6    |
| C1076   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 31.1/85.3    |
| C1101   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 7.7/98.4     |
| C1111   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 7.7/106      |
| C1201   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 50.7/128.2   |
| C1202   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 35.6/129.3   |
| C1252   | 4030017490 | S.CER C1608 JB 1A 105K-T          | B  | 42.2/121.6   |
| C1253   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 44.6/121.1   |
| C1254   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 43.5/118     |
| C1256   | 4030017490 | S.CER C1608 JB 1A 105K-T          | B  | 46.7/118     |
| C1257   | 4030017490 | S.CER C1608 JB 1A 105K-T          | B  | 48.3/118.8   |
| C1258   | 4030009530 | S.CER C1608 CH 1H 030B-T          | B  | 49/125.9     |
| C1259   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 55/114.1     |
| C1260   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 60/113.2     |
| C1301   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 15.8/124.5   |
| C1302   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 17.5/137.8   |
| C1303   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 6.5/135.6    |
| C1304   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 27.6/138.9   |
| C1305   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 23.6/127.4   |
| C1401   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 57.3/99.5    |
| C1402   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 61.8/99.5    |
| C1403   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 41.5/123.6   |
| C1404   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 56.8/90.4    |
| C1405   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 56.8/102.2   |
| C1407   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 170.9/132.9  |
| C1409   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 61.9/101.4   |
| C1410   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 64.5/95.6    |
| C1601   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 1.8/111.3    |
| C1901   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 154.6/146.4  |
| C1902   | 4030011340 | S.CER C1608 CH 1H 471J-T          | T  | 152.7/142.9  |
| C1903   | 4030011340 | S.CER C1608 CH 1H 471J-T          | T  | 151.3/142.9  |
| C2001   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/122.8  |
| C2002   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/126.3  |
| C2003   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/114.9  |
| C2004   | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 174.5/132.5  |
| C2005   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/120.2  |
| C2006   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/124.1  |
| C2007   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/118    |
| C2008   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/129.4  |
| C2009   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/135.6  |
| C2010   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 174.5/138.7  |
| C2011   | 4030019090 | S.CER C2012 JB 1C 225M-T          | T  | 172.3/77.8   |
| C2012   | 4030019090 | S.CER C2012 JB 1C 225M-T          | B  | 171.5/85.9   |
| C2013   | 4030018620 | S.CER C1608 CH 1H 222J-T          | B  | 166.7/73     |
| C2014   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 175.3/82     |
| C2015   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 168.7/70.9   |
| C2016   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 179.7/81.7   |
| C2031   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 170.2/148.1  |
| C2041   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 177.9/145.4  |
| C2042   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 188.2/148.1  |
| C2051   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 163.2/148.1  |
| C2062   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 173.5/70.9   |
| C2063   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 181.3/72.4   |
| C2101   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 156/32.4     |
| C2102   | 4030007040 | S.CER C1608 CH 1H 180J-T          | T  | 158.2/27.3   |

# [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| C2103   | 4030007040 | S.CER C1608 CH 1H 180J-T          | T  | 160.9/28.6   |
| C2104   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 158.5/29.7   |
| C2105   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 155.3/40     |
| C2106   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 163/28.8     |
| C2107   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 165.3/29.8   |
| C2108   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 167.6/29.9   |
| C2109   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 168.9/35.5   |
| C2110   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 156.8/39.3   |
| C2111   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 178.7/33.4   |
| C2112   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 178.7/27.7   |
| C2113   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 164.2/40.1   |
| C2114   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 175.6/31.6   |
| C2115   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 176/25.6     |
| C2116   | 4030011330 | S.CER C1608 CH 1H 391J-T          | B  | 180.8/72.8   |
| C2117   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 169.2/69.6   |
| C2118   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 154.3/54.1   |
| C2119   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 160.9/61.5   |
| C2120   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 158.1/31.9   |
| C2121   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 171.4/41.5   |
| C2122   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 173/38.7     |
| C2123   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 173.8/37.4   |
| C2124   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 173/40       |
| C2131   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 177.5/55.7   |
| C2132   | 4550007480 | S.TAN F930J106MAABMA              | B  | 171.9/56.8   |
| C2133   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 155.2/47.6   |
| C2134   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 158.1/47.5   |
| C2135   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 172.5/58.8   |
| C2137   | 4550007230 | S.TAN F930J475MAABMA              | B  | 171.9/49.5   |
| C2138   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 165.9/46.7   |
| C2139   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 164.1/46.7   |
| C2140   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 162.6/47.1   |
| C2141   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 166.5/54     |
| C2142   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 168.1/53.9   |
| C2143   | 4030007040 | S.CER C1608 CH 1H 180J-T          | T  | 161/58.7     |
| C2144   | 4030007040 | S.CER C1608 CH 1H 180J-T          | T  | 161/60       |
| C2145   | 4550007480 | S.TAN F930J106MAABMA              | B  | 167.4/59.7   |
| C2146   | 4550007230 | S.TAN F930J475MAABMA              | B  | 171.9/52.3   |
| C2201   | 4030007010 | S.CER C1608 CH 1H 100D-T          | B  | 191.7/40.4   |
| C2202   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 185/54.2     |
| C2203   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 187.1/35.4   |
| C2300   | 4030006860 | S.CER C1608 JB 1H 102K-T          | B  | 96.5/12      |
| C2301   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 146.4/5.3    |
| C2302   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 148.4/5.8    |
| C2303   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 140.2/5.3    |
| C2304   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 142.4/5.7    |
| C2305   | 4510009920 | S.ELE 16 CE 100 LH                | T  | 28/78.4      |
| C2306   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 10.5/69.2    |
| C2307   | 4030011340 | S.CER C1608 CH 1H 471J-T          | B  | 180.8/13     |
| C2309   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 90.2/4       |
| C2310   | 4510009930 | S.ELE 10 CE 10 FN                 | T  | 96.4/28.3    |
| C2311   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 106.7/4.6    |
| C2312   | 4510009370 | ELE 16 ME 470 CZ                  | T  |              |
| C2313   | 4510009390 | ELE 16 ME 2200 CZ                 | T  |              |
| C2314   | 4340000260 | S.MYL ECPU1C104MA5                | B  | 111.3/4.7    |
| C2315   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 102.2/8.3    |
| C2316   | 4030018580 | S.CER C1608 CH 1H 821J-T          | B  | 100.9/13.7   |
| C2317   | 4510009370 | ELE 16 ME 470 CZ                  | T  |              |
| C2318   | 4030018620 | S.CER C1608 CH 1H 222J-T          | B  | 114.4/4.6    |
| C2319   | 4550003220 | S.TAN TEESVA 1E 105M8R            | B  | 114.1/12.9   |
| C2321   | 4030008950 | S.CER C2012 JB 1C 823K-T          | B  | 111.4/13.2   |
| C2322   | 4030018640 | S.CER C2012 CH 1H 103J-T          | B  | 108.9/11.5   |
| C2323   | 4030017490 | S.CER C1608 JB 1A 105K-T          | B  | 104.1/13.7   |
| C2325   | 4550002890 | S.TAN TEESVA 1A 225M8R            | B  | 111.4/19.2   |
| C2326   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 96.4/16.1    |
| C2327   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 96.4/23.5    |
| C2328   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 109.3/18.4   |
| C2331   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 90.9/12.2    |
| C2333   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 87.6/8.7     |
| C2334   | 4550007480 | S.TAN F930J106MAABMA              | T  | 94.3/17      |
| C2335   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 92/4         |
| C2336   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 93.9/10      |
| C2351   | 4030018620 | S.CER C1608 CH 1H 222J-T          | B  | 91.8/20.5    |
| C2352   | 4550007480 | S.TAN F930J106MAABMA              | B  | 94.3/28      |
| C2361   | 4030017810 | S.CER C1608 CH 1H 102J-T          | B  | 100.8/25.5   |
| C2362   | 4510009930 | S.ELE 10 CE 10 FN                 | T  | 105.7/29.6   |
| C2363   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 106.3/25.7   |
| C2364   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 97.4/18.3    |
| C2401   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 190.6/80.2   |
| C2402   | 4030011340 | S.CER C1608 CH 1H 471J-T          | B  | 188.6/80.2   |
| C2501   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 175.1/96.5   |
| C2502   | 4030011340 | S.CER C1608 CH 1H 471J-T          | B  | 175.8/94.9   |
| C2601   | 4550003220 | S.TAN TEESVA 1E 105M8R            | B  | 4/61.3       |
| C2602   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 13.6/67      |
| C2603   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 17.9/62.6    |
| C2604   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 17.9/64.2    |
| C2605   | 4030007120 | S.CER C1608 CH 1H 820J-T          | T  | 4.7/62.8     |
| C2606   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 4.8/65.7     |

# [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                            | M. | H/V LOCATION |
|---------|------------|----------------------------------------|----|--------------|
| C2607   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 6.6/66.2     |
| C3001   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 143.1/30.2   |
| C3002   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 143.1/38.6   |
| C3003   | 4030017810 | S.CER C1608 CH 1H 102J-T               | B  | 147.1/36.6   |
| C3004   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 140.6/41     |
| C3005   | 4030009530 | S.CER C1608 CH 1H 030B-T               | T  | 142.8/43.8   |
| C3006   | 4610001970 | S.TRI TZC3P200A110R00 (TZC03P200A1102) | T  | 145.2/46.6   |
| C3007   | 4030017810 | S.CER C1608 CH 1H 102J-T               | B  | 146.1/46.2   |
| C3008   | 4030017810 | S.CER C1608 CH 1H 102J-T               | B  | 144.2/46.9   |
| C3009   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 86.9/20.2    |
| C3010   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 86.2/28.8    |
| C3012   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 89.6/24      |
| C3201   | 4030017870 | S.CER C1608 CH 1H 681J-T               | B  | 118.3/39.6   |
| C3202   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 116.1/43.6   |
| C3203   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 119/44.3     |
| C3204   | 4030007160 | S.CER C1608 CH 1H 181J-T               | B  | 118.2/47.5   |
| C3205   | 4030009350 | S.CER C1608 CH 1H 3R5B-T               | B  | 117.4/49.1   |
| C3206   | 4030017870 | S.CER C1608 CH 1H 681J-T               | B  | 117.4/55.5   |
| C3207   | 4030011330 | S.CER C1608 CH 1H 391J-T               | B  | 118.2/53.9   |
| C3208   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 119.8/48.5   |
| C3209   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 126.8/41.8   |
| C3210   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 132.1/43.4   |
| C3211   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 119/61.1     |
| C3212   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 119.8/65.3   |
| C3213   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 128.7/65.3   |
| C3214   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 129.5/61.1   |
| C3215   | 4030007170 | S.CER C1608 CH 1H 221J-T               | B  | 118.4/60     |
| C3216   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 118.4/70.5   |
| C3217   | 4510009910 | S.ELE 16 CE 10 LH                      | T  | 121.5/68.9   |
| C3218   | 4030018800 | S.CER C3216 CH 1H 223J-T               | B  | 119.5/68.6   |
| C3219   | 4030007170 | S.CER C1608 CH 1H 221J-T               | B  | 129.1/59.9   |
| C3220   | 4030018800 | S.CER C3216 CH 1H 223J-T               | B  | 125.2/66.6   |
| C3221   | 4030010760 | S.CER C1608 CH 1H 331J-T               | T  | 122.3/74.7   |
| C3222   | 4030017490 | S.CER C1608 JB 1A 105K-T               | T  | 122.3/77.7   |
| C3223   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 123.6/77.7   |
| C3224   | 4030007010 | S.CER C1608 CH 1H 100D-T               | T  | 118.4/77.7   |
| C3225   | 4550003220 | S.TAN TEESVA 1E 105M8R                 | B  | 122.1/76     |
| C3226   | 4030018640 | S.CER C2012 CH 1H 103J-T               | B  | 145.5/62.7   |
| C3227   | 4030010760 | S.CER C1608 CH 1H 331J-T               | T  | 128.8/74.7   |
| C3228   | 4030017490 | S.CER C1608 JB 1A 105K-T               | T  | 128.8/77.7   |
| C3229   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 130.1/77.7   |
| C3230   | 4030007010 | S.CER C1608 CH 1H 100D-T               | T  | 123.6/74.7   |
| C3231   | 4550003220 | S.TAN TEESVA 1E 105M8R                 | B  | 129.4/73.6   |
| C3232   | 4030018640 | S.CER C2012 CH 1H 103J-T               | B  | 137.7/65.9   |
| C3233   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 118.3/54     |
| C3234   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 119.8/49.8   |
| C3235   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 126.8/45     |
| C3236   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 129.5/50.5   |
| C3237   | 4030009920 | S.CER C1608 CH 1H 050B-T               | B  | 151/69.4     |
| C3239   | 4030009920 | S.CER C1608 CH 1H 050B-T               | B  | 151/71       |
| C3301   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 131/38.5     |
| C3302   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 117.5/36.5   |
| C3303   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 121.7/35.7   |
| C3304   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 123.5/33.3   |
| C3305   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 120/28.7     |
| C3306   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 132.8/35.8   |
| C3307   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 128.7/25.2   |
| C3401   | 4030017810 | S.CER C1608 CH 1H 102J-T               | T  | 106/44.4     |
| C3403   | 4030018590 | S.CER C1608 CH 1H 122J-T               | B  | 94.9/36.7    |
| C3404   | 4030018600 | S.CER C1608 CH 1H 152J-T               | B  | 99/33.9      |
| C3405   | 4030018620 | S.CER C1608 CH 1H 222J-T               | B  | 110.5/34.1   |
| C3406   | 4030007140 | S.CER C1608 CH 1H 121J-T               | B  | 97.7/33.9    |
| C3407   | 4030011330 | S.CER C1608 CH 1H 391J-T               | B  | 99/39.7      |
| C3408   | 4030018620 | S.CER C1608 CH 1H 222J-T               | B  | 109.2/34.1   |
| C3409   | 4030011280 | S.CER C1608 CH 1H 271J-T               | B  | 110.5/38.4   |
| C3410   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 107.3/44.4   |
| C3411   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 104.4/47.6   |
| C3412   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 106/47.3     |
| C3413   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 108.6/44.4   |
| C3414   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 98/35.5      |
| C3415   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 102.2/36.9   |
| C3416   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 105.8/37     |
| C3417   | 4510009920 | S.ELE 16 CE 100 LH                     | T  | 110.1/35.5   |
| C3418   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 106/50.1     |
| C3501   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 109.4/52.7   |
| C3502   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 105.4/52.4   |
| C3503   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | B  | 102.3/50.3   |
| C3504   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 111.8/52.4   |
| C3505   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 108.6/57.6   |
| C3506   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 105.4/57.6   |
| C3507   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 111.3/75.4   |
| C3509   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 105.4/55     |
| C3510   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 111.3/78.2   |
| C3513   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 115/81.8     |
| C3515   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 110/58.9     |
| C3516   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 110.7/81.4   |
| C3517   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 112.8/81.4   |
| C3518   | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 111.7/85.9   |
| C3519   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)      | T  | 111.9/87.4   |
| C3520   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 111.9/86.5   |
| C3522   | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 106.2/75.4   |
| C3601   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 165.8/77.1   |
| C3602   | 4030011600 | S.CER C1608 JB 1E 104K-T               | B  | 160.8/70.9   |
| C3603   | 4030006860 | S.CER C1608 JB 1H 102K-T               | B  | 160.8/72.7   |
| C3604   | 4030006860 | S.CER C1608 JB 1H 102K-T               | B  | 156.4/77.7   |
| C3605   | 4030007040 | S.CER C1608 CH 1H 180J-T               | B  | 157.6/71.9   |
| C3606   | 4030006900 | S.CER C1608 JB 1H 103K-T               | B  | 155.1/82.4   |
| C3607   | 4030006980 | S.CER C1608 CH 1H 070D-T               | B  | 156/84.6     |



# [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| C3608   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 166.2/82.5   |
| C3609   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 168.5/84.2   |
| C3610   | 4030007010 | S.CER C1608 CH 1H 100D-T          | T  | 163/89.3     |
| C3611   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 165/87.2     |
| C3612   | 4030010750 | S.CER C1608 CH 1H 201J-T          | B  | 161.8/90.8   |
| C3613   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 165/85.9     |
| C3615   | 4030007150 | S.CER C1608 CH 1H 151J-T          | B  | 164.9/94.1   |
| C3616   | 4030007120 | S.CER C1608 CH 1H 820J-T          | B  | 159.6/96     |
| C3651   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 167.4/76.5   |
| C3652   | 4030019090 | S.CER C2012 JB 1C 225M-T          | T  | 164.4/79.8   |
| C3701   | 4030011340 | S.CER C1608 CH 1H 471J-T          | T  | 132.5/91     |
| C3702   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 150.6/95.5   |
| C3704   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 148.7/91.1   |
| C3705   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 163.4/97.9   |
| C3706   | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 146.6/85.6   |
| C3715   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 140.8/100.9  |
| C3716   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 144.2/98.5   |
| C3717   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 142.5/103.6  |
| C3718   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 143.3/99.5   |
| C4001   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 89.5/28.4    |
| C4002   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 83.6/22.6    |
| C4003   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 83.5/12.5    |
| C4004   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 84.3/20.6    |
| C4005   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 83.1/17.9    |
| C4006   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 83.5/8.1     |
| C4007   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 83.8/6.3     |
| C4008   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 79.2/16.5    |
| C4009   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 88.5/17      |
| C4010   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 83.5/9.7     |
| C4011   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 80.4/10.7    |
| C4012   | 4030017870 | S.CER C1608 CH 1H 681J-T          | T  | 75.8/11.7    |
| C4013   | 4030017870 | S.CER C1608 CH 1H 681J-T          | T  | 76.6/13.7    |
| C4014   | 4030007080 | S.CER C1608 CH 1H 390J-T          | T  | 75.6/24.4    |
| C4015   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 66.8/9.5     |
| C4016   | 4030018620 | S.CER C1608 CH 1H 222J-T          | T  | 73.2/14.5    |
| C4017   | 4030018620 | S.CER C1608 CH 1H 222J-T          | T  | 73/22.4      |
| C4018   | 4550007470 | S.TAN F930J106MAABMA              | B  | 72.9/10.7    |
| C4019   | 4550007470 | S.TAN F930J106MAABMA              | B  | 72.9/26.2    |
| C4020   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 73.8/17.6    |
| C4021   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 73.1/19.8    |
| C4022   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 69.2/26.1    |
| C4023   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 70.3/13.3    |
| C4024   | 4550007470 | S.TAN F930J106MAABMA              | B  | 67.5/27.7    |
| C4025   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 68.1/11.7    |
| C4026   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 67.6/26.1    |
| C4027   | 4550007470 | S.TAN F930J106MAABMA              | B  | 67.5/13      |
| C4028   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 59/20.3      |
| C4029   | 4550007470 | S.TAN F930J106MAABMA              | B  | 60.4/19.6    |
| C4030   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 80.4/12.4    |
| C4031   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 81.9/23.8    |
| C4032   | 4030007090 | S.CER C1608 CH 1H 470J-T          | B  | 97/53.2      |
| C4033   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 60.7/10.1    |
| C4034   | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 60.7/8.1     |
| C4035   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 58.2/15.3    |
| C4101   | 4550007480 | S.TAN F930J106MAABMA              | T  | 82.5/68.5    |
| C4102   | 4550007480 | S.TAN F930J106MAABMA              | T  | 89.5/69.2    |
| C4106   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 84.1/74.5    |
| C4107   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 97.8/68      |
| C4201   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 73.3/54      |
| C4202   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 65.4/47.6    |
| C4203   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 77.3/56.6    |
| C4205   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 85.8/52.3    |
| C4207   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 74.4/39.4    |
| C4209   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 85.2/40.1    |
| C4210   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 68.5/54      |
| C4211   | 4550007480 | S.TAN F930J106MAABMA              | T  | 73.2/48.1    |
| C4212   | 4550007480 | S.TAN F930J106MAABMA              | T  | 67.9/48.1    |
| C4213   | 4550007480 | S.TAN F930J106MAABMA              | T  | 80.5/48.1    |
| C4214   | 4550007480 | S.TAN F930J106MAABMA              | T  | 82.9/44.3    |
| C4215   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 73.4/48.4    |
| C4216   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 65/45.5      |
| C4217   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 76.7/48.4    |
| C4218   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 83/48.4      |
| C4219   | 4030017810 | S.CER C1608 CH 1H 102J-T          | T  | 73.2/45.7    |
| C4220   | 4030017810 | S.CER C1608 CH 1H 102J-T          | T  | 68.8/45.7    |
| C4221   | 4030017810 | S.CER C1608 CH 1H 102J-T          | T  | 77/44.7      |
| C4222   | 4030017810 | S.CER C1608 CH 1H 102J-T          | T  | 79.5/44.7    |
| C4223   | 4030018620 | S.CER C1608 CH 1H 222J-T          | T  | 71.3/43.5    |
| C4224   | 4030018620 | S.CER C1608 CH 1H 222J-T          | T  | 74.1/40.4    |
| C4225   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 79.9/48.4    |
| C4226   | 4510009910 | S.ELE 16 CE 10 LH                 | T  | 78.1/53.9    |
| C4227   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 64.3/39.4    |
| C4228   | 4550007480 | S.TAN F930J106MAABMA              | T  | 88.4/72.5    |
| C4229   | 4030007140 | S.CER C1608 CH 1H 121J-T          | T  | 80.6/73.5    |
| C4231   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 78.8/78.8    |
| C4232   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 80.6/68.2    |
| C4236   | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 95.2/63.2    |
| C4237   | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 80.6/74.7    |
| C4301   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 70.7/39.4    |
| C4302   | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 69.1/39.4    |
| C4303   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 64.3/44.6    |
| C4304   | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 65.8/44.4    |

# [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                             | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------------|----|--------------|
| C4305   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 76.4/66.4    |
| C4306   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 83.3/63.8    |
| C4307   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 67.6/30.8    |
| C4308   | 4030017490 | S.CER       | C1608 JB 1A 105K-T          | T  | 67.6/32.1    |
| C4310   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 62.5/44.6    |
| C4311   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 60.9/44.4    |
| C4401   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 76.1/27.7    |
| C4402   | 4550007480 | S.TAN       | F930J106MAABMA              | T  | 72.1/30      |
| C4404   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 83/33.5      |
| C4405   | 4550007480 | S.TAN       | F930J106MAABMA              | T  | 70/30        |
| C4406   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 73.9/35.4    |
| C4408   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 84.4/59.9    |
| C4409   | 4340000510 | S.MYL       | ECHU01153JX5                | T  | 76.9/28.7    |
| C4410   | 4030018600 | S.CER       | C1608 CH 1H 152J-T          | B  | 79.3/37.6    |
| C4411   | 4550007480 | S.TAN       | F930J106MAABMA              | T  | 79.9/61.7    |
| C4412   | 4030018620 | S.CER       | C1608 CH 1H 222J-T          | T  | 81.6/27.9    |
| C4413   | 4030018620 | S.CER       | C1608 CH 1H 222J-T          | T  | 80.1/31.1    |
| C4414   | 4030011340 | S.CER       | C1608 CH 1H 471J-T          | T  | 79.3/34      |
| C4415   | 4030011340 | S.CER       | C1608 CH 1H 471J-T          | B  | 75.9/33.9    |
| C4416   | 4030018580 | S.CER       | C1608 CH 1H 821J-T          | T  | 89.7/58.4    |
| C4417   | 4030018580 | S.CER       | C1608 CH 1H 821J-T          | T  | 85.8/56.6    |
| C4418   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 73.9/36.8    |
| C4419   | 4510009910 | S.ELE       | 16 CE 10 LH                 | T  | 89.5/34.3    |
| C4420   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 97/58        |
| C4421   | 4510009910 | S.ELE       | 16 CE 10 LH                 | T  | 96.2/56.1    |
| C4422   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 93.2/59.7    |
| C4423   | 4030007090 | S.CER       | C1608 CH 1H 470J-T          | B  | 86.2/63.3    |
| C4501   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 70.9/89.9    |
| C4502   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 67.2/84.8    |
| C4503   | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 69.3/88.7    |
| C4505   | 4030006960 | S.CER       | C1608 CH 1H 050C-T          | B  | 41.9/31.4    |
| C5001   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 46.7/37.7    |
| C5002   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 44.9/37.7    |
| C5003   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 42.8/37.7    |
| C5004   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 40.7/37.7    |
| C5005   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 38.8/37.7    |
| C5006   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 35.2/37.7    |
| C5007   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 37.1/37.7    |
| C5008   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 31.5/36      |
| C5009   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 33.6/38      |
| C5010   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 32.9/41.4    |
| C5011   | 4550007470 | S.TAN       | F931A107MNNBMA              | B  | 54/38.5      |
| C5012   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/28.7    |
| C5014   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/30.1    |
| C5015   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/28.6    |
| C5016   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/26.7    |
| C5017   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/24.4    |
| C5018   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/22.9    |
| C5019   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/21.4    |
| C5020   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/25.8    |
| C5021   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/24.1    |
| C5022   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/22.3    |
| C5023   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/20.7    |
| C5024   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/18.3    |
| C5025   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.4/15.9    |
| C5026   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 27.3/17      |
| C5027   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 48.1/9.2     |
| C5028   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 46.5/9.2     |
| C5029   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 42.6/9.2     |
| C5030   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 41/9.2       |
| C5031   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 38.9/9.2     |
| C5032   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.8/9.2     |
| C5033   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 34.5/9.2     |
| C5034   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 32.7/9.2     |
| C5036   | 4550007470 | S.TAN       | F931A107MNNBMA              | B  | 23.6/21.7    |
| C5101   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 56.7/76.6    |
| C5102   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 54.7/77.4    |
| C5103   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 52.1/77.4    |
| C5104   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 50.5/77.4    |
| C5105   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 48.2/77.4    |
| C5106   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 43.3/77.4    |
| C5107   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 45.8/76.6    |
| C5108   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 41.5/75.7    |
| C5109   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 41.7/78      |
| C5110   | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 45.8/78.3    |
| C5111   | 4550007470 | S.TAN       | F931A107MNNBMA              | B  | 32.5/72.3    |
| C5113   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 65.2/68.1    |
| C5114   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 65.2/65.6    |
| C5115   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 65.2/63.2    |
| C5116   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 65.2/62      |
| C5117   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 65.2/60.5    |
| C5118   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/69.4    |
| C5119   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/68.2    |
| C5120   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/65.1    |
| C5121   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/63.7    |
| C5122   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/61.7    |
| C5123   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 64.8/55.3    |
| C5124   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/60.2    |
| C5125   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/57.7    |
| C5126   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 36.3/56.4    |
| C5127   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 57.2/48.5    |
| C5128   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 55.8/48.5    |
| C5129   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 51.6/48.5    |
| C5130   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 50.2/48.5    |
| C5131   | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 48/48.5      |



[MAIN UNIT]

| REF<br>NO. | PARTS<br>NO. | DESCRIPTION | M. | H/V<br>LOCATION |
|------------|--------------|-------------|----|-----------------|
|------------|--------------|-------------|----|-----------------|

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

# [MAIN UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION             | M. | H/V LOCATION |
|---------|------------|-------------------------|----|--------------|
| EP1608  | 6910015970 | S.BEA MMZ1608B 301CT-AS | T  | 3.7/126      |
| EP1609  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 12.5/125.3   |
| EP1610  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 12.5/124     |
| EP1611  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 15.2/122.9   |
| EP1612  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 12.5/121     |
| EP1613  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 12.5/119.3   |
| EP1614  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 12.5/118     |
| EP1615  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 3.7/116      |
| EP1616  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 3.7/114.8    |
| EP1617  | 6910014640 | S.BEA MPZ2012S221A-T    | T  | 4/110.5      |
| EP1618  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 3.7/124.7    |
| EP1701  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 130/139.9    |
| EP1702  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 128.7/139.9  |
| EP1703  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 127.4/139.9  |
| EP1704  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 126.1/139.9  |
| EP1705  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 124.8/139.9  |
| EP1706  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 122.4/139.9  |
| EP1707  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 121.1/139.9  |
| EP1708  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 119.8/139.9  |
| EP1709  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 118.5/139.9  |
| EP1710  | 6910014640 | S.BEA MPZ2012S221A-T    | T  | 115.8/139.9  |
| EP1801  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 41.7/142.5   |
| EP1802  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 43/142.5     |
| EP1803  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 44.3/142.5   |
| EP1804  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 47/142.5     |
| EP1805  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 48.3/142.5   |
| EP1901  | 6910018930 | S.BEA MPZ2012S601A      | T  | 154.6/143    |
| EP1902  | 6910018930 | S.BEA MPZ2012S601A      | T  | 158.2/143.1  |
| EP2001  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 178.8/121.5  |
| EP2002  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 178.8/124.1  |
| EP2003  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 174.5/112.8  |
| EP2004  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 178.8/120.2  |
| EP2031  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 181.8/144.8  |
| EP2101  | 6910012350 | S.BEA MMZ1608Y 102BT    | B  | 192.2/62.7   |
| EP2102  | 6910012350 | S.BEA MMZ1608Y 102BT    | B  | 183.7/62.7   |
| EP2103  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 175.3/30.3   |
| EP2104  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 172.7/26.3   |
| EP2121  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 173.8/36.1   |
| EP2131  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 158/58.7     |
| EP2132  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 158/60.4     |
| EP2201  | 6910012350 | S.BEA MMZ1608Y 102BT    | T  | 195.2/37     |
| EP2301  | 6910014730 | S.BEA MPZ2012S331A-T    | B  | 188.7/11.5   |
| EP2302  | 6910014730 | S.BEA MPZ2012S331A-T    | B  | 183/19.2     |
| EP2303  | 6910014730 | S.BEA MPZ2012S331A-T    | B  | 186.4/17     |
| EP2304  | 6910014730 | S.BEA MPZ2012S331A-T    | B  | 196.1/20     |
| EP2401  | 6910015970 | S.BEA MMZ1608B 301CT-AS | B  | 193.5/79.5   |
| EP2402  | 6910015970 | S.BEA MMZ1608B 301CT-AS | B  | 197.2/79.6   |
| EP3001  | 6910012350 | S.BEA MMZ1608Y 102BT    | B  | 136.9/38.8   |
| EP3601  | 6910012350 | S.BEA MMZ1608Y 102BT    | B  | 135.5/27.8   |
| EP3602  | 6910012350 | S.BEA MMZ1608Y 102BT    | B  | 132.5/25.6   |
| EP3715  | 6910015970 | S.BEA MMZ1608B 301CT-AS | T  | 140.1/99     |
| EP4101  | 6910014730 | S.BEA MPZ2012S331A-T    | B  | 2.3/79.1     |
| EP5001  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 29.5/36.8    |
| EP5101  | 6910014690 | S.BEA MPZ1608S221A-T    | T  | 38.9/76.6    |
| EP6001  | 6910015970 | S.BEA MMZ1608B 301CT-AS | T  | 146.8/110.7  |

# [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| IC1     | 1180000421 | S.IC TA78L05F(TE12R,F)          | B  | 94.4/59.7    |
| IC2     | 1130009691 | S.IC TC74HCT7007AF(F) S         | T  | 133.6/64.3   |
| IC3     | 1130011530 | S.IC CD74HC4094M96              | T  | 122.4/64.6   |
| IC4     | 1130011530 | S.IC CD74HC4094M96              | T  | 133/75.2     |
| IC101   | 1190002101 | S.IC AD9951YSVZ <FE>            | T  | 110.6/100.7  |
| IC102   | 1130010560 | S.IC SN74AHC244PWR              | T  | 126.1/95.9   |
| IC103   | 1180003190 | S.REG UPD120N33TA-E1-A          | T  | 115.7/86.4   |
| IC104   | 1180003200 | S.REG UPD120N18TA-E1-A          | T  | 115.8/91.4   |
| IC192   | 1130013010 | S.IC SN74AHC1G08DCK3            | T  | 77.6/36.8    |
| IC320   | 1110007400 | S.IC BGA616                     | T  | 43.3/67.2    |
| IC381   | 1130013270 | S.IC ADF4116BRUZ <FE>           | T  | 70/70.3      |
| IC401   | 1130013010 | S.IC SN74AHC1G08DCK3            | T  | 114/3.1      |
| IC402   | 1130003831 | S.IC TC7S04F(TE85R,F)           | T  | 90.5/9.5     |
| IC403   | 1140007881 | S.IC TC190G08EFG0046JDZ/SC1246A | T  | 104.1/13.6   |
| IC405   | 1130013010 | S.IC SN74AHC1G08DCK3            | T  | 75.2/53.2    |
| IC620   | 1110007400 | S.IC BGA616                     | T  | 38.4/47.5    |
| IC681   | 1130013270 | S.IC ADF4116BRUZ <FE>           | T  | 29.3/39.8    |
| IC701   | 1140014960 | S.IC TC190G02EFG-0058/SC1287A   | T  | 130.6/15.3   |
| Q1      | 1590003680 | S.TRA KRC402 RTK/P              | T  | 138.4/75.4   |
| Q51     | 1530003890 | S.TRA KTC3880S Y-RTK/P          | T  | 101.5/41.6   |
| Q61     | 1530004011 | S.TRA KTC3770U-C-RTK/P          | T  | 109.9/41.5   |
| Q71     | 1530003890 | S.TRA KTC3880S Y-RTK/P          | T  | 109.5/51.1   |
| Q87     | 1530003890 | S.TRA KTC3880S Y-RTK/P          | T  | 133.1/87.2   |
| Q121    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 85.8/93.8    |
| Q122    | 1590003680 | S.TRA KRC402 RTK/P              | B  | 87.2/92.2    |
| Q123    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 85.2/96.3    |
| Q124    | 1590003680 | S.TRA KRC402 RTK/P              | B  | 87.6/95.2    |
| Q125    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 85.8/91.1    |
| Q126    | 1590003680 | S.TRA KRC402 RTK/P              | B  | 86.9/89.2    |
| Q127    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 86/99        |
| Q128    | 1590003680 | S.TRA KRC402 RTK/P              | B  | 87.9/98.2    |
| Q151    | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 82.7/70.0    |
| Q152    | 1530003340 | S.TRA 2SC3357-T1 RF             | B  | 117.3/106.5  |
| Q181    | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 53.9/78.1    |
| Q201    | 1560000491 | S.FET 2SK508-T2B-A K52          | T  | 74.1/96.5    |
| Q202    | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 73.6/102.5   |
| Q221    | 1560000491 | S.FET 2SK508-T2B-A K52          | T  | 57.2/96.5    |
| Q222    | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 56.8/102.5   |
| Q251    | 1560000491 | S.FET 2SK508-T2B-A K52          | T  | 40.1/96.5    |
| Q252    | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 102/102.5    |
| Q271    | 1560000491 | S.FET 2SK508-T2B-A K52          | T  | 23.1/96.5    |
| Q272    | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 23.1/102.5   |
| Q301    | 1530004011 | S.TRA KTC3770U-C-RTK/P          | T  | 33.2/76      |
| Q361    | 1590003680 | S.TRA KRC402 RTK/P              | B  | 20.9/77.3    |
| Q402    | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 93.2/20.9    |
| Q403    | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 115.6/12.5   |
| Q404    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 94.1/4.8     |
| Q421    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 81.3/9.9     |
| Q422    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 83.1/12.4    |
| Q423    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 81.3/7.4     |
| Q424    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 82.7/5       |
| Q425    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 81.7/14.3    |
| Q426    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 83.1/16.6    |
| Q427    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 81.3/18.6    |
| Q428    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 83.1/20.8    |
| Q451    | 1560000331 | S.FET 2SK210-GR(TE85R,F)        | T  | 61/44        |
| Q452    | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 61.9/34.8    |
| Q481    | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 22.8/34.1    |
| Q501    | 1560000491 | S.FET 2SK508-T2B-A K52          | T  | 30.8/13.4    |
| Q502    | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 31.2/7.5     |
| Q521    | 1560000491 | S.FET 2SK508-T2B-A K52          | T  | 14/13.5      |
| Q522    | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 14.3/7.5     |
| Q551    | 1560000491 | S.FET 2SK508-T2B-A K52          | T  | 47.6/13.4    |
| Q552    | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 47.9/7.5     |
| Q571    | 1560000491 | S.FET 2SK508-T2B-A K52          | T  | 64.5/13.5    |
| Q572    | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 64.7/7.5     |
| Q601    | 1530004011 | S.TRA KTC3770U-C-RTK/P          | T  | 41/37        |
| Q661    | 1590003680 | S.TRA KRC402 RTK/P              | B  | 5.1/27.9     |
| Q681    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 67.8/51.5    |
| Q701    | 1530003900 | S.TRA KTC4075 BL-RTK/P          | B  | 123.9/12.4   |
| Q702    | 1530003900 | S.TRA KTC4075 BL-RTK/P          | T  | 141.9/19.2   |
| Q801    | 1530003890 | S.TRA KTC3880S Y-RTK/P          | T  | 127.9/46.7   |
| Q831    | 1560000561 | S.FET 2SK882-GR(TE85L,F)        | T  | 149.4/37.4   |
| Q851    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 138/52.1     |
| Q852    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 137.8/49.8   |
| Q853    | 1590003680 | S.TRA KRC402 RTK/P              | B  | 109.5/55.3   |
| Q854    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 106.6/54.7   |
| Q1502   | 1590003680 | S.TRA KRC402 RTK/P              | T  | 73/63.6      |
| Q1521   | 1590003680 | S.TRA KRC402 RTK/P              | B  | 21.5/62.4    |
| Q1522   | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 21.2/64.1    |
| Q2501   | 1590003680 | S.TRA KRC402 RTK/P              | T  | 85.1/50.4    |
| Q2511   | 1590003680 | S.TRA KRC402 RTK/P              | B  | 7.2/47.5     |
| Q2512   | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 5.6/45.5     |
| D81     | 1750000581 | S.DIO 1SV307(TPH3,F)            | B  | 97/49.7      |
| D201    | 1720000831 | S.VAR KV1770STL-G               | T  | 74.5/88.8    |
| D202    | 1720000831 | S.VAR KV1770STL-G               | B  | 74.3/88.7    |
| D221    | 1720000831 | S.VAR KV1770STL-G               | T  | 57.5/88.7    |
| D222    | 1720000831 | S.VAR KV1770STL-G               | B  | 57.5/88.7    |
| D251    | 1750001720 | S.VAR 1SV215(TPH3,F)            | T  | 39.1/87.9    |
| D252    | 1750001720 | S.VAR 1SV215(TPH3,F)            | T  | 41.4/87.9    |
| D253    | 1750001720 | S.VAR 1SV215(TPH3,F)            | B  | 41.4/88      |
| D254    | 1750001720 | S.VAR 1SV215(TPH3,F)            | B  | 39.1/87.9    |
| D271    | 1750001720 | S.VAR 1SV215(TPH3,F)            | T  | 22.3/87.2    |
| D272    | 1750001720 | S.VAR 1SV215(TPH3,F)            | T  | 24.6/87.1    |
| D273    | 1750001720 | S.VAR 1SV215(TPH3,F)            | B  | 24.5/87.9    |
| D274    | 1750001720 | S.VAR 1SV215(TPH3,F)            | B  | 22.3/88      |
| D361    | 1750000581 | S.DIO 1SV307(TPH3,F)            | T  | 22.7/75.5    |
| D362    | 1750000581 | S.DIO 1SV307(TPH3,F)            | T  | 26.1/75.4    |
| D401    | 1750001320 | S.DIO KDS4148U RTK/P            | B  | 88.9/6.7     |
| D451    | 1720000681 | S.VAR 1SV262(TPH2,F)            | T  | 64.7/33.5    |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                            | M. | H/V LOCATION |
|---------|------------|----------------------------------------|----|--------------|
| D452    | 1790000491 | S.DIO HSM88ASTR-E                      | T  | 67/46.2      |
| D453    | 1790000491 | S.DIO HSM88ASTR-E                      | T  | 67.1/43      |
| D501    | 1720000831 | S.VAR KV1770STL-G                      | T  | 30.2/21.3    |
| D502    | 1720000831 | S.VAR KV1770STL-G                      | B  | 30.3/21.2    |
| D521    | 1720000831 | S.VAR KV1770STL-G                      | T  | 13.5/21.2    |
| D522    | 1720000831 | S.VAR KV1770STL-G                      | B  | 13.5/21.2    |
| D551    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | T  | 48.7/22      |
| D552    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | T  | 46.4/22      |
| D553    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | B  | 46.5/22      |
| D554    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | B  | 48.7/22      |
| D571    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | T  | 65.5/22      |
| D572    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | T  | 63.2/22      |
| D573    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | B  | 63.3/22      |
| D574    | 1750001720 | S.VAR 1SV215(TPH3,F)                   | B  | 65.5/22      |
| D661    | 1750000581 | S.DIO 1SV307(TPH3,F)                   | T  | 6.6/27.3     |
| D662    | 1750000581 | S.DIO 1SV307(TPH3,F)                   | T  | 6.7/29.9     |
| D680    | 1750001320 | S.DIO KDS4148U RTK/P                   | B  | 43.8/47.6    |
| D681    | 1750001320 | S.DIO KDS4148U RTK/P                   | T  | 69.8/52.2    |
| D821    | 1750000431 | S.DIO HSB88WSTR-E                      | T  | 132.7/32.5   |
| D1201   | 1750001310 | S.DIO KDS114 RTK/PA                    | T  | 36.4/64.1    |
| D1221   | 1750001310 | S.DIO KDS114 RTK/PA                    | B  | 22.5/70      |
| D2201   | 1750001310 | S.DIO KDS114 RTK/PA                    | T  | 19.5/46.8    |
| D2221   | 1750001310 | S.DIO KDS114 RTK/PA                    | T  | 8.5/39       |
| FI101   | 2020001820 | S.CER SFECV10M5FA00-R0 (SFECV10.5MA5S) | T  | 96.1/89      |
| FI401   | 2020001820 | S.CER SFECV10M5FA00-R0 (SFECV10.5MA5S) | T  | 92.9/28.8    |
| FI831   | 2030000300 | S.MON DSF753SBF 64.491 MHz (FL-356)    | T  | 149.7/42.6   |
| X51     | 6050012560 | S.XTA CR-770B DSA321SD 32 MHz          | T  | 97.9/41.6    |
| L51     | 6200005011 | S.COI NLV25T-100J                      | T  | 96.8/44.9    |
| L52     | 6200005011 | S.COI NLV25T-100J                      | T  | 103.4/44.4   |
| L53     | 6200009351 | S.COI ELJRE R22GFA                     | T  | 105.8/41.9   |
| L61     | 6150004831 | S.COI LS-509-LF                        | T  | 119.3/40.8   |
| L62     | 6150004831 | S.COI LS-509-LF                        | T  | 119.3/48.3   |
| L72     | 6200009181 | S.COI ELJRE R10JFA                     | T  | 103/52       |
| L73     | 6200009531 | S.COI ELJRE R15GFA                     | T  | 101.2/54.1   |
| L75     | 6200009531 | S.COI ELJRE R15GFA                     | T  | 98.6/55.2    |
| L86     | 6200002861 | S.COI NLV25T-4R7J                      | T  | 102.9/49.6   |
| L87     | 6200009181 | S.COI ELJRE R10JFA                     | T  | 135.4/87.2   |
| L88     | 6200009531 | S.COI ELJRE R15GFA                     | T  | 138.8/86.5   |
| L89     | 6200009531 | S.COI ELJRE R15GFA                     | T  | 142.3/89.8   |
| L101    | 6200005011 | S.COI NLV25T-100J                      | B  | 113.9/86.4   |
| L103    | 6140002810 | S.COI LR-317                           | T  | 98.2/100.8   |
| L104    | 6200005011 | S.COI NLV25T-100J                      | B  | 109/94.8     |
| L105    | 6200005011 | S.COI NLV25T-100J                      | B  | 111.8/94.8   |
| L106    | 6200006671 | S.COI ELJRE 68NGFA                     | B  | 105.8/98.2   |
| L121    | 6200005011 | S.COI NLV25T-100J                      | B  | 84.1/97.1    |
| L122    | 6200005011 | S.COI NLV25T-100J                      | B  | 82.2/90.2    |
| L123    | 6200005011 | S.COI NLV25T-100J                      | T  | 82.4/95.7    |
| L125    | 6200005011 | S.COI NLV25T-100J                      | T  | 82.4/90.9    |
| L127    | 6200004951 | S.COI NLV25T-1R8J                      | T  | 99.8/90.6    |
| L128    | 6200005011 | S.COI NLV25T-100J                      | T  | 85.4/88.4    |
| L151    | 6200002651 | S.COI NLV25T-R18J                      | B  | 112.8/105.9  |
| L155    | 6200002851 | S.COI NLV25T-R82J                      | T  | 98.2/94      |
| L156    | 6200002851 | S.COI NLV25T-R82J                      | T  | 100.9/93.4   |
| L161    | 6200001981 | S.COI NLV25T-1R0J                      | T  | 90.1/76.3    |
| L162    | 6200001981 | S.COI NLV25T-1R0J                      | T  | 81.8/66.4    |
| L181    | 6200005011 | S.COI NLV25T-100J                      | T  | 52.7/75.5    |
| L202    | 6190001411 | COI #E526GN-110501                     |    |              |
| L204    | 6200002041 | S.COI NLV25T-101J                      | B  | 74.1/92.4    |
| L205    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 63.9/91.5    |
| L206    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 67.8/86.8    |
| L222    | 6190001411 | COI #E526GN-110501                     |    |              |
| L224    | 6200002041 | S.COI NLV25T-101J                      | B  | 57.3/92.4    |
| L225    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 46.9/91.5    |
| L226    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 51/86.8      |
| L252    | 6190001421 | COI #E526GN-110502                     |    |              |
| L254    | 6200002041 | S.COI NLV25T-101J                      | B  | 39.6/92.4    |
| L255    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 29.9/91.5    |
| L256    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 34.4/86.8    |
| L272    | 6190001441 | COI #E526GN-110504                     |    |              |
| L274    | 6200002041 | S.COI NLV25T-101J                      | B  | 22.8/92.4    |
| L275    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 13.4/91.5    |
| L276    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 16/86.8      |
| L301    | 6200005011 | S.COI NLV25T-100J                      | T  | 33.9/72.7    |
| L304    | 6200002861 | S.COI NLV25T-4R7J                      | T  | 33.9/70.2    |
| L320    | 6200009101 | S.COI ELJRE R18GFA                     | T  | 40.3/74.2    |
| L321    | 6200002841 | S.COI NLV25T-R22J                      | T  | 42.3/64.1    |
| L328    | 6200006991 | S.COI ELJRE 56NGFA                     | T  | 42.3/77.3    |
| L329    | 6200006991 | S.COI ELJRE 56NGFA                     | T  | 43.9/75.4    |
| L401    | 6200005011 | S.COI NLV25T-100J                      | T  | 88.3/13.9    |
| L421    | 6200005011 | S.COI NLV25T-100J                      | B  | 84.5/10.9    |
| L422    | 6200005011 | S.COI NLV25T-100J                      | B  | 83.8/7.6     |
| L423    | 6200005011 | S.COI NLV25T-100J                      | B  | 81.7/1.9     |
| L425    | 6200005011 | S.COI NLV25T-100J                      | B  | 83.1/4.6     |
| L428    | 6200005011 | S.COI NLV25T-100J                      | T  | 81.6/23.7    |
| L452    | 6130002970 | COI LB-343                             |    |              |
| L453    | 6200005011 | S.COI NLV25T-100J                      | T  | 56.8/40.6    |
| L454    | 6200009861 | S.COI NLV25T-1R5J                      | T  | 57.8/34.4    |
| L455    | 6200005011 | S.COI NLV25T-100J                      | T  | 54/39.6      |
| L481    | 6200005011 | S.COI NLV25T-100J                      | B  | 21.7/37.1    |
| L502    | 6190001411 | COI #E526GN-110501                     |    |              |
| L504    | 6200002041 | S.COI NLV25T-101J                      | B  | 29.7/17.5    |
| L505    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 40.7/18.4    |
| L506    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 36.6/23.1    |
| L522    | 6190001411 | COI #E526GN-110501                     |    |              |
| L524    | 6200002041 | S.COI NLV25T-101J                      | B  | 14.1/17.5    |
| L525    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)             | T  | 24.1/18.4    |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                   | M. | H/V LOCATION |
|---------|------------|-------------------------------|----|--------------|
| L526    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)    | T  | 19.7/23.1    |
| L552    | 6190001421 | COI #E526GN-110502            |    |              |
| L554    | 6200002041 | S.COI NLV25T-101J             | B  | 47/17.6      |
| L555    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)    | T  | 57.9/18.4    |
| L556    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)    | T  | 53.3/23.1    |
| L572    | 6190001441 | COI #E526GN-110504            |    |              |
| L574    | 6200002041 | S.COI NLV25T-101J             | B  | 63.8/17.6    |
| L575    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)    | T  | 73.9/18.4    |
| L576    | 6200010440 | S.COI C2520C-1R2G-A (1.2U)    | T  | 72/23.1      |
| L601    | 6200005011 | S.COI NLV25T-100J             | T  | 39.8/34      |
| L604    | 6200002861 | S.COI NLV25T-4R7J             | B  | 43.7/40.5    |
| L620    | 6200009101 | S.COI ELJRE R18GFA            | T  | 44.1/41.6    |
| L621    | 6200002841 | S.COI NLV25T-R22J             | T  | 33.3/47.7    |
| L628    | 6200006991 | S.COI ELJRE 56NGFA            | T  | 41.1/44.1    |
| L629    | 6200006991 | S.COI ELJRE 56NGFA            | T  | 41.1/45.3    |
| L701    | 6200005011 | S.COI NLV25T-100J             | T  | 124.1/24.8   |
| L702    | 6200005491 | S.COI NLV32T-331J             | T  | 137.5/6.4    |
| L703    | 6200005491 | S.COI NLV32T-331J             | T  | 141.2/6      |
| L704    | 6200008641 | S.COI NLV32T-391J             | T  | 144.8/3      |
| L721    | 6200002041 | S.COI NLV25T-101J             | T  | 141/12.4     |
| L821    | 6140002810 | S.COI LR-317                  | T  | 127/32.5     |
| L822    | 6140002810 | S.COI LR-317                  | T  | 138.4/32.5   |
| L831    | 6140003770 | S.COI LR-414 4KBL (STP-01435) | T  | 139.5/40.5   |
| L834    | 6150004280 | COI LS-484B (C-14927)         |    |              |
| L851    | 6200005011 | S.COI NLV25T-100J             | T  | 135.2/50.8   |
| L852    | 6200005011 | S.COI NLV25T-100J             | B  | 106.8/57.2   |
| L1201   | 6200002601 | S.COI NLV25T-047J             | T  | 33.6/65.5    |
| L1221   | 6200002431 | S.COI NLV25T-082J             | T  | 27.9/65.5    |
| L1222   | 6200002431 | S.COI NLV25T-082J             | T  | 27.2/68.9    |
| L1223   | 6200002641 | S.COI NLV25T-R15J             | T  | 21/70.1      |
| L1224   | 6200002411 | S.COI NLV25T-056J             | T  | 30.8/64.4    |
| L1225   | 6200005011 | S.COI NLV25T-100J             | B  | 25.1/66.3    |
| L1301   | 6200005011 | S.COI NLV25T-100J             | T  | 75.6/72.4    |
| L1521   | 6200005011 | S.COI NLV25T-100J             | B  | 27.2/63.7    |
| L2201   | 6200002601 | S.COI NLV25T-047J             | T  | 19.5/44.4    |
| L2202   | 6200005011 | S.COI NLV25T-100J             | B  | 28.3/48.9    |
| L2221   | 6200002431 | S.COI NLV25T-082J             | T  | 12.4/43.7    |
| L2222   | 6200002431 | S.COI NLV25T-082J             | T  | 11.2/39.4    |
| L2223   | 6200002641 | S.COI NLV25T-R15J             | T  | 5.1/34.6     |
| L2224   | 6200002411 | S.COI NLV25T-056J             | T  | 13.4/46.6    |
| L2225   | 6200005011 | S.COI NLV25T-100J             | T  | 6/43.2       |
| L2511   | 6200005011 | S.COI NLV25T-100J             | B  | 11.8/48.8    |
| L4301   | 6200005011 | S.COI NLV25T-100J             | B  | 35.1/46.1    |
| R1      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)    | B  | 149.3/61.5   |
| R2      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)    | B  | 142.5/61.8   |
| R3      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)    | B  | 141.8/74.5   |
| R4      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)    | B  | 149.3/75.5   |
| R6      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)    | B  | 149.3/77.5   |
| R7      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)    | B  | 141.8/78.5   |
| R8      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)    | B  | 149.3/79.5   |
| R9      | 7030011030 | S.RES ERJ1TYJ 270U (27)       | B  | 104.4/60.7   |
| R10     | 7030003200 | S.RES ERJ3GEYJ 100 V (10)     | T  | 127.8/72     |
| R11     | 7030003200 | S.RES ERJ3GEYJ 100 V (10)     | T  | 127.8/75.6   |
| R12     | 7030003200 | S.RES ERJ3GEYJ 100 V (10)     | T  | 127.8/74.4   |
| R13     | 7030003200 | S.RES ERJ3GEYJ 100 V (10)     | T  | 127.8/77.2   |
| R14     | 7030003200 | S.RES ERJ3GEYJ 100 V (10)     | B  | 131.4/73.1   |
| R16     | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K)   | T  | 127.4/63.4   |
| R18     | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K)   | T  | 127.4/64.7   |
| R19     | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K)   | T  | 127.4/66.4   |
| R20     | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K)   | T  | 118/60.1     |
| R21     | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K)   | T  | 116.6/61.4   |
| R22     | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K)   | B  | 122.5/62.4   |
| R23     | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K)   | T  | 126.6/68.4   |
| R24     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)    | T  | 137.5/78.9   |
| R25     | 7030003860 | S.RES ERJ3GE JPW V            | T  | 117.4/65.5   |
| R26     | 7030003860 | S.RES ERJ3GE JPW V            | T  | 116.1/65.5   |
| R51     | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)    | T  | 93.1/43.6    |
| R52     | 7030003590 | S.RES ERJ3GEYJ 183 V (18K)    | T  | 93.1/40.8    |
| R53     | 7030003690 | S.RES ERJ3GEYJ 124 V (120K)   | T  | 94.4/43.6    |
| R54     | 7030003590 | S.RES ERJ3GEYJ 183 V (18K)    | T  | 100.7/44     |
| R55     | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)    | T  | 101.1/38.5   |
| R56     | 7030003320 | S.RES ERJ3GEYJ 101 V (100)    | T  | 103.5/38.5   |
| R57     | 7030003860 | S.RES ERJ3GE JPW V            | T  | 103.8/41.3   |
| R58     | 7030003860 | S.RES ERJ3GE JPW V            | T  | 107.1/38.5   |
| R61     | 7030003260 | S.RES ERJ3GEYJ 330 V (33)     | T  | 106.5/44.1   |
| R62     | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)    | T  | 107.8/44.1   |
| R63     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)    | T  | 109.7/43.4   |
| R64     | 7030003370 | S.RES ERJ3GEYJ 271 V (270)    | T  | 109.9/38.1   |
| R65     | 7030003860 | S.RES ERJ3GE JPW V            | B  | 123.5/48.6   |
| R66     | 7030003320 | S.RES ERJ3GEYJ 101 V (100)    | T  | 115.8/52.5   |
| R71     | 7030003510 | S.RES ERJ3GEYJ 392 V (3.9K)   | T  | 108.5/48.8   |
| R72     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)   | T  | 111.6/50.9   |
| R73     | 7030003200 | S.RES ERJ3GEYJ 100 V (10)     | B  | 106/52       |
| R74     | 7030003360 | S.RES ERJ3GEYJ 221 V (220)    | T  | 111.2/53.5   |
| R85     | 7030003380 | S.RES ERJ3GEYJ 331 V (330)    | T  | 99.9/70.1    |
| R86     | 7030003400 | S.RES ERJ3GEYJ 471 V (470)    | T  | 127/85.3     |
| R87     | 7030003200 | S.RES ERJ3GEYJ 100 V (10)     | T  | 130.8/89.3   |
| R88     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)   | T  | 129.4/87.2   |
| R89     | 7030003510 | S.RES ERJ3GEYJ 392 V (3.9K)   | T  | 130.7/87.2   |
| R90     | 7030003360 | S.RES ERJ3GEYJ 221 V (220)    | T  | 135.4/89.8   |
| R91     | 7030008240 | S.RES ERJ12Y0R00U             | B  | 84.1/45.2    |
| R92     | 7030008240 | S.RES ERJ12Y0R00U             | B  | 152.8/97.2   |
| R93     | 7030003430 | S.RES ERJ3GEYJ 821 V (820)    | B  |              |



## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R111    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 117.3/97.4   |
| R112    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 115.3/94.6   |
| R113    | 7030003510 | S.RES ERJ3GEYJ 392 V (3.9K) | T  | 104.8/96.9   |
| R114    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 101.5/99.9   |
| R115    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 103.1/100.7  |
| R116    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 105.9/108    |
| R131    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 93.1/76.3    |
| R133    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | T  | 93.9/78.2    |
| R152    | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 124.6/105.3  |
| R154    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 115/101      |
| R155    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | B  | 125/104.4    |
| R157    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 121.7/103.5  |
| R158    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 120.7/107.2  |
| R159    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 85.5/67.3    |
| R160    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 84.7/69.4    |
| R161    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 82.7/72.1    |
| R181    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 55.8/78      |
| R182    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 53.8/80.1    |
| R191    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 75.7/39.8    |
| R192    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 77.6/39.1    |
| R193    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 78.2/34.6    |
| R202    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 61.9/88.1    |
| R203    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 73.7/104.9   |
| R204    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 72.4/99.5    |
| R222    | 7030009841 | S.RES ERA3YHD 330V (33)     | T  | 45/88.1      |
| R223    | 7030009861 | S.RES ERA3YED 471V (470)    | T  | 56.9/104.9   |
| R224    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 55.5/99.5    |
| R252    | 7030009851 | S.RES ERA3YED 271V (270)    | T  | 28.3/88.1    |
| R253    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 40.1/104.9   |
| R254    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 38.8/99.5    |
| R272    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 12.3/87.9    |
| R273    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 23.3/104.9   |
| R274    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 22/99.6      |
| R275    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 30.6/77.9    |
| R281    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 33.1/92.5    |
| R282    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 49.7/92.5    |
| R283    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 66.4/92.5    |
| R284    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 78.2/106.7   |
| R301    | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 33.2/77.9    |
| R302    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 31.2/76.1    |
| R303    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 38.8/74.2    |
| R304    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | T  | 31.7/71.5    |
| R305    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 45.1/74.2    |
| R309    | 7030003410 | S.RES ERJ3GEYJ 561 V (560)  | T  | 63.4/67.5    |
| R321    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 45.1/71.5    |
| R323    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 40.4/63.6    |
| R352    | 7030003410 | S.RES ERJ3GEYJ 561 V (560)  | T  | 14.2/78.3    |
| R353    | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | T  | 13.5/75.2    |
| R354    | 7030003410 | S.RES ERJ3GEYJ 561 V (560)  | T  | 12.3/75.2    |
| R361    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 25.6/73.2    |
| R362    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 21.7/74.2    |
| R363    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 20/75        |
| R380    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 71/66.2      |
| R385    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 75.5/68.1    |
| R386    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 75.6/69.3    |
| R387    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 75.5/70.5    |
| R392    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 68/74.5      |
| R393    | 7030009961 | S.RES ERA3YED 221V (220)    | T  | 69.3/74.5    |
| R394    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 66/73.8      |
| R401    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 115.7/28.7   |
| R402    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 114.4/28.7   |
| R403    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 115.1/30.8   |
| R404    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 112.1/27.4   |
| R405    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 113/29.4     |
| R406    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 110.3/27.2   |
| R407    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 110.9/29.3   |
| R408    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 109/27.2     |
| R409    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 108.1/30.6   |
| R410    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 107.7/27.2   |
| R411    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 108.1/29.3   |
| R412    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 106.4/27.2   |
| R413    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 105.2/30.6   |
| R414    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 105.1/27.2   |
| R415    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 105.2/29.3   |
| R416    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 103.8/27.2   |
| R417    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 102.3/30.6   |
| R418    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 102.5/27.2   |
| R419    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 102.3/29.3   |
| R420    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 101.2/27.2   |
| R421    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 99.4/30.6    |
| R422    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 99.9/27.2    |
| R423    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 99.4/29.3    |
| R424    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 98.6/27.2    |
| R425    | 7030009861 | S.RES ERA3YED 471V (470)    | T  | 97.3/27.2    |
| R427    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 92.9/9.2     |
| R428    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 115.9/39.9   |
| R430    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 88.1/11.3    |
| R431    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 90/23.7      |
| R432    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 95/23.9      |
| R433    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 92.1/16.4    |
| R434    | 7030003240 | S.RES ERJ3GEYJ 220 V (22)   | T  | 89.4/16.4    |
| R435    | 7030003330 | S.RES ERJ3GEYJ 121 V (120)  | T  | 97.1/2.8     |
| R436    | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | T  | 94.5/2.8     |
| R437    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 97.1/4.3     |
| R438    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 91.7/11      |
| R439    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | T  | 115.6/10.6   |
| R440    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 115.7/8.2    |
| R441    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 90.4/21.6    |
| R442    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 99.6/6.5     |
| R443    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 116.3/20.5   |
| R444    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 114.7/20.5   |
| R445    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 115/20.8     |
| R446    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 116.2/20     |
| R447    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 100.4/14.9   |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R448    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 115.7/9.4    |
| R449    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 115.2/5.1    |
| R450    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 66.9/33.2    |
| R451    | 7030005871 | S.RES ERA3YKD 104V (100K)   | T  | 64/46.2      |
| R452    | 7030005871 | S.RES ERA3YKD 104V (100K)   | T  | 56.1/43.7    |
| R453    | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 56.5/38.7    |
| R454    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 58.7/46.3    |
| R455    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | T  | 61.3/46.2    |
| R456    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | T  | 60.1/33.1    |
| R457    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 54.2/34.8    |
| R459    | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | T  | 57.1/31.9    |
| R460    | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | T  | 55.2/31.2    |
| R461    | 7030003310 | S.RES ERJ3GEYJ 820 V (82)   | T  | 58.9/31.2    |
| R462    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 115.9/15.6   |
| R463    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 72.6/51.3    |
| R464    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 71.3/52      |
| R471    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 89.8/18.3    |
| R481    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 20.9/34.2    |
| R482    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 19.6/32.4    |
| R502    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 42.9/21.9    |
| R503    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 31.1/5.1     |
| R504    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 32.2/10.5    |
| R522    | 7030009841 | S.RES ERA3YHD 330V (33)     | T  | 26/21.9      |
| R523    | 7030009861 | S.RES ERA3YED 471V (470)    | T  | 14.2/5.1     |
| R524    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 15.3/10.4    |
| R552    | 7030009851 | S.RES ERA3YED 271V (270)    | T  | 59.7/21.8    |
| R553    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 47.8/5.1     |
| R554    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 48.9/10.4    |
| R572    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 75.5/21.8    |
| R573    | 7030006521 | S.RES ERA3YED 561V (560)    | T  | 64.6/5.1     |
| R574    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 65.7/10.4    |
| R575    | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 35/35.4      |
| R581    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 21.8/17.6    |
| R582    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 37.8/17.6    |
| R583    | 7030008240 | S.RES ERJ12Y0R00U           | B  | 54.8/17.6    |
| R601    | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 38.7/37.4    |
| R602    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 44.1/36.5    |
| R603    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 44.1/38.9    |
| R604    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 40.7/39.7    |
| R609    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 18.7/40.4    |
| R621    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 41.9/47.3    |
| R623    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 31.2/47.4    |
| R624    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 36.5/48.1    |
| R652    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 5/27         |
| R653    | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | T  | 5/22.9       |
| R654    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 3.7/24.1     |
| R661    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 3.5/30.3     |
| R662    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 4.5/29.9     |
| R663    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 2.1/29.6     |
| R680    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 41.4/46.8    |
| R685    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 23.5/41.7    |
| R686    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 23.5/40.5    |
| R687    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 23.5/39.3    |
| R692    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 25.2/34.7    |
| R693    | 7030009651 | S.RES ERA3YHD 820V (82)     | T  | 28.2/34.7    |
| R694    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 29.5/34.5    |
| R701    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 135.4/5.4    |
| R702    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 134.6/3.4    |
| R703    | 7030007200 | S.RES ERA3YED 202V (2K)     | T  | 134.1/5.4    |
| R704    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 133.3/2.1    |
| R705    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 132.8/5.4    |
| R706    | 7030007210 | S.RES ERA3YED 102V (1K)     | T  | 132/3.4      |
| R707    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 131.5/5.4    |
| R708    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 130.7/2.1    |
| R709    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 130.2/5.5    |
| R710    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 129.4/3.6    |
| R711    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 128.9/5.5    |
| R712    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 128.1/2.3    |
| R713    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 127.6/5.5    |
| R714    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 126.8/3.6    |
| R715    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 126.3/5.5    |
| R716    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 124.4/2.3    |
| R717    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 125/5.5      |
| R718    | 7030007230 | S.RES ERA3YED 102V (1K)     | T  | 124.2/3.6    |
| R719    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 123.7/5.5    |
| R720    | 7030007220 | S.RES ERA3YED 202V (2K)     | T  | 122.4/5.5    |
| R721    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | B  | 124.9/14.6   |
| R722    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | B  | 124.9/16.7   |
| R724    | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 145/10.8     |
| R726    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 143.9/17.8   |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| R835    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)        | B  | 154/36.4     |
| R836    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)        | B  | 149.5/27.7   |
| R837    | 7030003230 | S.RES ERJ3GEYJ 180 V (18)         | B  | 148.8/25.4   |
| R838    | 7030003370 | S.RES ERJ3GEYJ 271 V (270)        | B  | 150.4/25.4   |
| R851    | 7030003860 | S.RES ERJ3GE JPW V                | T  | 141/51.5     |
| R852    | 7030003860 | S.RES ERJ3GE JPW V                | B  | 111.2/57.4   |
| R1201   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K)       | T  | 38.9/63.6    |
| R1202   | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K)       | T  | 37.5/62.1    |
| R1205   | 7030003860 | S.RES ERJ3GE JPW V                | T  | 2.4/60.4     |
| R1221   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)        | B  | 19.5/69.9    |
| R1222   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)        | T  | 23/73.4      |
| R1223   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 25.1/72.9    |
| R1224   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 34.3/62.4    |
| R1521   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)        | B  | 19.6/66.5    |
| R2201   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K)       | T  | 25.4/47.7    |
| R2202   | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K)       | T  | 23/47.7      |
| R2205   | 7030003860 | S.RES ERJ3GE JPW V                | T  | 2.4/49.7     |
| R2221   | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)        | T  | 8/41.3       |
| R2222   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)        | B  | 3.3/36.8     |
| R2223   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | B  | 3.3/34.1     |
| R2224   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 14.3/43.6    |
| R2512   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)        | B  | 5.7/41       |
| C1      | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 153.7/79.5   |
| C2      | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 141.8/78.5   |
| C3      | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 153.7/77.5   |
| C5      | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 153.7/73.5   |
| C6      | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 141.8/72.5   |
| C7      | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 153.7/71.5   |
| C8      | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 141.8/70.5   |
| C9      | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 153.4/67.5   |
| C10     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 141.4/64.8   |
| C11     | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 141.8/63.9   |
| C12     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 153.5/61.5   |
| C13     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 143.6/59.1   |
| C14     | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 90.5/60.1    |
| C15     | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 92.4/64.1    |
| C16     | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 96.5/64.1    |
| C17     | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | B  | 98.4/60.7    |
| C18     | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 131/58.1     |
| C19     | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 124.9/70.5   |
| C20     | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 136.6/80.8   |
| C22     | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 130.6/75     |
| C23     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 125.8/72.4   |
| C24     | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 128.2/74     |
| C25     | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 128.2/75.6   |
| C26     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 127.8/70.8   |
| C51     | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 94.4/40.8    |
| C52     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 95.7/42.3    |
| C53     | 4030006860 | S.CER C1608 JB 1H 102K-T          | T  | 99.1/38.8    |
| C54     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 102.3/38.5   |
| C55     | 4030007120 | S.CER C1608 CH 1H 820J-T          | T  | 104.7/38.5   |
| C56     | 4030007040 | S.CER C1608 CH 1H 180J-T          | T  | 105.8/40.6   |
| C57     | 4030007120 | S.CER C1608 CH 1H 820J-T          | T  | 105.9/38.5   |
| C58     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 107.8/41.3   |
| C61     | 4030007170 | S.CER C1608 CH 1H 221J-T          | T  | 109.7/39.3   |
| C62     | 4030007050 | S.CER C1608 CH 1H 220J-T          | B  | 115.1/43.4   |
| C63     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 109.7/44.6   |
| C64     | 4030009510 | S.CER C1608 CH 1H 010B-T          | T  | 114.9/45.7   |
| C65     | 4030007050 | S.CER C1608 CH 1H 220J-T          | T  | 114.9/48.5   |
| C67     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 112.9/50.9   |
| C75     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 107.3/52.1   |
| C76     | 4030007090 | S.CER C1608 CH 1H 470J-T          | T  | 103.8/55.2   |
| C77     | 4030007000 | S.CER C1608 CH 1H 090D-T          | T  | 103/53.3     |
| C78     | 4030007120 | S.CER C1608 CH 1H 820J-T          | T  | 102.5/55.2   |
| C79     | 4030009910 | S.CER C1608 CH 1H 040B-T          | T  | 100.4/52     |
| C80     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 99.9/55.2    |
| C83     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 99.3/53.3    |
| C84     | 4030007170 | S.CER C1608 CH 1H 221J-T          | T  | 97.3/54.1    |
| C85     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 98/51.5      |
| C86     | 4030006900 | S.CER C1608 JB 1H 103K-T          | B  | 95.3/53.7    |
| C87     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 105.2/49.3   |
| C88     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 130.8/90.6   |
| C89     | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 129.6/85.3   |
| C90     | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 133.5/90.1   |
| C92     | 4030007000 | S.CER C1608 CH 1H 090D-T          | T  | 136.7/87.2   |
| C93     | 4030007090 | S.CER C1608 CH 1H 470J-T          | T  | 136.7/89.8   |
| C94     | 4030007120 | S.CER C1608 CH 1H 820J-T          | T  | 138.1/89.8   |
| C95     | 4030009910 | S.CER C1608 CH 1H 040B-T          | T  | 138.8/87.8   |
| C96     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 141.6/87.8   |
| C97     | 4030007170 | S.CER C1608 CH 1H 221J-T          | T  | 143.7/88.5   |
| C98     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 145.1/88.5   |
| C99     | 4030007100 | S.CER C1608 CH 1H 560J-T          | T  | 139.5/89.8   |
| C101    | 4550007090 | S.TAN TEESVA 1A 226M8R            | B  | 109.4/84.1   |
| C102    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 115.3/89     |
| C103    | 4030011600 | S.CER C1608 JB 1E 104K-T          | B  | 106/101      |
| C105    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 106/106.7    |
| C106    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 108.5/108    |
| C107    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 114.2/106.9  |
| C108    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 112/107.4    |
| C109    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 110.6/107.6  |
| C110    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 103.7/103.3  |
| C111    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 105.6/104.7  |
| C112    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 104.2/101.4  |
| C113    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 103/98.6     |
| C114    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 107.1/93.8   |
| C115    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 108.6/93.8   |
| C119    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 104.8/95.7   |
| C120    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 123.8/91.7   |
| C121    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 113.2/86.3   |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                                  | M. | H/V LOCATION |
|---------|------------|-------------|----------------------------------|----|--------------|
| C122    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B)      | B  | 114.3/91.2   |
| C123    | 4030011600 | S.CER       | C1608 JB 1E 104K-T               | T  | 113.3/90.3   |
| C124    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B)      | B  | 114.5/94.8   |
| C128    | 4030007140 | S.CER       | C1608 CH 1H 121J-T               | T  | 98.7/88.3    |
| C129    | 4030007060 | S.CER       | C1608 CH 1H 270J-T               | B  | 102.2/96.9   |
| C132    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | B  | 82.2/99.7    |
| C133    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | B  | 81.7/92.5    |
| C134    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 82.2/98.1    |
| C137    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | B  | 85.6/100     |
| C138    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | B  | 83.7/92.9    |
| C139    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 83.4/98.1    |
| C146    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 82.2/93.3    |
| C147    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 83.4/93.3    |
| C150    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 81.7/88.3    |
| C151    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | B  | 122.9/107.2  |
| C152    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | B  | 115.7/103.2  |
| C153    | 4030007130 | S.CER       | C1608 CH 1H 101J-T               | B  | 110.8/105.8  |
| C154    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | B  | 123.3/103.4  |
| C155    | 4030006860 | S.CER       | C1608 JB 1H 102K-T               | T  | 94.9/94.3    |
| C156    | 4030017800 | S.CER       | C1608 CH 1H 561J-T               | T  | 100.5/95.7   |
| C157    | 4030011340 | S.CER       | C1608 CH 1H 471J-T               | T  | 100.8/88.3   |
| C161    | 4030007070 | S.CER       | C1608 CH 1H 330J-T               | B  | 110.1/107.7  |
| C163    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 82.6/68.3    |
| C164    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 83.5/73.9    |
| C165    | 4030010760 | S.CER       | C1608 CH 1H 331J-T               | T  | 91.2/78.6    |
| C166    | 4030011280 | S.CER       | C1608 CH 1H 271J-T               | T  | 89.1/78.6    |
| C167    | 4030010760 | S.CER       | C1608 CH 1H 331J-T               | T  | 82/64        |
| C168    | 4030011280 | S.CER       | C1608 CH 1H 271J-T               | T  | 80.7/63.3    |
| C181    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 51.3/77.5    |
| C182    | 4550007520 | S.TAN       | F931A106MAABMA                   | B  | 53.1/75.2    |
| C183    | 4340000290 | S.MYL       | ECHU 1C 103JX5                   | T  | 50.1/79.1    |
| C184    | 4550007470 | S.TAN       | F931A107MNMABMA                  | B  | 50.6/78.6    |
| C192    | 4030011600 | S.CER       | C1608 JB 1E 104K-T               | T  | 75.7/36.9    |
| C201    | 4340000290 | S.MYL       | ECHU 1C 103JX5                   | T  | 64.7/86.4    |
| C202    | 4030009990 | S.CER       | C1608 CH 1H 200J-T               | T  | 68.8/89.6    |
| C203    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 64.2/94.4    |
| C204    | 4030011340 | S.CER       | C1608 CH 1H 471J-T               | T  | 63.2/88.1    |
| C205    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 73.7/106.1   |
| C206    | 4030009500 | S.CER       | C1608 CH 1H 0R5B-T               | B  | 68.9/94.1    |
| C207    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 74.3/100.1   |
| C208    | 4610001860 | S.TRI       | TZB4Z060AB10R00 (TZBX4Z060BA110) | T  | 70.8/92.6    |
| C209    | 4030009350 | S.CER       | C1608 CH 1H 3R5B-T               | T  | 74.5/94.1    |
| C222    | 4030007100 | S.CER       | C1608 CH 1H 560J-T               | T  | 51.6/89.7    |
| C223    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 47.4/94.4    |
| C224    | 4030011340 | S.CER       | C1608 CH 1H 471J-T               | T  | 46.3/88.1    |
| C225    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 56.9/106.1   |
| C226    | 4030009510 | S.CER       | C1608 CH 1H 010B-T               | B  | 52.4/94.1    |
| C227    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 57.4/100.1   |
| C228    | 4610001830 | S.TRI       | TZB4S100AB10R00 (TZBX4N100BA110) | T  | 53.9/92.6    |
| C229    | 4030009920 | S.CER       | C1608 CH 1H 050B-T               | T  | 57.7/94.1    |
| C252    | 4030007150 | S.CER       | C1608 CH 1H 151J-T               | T  | 34.3/89.7    |
| C253    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 30.6/94.4    |
| C254    | 4030011340 | S.CER       | C1608 CH 1H 471J-T               | T  | 29.6/88.1    |
| C255    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 40/106.1     |
| C256    | 4030009510 | S.CER       | C1608 CH 1H 010B-T               | B  | 36.1/94.1    |
| C257    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 40.8/100.1   |
| C258    | 4610001830 | S.TRI       | TZB4S100AB10R00 (TZBX4N100BA110) | T  | 36.8/92.6    |
| C259    | 4030011770 | S.CER       | C1608 CH 1H 060B-T               | T  | 41/94.1      |
| C272    | 4030007130 | S.CER       | C1608 CH 1H 101J-T               | T  | 17.6/89.7    |
| C273    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 13.8/94.4    |
| C274    | 4030011340 | S.CER       | C1608 CH 1H 471J-T               | T  | 11/87.9      |
| C275    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 23.3/106.1   |
| C276    | 4030009510 | S.CER       | C1608 CH 1H 010B-T               | B  | 18.3/94.1    |
| C277    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 23.9/100.1   |
| C278    | 4610001830 | S.TRI       | TZB4S100AB10R00 (TZBX4N100BA110) | T  | 19.8/92.6    |
| C279    | 4030007020 | S.CER       | C1608 CH 1H 120J-T               | T  | 24.2/94.1    |
| C301    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 35.2/75.3    |
| C302    | 4030007080 | S.CER       | C1608 CH 1H 390J-T               | T  | 37.1/77.1    |
| C309    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 29.8/72.2    |
| C310    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 29.8/70.7    |
| C320    | 4030007080 | S.CER       | C1608 CH 1H 390J-T               | T  | 39.7/77.3    |
| C321    | 4030007120 | S.CER       | C1608 CH 1H 820J-T               | T  | 39.7/76.1    |
| C322    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 43.9/70.2    |
| C323    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 40.7/66.7    |
| C324    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 44.6/63.1    |
| C326    | 4030011600 | S.CER       | C1608 JB 1E 104K-T               | T  | 44.6/64.3    |
| C328    | 4030006990 | S.CER       | C1608 CH 1H 080D-T               | T  | 41.5/75.4    |
| C329    | 4030007060 | S.CER       | C1608 CH 1H 270J-T               | T  | 42.7/75.4    |
| C330    | 4030006990 | S.CER       | C1608 CH 1H 080D-T               | T  | 43.2/73.5    |
| C345    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | B  | 23.6/78.8    |
| C361    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 14.2/77.1    |
| C362    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 28.1/74.1    |
| C363    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 12.3/77.8    |
| C364    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | B  | 23.2/73.9    |
| C381    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 67.3/66.8    |
| C382    | 4030007130 | S.CER       | C1608 CH 1H 101J-T               | T  | 65.3/68.3    |
| C386    | 4550005980 | S.TAN       | TEESVA 1A 475MR8                 | T  | 67.9/76.8    |
| C387    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 72.2/74.9    |
| C389    | 4030011340 | S.CER       | C1608 CH 1H 471J-T               | T  | 72.2/73.7    |
| C392    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 72.9/66.8    |
| C393    | 4340000290 | S.MYL       | ECHU 1C 103JX5                   | T  | 63/74.2      |
| C394    | 4030011340 | S.CER       | C1608 CH 1H 471J-T               | T  | 63.2/75.7    |
| C395    | 4030006900 | S.CER       | C1608 JB 1H 103K-T               | T  | 65.3/70.9    |
| C396    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B)      | B  | 66.4/68.6    |
| C401    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B)      | B  | 66.4/68.6    |
| C402    | 4030011600 | S.CER       | C1608 JB 1E 104K-T               | T  | 97.9/10.6    |
|         |            |             |                                  |    | 112.9/21.7   |



## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                               | M. | H/V LOCATION |
|---------|------------|-------------------------------------------|----|--------------|
| C403    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 100.1/24     |
| C404    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 99.4/22.2    |
| C405    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 94.6/18      |
| C406    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 94.6/15.2    |
| C407    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 93.8/13      |
| C408    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 94.8/11.1    |
| C409    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 99.2/3.6     |
| C410    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 96.9/7.1     |
| C411    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 100.5/3.2    |
| C412    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 103.9/3.5    |
| C413    | 4550007470 | S.TAN F931A107MNMBA                       | B  | 95.7/17.7    |
| C414    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 113.6/11.3   |
| C415    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 112.9/20.5   |
| C416    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 97.3/30.1    |
| C417    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 88.5/27.4    |
| C418    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 90/11.8      |
| C419    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 93.1/22.8    |
| C420    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 91.7/17.6    |
| C421    | 4550007520 | S.TAN F931A106MAABMA                      | B  | 93.4/6.4     |
| C422    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 115.9/14.4   |
| C423    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 106.1/3      |
| C424    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 106.3/8.7    |
| C425    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 106.5/10.2   |
| C426    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 108.4/3.2    |
| C427    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 110.3/3.9    |
| C428    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 110.3/2.7    |
| C429    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 96.2/8.5     |
| C430    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 113.5/8.4    |
| C431    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 113.6/13.9   |
| C432    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 81.4/10.2    |
| C433    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 79.1/5.7     |
| C434    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 79.1/1.7     |
| C435    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 90.6/13.7    |
| C436    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 91.8/13.7    |
| C437    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 83.5/18.5    |
| C438    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 83.5/10.5    |
| C439    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 81.8/3.1     |
| C440    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 93.9/7.2     |
| C441    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 117.1/6      |
| C444    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 116.2/3.2    |
| C445    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 113.4/5.8    |
| C446    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 77.5/1.9     |
| C447    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 83.5/8.7     |
| C450    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 83.5/23.3    |
| C451    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 65.1/32      |
| C452    | 4030007070 | S.CER C1608 CH 1H 330J-T                  | T  | 68.2/35.1    |
| C453    | 4030009910 | S.CER C1608 CH 1H 040B-T                  | T  | 65.5/35.1    |
| C454    | 4610001850 | S.TRI TZB4R200AB10R00<br>(TZBX4R200BA110) | T  | 61.2/39.4    |
| C455    | 4030016550 | S.CER CM105 CH 151G 50AT                  | T  | 64.7/43      |
| C456    | 4030016550 | S.CER CM105 CH 151G 50AT                  | T  | 58.7/43.7    |
| C457    | 4030016550 | S.CER CM105 CH 151G 50AT                  | T  | 57.4/43      |
| C458    | 4030019500 | S.CER GRM21BB31A106KE18<br>(GRM40 B)      | T  | 55.5/46.2    |
| C459    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 54.8/44.1    |
| C460    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 63.4/44.3    |
| C461    | 4030009920 | S.CER C1608 CH 1H 050B-T                  | B  | 58.4/35      |
| C462    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 54.7/36.7    |
| C463    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 55.5/33.1    |
| C464    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 74.5/51.3    |
| C465    | 4030007160 | S.CER C1608 CH 1H 181J-T                  | T  | 56.7/36.8    |
| C466    | 4030007150 | S.CER C1608 CH 1H 151J-T                  | T  | 58/36.8      |
| C467    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 68.9/50.1    |
| C472    | 4030006900 | S.CER C1608 CH 1H 080D-T                  | B  | 104.8/22.5   |
| C473    | 4030007030 | S.CER C1608 CH 1H 150J-T                  | B  | 103/21.7     |
| C474    | 4030007060 | S.CER C1608 CH 1H 270J-T                  | B  | 101.2/22.5   |
| C481    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 19.7/34.2    |
| C482    | 4550007520 | S.TAN F931A106MAABMA                      | B  | 18.4/31.7    |
| C483    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 23.3/32.1    |
| C501    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 40.1/23.5    |
| C502    | 4030009990 | S.CER C1608 CH 1H 200J-T                  | T  | 36.1/20.3    |
| C503    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 40.4/15.6    |
| C504    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 41.6/21.9    |
| C505    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 31.1/3.9     |
| C506    | 4030009510 | S.CER C1608 CH 1H 010B-T                  | B  | 34.9/15.9    |
| C507    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 30.3/9.9     |
| C508    | 4610001860 | S.TRI TZB4Z060AB10R00<br>(TZBX4Z060BA110) | T  | 33.8/17.4    |
| C509    | 4030009350 | S.CER C1608 CH 1H 3R5B-T                  | T  | 30.1/15.8    |
| C522    | 4030007100 | S.CER C1608 CH 1H 560J-T                  | T  | 18.9/20.3    |
| C523    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 23.6/15.6    |
| C524    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 24.7/21.9    |
| C525    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 14.2/3.9     |
| C526    | 4030009510 | S.CER C1608 CH 1H 010B-T                  | B  | 18.6/15.9    |
| C527    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 13.4/9.9     |
| C528    | 4610001830 | S.TRI TZB4S100AB10R00<br>(TZBX4N100BA110) | T  | 17.2/17.4    |
| C529    | 4030009920 | S.CER C1608 CH 1H 050B-T                  | T  | 13.3/15.8    |
| C552    | 4030007150 | S.CER C1608 CH 1H 151J-T                  | T  | 52.9/20.3    |
| C553    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 57.2/15.6    |
| C554    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 58.4/21.8    |
| C555    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 47.8/3.9     |
| C556    | 4030009510 | S.CER C1608 CH 1H 010B-T                  | B  | 51.7/15.9    |
| C557    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 47/9.9       |
| C558    | 4610001830 | S.TRI TZB4S100AB10R00<br>(TZBX4N100BA110) | T  | 51/17.4      |
| C559    | 4030011770 | S.CER C1608 CH 1H 060B-T                  | T  | 46.9/15.8    |
| C572    | 4030007130 | S.CER C1608 CH 1H 101J-T                  | T  | 69.7/20.3    |
| C573    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 74/15.6      |
| C574    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 76.8/21.8    |
| C575    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 64.6/3.9     |
| C576    | 4030009510 | S.CER C1608 CH 1H 010B-T                  | B  | 68.6/15.9    |
| C577    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 63.8/9.9     |

## [PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                               | M. | H/V LOCATION |
|---------|------------|-------------------------------------------|----|--------------|
| C578    | 4610001830 | S.TRI TZB4S100AB10R00<br>(TZBX4N100BA110) | T  | 68/17.4      |
| C579    | 4030007020 | S.CER C1608 CH 1H 120J-T                  | T  | 63.8/15.9    |
| C601    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 44.1/35.3    |
| C602    | 4030007080 | S.CER C1608 CH 1H 390J-T                  | T  | 41.2/40.2    |
| C603    | 4030007010 | S.CER C1608 CH 1H 100D-T                  | T  | 44.1/37.7    |
| C609    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 44.1/34      |
| C610    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 42.7/37.6    |
| C620    | 4030007080 | S.CER C1608 CH 1H 390J-T                  | T  | 41.2/42.8    |
| C621    | 4030007120 | S.CER C1608 CH 1H 820J-T                  | T  | 41.2/41.6    |
| C622    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 40.4/47.3    |
| C623    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 29.9/47.8    |
| C624    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 36.5/45.4    |
| C626    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 35.3/45.4    |
| C628    | 4030006900 | S.CER C1608 CH 1H 080D-T                  | T  | 44.1/42.8    |
| C629    | 4030007060 | S.CER C1608 CH 1H 270J-T                  | T  | 44.1/44.1    |
| C630    | 4030006900 | S.CER C1608 CH 1H 080D-T                  | T  | 44.1/45.3    |
| C645    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 7.3/27.8     |
| C661    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 5.8/29.9     |
| C662    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 3.5/29       |
| C663    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 3.7/27       |
| C664    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 5.3/31.2     |
| C681    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 34.9/42.1    |
| C682    | 4030007130 | S.CER C1608 CH 1H 101J-T                  | T  | 19.5/38.4    |
| C686    | 4550005980 | S.TAN TEESVA 1A 475M8R                    | T  | 30.4/32.2    |
| C687    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 24.5/36.9    |
| C689    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 25.6/43.2    |
| C690    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 26.8/44.5    |
| C691    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 27/37.2      |
| C692    | 4030006860 | S.CER C1608 JB 1H 102K-T                  | B  | 32.5/45.1    |
| C693    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 30.7/34.5    |
| C694    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 26.6/32.2    |
| C695    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 34.8/39.4    |
| C696    | 4030019500 | S.CER GRM21BB31A106KE18<br>(GRM40 B)      | T  | 30.2/43.7    |
| C701    | 4030019500 | S.CER GRM21BB31A106KE18<br>(GRM40 B)      | B  | 134.7/19.9   |
| C702    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 131/23       |
| C703    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 123.9/20.5   |
| C704    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 128.5/16.4   |
| C705    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 122.8/12.1   |
| C706    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | B  | 130.6/8.6    |
| C707    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 138.4/12     |
| C708    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 124.9/19.1   |
| C709    | 4030011340 | S.CER C1608 CH 1H 471J-T                  | T  | 139.1/2.1    |
| C710    | 4030007120 | S.CER C1608 CH 1H 820J-T                  | T  | 139.3/3.6    |
| C711    | 4030017870 | S.CER C1608 CH 1H 681J-T                  | T  | 141.4/3.3    |
| C712    | 4030007060 | S.CER C1608 CH 1H 270J-T                  | T  | 140.5/8.2    |
| C713    | 4030017800 | S.CER C1608 CH 1H 561J-T                  | T  | 142.7/3.2    |
| C714    | 4030011280 | S.CER C1608 CH 1H 271J-T                  | T  | 143.6/8.2    |
| C715    | 4030006860 | S.CER C1608 JB 1H 102K-T                  | T  | 144.6/6.6    |
| C716    | 4030011280 | S.CER C1608 CH 1H 271J-T                  | T  | 145/9.5      |
| C717    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 124.5/21.7   |
| C718    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 124.5/22.9   |
| C719    | 4550007710 | S.TAN TEESVB2 1A 476M8R                   | B  | 130.2/20.9   |
| C720    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 137.3/2.8    |
| C721    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 142.5/10.4   |
| C722    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 142.9/12.8   |
| C723    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 142.9/16     |
| C724    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 141.7/21.6   |
| C725    | 4030011600 | S.CER C1608 JB 1E 104K-T                  | T  | 143.5/21.1   |
| C726    | 4030017490 | S.CER C1608 JB 1A 105K-T                  | T  | 142.9/14.7   |
| C801    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 125.6/47.8   |
| C802    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 131.6/47     |
| C803    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 133.4/46.4   |
| C804    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 126.6/42.5   |
| C831    | 4030009910 | S.CER C1608 CH 1H 040B-T                  | T  | 144.6/42.5   |
| C832    | 4030009510 | S.CER C1608 CH 1H 010B-T                  | T  | 154.8/42.1   |
| C834    | 4030007030 | S.CER C1608 CH 1H 150J-T                  | T  | 152.2/36.8   |
| C835    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 154.8/36.8   |
| C838    | 4030007020 | S.CER C1608 CH 1H 120J-T                  | T  | 150.5/46.7   |
| C851    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 143.1/50.7   |
| C852    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 111.9/55.3   |
| C853    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | T  | 140.5/49.8   |
| C854    | 4030006900 | S.CER C1608 JB 1H 103K-T                  | B  | 108.1/52.8   |
| C855    | 4030019500 | S.CER GRM21BB31A106KE18<br>(GRM40 B)      | B  | 140.8/50.2   |
| C856    | 4030019500 | S.CER GRM21BB31A106KE18<br>(GRM40 B)      | B  | 103.4/54.5   |
| C1201   | 4030007080 | S.CER C1608 CH 1H 390J-T                  | T  | 31.1/66.5    |
| C1202   | 4030006980 | S.CER C1608 CH 1H 070D-T                  | T  | 36.2/66.2    |
| C1203   | 4030007020 | S.CER C1608 CH 1H 120J-T                  | T  | 37.4/66.2    |
| C1204   | 4030007080 | S.CER C1608 CH 1H 390J-T                  | T  | 3            |



[PLL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| C2222   | 4030008560 | S.CER C1608 CH 1H 300J-T        | T  | 9.6/46.6     |
| C2223   | 4030009530 | S.CER C1608 CH 1H 030B-T        | T  | 10.3/44.8    |
| C2224   | 4030007070 | S.CER C1608 CH 1H 330J-T        | T  | 9.6/42.9     |
| C2225   | 4030009520 | S.CER C1608 CH 1H 020B-T        | T  | 11.4/37.3    |
| C2226   | 4030007050 | S.CER C1608 CH 1H 220J-T        | T  | 7/38.7       |
| C2227   | 4030007100 | S.CER C1608 CH 1H 560J-T        | T  | 7.9/36.6     |
| C2228   | 4030011280 | S.CER C1608 CH 1H 271J-T        | T  | 7.1/34.4     |
| C2229   | 4030007100 | S.CER C1608 CH 1H 560J-T        | T  | 8.8/34.4     |
| C2230   | 4030006900 | S.CER C1608 JB 1H 103K-T        | B  | 4.9/34.1     |
| C2231   | 4030007010 | S.CER C1608 CH 1H 100D-T        | T  | 11.5/41.3    |
| C2232   | 4030006900 | S.CER C1608 JB 1H 103K-T        | B  | 5.7/42.5     |
| C2511   | 4030006900 | S.CER C1608 JB 1H 103K-T        | B  | 9.5/47.3     |
| C2512   | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 5.7/47.1     |
| J1      | 6510022581 | S.CON 24FMN-BMTRA-A-TBT(LF)(SN) | T  | 147.7/71     |
| J51     | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J81     | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J351    | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J651    | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J701    | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J831    | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J851    | 6510007020 | CON TMP-J01X-V6                 |    |              |
| EP1     | 6910019900 | S.BEA MPZ1608S601AT             | T  | 142.1/60.5   |
| EP2     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 148.3/59.4   |
| EP3     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 142.5/59     |
| EP4     | 6910019900 | S.BEA MPZ1608S601AT             | T  | 142.1/62.9   |
| EP5     | 6910019900 | S.BEA MPZ1608S601AT             | B  | 149.3/67.5   |
| EP6     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 141.8/70.5   |
| EP7     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 149.3/71.5   |
| EP8     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 141.8/72.5   |
| EP9     | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 149.3/73.5   |
| EP103   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 103/101.4    |
| EP204   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 71.1/101.2   |
| EP224   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 62.8/105.3   |
| EP254   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 48.1/105.7   |
| EP274   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 20.7/101.2   |
| EP382   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 66/75.1      |
| EP401   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 106.1/4.2    |
| EP402   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 106.7/5.4    |
| EP403   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 96.7/3.2     |
| EP404   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 108.3/5.4    |
| EP405   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 96/1.8       |
| EP406   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | B  | 109.9/5.4    |
| EP407   | 6910015970 | S.BEA MMZ1608B 301CT-AS         | T  | 115.2/6.3    |
| EP504   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 37/4.6       |
| EP524   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 20.5/4.3     |
| EP554   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 53.9/4.4     |
| EP574   | 6910012350 | S.BEA MMZ1608Y 102BT            | B  | 71/4.1       |
| EP682   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 25.2/33.5    |
| EP1503  | 6910015970 | S.BEA MMZ1608B 301CT-AS         | T  | 39.6/65.4    |
| EP2501  | 6910015970 | S.BEA MMZ1608B 301CT-AS         | T  | 28.4/47.7    |

[RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION              | M. | H/V LOCATION |
|---------|------------|--------------------------|----|--------------|
| IC161   | 1190001930 | S.IC PS7122AL-1A-E3      | T  | 134.8/91.3   |
| IC201   | 1110007400 | S.IC BGA616              | T  | 4.1/33.2     |
| IC301   | 1130011530 | S.IC CD74HC4094M96       | B  | 40.1/13.4    |
| IC303   | 1130011530 | S.IC CD74HC4094M96       | B  | 40.1/24.3    |
| IC305   | 1130011530 | S.IC CD74HC4094M96       | B  | 29/19        |
| IC1401  | 1110006420 | S.IC UPC2708TB-E3-A      | T  | 53.6/40      |
| Q101    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 9.2/68       |
| Q102    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 5.6/68.4     |
| Q103    | 1530003900 | S.TRA KTC4075 BL-RTK/P   | B  | 74.7/71.7    |
| Q104    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 72.4/73.2    |
| Q151    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 46.8/83.2    |
| Q152    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 44/81.2      |
| Q153    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 49.5/83.3    |
| Q161    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 115.2/81     |
| Q162    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 143/85.6     |
| Q201    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 7.5/27.8     |
| Q202    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 8/30.8       |
| Q203    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 9.5/34.5     |
| Q204    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 6.7/34.4     |
| Q303    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 44.5/13.5    |
| Q307    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 38/13.3      |
| Q308    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 38.2/7.9     |
| Q309    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 38/16.2      |
| Q310    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 40.3/7.9     |
| Q311    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 43.6/9.6     |
| Q312    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 44/7         |
| Q313    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 34/11.5      |
| Q314    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 31.7/11.1    |
| Q317    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 43.4/24.3    |
| Q318    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 28.3/6.5     |
| Q319    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 39.3/23.1    |
| Q320    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 27.9/9.7     |
| Q321    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 31.1/7.5     |
| Q322    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 28.6/5.7     |
| Q323    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 32.4/11.1    |
| Q324    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 27.8/8.3     |
| Q325    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 33/25.1      |
| Q326    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 25.4/8.3     |
| Q327    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 28.5/12.5    |
| Q328    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 27/10.3      |
| Q329    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 32.9/27.6    |
| Q330    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 30.1/28.2    |
| Q331    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 29/29.3      |
| Q332    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 28.5/32.1    |
| Q333    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 24.9/31.4    |
| Q334    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 22.2/30.9    |
| Q335    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 24.9/28.8    |
| Q336    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 22.1/28.3    |
| Q337    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 26.5/17.8    |
| Q338    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 26/20.9      |
| Q339    | 1590003680 | S.TRA KRC402 RTK/P       | B  | 24.9/26.2    |
| Q340    | 1590003770 | S.TRA KRA302E-RTK/P      | B  | 22.1/25.7    |
| Q341    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 27.7/25      |
| Q342    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 25.2/24.4    |
| Q343    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 26.3/27.7    |
| Q344    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 23.8/27.1    |
| Q345    | 1590003680 | S.TRA KRC402 RTK/P       | T  | 24.9/30.4    |
| Q346    | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 22.4/29.8    |
| Q1001   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 72.6/26.6    |
| Q1002   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 72.6/23.5    |
| Q1003   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | B  | 92.6/27.5    |
| Q1004   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 90.1/31.9    |
| Q1005   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 90.1/24.1    |
| Q1006   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | B  | 92.6/23.4    |
| Q1007   | 1530003900 | S.TRA KTC4075 BL-RTK/P   | T  | 106.8/33.2   |
| Q1008   | 1530003340 | S.TRA 2SC3357-T1 RF      | T  | 107.6/20.6   |
| Q1101   | 1530003340 | S.TRA 2SC3357-T1 RF      | T  | 81.1/19.7    |
| Q1201   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 72.3/48.5    |
| Q1202   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 72.3/45.5    |
| Q1203   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | B  | 92.6/49.9    |
| Q1204   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 89.2/51.1    |
| Q1205   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 89.2/45.5    |
| Q1206   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | B  | 92.6/46.5    |
| Q1207   | 1530003900 | S.TRA KTC4075 BL-RTK/P   | T  | 103.3/58.6   |
| Q1208   | 1530003340 | S.TRA 2SC3357-T1 RF      | T  | 108.5/51.8   |
| Q1209   | 1530003851 | S.TRA 2SC5551-FD-E       | B  | 98.9/56.2    |
| Q1301   | 1530003340 | S.TRA 2SC3357-T1 RF      | T  | 75.5/62.4    |
| Q1551   | 1560000561 | S.FET 2SK882-GR(TE85L,F) | B  | 121/70.1     |
| Q1901   | 1590003680 | S.TRA KRC402 RTK/P       | T  | 130.9/27.2   |
| Q1902   | 1590003770 | S.TRA KRA302E-RTK/P      | T  | 130.9/29.5   |
| Q2001   | 1560000641 | S.FET 2SK1740-4/5-TB-E   | T  | 106.6/76     |
| D101    | 1790000980 | S.DIO MA742(TX)          | B  | 83.2/72.4    |
| D104    | 1750000581 | S.DIO 1SV307(TPH3,F)     | B  | 14.1/79.4    |
| D105    | 1750001320 | S.DIO KDS4148U RTK/P     | B  | 77.4/74.7    |
| D106    | 1750001320 | S.DIO KDS4148U RTK/P     | T  | 59.4/77.7    |
| D107    | 1750001320 | S.DIO KDS4148U RTK/P     | T  | 67/75.1      |
| D108    | 1750001320 | S.DIO KDS4148U RTK/P     | B  | 86.2/75      |
| D109    | 1750001320 | S.DIO KDS4148U RTK/P     | B  | 94.7/75.7    |
| D151    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 46/86        |
| D152    | 1750000581 | S.DIO 1SV307(TPH3,F)     | B  | 16.4/82.1    |
| D161    | 1750001320 | S.DIO KDS4148U RTK/P     | B  | 111/83.4     |
| D201    | 1750000581 | S.DIO 1SV307(TPH3,F)     | B  | 2.9/77.8     |
| D501    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 20.5/71.8    |
| D502    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 28.8/41.8    |
| D551    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 31/74.8      |
| D552    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 33/44.6      |
| D601    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 21.4/75.2    |
| D602    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 25.7/74.5    |
| D603    | 1750000581 | S.DIO 1SV307(TPH3,F)     | T  | 28.8/43.6    |
| D604    | 1750000581 | S.DIO 1SV307(TPH3,F)     | B  | 42/44.9      |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)

S.=Surface mount

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                      | M. | H/V LOCATION |
|---------|------------|----------------------------------|----|--------------|
| D651    | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 43.8/74.2    |
| D652    | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 42.5/45.6    |
| D701    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 41.6/75.9    |
| D702    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 45.1/45.3    |
| D751    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 37.2/76      |
| D752    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 35.7/45.3    |
| D801    | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 10.9/65.6    |
| D802    | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 34.8/42.5    |
| D851    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 20.5/72.6    |
| D852    | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 32/44.8      |
| D951    | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 51.8/29.1    |
| D1001   | 1750000971 | S.DIO CPH5513-TL-E               | T  | 103.5/27.5   |
| D1002   | 1750000441 | S.DIO 1SV263-TL-E                | T  | 109.8/31.8   |
| D1003   | 1750000971 | S.DIO CPH5513-TL-E               | T  | 107.1/27.5   |
| D1004   | 1750001320 | S.DIO KDS4148U RTK/P             | B  | 109/32.4     |
| D1201   | 1750000971 | S.DIO CPH5513-TL-E               | T  | 103.5/46.2   |
| D1202   | 1750001310 | S.DIO KDS114 RTK/PA              | T  | 100.2/60.7   |
| D1203   | 1750000441 | S.DIO 1SV263-TL-E                | T  | 103.8/50.5   |
| D1204   | 1750000971 | S.DIO CPH5513-TL-E               | T  | 107/46.2     |
| D1205   | 1750001320 | S.DIO KDS4148U RTK/P             | T  | 102.5/62.1   |
| D1301   | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 93.4/64.1    |
| D1302   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 88.6/65.6    |
| D1401   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 46.9/35.1    |
| D1451   | 1750000431 | S.DIO HSB88WSTR-E                | T  | 80.2/71      |
| D1501   | 1750001310 | S.DIO KDS114 RTK/PA              | T  | 102.7/68.6   |
| D1551   | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 124.2/30.5   |
| D1601   | 1750000581 | S.DIO 1SV307(TPH3,F)             | T  | 122.1/30.5   |
| D1701   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 149.5/43.3   |
| D1702   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 150.4/79.8   |
| D1703   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 125.2/37.5   |
| D1704   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 131.8/78.9   |
| D1705   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 137.9/37.5   |
| D1706   | 1750000581 | S.DIO 1SV307(TPH3,F)             | B  | 139.9/78.3   |
| L101    | 6200007780 | S.COI LQW2BHN12J03L              | T  | 46.2/89.3    |
| L102    | 6200007760 | S.COI LQW2BHN82NJ03L             | T  | 40.1/88.4    |
| L103    | 6200010730 | S.COI C2520C-68NG-A              | T  | 14.7/83.4    |
| L104    | 6200005491 | S.COI NLV32T-331J                | B  | 9.3/67.5     |
| L137    | 6190001650 | COI ELC06D102E                   |    |              |
| L151    | 6200005491 | S.COI NLV32T-331J                | T  | 44.8/78      |
| L161    | 6200002041 | S.COI NLV25T-100J                | B  | 99.2/88.4    |
| L201    | 6200009810 | S.COI LQH31HNR61J03L             | T  | 3.8/20       |
| L202    | 6200002181 | S.COI NLV25T-R12J                | T  | 3.3/23       |
| L203    | 6200005041 | S.COI NLV25T-220J                | T  | 3.9/27.6     |
| L251    | 6200005491 | S.COI NLV32T-331J                | B  | 12.2/76.1    |
| L252    | 6200005491 | S.COI NLV32T-331J                | B  | 10.4/72.5    |
| L253    | 6180003560 | COI SP0406-5R6K-6                |    |              |
| L271    | 6180003550 | COI SP0406-4R7K-6                |    |              |
| L501    | 6200010780 | S.COI C2520C-1R0G-A              | T  | 15.1/65.7    |
| L502    | 6200010970 | S.COI C2520C-1R8G-A (1.8U)       | T  | 15.1/60.1    |
| L503    | 6200010970 | S.COI C2520C-1R8G-A (1.8U)       | T  | 15.1/54.4    |
| L504    | 6200010780 | S.COI C2520C-1R0G-A              | T  | 15.2/43.4    |
| L505    | 6200010970 | S.COI C2520C-1R8G-A (1.8U)       | T  | 15.1/49.2    |
| L551    | 6200010770 | S.COI C2520C-R68G-A              | T  | 34.8/70.4    |
| L552    | 6200010950 | S.COI C2520C-1R5G-A (1.5U)       | T  | 34.8/64.7    |
| L553    | 6200010950 | S.COI C2520C-1R5G-A (1.5U)       | T  | 34.8/59.1    |
| L554    | 6200010770 | S.COI C2520C-R68G-A              | T  | 34.9/47.7    |
| L555    | 6200010950 | S.COI C2520C-1R5G-A (1.5U)       | T  | 34.9/53.3    |
| L601    | 6200010530 | S.COI C2520C-R56G-A (0.56U)      | T  | 25.1/70.3    |
| L602    | 6200010450 | S.COI C2520C-R82G-A (0.82U)      | T  | 25.1/64.6    |
| L603    | 6200010450 | S.COI C2520C-R82G-A (0.82U)      | T  | 25.1/59      |
| L604    | 6200010530 | S.COI C2520C-R56G-A (0.56U)      | T  | 25.1/48      |
| L605    | 6200010450 | S.COI C2520C-R82G-A (0.82U)      | T  | 25/53.3      |
| L651    | 6200010870 | S.COI C2520C-R33G-A (0.33U)      | T  | 44.3/69.8    |
| L652    | 6200010770 | S.COI C2520C-R68G-A              | T  | 44.3/64.1    |
| L653    | 6200010770 | S.COI C2520C-R68G-A              | T  | 44.2/58.7    |
| L654    | 6200010870 | S.COI C2520C-R33G-A (0.33U)      | T  | 44.4/47.5    |
| L655    | 6200010770 | S.COI C2520C-R68G-A              | T  | 44.3/53.4    |
| L701    | 6200010980 | S.COI LQW2BHN12J03L              | B  | 45.1/67.2    |
| L702    | 6200008080 | S.COI LQW2BHN22J03L              | B  | 45.6/58.9    |
| L703    | 6200010980 | S.COI LQW2BHN27J03L              | B  | 44.6/55.7    |
| L751    | 6200008100 | S.COI LQH31HNR14J03L             | B  | 33.8/70      |
| L753    | 6200007810 | S.COI LQH31HN95NK03L             | B  | 38.6/59.5    |
| L754    | 6200008100 | S.COI LQH31HNR14J03L             | B  | 34.2/49.2    |
| L801    | 6200010800 | S.COI C2520C-4R7G-A              | T  | 33.8/34.4    |
| L802    | 6200010800 | S.COI C2520C-4R7G-A              | T  | 34.3/38.2    |
| L803    | 6200009060 | S.COI LQH32CN101K23L             | T  | 22.7/38      |
| L851    | 6200007810 | S.COI LQH31HN95NK03L             | B  | 25/69.5      |
| L852    | 6200009810 | S.COI LQH31HNR61J03L             | B  | 25/64.4      |
| L853    | 6200009810 | S.COI LQH31HNR61J03L             | B  | 28.5/60      |
| L854    | 6200009810 | S.COI LQH31HNR61J03L             | B  | 25/54.5      |
| L855    | 6200007810 | S.COI LQH31HN95NK03L             | B  | 25/49.5      |
| L901    | 6200005491 | S.COI NLV32T-331J                | B  | 42.7/32.1    |
| L904    | 6140004680 | S.COI LR-528 4KBL                | T  | 54.5/24.4    |
| L905    | 6140004680 | S.COI LR-528 4KBL                | T  | 56.7/13.2    |
| L971    | 6200005491 | S.COI NLV32T-331J                | B  | 25.9/41.7    |
| L972    | 6200005491 | S.COI NLV32T-331J                | B  | 25.9/37.5    |
| L1001   | 6200012470 | S.COI 0.30-1.7-TTL 45.3N <COMO>  | T  | 61.6/20.2    |
| L1002   | 6200013080 | S.COI 0.25-1.9-10TL 97.0N <COMO> | T  | 62.8/24.3    |
| L1003   | 6200013000 | S.COI 0.25-1.9-13TL 135N <COMO>  | T  | 62.8/29.1    |
| L1004   | 6200008940 | S.COI LQH32MN331K23L             | T  | 65.7/33.6    |
| L1005   | 6200010870 | S.COI C2520C-R33G-A (0.33U)      | T  | 72.4/31.7    |
| L1006   | 6200009060 | S.COI LQH32CN101K23L             | B  | 85.6/18.3    |
| L1007   | 6140004420 | COI LR-501                       |    |              |
| L1008   | 6200007780 | S.COI LQW2BHN12J03L              | B  | 94.9/33.8    |
| L1009   | 6200007780 | S.COI LQW2BHN12J03L              | B  | 95.4/19.6    |
| L1010   | 6200009060 | S.COI LQH32CN101K23L             | T  | 99.9/21.2    |
| L1011   | 6150005320 | COI LS-546 7K7                   |    |              |
| L1012   | 6200005011 | S.COI NLV25T-100J                | B  | 105.3/24.5   |
| L1013   | 6200005011 | S.COI NLV25T-100J                | T  | 112.6/31.2   |
| L1014   | 6200005011 | S.COI NLV25T-100J                | B  | 108.9/29.7   |
| L1015   | 6200005011 | S.COI NLV25T-100J                | T  | 113.7/27.1   |
| L1016   | 6200005011 | S.COI NLV25T-100J                | T  | 112/12.5     |

## [RF UNIT]

| REF NO. | PARTS NO.   | DESCRIPTION |                            | M. | H/V LOCATION |
|---------|-------------|-------------|----------------------------|----|--------------|
| L1017   | 6200010740  | S.COI       | C2520C-R27G-A              | T  | 108.9/15.7   |
| L1018   | 6140002810  | S.COI       | LR-317                     | T  | 122.7/35.1   |
| L1019   | 6190001650  | COI         | ELC06D102E                 |    |              |
| L1020   | 6200003711  | S.COI       | NLV25T-2R7J                | B  | 111.3/14.6   |
| L1101   | 6130002961  | S.COI       | #617DB-1327=P3             | T  | 90.7/20.1    |
| L1102   | 6200008090  | S.COI       | LQW2BHN68NJ03L             | T  | 93.3/15.1    |
| L1103   | 6200008090  | S.COI       | LQW2BHN68NJ03L             | T  | 89.4/13.6    |
| L1104   | 6200007750  | S.COI       | LQW2BHN56NJ03L             | T  | 85.8/13.1    |
| L1105   | 6200005011  | S.COI       | NLV25T-100J                | T  | 79.5/12.1    |
| L1106   | 6200003281  | S.COI       | NLV25T-2R2J                | T  | 75.4/15.5    |
| L1201   | 6200012470  | S.COI       | 0.30-1.7-TTL 45.3N <COMO>  | T  | 61.8/37.8    |
| L1202   | 6200013080  | S.COI       | 0.25-1.9-10TL 97.0N <COMO> | T  | 62.6/42.2    |
| L1203   | 6200013000  | S.COI       | 0.25-1.9-13TL 135N <COMO>  | T  | 62/47        |
| L1204   | 6200008940  | S.COI       | LQH32MN331K23L             | T  | 65.3/50.7    |
| L1205   | 6200010870  | S.COI       | C2520C-R33G-A (0.33U)      | T  | 72.4/52.2    |
| L1206   | 6200009060  | S.COI       | LQH32CN101K23L             | B  | 79.6/50.8    |
| L1207   | 6140004420  | COI         | LR-501                     |    |              |
| L1208   | 6200007780  | S.COI       | LQW2BHN12J03L              | B  | 92.4/42.5    |
| L1209   | 6200007780  | S.COI       | LQW2BHN12J03L              | B  | 89.3/53.5    |
| L1210   | 6200009060  | S.COI       | LQH32CN101K23L             | T  | 98.6/54.4    |
| L1211   | 6150005320  | COI         | LS-546 7K7                 |    |              |
| L1212   | 6200005011  | S.COI       | NLV25T-100J                | B  | 105.3/45.1   |
| L1214   | 6200005011  | S.COI       | NLV25T-100J                | B  | 112.1/52.3   |
| L1215   | 6200005011  | S.COI       | NLV25T-100J                | B  | 104.6/49     |
| L1216   | 6200005011  | S.COI       | NLV25T-100J                | B  | 110.8/46.4   |
| L1217   | 6200005011  | S.COI       | NLV25T-100J                | T  | 113.7/56.7   |
| L1218   | 6200010740  | S.COI       | C2520C-R27G-A              | T  | 114.3/48.7   |
| L1219   | 6200003711  | S.COI       | NLV25T-2R7J                | B  | 111/64.4     |
| L1220   | 6200010980  | S.COI       | LQW2BHN12J03L              | B  | 94.7/59.4    |
| L1221   | 6200005011  | S.COI       | NLV25T-100J                | B  | 91.9/60.5    |
| L1242   | 6200005011  | S.COI       | NLV25T-100J                | B  | 106.7/58.5   |
| L1301   | 6130002961  | S.COI       | #617DB-1327=P3             | T  | 91.8/54.9    |
| L1302   | 6200003281  | S.COI       | NLV25T-2R2J                | B  | 99.4/63      |
| L1303   | 6200008090  | S.COI       | LQW2BHN68NJ03L             | T  | 89.5/62.4    |
| L1304   | 6200008090  | S.COI       | LQW2BHN68NJ03L             | T  | 86.9/58.8    |
| L1305   | 6200007750  | S.COI       | LQW2BHN56NJ03L             | T  | 85.9/63.2    |
| L1306   | 6200005011  | S.COI       | NLV25T-100J                | T  | 80.2/55.7    |
| L1307   | 6200003281  | S.COI       | NLV25T-2R2J                | T  | 79.2/58.9    |
| L1401   | 6200005041  | S.COI       | NLV25T-220J                | T  | 50.2/40.2    |
| L1402   | 6200002641  | S.COI       | NLV25T-R15J                | T  | 52/46.4      |
| L1403   | 6200002431  | S.COI       | NLV25T-082J                | T  | 51.4/51.2    |
| L1451   | 6130002961  | S.COI       | #617DB-1327=P3             | T  | 73.9/71      |
| L1452   | 6130002961  | S.COI       | #617DB-1327=P3             | T  | 86.6/71      |
| L1551   | 6200004600  | S.COI       | MLF1608D R15K-T            | B  | 98.7/69.4    |
| L1552   | 6200004600  | S.COI       | MLF1608D R15K-T            | B  | 103.3/72     |
| L1553   | 6150004280  | COI         | LS-484B (C-14927)          |    |              |
| L1554   | 6200002611  | S.COI       | NLV25T-R47J                | B  | 124.2/71     |
| L1555   | 6200003281  | S.COI       | NLV25T-2R2J                | B  | 127.6/60     |
| L1601   | 6200010760  | S.COI       | C2520C-27NG-A              | T  | 132.6/32.7   |
| L1602   | 6200003281  | S.COI       | NLV25T-2R2J                | T  | 119.8/30.5   |
| L1703   | 6200003281  | S.COI       | NLV25T-2R2J                | B  | 143.4/46.4   |
| L1704   | 6200003281  | S.COI       | NLV25T-2R2J                | B  | 144.2/74.4   |
| R101    | 7540000130  | ABS         | 2P-50A-301                 |    |              |
| R102    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 52.4/91.5    |
| R103    | 7030003480  | S.RES       | ERJ3GEYJ 222 V (2.2K)      | B  | 77.7/70.9    |
| R104    | 7030003680  | S.RES       | ERJ3GEYJ 104 V (100K)      | B  | 74.6/69.3    |
| R105    | 7030003860  | S.RES       | ERJ3GE JPW V               | B  | 80.5/70.9    |
| R106    | 7030003340  | S.RES       | ERJ3GEYJ 151 V (150)       | B  | 69.5/89.5    |
| R107    | 7030008180  | S.RES       | ERJ12YJ331U (330)          | B  | 12.8/67.5    |
| R108    | 7030003680  | S.RES       | ERJ3GEYJ 104 V (100K)      | T  | 63.7/70.4    |
| R109    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 5.8/66.4     |
| R110    | 7030003270  | S.RES       | ERJ3GEYJ 390 V (39)        | B  | 70.2/87.2    |
| R111    | 7030003340  | S.RES       | ERJ3GEYJ 151 V (150)       | B  | 71.1/89.5    |
| R112    | 7030003310  | S.RES       | ERJ3GEYJ 820 V (82)        | B  | 65.4/89.5    |
| R113    | 7030003320  | S.RES       | ERJ3GEYJ 101 V (100)       | B  | 66.2/87.2    |
| R114    | 7030003310  | S.RES       | ERJ3GEYJ 820 V (82)        | B  | 67/89.5      |
| R115    | 7030003340  | S.RES       | ERJ3GEYJ 151 V (150)       | B  | 74.2/75      |
| R116    | 7030003340  | S.RES       | ERJ3GEYJ 151 V (150)       | T  | 22.1/27      |
| R117    | 7030003340  | S.RES       | ERJ3GEYJ 151 V (150)       | T  | 21.4/10.2    |
| R118    | 7030003340  | S.RES       | ERJ3GEYJ 151 V (150)       | T  | 87/75.4      |
| R119    | 7030003340  | S.RES       | ERJ3GEYJ 151 V (150)       | T  | 92.9/75.3    |
| R151    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 52.1/83.7    |
| R152    | 7540000130  | ABS         | 2P-50A-301                 |    |              |
| R153    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | B  | 6.5/84.2     |
| R154    | 7030003680  | S.RES       | ERJ3GEYJ 104 V (100K)      | T  | 47.4/81.2    |
| R155    | 7030003480  | S.RES       | ERJ3GEYJ 222 V (2.2K)      | T  | 47.6/86.1    |
| R156    | 7030008180  | S.RES       | ERJ12YJ331U (330)          | T  | 40.9/81.9    |
| R157    | 7030003680  | S.RES       | ERJ3GEYJ 104 V (100K)      | T  | 47.4/79.4    |
| R161    | 75400000270 | S.ABS       | ERZVF2M201                 | T  | 134.3/83     |
| R162    | 7030003200  | S.RES       | ERJ3GEYJ 100 V (10)        | B  | 102/80.5     |
| R163    | 7030003390  | S.RES       | ERJ3GEYJ 391 V (390)       | T  | 140.5/85.4   |
| R201    | 7030003400  | S.RES       | ERJ3GEYJ 471 V (470)       | T  | 5.8/17       |
| R202    | 7030003200  | S.RES       | ERJ3GEYJ 100 V (10)        | T  | 3.9/17.5     |
| R203    | 7030003400  | S.RES       | ERJ3GEYJ 471 V (470)       | T  | 5.8/18.2     |
| R207    | 7030003220  | S.RES       | ERJ3GEYJ 150 V (15)        | T  | 7.4/25.8     |
| R208    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 8.9/37.3     |
| R209    | 7030003380  | S.RES       | ERJ3GEYJ 331 V (330)       | T  | 3.8/40.7     |
| R210    | 7030003220  | S.RES       | ERJ3GEYJ 150 V (15)        | T  | 6/42.2       |
| R211    | 7030003380  | S.RES       | ERJ3GEYJ 331 V (330)       | T  | 3.8/42.5     |
| R212    | 7030003350  | S.RES       | ERJ3GEYJ 181 V (180)       | T  | 4.1/44.5     |
| R213    | 7030003680  | S.RES       | ERJ3GEYJ 104 V (100K)      | T  | 7.6/37.6     |
| R251    | 7030003680  | S.RES       | ERJ3GEYJ 104 V (100K)      | B  | 8/76.9       |
| R301    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 28.6/4.6     |
| R302    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 25.2/6.4     |
| R303    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | B  | 26.6/5.8     |
| R304    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | B  | 24.7/7.9     |
| R305    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 22.9/7.7     |
| R306    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | B  | 25/12.7      |
| R307    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 28.4/30.5    |
| R308    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 27.9/32.4    |
| R309    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | B  | 21.2/3.7     |
| R310    | 7030003560  | S.RES       | ERJ3GEYJ 103 V (10K)       | T  | 19.8/29.2    |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R311    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26/13.8      |
| R312    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 19.8/27.2    |
| R313    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 26/15.3      |
| R314    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 37.1/10.4    |
| R315    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 46.2/8.6     |
| R316    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 42.4/7.1     |
| R360    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 24.6/4.7     |
| R361    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 19.5/29.3    |
| R362    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 46/11.7      |
| R451    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 147.5/13.4   |
| R452    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 146.3/13.4   |
| R501    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 18.4/64.8    |
| R502    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 17.7/41.5    |
| R551    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 37.6/71.6    |
| R552    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 37.7/46.2    |
| R601    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 27.9/71.3    |
| R602    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 28/46.4      |
| R651    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 46.8/67.5    |
| R652    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 46.9/45.7    |
| R701    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 42.2/66.4    |
| R702    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 41.4/50      |
| R751    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 31.8/70.1    |
| R752    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 35.6/67.7    |
| R753    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 32.9/56.7    |
| R754    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 38/49        |
| R801    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 26.3/37.4    |
| R802    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 26.3/36      |
| R803    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 28.9/37.4    |
| R851    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 29.4/65.8    |
| R852    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 28.5/52      |
| R901    | 7030009220 | S.RES ERJ12YJ561U           | B  | 46.5/30.2    |
| R902    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 54.5/17.8    |
| R951    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 52.1/30.7    |
| R952    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | T  | 48.4/27.8    |
| R953    | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | T  | 48.4/30.4    |
| R954    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 49.6/27.8    |
| R971    | 7030008180 | S.RES ERJ12YJ331U (330)     | B  | 32/41.7      |
| R972    | 7030009220 | S.RES ERJ12YJ561U           | B  | 32/37.5      |
| R1001   | 7030003270 | S.RES ERJ3GEYJ 390 V (39)   | T  | 66.7/30.8    |
| R1002   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 85.9/29.6    |
| R1003   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 87.2/29.7    |
| R1004   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 87.2/24.5    |
| R1005   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 85.9/22.6    |
| R1006   | 7310004650 | S.TRI EVM-2WSX80 B53 (502)  | T  | 87.2/27.7    |
| R1007   | 7310004650 | S.TRI EVM-2WSX80 B53 (502)  | T  | 92.1/27.7    |
| R1008   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 94.4/36.4    |
| R1009   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 95.5/21.8    |
| R1010   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 97.8/27.7    |
| R1011   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 105.8/31.1   |
| R1012   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 103.2/31.2   |
| R1013   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 102.1/33     |
| R1014   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | T  | 109.3/24.2   |
| R1015   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 104.8/32.9   |
| R1016   | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 111.5/24.9   |
| R1017   | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | T  | 112.6/18.3   |
| R1018   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 112.6/17.1   |
| R1019   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 111.7/15.9   |
| R1020   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 118/38       |
| R1021   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 110.8/22.8   |
| R1101   | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | T  | 95.9/19.5    |
| R1102   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 94.7/18.3    |
| R1103   | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | T  | 94.7/21      |
| R1104   | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | T  | 79.9/16.5    |
| R1106   | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | T  | 76.1/18.5    |
| R1107   | 7030003450 | S.RES ERJ3GEYJ 122 V (1.2K) | T  | 76.2/20.9    |
| R1108   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | T  | 83.9/21.6    |
| R1201   | 7030003270 | S.RES ERJ3GEYJ 390 V (39)   | T  | 66.6/46.7    |
| R1202   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 85.8/52.6    |
| R1203   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 86.3/50.5    |
| R1204   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 86.3/44.5    |
| R1205   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 86.2/43.8    |
| R1206   | 7310004650 | S.TRI EVM-2WSX80 B53 (502)  | T  | 87/48.2      |
| R1207   | 7310004650 | S.TRI EVM-2WSX80 B53 (502)  | T  | 92/48.2      |
| R1208   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 92.4/40.2    |
| R1209   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 91.8/53.2    |
| R1210   | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 101.3/47.8   |
| R1212   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | B  | 103.9/57.2   |
| R1213   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 103.3/52.8   |
| R1214   | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 105.2/53.4   |
| R1215   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 103.3/54     |
| R1216   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | T  | 110.1/47.4   |
| R1217   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 103.6/56.7   |
| R1218   | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 110.8/45.5   |
| R1219   | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | T  | 107.8/56.2   |
| R1220   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 105.9/55.2   |
| R1221   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 112.1/49.6   |
| R1222   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 100.5/52.3   |
| R1223   | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | B  | 95/56.1      |
| R1224   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 91.2/56.5    |
| R1225   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 112.1/46.7   |
| R1226   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 99.1/57      |
| R1229   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 108.9/56.1   |
| R1301   | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | T  | 94.3/62      |
| R1302   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 95.6/62      |
| R1303   | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | T  | 95.6/59.3    |
| R1304   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 94/58.8      |
| R1305   | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | T  | 73.9/59.2    |
| R1307   | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | T  | 79.9/61.6    |
| R1308   | 7030003450 | S.RES ERJ3GEYJ 122 V (1.2K) | T  | 79.9/63.1    |
| R1309   | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | T  | 72.3/63.1    |
| R1401   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 50.7/35.2    |
| R1402   | 7030003270 | S.RES ERJ3GEYJ 390 V (39)   | T  | 50.7/36.4    |
| R1403   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 52.6/36.3    |
| R1404   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 54.5/36.9    |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R1405   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 54.8/50.5    |
| R1406   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 51.4/43.1    |
| R1451   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 91.1/73.8    |
| R1452   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 88.4/73.8    |
| R1453   | 7030004030 | S.RES ERJ3GEYJ 5R6 V (5.6)  | B  | 86.8/69.4    |
| R1454   | 7030003430 | S.RES ERJ3GEYJ 821 V (820)  | B  | 88.6/69.4    |
| R1502   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 100.4/69.4   |
| R1503   | 7030003290 | S.RES ERJ3GEYJ 560 V (56)   | T  | 97.6/70.7    |
| R1504   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 95.8/68.6    |
| R1552   | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 118.8/69.9   |
| R1553   | 7510001491 | S.THE NTCG16 3NH 681JT      | B  | 121.1/66.7   |
| R1554   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | B  | 122.4/66.7   |
| R1555   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 125/69       |
| R1556   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | B  | 127.5/68.2   |
| R1557   | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 127.7/71     |
| R1558   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 129.1/63.5   |
| R1601   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 120.8/27.8   |
| R1602   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 128.1/35.2   |
| R1603   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 129/32.7     |
| R1604   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 120.8/26.6   |
| R1701   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 145.5/42.7   |
| R1702   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 156/43.2     |
| R1703   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 127.8/38.6   |
| R1704   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 138/37.5     |
| R1705   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 141.5/73.4   |
| R1706   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 130.6/75.2   |
| R1707   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 150.2/73.1   |
| R1708   | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 144.4/78     |
| R1901   | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 128.2/28.1   |
| R2001   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 103/72.5     |
| R2002   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 105.2/73.4   |
| R2003   | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 103/74.1     |
| R2004   | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 106.9/78.2   |
| R2005   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 103/75.5     |
| C101    | 4030007090 | S.CER C1608 CH 1H 470J-T    | T  | 41/91.7      |
| C102    | 4030007030 | S.CER C1608 CH 1H 150J-T    | T  | 43.6/90.2    |
| C103    | 4030007120 | S.CER C1608 CH 1H 820J-T    | T  | 39.8/91.7    |
| C104    | 4030009560 | S.CER C1608 CH 1H R75B-T    | T  | 42.1/89.1    |
| C105    | 4030007070 | S.CER C1608 CH 1H 330J-T    | T  | 38.6/91.7    |
| C106    | 4030019320 | S.CER C1608 X7R 1C 105K-T   | T  | 37.2/89.4    |
| C108    | 4030006930 | S.CER C1608 CH 1H 020C-T    | B  | 82.8/75.3    |
| C109    | 4030007050 | S.CER C1608 CH 1H 220J-T    | B  | 84.4/75.3    |
| C110    | 4030019320 | S.CER C1608 X7R 1C 105K-T   | T  | 14.1/80.3    |
| C111    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 9.4/70       |
| C112    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 8.4/65.9     |
| C113    | 4030010760 | S.CER C1608 CH 1H 331J-T    | B  | 83.3/70      |
| C114    | 4030006900 | S.CER C1608 JB 1H 103K-T    | T  | 57.9/78      |
| C115    | 4030006900 | S.CER C1608 JB 1H 103K-T    | T  | 70.4/75.4    |
| C116    | 4030006900 | S.CER C1608 JB 1H 103K-T    | B  | 75.8/75      |
| C117    | 4030006900 | S.CER C1608 JB 1H 103K-T    | B  | 88/76        |
| C118    | 4030006900 | S.CER C1608 JB 1H 103K-T    | B  | 96.6/75.3    |
| C151    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 49.5/86.8    |
| C152    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 43.5/84      |
| C153    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 52.1/82.5    |
| C154    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 44/85.8      |
| C155    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 48.6/79.4    |
| C161    | 4030006900 | S.CER C1608 JB 1H 103K-T    | B  | 96.6/90.6    |
| C163    | 4030006900 | S.CER C1608 JB 1H 103K-T    | B  | 108.9/83.4   |
| C164    | 4030006900 | S.CER C1608 JB 1H 103K-T    | B  | 113/80.9     |
| C165    | 4030019540 | S.CER GRM31BR72J472KW01L    | B  | 122.2/86.7   |
| C201    | 4030007010 | S.CER C1608 CH 1H 100D-T    | T  | 7.3/20.3     |
| C202    | 4030007120 | S.CER C1608 CH 1H 820J-T    | T  | 7.3/21.5     |
| C203    | 4030007020 | S.CER C1608 CH 1H 120J-T    | T  | 5.5/22.2     |
| C204    | 4030007120 | S.CER C1608 CH 1H 820J-T    | T  | 7.3/23       |
| C205    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 5.5/24.8     |
| C206    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 4.6/29.8     |
| C207    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 8.9/39.9     |
| C208    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 6/39.6       |
| C209    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 2.9/39       |
| C210    | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 7.3/24.5     |
| C251    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 13.6/72.5    |
| C252    | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 9.8/76.1     |
| C271    | 4030018600 | S.CER C1608 CH 1H 152J-T    | T  | 8.9/80.1     |
| C272    | 4030018590 | S.CER C1608 CH 1H 122J-T    | T  | 8.9/78.9     |
| C273    | 4030018620 | S.CER C1608 CH 1H 222J-T    | T  | 1            |



## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION              | M. | H/V LOCATION |
|---------|------------|--------------------------|----|--------------|
| C466    | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 149.6/21.8   |
| C467    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 149.7/19.8   |
| C468    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 153.5/18.8   |
| C469    | 4510008510 | S.ELE EEE1CA471P         | T  | 141.8/7.4    |
| C470    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 141.2/17.8   |
| C471    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 158.6/17.1   |
| C472    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 141.4/19.8   |
| C473    | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 141.4/21.8   |
| C474    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 158/25.5     |
| C475    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 158.7/28.1   |
| C476    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 141.4/27.8   |
| C477    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 141.5/29.8   |
| C478    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 158.6/32     |
| C479    | 4030017810 | S.CER C1608 CH 1H 102J-T | B  | 141.3/31.8   |
| C480    | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 153.5/22.7   |
| C481    | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 157.9/21.9   |
| C501    | 4030007170 | S.CER C1608 CH 1H 221J-T | T  | 17.4/68.6    |
| C502    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 18.2/66.6    |
| C503    | 4030007110 | S.CER C1608 CH 1H 680J-T | T  | 18.6/68.6    |
| C504    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 19.3/59.1    |
| C505    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 19.3/57.9    |
| C506    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 16.1/57.2    |
| C507    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 17.3/57.2    |
| C508    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 19.3/56.4    |
| C509    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 19.3/55.2    |
| C510    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 12.4/51.8    |
| C511    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 13.6/51.8    |
| C512    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 18.2/52.6    |
| C513    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 18.2/51.4    |
| C514    | 4030007170 | S.CER C1608 CH 1H 221J-T | T  | 18.2/47.7    |
| C515    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 19.7/45      |
| C516    | 4030007110 | S.CER C1608 CH 1H 680J-T | T  | 18.2/46.4    |
| C551    | 4030007160 | S.CER C1608 CH 1H 181J-T | T  | 38.1/73.6    |
| C552    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 37.4/67.8    |
| C553    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 36.8/73.6    |
| C554    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 39/63.9      |
| C555    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 39/62.6      |
| C556    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 37.1/61.9    |
| C557    | 4030007030 | S.CER C1608 CH 1H 150J-T | T  | 35.9/61.9    |
| C558    | 4030006990 | S.CER C1608 CH 1H 080D-T | T  | 39/61.1      |
| C559    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 39/59.9      |
| C560    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 31.5/56.1    |
| C561    | 4030007030 | S.CER C1608 CH 1H 150J-T | T  | 32.8/56.1    |
| C562    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 38.1/56.6    |
| C563    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 38.1/55.3    |
| C564    | 4030007160 | S.CER C1608 CH 1H 181J-T | T  | 38/50.7      |
| C565    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 39.5/49.4    |
| C566    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 38/52        |
| C601    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 27.2/73.3    |
| C602    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 27.5/67.8    |
| C603    | 4030007140 | S.CER C1608 CH 1H 121J-T | T  | 28.5/73.3    |
| C604    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 29.4/62.7    |
| C605    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 29.4/63.9    |
| C606    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 26.2/61.9    |
| C607    | 4030007010 | S.CER C1608 CH 1H 100D-T | T  | 27.5/61.9    |
| C609    | 4030007090 | S.CER C1608 CH 1H 470J-T | T  | 29.4/59.9    |
| C610    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 21.7/56      |
| C611    | 4030007010 | S.CER C1608 CH 1H 100D-T | T  | 23/56        |
| C612    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 28.4/56.5    |
| C613    | 4030007070 | S.CER C1608 CH 1H 330J-T | T  | 28.4/55.2    |
| C614    | 4030007040 | S.CER C1608 CH 1H 180J-T | T  | 28.4/52.1    |
| C615    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 29.8/49.6    |
| C616    | 4030007140 | S.CER C1608 CH 1H 121J-T | T  | 28.4/50.8    |
| C651    | 4030007130 | S.CER C1608 CH 1H 101J-T | T  | 46/73.3      |
| C652    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 46.8/71.3    |
| C653    | 4030007030 | S.CER C1608 CH 1H 150J-T | T  | 47.2/73.3    |
| C654    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 48.8/63.5    |
| C655    | 4030007020 | S.CER C1608 CH 1H 120J-T | T  | 48.8/62.2    |
| C656    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 45.5/61.5    |
| C658    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 48.8/60.7    |
| C659    | 4030006980 | S.CER C1608 CH 1H 070D-T | T  | 48.8/59.5    |
| C660    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 40.9/56      |
| C662    | 4030007050 | S.CER C1608 CH 1H 220J-T | T  | 47.7/56.8    |
| C663    | 4030007020 | S.CER C1608 CH 1H 120J-T | T  | 47.7/55.6    |
| C664    | 4030007130 | S.CER C1608 CH 1H 101J-T | T  | 46.1/49.9    |
| C665    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 47.6/52.3    |
| C666    | 4030007030 | S.CER C1608 CH 1H 150J-T | T  | 46.1/51.1    |
| C701    | 4030007100 | S.CER C1608 CH 1H 560J-T | B  | 45.1/69.2    |
| C702    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 44/62.7      |
| C704    | 4030007110 | S.CER C1608 CH 1H 680J-T | B  | 47.7/62.3    |
| C706    | 4030007100 | S.CER C1608 CH 1H 560J-T | B  | 44.6/51.7    |
| C707    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 42.5/58.7    |
| C752    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 32.1/73.9    |
| C756    | 4030007090 | S.CER C1608 CH 1H 470J-T | B  | 35.6/64.4    |
| C757    | 4030006990 | S.CER C1608 CH 1H 080D-T | B  | 33.8/64.4    |
| C760    | 4030007090 | S.CER C1608 CH 1H 470J-T | B  | 35.6/61.1    |
| C765    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 39/52.3      |
| C801    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 28.9/36      |
| C803    | 4030018600 | S.CER C1608 CH 1H 152J-T | T  | 29.6/39.5    |
| C804    | 4030018610 | S.CER C1608 CH 1H 182J-T | T  | 28.4/39.5    |
| C805    | 4030018610 | S.CER C1608 CH 1H 182J-T | T  | 31.5/39.6    |
| C806    | 4030018600 | S.CER C1608 CH 1H 152J-T | T  | 31.5/37.2    |
| C807    | 4030018600 | S.CER C1608 CH 1H 152J-T | T  | 31.5/38.4    |
| C808    | 4030018600 | S.CER C1608 CH 1H 152J-T | T  | 32/41.6      |
| C809    | 4030018610 | S.CER C1608 CH 1H 182J-T | T  | 33.3/41.6    |
| C810    | 4030011600 | S.CER C1608 JB 1E 104K-T | T  | 19.6/37.7    |
| C845    | 4030011770 | S.CER C1608 CH 1H 060B-T | B  | 29.4/62.4    |
| C851    | 4030007140 | S.CER C1608 CH 1H 121J-T | B  | 25/67        |
| C852    | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 28.7/67.4    |
| C853    | 4030011770 | S.CER C1608 CH 1H 060B-T | B  | 29.4/64      |
| C855    | 4030009550 | S.CER C1608 CH 1H 2R5B-T | B  | 23.2/61.1    |
| C856    | 4030009920 | S.CER C1608 CH 1H 050B-T | B  | 25/61.1      |
| C857    | 4030007010 | S.CER C1608 CH 1H 100D-T | B  | 29.4/57.8    |
| C858    | 4030009920 | S.CER C1608 CH 1H 050B-T | B  | 23.2/57.8    |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                           | M. | H/V LOCATION |
|---------|------------|---------------------------------------|----|--------------|
| C859    | 4030009550 | S.CER C1608 CH 1H 2R5B-T              | B  | 25/57.8      |
| C860    | 4030011770 | S.CER C1608 CH 1H 060B-T              | B  | 29.4/54.2    |
| C861    | 4030011770 | S.CER C1608 CH 1H 060B-T              | B  | 29.4/56      |
| C862    | 4030007030 | S.CER C1608 CH 1H 150J-T              | B  | 25/52        |
| C863    | 4030007140 | S.CER C1608 CH 1H 121J-T              | B  | 25/47.3      |
| C864    | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 29.3/50.1    |
| C901    | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 50.1/13.8    |
| C951    | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 49.6/30.4    |
| C952    | 4030007170 | S.CER C1608 CH 1H 221J-T              | T  | 48.4/25.2    |
| C971    | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 35.7/39.7    |
| C1001   | 4030007050 | S.CER C1608 CH 1H 220J-T              | T  | 66.4/20.6    |
| C1002   | 4030007140 | S.CER C1608 CH 1H 121J-T              | T  | 59.2/22.6    |
| C1004   | 4030007070 | S.CER C1608 CH 1H 330J-T              | T  | 66.4/23      |
| C1005   | 4030007080 | S.CER C1608 CH 1H 390J-T              | T  | 66.4/21.8    |
| C1006   | 4030007090 | S.CER C1608 CH 1H 470J-T              | T  | 59.9/25.3    |
| C1007   | 4030007080 | S.CER C1608 CH 1H 390J-T              | T  | 66.4/24.2    |
| C1008   | 4030007100 | S.CER C1608 CH 1H 560J-T              | T  | 66.4/25.4    |
| C1009   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 64.4/26.6    |
| C1010   | 4030007100 | S.CER C1608 CH 1H 560J-T              | T  | 66.4/26.6    |
| C1011   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 66.4/27.8    |
| C1012   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 73.2/29      |
| C1013   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 73/21.4      |
| C1014   | 4030007020 | S.CER C1608 CH 1H 120J-T              | B  | 86.2/27      |
| C1015   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 85.9/31.4    |
| C1016   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 87.2/30.9    |
| C1017   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 87.2/25.7    |
| C1018   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 85.9/24.4    |
| C1019   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 93.2/30.3    |
| C1020   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 93.1/25.1    |
| C1021   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 101.6/27.7   |
| C1022   | 4030011340 | S.CER C1608 CH 1H 471J-T              | T  | 103.8/24.9   |
| C1023   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 106.4/24.9   |
| C1024   | 4030011340 | S.CER C1608 CH 1H 471J-T              | T  | 105.8/29.9   |
| C1025   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 100.9/33     |
| C1026   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 108.4/29.9   |
| C1027   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 110.1/28.5   |
| C1028   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 110.1/26.5   |
| C1029   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 109.6/33.8   |
| C1030   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)     | B  | 105.5/31     |
| C1031   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 112.6/19.5   |
| C1032   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 112.5/14.7   |
| C1033   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 108.6/11.6   |
| C1034   | 4030009530 | S.CER C1608 CH 1H 030B-T              | T  | 112.6/20.7   |
| C1035   | 4030007030 | S.CER C1608 CH 1H 150J-T              | B  | 112.6/19.6   |
| C1036   | 4540000020 | S.TRI TZY2Z060A001R00 (TZVY2Z060A110) | T  | 113.5/22.7   |
| C1037   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 96.2/12.5    |
| C1038   | 4510008540 | S.ELE EEE1CA100SR                     | T  | 104.9/14     |
| C1039   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 99.5/12.5    |
| C1040   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 113.7/13.9   |
| C1041   | 4030009920 | S.CER C1608 CH 1H 050B-T              | T  | 114.2/24.8   |
| C1042   | 4030017810 | S.CER C1608 CH 1H 102J-T              | B  | 113.3/30.4   |
| C1101   | 4030007040 | S.CER C1608 CH 1H 180J-T              | T  | 89.6/17      |
| C1102   | 4030006980 | S.CER C1608 CH 1H 070D-T              | T  | 89.6/15.8    |
| C1103   | 4030008560 | S.CER C1608 CH 1H 300J-T              | T  | 87/17        |
| C1104   | 4030007020 | S.CER C1608 CH 1H 120J-T              | T  | 87/15.8      |
| C1105   | 4030007060 | S.CER C1608 CH 1H 270J-T              | T  | 85.2/16.5    |
| C1107   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 77.7/15.3    |
| C1108   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 76.1/12      |
| C1110   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 77.4/20.9    |
| C1111   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 73/20.2      |
| C1201   | 4030007050 | S.CER C1608 CH 1H 220J-T              | T  | 67.1/37.9    |
| C1202   | 4030007140 | S.CER C1608 CH 1H 121J-T              | T  | 63.9/39.9    |
| C1204   | 4030007070 | S.CER C1608 CH 1H 330J-T              | T  | 67.1/40.3    |
| C1205   | 4030007080 | S.CER C1608 CH 1H 390J-T              | T  | 67.1/39.1    |
| C1206   | 4030007090 | S.CER C1608 CH 1H 470J-T              | T  | 61/44.2      |
| C1207   | 4030007080 | S.CER C1608 CH 1H 390J-T              | T  | 67.1/41.5    |
| C1208   | 4030007100 | S.CER C1608 CH 1H 560J-T              | T  | 67.1/42.7    |
| C1209   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 64.9/44.5    |
| C1210   | 4030007100 | S.CER C1608 CH 1H 560J-T              | T  | 67.1/43.9    |
| C1211   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 67.1/45.1    |
| C1212   | 4030007030 | S.CER C1608 CH 1H 150J-T              | B  | 73.8/50.6    |
| C1213   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 72.5/43.3    |
| C1214   | 4030007020 | S.CER C1608 CH 1H 120J-T              | B  | 85.3/48.1    |
| C1215   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 85.8/50.8    |
| C1216   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 86.3/51.7    |
| C1217   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 86.3/45.7    |
| C1218   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 86.2/45.6    |
| C1219   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 93/50.8      |
| C1220   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 93/45.3      |
| C1221   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 97.7/48.2    |
| C1222   | 4030007040 | S.CER C1608 CH 1H 180J-T              | B  | 99.4/60.2    |
| C1223   | 4030011340 | S.CER C1608 CH 1H 471J-T              | T  | 103.9/43.9   |
| C1224   | 4030006900 | S.CER C1608 JB 1H 103K-T              | B  | 104.7/55.5   |
| C1225   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 106.5/43.9   |
| C1226   | 4030011340 | S.CER C1608 CH 1H 471J-T              | T  | 103.9/48.6   |
| C1227   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 103.3/55.2   |
| C1228   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 105.8/49.1   |
| C1229   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 108.9/48.6   |
| C1230   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 109.6/45.5   |
| C1231   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 102.6/60.5   |
| C1232   | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)     | T  | 102.5/64.1   |
| C1233   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 109/56.3     |
| C1234   | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 114.5/53.2   |
| C1235   | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 111.1/57.2   |
| C1236   | 4030009530 | S.CER C1608 CH 1H 030B-T              | T  | 110.3/54.6   |
| C1237   | 4030007030 | S.CER C1608 CH 1H 150J-T              | T  | 114.5/46.1   |
| C1238   | 4540000020 | S.TRI TZY2Z060A001R00 (TZVY2Z060A110) | T  | 112.4/53.2   |
| C1239   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 114.8/65.2   |
| C1240   | 4030007000 | S.CER C1608 CH 1H 090D-T              | B  | 102.8/52.1   |
| C1241   | 4030011600 | S.CER C1608 JB 1E 104K-T              | B  | 88.8/59.4    |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                    | M. | H/V LOCATION |
|---------|------------|--------------------------------|----|--------------|
| C1242   | 4030011600 | S.CER C1608 JB 1E 104K-T       | B  | 93/55.8      |
| C1243   | 4030009920 | S.CER C1608 CH 1H 050B-T       | T  | 112.1/44     |
| C1245   | 4030017810 | S.CER C1608 CH 1H 102J-T       | B  | 106/61.5     |
| C1246   | 4030007010 | S.CER C1608 CH 1H 100D-T       | T  | 99.1/58.2    |
| C1247   | 4550007650 | S.TAN F931V105MAABMA           | B  | 106.9/53.5   |
| C1301   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 96.7/57.5    |
| C1302   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 102.9/61.2   |
| C1303   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 96.4/64.1    |
| C1304   | 4030007040 | S.CER C1608 CH 1H 180J-T       | T  | 92.8/59.7    |
| C1305   | 4030006980 | S.CER C1608 CH 1H 070D-T       | T  | 91.8/62      |
| C1306   | 4030008560 | S.CER C1608 CH 1H 300J-T       | T  | 91/58.6      |
| C1307   | 4030007020 | S.CER C1608 CH 1H 120J-T       | T  | 89.1/59      |
| C1308   | 4030007060 | S.CER C1608 CH 1H 270J-T       | T  | 91/59.8      |
| C1310   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 82.2/60.8    |
| C1311   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 77/58.5      |
| C1313   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 79.9/64.3    |
| C1314   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 70.1/61.2    |
| C1400   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 49.5/46.2    |
| C1401   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 54.5/38.1    |
| C1402   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 50.7/37.6    |
| C1403   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 52.9/41.9    |
| C1404   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 54.8/42.4    |
| C1405   | 4030007120 | S.CER C1608 CH 1H 820J-T       | T  | 54/44.3      |
| C1406   | 4030007040 | S.CER C1608 CH 1H 180J-T       | T  | 51.4/48.6    |
| C1407   | 4030007130 | S.CER C1608 CH 1H 101J-T       | T  | 54/48.6      |
| C1408   | 4030007110 | S.CER C1608 CH 1H 680J-T       | T  | 53.6/50.5    |
| C1409   | 4030007100 | S.CER C1608 CH 1H 560J-T       | T  | 54.1/52.4    |
| C1452   | 4030009920 | S.CER C1608 CH 1H 050B-T       | T  | 82.6/71      |
| C1453   | 4030011600 | S.CER C1608 JB 1E 104K-T       | B  | 86/72        |
| C1454   | 4030011600 | S.CER C1608 JB 1E 104K-T       | B  | 91.1/68.2    |
| C1501   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 98.4/68.6    |
| C1502   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 99.7/71.3    |
| C1550   | 4030017810 | S.CER C1608 CH 1H 102J-T       | B  | 125.1/64.3   |
| C1551   | 4030007100 | S.CER C1608 CH 1H 560J-T       | B  | 96.3/70.1    |
| C1552   | 4030006980 | S.CER C1608 CH 1H 070D-T       | B  | 98.7/70.9    |
| C1553   | 4030007100 | S.CER C1608 CH 1H 560J-T       | B  | 101.1/71     |
| C1556   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 116.6/66.7   |
| C1557   | 4030007010 | S.CER C1608 CH 1H 100D-T       | B  | 117.1/69.9   |
| C1558   | 4030011600 | S.CER C1608 JB 1E 104K-T       | B  | 119.2/67.4   |
| C1559   | 4030006970 | S.CER C1608 CH 1H 060D-T       | B  | 124/66.7     |
| C1560   | 4030017810 | S.CER C1608 CH 1H 102J-T       | B  | 125.9/66.7   |
| C1561   | 4030017810 | S.CER C1608 CH 1H 102J-T       | B  | 129.1/68.7   |
| C1563   | 4030017810 | S.CER C1608 CH 1H 102J-T       | B  | 124.9/58.9   |
| C1601   | 4030007170 | S.CER C1608 CH 1H 221J-T       | T  | 130.3/33.1   |
| C1603   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 127.4/32.7   |
| C1604   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 128.2/30.7   |
| C1651   | 4030009920 | S.CER C1608 CH 1H 050B-T       | B  | 125.8/25.4   |
| C1701   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 128.3/30.2   |
| C1704   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 149.7/84.4   |
| C1705   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 159/43.2     |
| C1706   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 127.6/35.4   |
| C1707   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 140.2/36.7   |
| C1708   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 138.1/71.3   |
| C1709   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 130.6/71     |
| C1710   | 4030006900 | S.CER C1608 JB 1H 103K-T       | B  | 147.2/73.1   |
| C1901   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 128.2/29.5   |
| C2001   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 104.5/71.4   |
| C2002   | 4030011600 | S.CER C1608 JB 1E 104K-T       | T  | 103/77.1     |
| C2003   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 109.7/77     |
| C9001   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 4.6/59.4     |
| C9002   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 7.4/59.4     |
| C9007   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 42/38.9      |
| C9008   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 42/36.1      |
| C9011   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 26/82.4      |
| C9012   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 26/79.6      |
| C9015   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 54.6/67.5    |
| C9016   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 57.4/67.5    |
| C9018   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 20.6/17.5    |
| C9020   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 23.4/17.5    |
| C9021   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 49.4/17.5    |
| C9024   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 46.6/17.5    |
| C9026   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 44.1/42.9    |
| C9027   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 44.1/40.1    |
| C9031   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 154.9/54.3   |
| C9035   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 142.9/62.7   |
| C9036   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 146.3/62.7   |
| C9061   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 150.6/77.8   |
| C9062   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 149/74.4     |
| C9065   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 148.9/42.2   |
| C9066   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 150.6/38.8   |
| C9071   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 137.9/77.8   |
| C9072   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 137.9/74.4   |
| C9075   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 137.9/42.2   |
| C9076   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 136.1/38.8   |
| C9081   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 125.2/77.8   |
| C9082   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 125.2/74.4   |
| C9085   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 125.2/42.2   |
| C9086   | 4030006900 | S.CER C1608 JB 1H 103K-T       | T  | 125.2/38.8   |
| RL101   | 6330001860 | REL UA2-12NU                   |    |              |
| RL102   | 6330001860 | REL UA2-12NU                   |    |              |
| RL103   | 6330001860 | REL UA2-12NU                   |    |              |
| RL104   | 6330001860 | REL UA2-12NU                   |    |              |
| RL105   | 6330001860 | REL UA2-12NU                   |    |              |
| RL161   | 6330000540 | REL 2-1419131-2(OMR-109F)      |    |              |
| J101    | 6510007020 | CON TMP-J01X-V6                |    |              |
| J102    | 6450001130 | CON JPJ2042-01-110             |    |              |
| J103    | 6450001800 | CON JPJ1044-01-010             |    |              |
| J161    | 6450001130 | CON JPJ2042-01-110             |    |              |
| J201    | 6510007020 | CON TMP-J01X-V6                |    |              |
| J451    | 6510022581 | S.CON 24FMN-BMTR-A-TBT(LF)(SN) | T  | 151.7/24.3   |

## [RF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| J801    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J802    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J803    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J804    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J805    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J807    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J809    | 6910016430 | CON IMSA-9210B-1-05Z869-PT1 |    |              |
| J951    | 6510007020 | CON TMP-J01X-V6             |    |              |
| J1101   | 6510007020 | CON TMP-J01X-V6             |    |              |
| J1301   | 6510007020 | CON TMP-J01X-V6             |    |              |
| J1651   | 6510007020 | CON TMP-J01X-V6             |    |              |
| J1701   | 6510007020 | CON TMP-J01X-V6             |    |              |
| J1702   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1703   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1704   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1705   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1706   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1707   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1708   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J1709   | 6910004741 | CON IMSA-9202B-1-03Z041-PT1 |    |              |
| J2001   | 6510007020 | CON TMP-J01X-V6             |    |              |
| EP451   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 145.6/35.8   |
| EP452   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 156.3/36.2   |
| EP453   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 145.6/33.8   |
| EP454   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 157.6/32.8   |
| EP455   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 145.6/31.8   |
| EP456   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 157.6/30.8   |
| EP457   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 145.6/29.8   |
| EP458   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 145.6/27.8   |
| EP459   | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 157.5/26.8   |
| EP460   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 157.5/24.8   |
| EP461   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 145.6/21.8   |
| EP462   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 145.6/19.8   |
| EP463   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 157.4/18.8   |
| EP464   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 145.6/17.8   |
| EP465   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 35.5/7.5     |
| EP466   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 32.6/4.2     |
| EP467   | 6910019900 | S.BEA MPZ1608S601AT         | T  | 157.5/22.8   |
| EP1001  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | B  | 112.5/32.4   |
| EP1009  | 6910019900 | S.BEA MPZ1608S601AT         | T  | 120.6/9.9    |
| EP1201  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | B  | 106/63       |
| EP1406  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 50.7/44.3    |
| EP1551  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | B  | 127.5/65.1   |
| EP1701  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | B  | 158.2/41     |
| EP1702  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | B  | 129.9/36.2   |
| EP1703  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 137.2/35.5   |
| EP1901  | 6910015970 | S.BEA MMZ1608B 301CT-AS     | T  | 133.6/30     |
| MP1     | 8930065741 | SPR 2590 D-EARTH SPRING-1   | B  | 100.3/94.8   |
| MP2     | 8930065741 | SPR 2590 D-EARTH SPRING-1   | B  | 68.3/94.8    |
| MP3     | 8930065741 | SPR 2590 D-EARTH SPRING-1   | B  | 26.3/94.8    |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [BPF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                | M. | H/V LOCATION |
|---------|------------|----------------------------|----|--------------|
| D3201   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 39.6/48.2    |
| D3202   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 48.2/9.2     |
| D3301   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 33.9/45.3    |
| D3302   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 30.9/3.5     |
| D3401   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 21.7/44.3    |
| D3402   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 27.5/5.7     |
| D3501   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 36.5/48.4    |
| D3502   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 40/10.5      |
| D3601   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 26.6/41.6    |
| D3602   | 1750000581 | S.DIO 1SV307(TPH3,F)       | B  | 27.5/3.9     |
| L3201   | 6180003540 | COI SP0406-3R9K-6          |    |              |
| L3202   | 6180003580 | COI SP0406-120K-6          |    |              |
| L3203   | 6180003580 | COI SP0406-120K-6          |    |              |
| L3204   | 6180003540 | COI SP0406-3R9K-6          |    |              |
| L3205   | 6180003580 | COI SP0406-120K-6          |    |              |
| L3301   | 6180003550 | COI SP0406-4R7K-6          |    |              |
| L3302   | 6180003560 | COI SP0406-5R6K-6          |    |              |
| L3303   | 6180003560 | COI SP0406-5R6K-6          |    |              |
| L3304   | 6180003550 | COI SP0406-4R7K-6          |    |              |
| L3305   | 6180003560 | COI SP0406-5R6K-6          |    |              |
| L3401   | 6180003410 | COI SP0406-2R2K-6          |    |              |
| L3402   | 6180003510 | COI SP0406-6R8K-6          |    |              |
| L3403   | 6180003510 | COI SP0406-6R8K-6          |    |              |
| L3404   | 6180003410 | COI SP0406-2R2K-6          |    |              |
| L3405   | 6180003510 | COI SP0406-6R8K-6          |    |              |
| L3501   | 6180003410 | COI SP0406-2R2K-6          |    |              |
| L3502   | 6180003570 | COI SP0406-3R3K-6          |    |              |
| L3503   | 6180003570 | COI SP0406-3R3K-6          |    |              |
| L3504   | 6180003410 | COI SP0406-2R2K-6          |    |              |
| L3505   | 6180003570 | COI SP0406-3R3K-6          |    |              |
| L3601   | 6180003390 | COI SP0406-1R2K-6          |    |              |
| L3602   | 6180003490 | COI SP0406-2R7K-6          |    |              |
| L3603   | 6180003490 | COI SP0406-2R7K-6          |    |              |
| L3604   | 6180003390 | COI SP0406-1R2K-6          |    |              |
| L3605   | 6180003490 | COI SP0406-2R7K-6          |    |              |
| R3201   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 54.2/39.5    |
| R3202   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 56.9/25.8    |
| R3301   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 31.3/39.2    |
| R3302   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 30.2/12.7    |
| R3401   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 6/32.5       |
| R3402   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 6/17.5       |
| R3501   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 47.4/42.4    |
| R3502   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 45.2/23.4    |
| R3601   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 22/40.5      |
| R3602   | 7030003320 | S.RES ERJ3GEYJ 101 V (100) | B  | 20.2/11.1    |
| C3201   | 4030017810 | S.CER C1608 CH 1H 102J-T   | B  | 53.6/41.5    |
| C3202   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 51/41.6      |
| C3203   | 4030017810 | S.CER C1608 CH 1H 102J-T   | B  | 53.6/43.3    |
| C3204   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 50.4/39.2    |
| C3205   | 4030007140 | S.CER C1608 CH 1H 121J-T   | B  | 50.4/37.4    |
| C3206   | 4030007160 | S.CER C1608 CH 1H 181J-T   | B  | 48/33.6      |
| C3207   | 4030007060 | S.CER C1608 CH 1H 270J-T   | B  | 48/35.4      |
| C3208   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 49.4/31.8    |
| C3209   | 4030007090 | S.CER C1608 CH 1H 470J-T   | B  | 49.4/30      |
| C3210   | 4030007160 | S.CER C1608 CH 1H 181J-T   | B  | 47.9/27.3    |
| C3211   | 4030007060 | S.CER C1608 CH 1H 270J-T   | B  | 49.7/27.3    |
| C3212   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 49.4/24.6    |
| C3213   | 4030007140 | S.CER C1608 CH 1H 121J-T   | B  | 49.4/22.8    |
| C3214   | 4030017810 | S.CER C1608 CH 1H 102J-T   | B  | 53/20.3      |
| C3215   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 53/24.8      |
| C3216   | 4030017810 | S.CER C1608 CH 1H 102J-T   | B  | 53/22.1      |
| C3301   | 4030017800 | S.CER C1608 CH 1H 561J-T   | B  | 29.2/34.8    |
| C3302   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 31.2/31.2    |
| C3303   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 29.2/33      |
| C3304   | 4030007080 | S.CER C1608 CH 1H 390J-T   | B  | 31.2/29.4    |
| C3305   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 31.2/27.6    |
| C3306   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 34.4/25      |
| C3307   | 4030007100 | S.CER C1608 CH 1H 560J-T   | B  | 32.6/25      |
| C3308   | 4030007090 | S.CER C1608 CH 1H 470J-T   | B  | 30/24.4      |
| C3309   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 30/22.6      |
| C3310   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 32.6/21.3    |
| C3311   | 4030007100 | S.CER C1608 CH 1H 560J-T   | B  | 34.4/21.3    |
| C3312   | 4030007080 | S.CER C1608 CH 1H 390J-T   | B  | 30/20.6      |
| C3313   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 31.2/18.8    |
| C3314   | 4030017800 | S.CER C1608 CH 1H 561J-T   | B  | 32.2/12.9    |
| C3315   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 29.3/16.7    |
| C3316   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 34/12.9      |
| C3401   | 4030011330 | S.CER C1608 CH 1H 391J-T   | B  | 10.2/32      |
| C3402   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 10.2/30.2    |
| C3403   | 4030017800 | S.CER C1608 CH 1H 561J-T   | B  | 10.2/33.8    |
| C3404   | 4030007160 | S.CER C1608 CH 1H 181J-T   | B  | 10.2/26.6    |
| C3405   | 4030007070 | S.CER C1608 CH 1H 330J-T   | B  | 10.2/28.4    |
| C3406   | 4030007120 | S.CER C1608 CH 1H 820J-T   | B  | 12.9/27.4    |
| C3407   | 4030007030 | S.CER C1608 CH 1H 150J-T   | B  | 14.7/27.4    |
| C3408   | 4030007140 | S.CER C1608 CH 1H 121J-T   | B  | 11.5/22.8    |
| C3409   | 4030007100 | S.CER C1608 CH 1H 560J-T   | B  | 11.5/24.6    |
| C3410   | 4030007120 | S.CER C1608 CH 1H 820J-T   | B  | 15.9/20.7    |
| C3411   | 4030007030 | S.CER C1608 CH 1H 150J-T   | B  | 14.1/20.7    |
| C3412   | 4030007160 | S.CER C1608 CH 1H 181J-T   | B  | 13.5/16.4    |
| C3413   | 4030007070 | S.CER C1608 CH 1H 330J-T   | B  | 13.5/18.2    |
| C3414   | 4030011330 | S.CER C1608 CH 1H 391J-T   | B  | 13.8/11.3    |
| C3415   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 12/14.7      |
| C3416   | 4030017800 | S.CER C1608 CH 1H 561J-T   | B  | 12/11.3      |
| C3501   | 4030010760 | S.CER C1608 CH 1H 331J-T   | B  | 45.4/42.4    |
| C3502   | 4030011600 | S.CER C1608 JB 1E 104K-T   | B  | 41.8/40.8    |
| C3503   | 4030007150 | S.CER C1608 CH 1H 151J-T   | B  | 43.6/42.4    |
| C3504   | 4030007060 | S.CER C1608 CH 1H 270J-T   | B  | 40.8/38.2    |
| C3505   | 4030007150 | S.CER C1608 CH 1H 151J-T   | B  | 40.8/36.4    |

## [BPF UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION              | M. | H/V LOCATION |
|---------|------------|--------------------------|----|--------------|
| C3506   | 4030007140 | S.CER C1608 CH 1H 121J-T | B  | 38/34.5      |
| C3507   | 4030007060 | S.CER C1608 CH 1H 270J-T | B  | 38/32.7      |
| C3508   | 4030007010 | S.CER C1608 CH 1H 100D-T | B  | 39.3/30.9    |
| C3509   | 4030007150 | S.CER C1608 CH 1H 151J-T | B  | 39.3/29.1    |
| C3510   | 4030007140 | S.CER C1608 CH 1H 121J-T | B  | 38.8/26.4    |
| C3511   | 4030007060 | S.CER C1608 CH 1H 270J-T | B  | 40.6/26.4    |
| C3512   | 4030007060 | S.CER C1608 CH 1H 270J-T | B  | 39.3/23.7    |
| C3513   | 4030007150 | S.CER C1608 CH 1H 151J-T | B  | 38.8/21.9    |
| C3514   | 4030010760 | S.CER C1608 CH 1H 331J-T | B  | 42.6/19.6    |
| C3515   | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 42.6/23.2    |
| C3516   | 4030007150 | S.CER C1608 CH 1H 151J-T | B  | 42.6/21.4    |
| C3601   | 4030007170 | S.CER C1608 CH 1H 221J-T | B  | 20.8/34.8    |
| C3602   | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 22/42.4      |
| C3603   | 4030007170 | S.CER C1608 CH 1H 221J-T | B  | 20.8/33      |
| C3604   | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 21.8/29.4    |
| C3605   | 4030007050 | S.CER C1608 CH 1H 220J-T | B  | 21.8/31.2    |
| C3606   | 4030007080 | S.CER C1608 CH 1H 390J-T | B  | 22/26.8      |
| C3607   | 4030007070 | S.CER C1608 CH 1H 330J-T | B  | 23.8/26.8    |
| C3608   | 4030007120 | S.CER C1608 CH 1H 820J-T | B  | 21.8/22.2    |
| C3609   | 4030007050 | S.CER C1608 CH 1H 220J-T | B  | 21.8/24      |
| C3610   | 4030007080 | S.CER C1608 CH 1H 390J-T | B  | 24.4/20.8    |
| C3611   | 4030007070 | S.CER C1608 CH 1H 330J-T | B  | 26.2/20.8    |
| C3612   | 4030007130 | S.CER C1608 CH 1H 101J-T | B  | 23/18.2      |
| C3613   | 4030007050 | S.CER C1608 CH 1H 220J-T | B  | 23/16.4      |
| C3614   | 4030007170 | S.CER C1608 CH 1H 221J-T | B  | 22.2/11.3    |
| C3615   | 4030011600 | S.CER C1608 JB 1E 104K-T | B  | 21.5/14.2    |
| C3616   | 4030007170 | S.CER C1608 CH 1H 221J-T | B  | 24/11.3      |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount



# [PREAMP UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| Q4101   | 1590003680 | S.TRA KRC402 RTK/P          | T  | 49.4/33.7    |
| Q4102   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 47/31.7      |
| Q4201   | 1530003851 | S.TRA 2SC5551F-TD-E         | T  | 43.8/24.4    |
| Q4202   | 1530003851 | S.TRA 2SC5551F-TD-E         | T  | 36.3/12.9    |
| Q4203   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 21/10.2      |
| Q4204   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 20.5/4.7     |
| Q4205   | 1590003770 | S.TRA KRA302E-RTK/P         | B  | 45.7/24.5    |
| Q4301   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 23.5/25.7    |
| Q4302   | 1530003851 | S.TRA 2SC5551F-TD-E         | B  | 6/18.9       |
| Q4303   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 22.7/23.6    |
| Q4304   | 1590003770 | S.TRA KRA302E-RTK/P         | T  | 18.9/8.4     |
| Q4305   | 1590003680 | S.TRA KRC402 RTK/P          | T  | 16.6/7.3     |
| D4101   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 41.9/30.8    |
| D4102   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 48.8/26.2    |
| D4201   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 37.8/31.7    |
| D4202   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 44.5/15.9    |
| D4203   | 1750001320 | S.DIO KDS4148U RTK/P        | T  | 21/7.5       |
| D4301   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 35.1/32.1    |
| D4302   | 1750000581 | S.DIO 1SV307(TPH3,F)        | T  | 48.4/7.4     |
| D4303   | 1750001320 | S.DIO KDS4148U RTK/P        | T  | 22.4/21.7    |
| L4101   | 6200003221 | S.COI NLV32T-151J           | B  | 47.5/33      |
| L4201   | 6200003221 | S.COI NLV32T-151J           | T  | 38/28.6      |
| L4202   | 6140003800 | COI LR-439                  |    |              |
| L4203   | 6200009060 | S.COI LQH32CN101K23L        | T  | 38.1/17.5    |
| L4204   | 6200009060 | S.COI LQH32CN101K23L        | T  | 25.4/7.5     |
| L4205   | 6140003810 | COI LR-440                  |    |              |
| L4206   | 6140003810 | COI LR-440                  |    |              |
| L4207   | 6200009060 | S.COI LQH32CN101K23L        | T  | 31.6/7.5     |
| L4208   | 6140003800 | COI LR-439                  |    |              |
| L4209   | 6200003221 | S.COI NLV32T-151J           | B  | 42.9/23.1    |
| L4210   | 6200007780 | S.COI LQW2BHNH12J03L        | B  | 42.4/17.5    |
| L4301   | 6200003221 | S.COI NLV32T-151J           | T  | 19.2/26.5    |
| L4302   | 6140004430 | COI LR-500                  |    |              |
| L4303   | 6140003900 | COI LR-489                  |    |              |
| L4304   | 6200009060 | S.COI LQH32CN101K23L        | T  | 15.1/24.1    |
| L4305   | 6200003221 | S.COI NLV32T-151J           | T  | 17.1/12.4    |
| R4101   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 42.7/32.3    |
| R4102   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 44.7/32.3    |
| R4201   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 34.6/27.7    |
| R4202   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 41.7/17      |
| R4203   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 27.5/6.1     |
| R4204   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 44.5/19.9    |
| R4205   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 41.8/13.1    |
| R4206   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 41.8/18.8    |
| R4207   | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 39.9/15      |
| R4208   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 41.6/19.7    |
| R4209   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | B  | 37.2/23.6    |
| R4210   | 7030003220 | S.RES ERJ3GEYJ 150 V (15)   | B  | 28.7/15.2    |
| R4213   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 40.6/21.4    |
| R4214   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 33.1/12.4    |
| R4301   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 21.4/28.4    |
| R4302   | 7030003510 | S.RES ERJ3GEYJ 392 V (3.9K) | B  | 13.3/25.7    |
| R4303   | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 13.3/23.3    |
| R4304   | 7030007860 | S.RES ERJ3GEYJ 8R2V (8.2)   | B  | 1.6/19.3     |
| R4305   | 7030003240 | S.RES ERJ3GEYJ 220 V (22)   | B  | 11.9/28.7    |
| R4306   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 15.4/10.3    |
| R4307   | 7030003200 | S.RES ERJ3GEYJ 100 V (10)   | T  | 14.3/28.6    |
| R4308   | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | B  | 5.2/26.4     |
| C4101   | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 47.3/29.4    |
| C4102   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | T  | 45.4/29.8    |
| C4103   | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 48.4/30      |
| C4104   | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 49.6/31.3    |
| C4201   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | T  | 30.2/27.7    |
| C4202   | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 44.1/28.3    |
| C4205   | 4030017490 | S.CER C1608 JB 1A 105K-T    | B  | 33.9/23.6    |
| C4206   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 26.7/18.8    |
| C4207   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 46.9/22.8    |
| C4208   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 40.6/13.1    |
| C4209   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | B  | 35/18.9      |
| C4210   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | B  | 26.5/8.1     |
| C4211   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | B  | 39/16        |
| C4212   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | B  | 33.5/8.9     |
| C4213   | 4030017810 | S.CER C1608 CH 1H 102J-T    | T  | 34.1/7.8     |
| C4215   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | B  | 44/11.5      |
| C4216   | 4030011600 | S.CER C1608 JB 1E 104K-T    | B  | 43.7/26.4    |
| C4217   | 4030007110 | S.CER C1608 CH 1H 680J-T    | B  | 44.2/14.1    |
| C4218   | 4030007110 | S.CER C1608 CH 1H 680J-T    | B  | 42.5/15.6    |
| C4221   | 4030009510 | S.CER C1608 CH 1H 010B-T    | T  | 42.6/20.7    |
| C4222   | 4030009510 | S.CER C1608 CH 1H 010B-T    | T  | 38.1/10.1    |
| C4223   | 4030007010 | S.CER C1608 CH 1H 100D-T    | B  | 38.5/8       |
| C4224   | 4030017810 | S.CER C1608 CH 1H 102J-T    | T  | 29.6/18.9    |
| C4225   | 4030017810 | S.CER C1608 CH 1H 102J-T    | T  | 43.3/18.8    |
| C4226   | 4030017810 | S.CER C1608 CH 1H 102J-T    | T  | 39.4/13.1    |
| C4301   | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 21.4/25.8    |
| C4302   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | T  | 17.3/29.3    |
| C4303   | 4030017810 | S.CER C1608 CH 1H 102J-T    | B  | 10.2/24.2    |
| C4304   | 4030017810 | S.CER C1608 CH 1H 102J-T    | B  | 10.2/27.2    |
| C4305   | 4030019320 | S.CER C1608 X7R 1C 105K-T   | T  | 11.3/18.5    |
| C4306   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 14.5/13.3    |
| C4307   | 4030017810 | S.CER C1608 CH 1H 102J-T    | B  | 11.1/21.1    |
| C4308   | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 18/10.3      |
| C4309   | 4030006990 | S.CER C1608 CH 1H 080D-T    | T  | 15.5/27.2    |
| C4310   | 4550006120 | S.TAN TEESVA 0G 226M8R      | T  | 11.6/25.9    |
| C4311   | 4550006120 | S.TAN TEESVA 0G 226M8R      | T  | 6.7/19.3     |
| C4312   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 9.8/27.2     |
| C4313   | 4030017490 | S.CER C1608 JB 1A 105K-T    | T  | 8.2/21.1     |

# [MCF-M UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                         | M. | H/V LOCATION |
|---------|------------|-------------------------------------|----|--------------|
| FI5001  | 2030000740 | S.MON FL-425 (HF-734A 64.455M BW6K) | T  | 20/6         |
| L5001   | 6200012350 | S.COI C2520C-R62G-A                 | T  | 8.9/7.6      |
| L5002   | 6200012350 | S.COI C2520C-R62G-A                 | T  | 8.9/4.4      |
| L5003   | 6200012350 | S.COI C2520C-R62G-A                 | T  | 31.2/7.6     |
| L5004   | 6200012350 | S.COI C2520C-R62G-A                 | T  | 31.2/4.4     |
| C5001   | 4030006900 | S.CER C1608 JB 1H 103K-T            | T  | 6.2/6        |
| C5002   | 4030007010 | S.CER C1608 CH 1H 100D-T            | T  | 13.6/6.5     |
| C5003   | 4030007010 | S.CER C1608 CH 1H 100D-T            | T  | 14.9/6.5     |
| C5004   | 4030007030 | S.CER C1608 CH 1H 150J-T            | T  | 17.9/2.6     |
| C5006   | 4030007010 | S.CER C1608 CH 1H 100D-T            | T  | 25/5.5       |
| C5007   | 4030007010 | S.CER C1608 CH 1H 100D-T            | T  | 26.3/5.5     |
| C5008   | 4030006900 | S.CER C1608 JB 1H 103K-T            | T  | 33.9/6       |
| EP5001  | 6910002161 | CAS CASE-BM7H-LF                    |    |              |
| EP5002  | 6910002161 | CAS CASE-BM7H-LF                    |    |              |

# [MCF-N UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                         | M. | H/V LOCATION |
|---------|------------|-------------------------------------|----|--------------|
| FI6001  | 2030000750 | S.MON FL-426 (HF-734A 64.455M BW3K) | T  | 20/6         |
| L6001   | 6200010960 | S.COI C2520C-R47G-A (0.47U)         | T  | 8.9/7.6      |
| L6002   | 6200010960 | S.COI C2520C-R47G-A (0.47U)         | T  | 8.9/4.4      |
| L6003   | 6200010960 | S.COI C2520C-R47G-A (0.47U)         | T  | 31.2/7.6     |
| L6004   | 6200010960 | S.COI C2520C-R47G-A (0.47U)         | T  | 31.2/4.4     |
| C6001   | 4030006900 | S.CER C1608 JB 1H 103K-T            | T  | 6.2/6        |
| C6002   | 4030009990 | S.CER C1608 CH 1H 200J-T            | T  | 13.6/6.5     |
| C6004   | 4030007030 | S.CER C1608 CH 1H 150J-T            | T  | 17.9/2.6     |
| C6007   | 4030009990 | S.CER C1608 CH 1H 200J-T            | T  | 26.3/5.5     |
| C6008   | 4030006900 | S.CER C1608 JB 1H 103K-T            | T  | 33.9/6       |
| EP6001  | 6910002161 | CAS CASE-BM7H-LF                    |    |              |
| EP6002  | 6910002161 | CAS CASE-BM7H-LF                    |    |              |

# [MCF-W UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                             | M. | H/V LOCATION |
|---------|------------|-----------------------------------------|----|--------------|
| FI7001  | 2030000730 | S.MON FL-424<br>(HF-734A 64.455M BW15K) | T  | 20/6         |
| L7001   | 6200012350 | S.COI C2520C-R62G-A                     | T  | 8.9/7.6      |
| L7002   | 6200012350 | S.COI C2520C-R62G-A                     | T  | 8.9/4.4      |
| L7003   | 6200012350 | S.COI C2520C-R62G-A                     | T  | 31.2/7.6     |
| L7004   | 6200012350 | S.COI C2520C-R62G-A                     | T  | 31.2/4.4     |
| C7001   | 4030006900 | S.CER C1608 JB 1H 103K-T                | T  | 6.2/6        |
| C7002   | 4030007040 | S.CER C1608 CH 1H 180J-T                | T  | 13.6/6.5     |
| C7004   | 4030006990 | S.CER C1608 CH 1H 080D-T                | T  | 17.9/2.6     |
| C7007   | 4030007040 | S.CER C1608 CH 1H 180J-T                | T  | 26.3/5.5     |
| C7008   | 4030006900 | S.CER C1608 JB 1H 103K-T                | T  | 33.9/6       |
| EP7001  | 6910002161 | CAS CASE-BM7H-LF                        |    |              |
| EP7002  | 6910002161 | CAS CASE-BM7H-LF                        |    |              |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [PA UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| IC1     | 1180002020 | S.REG BA033FP-E2            | T  | 21.5/71.2    |
| IC2     | 1180002781 | REG KIA7805API-U/PF         |    |              |
| IC3     | 1180003150 | REG KIA7808API-U/PF         |    |              |
| IC101   | 1110006380 | S.IC LM2904PWR              | T  | 53.2/11.7    |
| Q1      | 1560001620 | FET RD06HVF1-101            |    |              |
| Q2      | 1560001530 | FET RD15HVF1-101            |    |              |
| Q3      | 1560001530 | FET RD15HVF1-101            |    |              |
| Q4      | 1560001640 | FET RD100HHF1C-103          |    |              |
| Q5      | 1560001640 | FET RD100HHF1C-103          |    |              |
| Q9      | 1590003680 | S.TRA KRC402 RTK/P          | T  | 75.1/86.5    |
| Q101    | 1520000651 | S.TRA 2SB1201S-TL-E         | T  | 63.4/9.5     |
| Q102    | 1530002060 | S.TRA 2SC4081 T106 R        | T  | 58.2/10.8    |
| D1      | 1160000060 | S.DIO DAN202U T106          | T  | 28.7/20.7    |
| D2      | 1160000060 | S.DIO DAN202U T106          | T  | 32.7/55.8    |
| D4      | 1790000700 | DIO DSA3A1                  |    |              |
| D5      | 1790000700 | DIO DSA3A1                  |    |              |
| D7      | 1160000060 | S.DIO DAN202U T106          | T  | 74.1/82.2    |
| D8      | 1790000700 | DIO DSA3A1                  |    |              |
| D11     | 1160000060 | S.DIO DAN202U T106          | T  | 84/60.7      |
| D12     | 1160000060 | S.DIO DAN202U T106          | T  | 74.8/8.9     |
| D101    | 1730002341 | S.ZEN MAZ8047GML            | T  | 59/14.1      |
| L1      | 6140003240 | COI LR-361                  |    |              |
| L4      | 6140001180 | COI LR-143                  |    |              |
| L6      | 6140003510 | COI LR-393                  |    |              |
| L7      | 6140000610 | COI LR-83                   |    |              |
| L8      | 6140002030 | COI LR-230 (SK-10M-15Y 120) |    |              |
| L14     | 6140003230 | S.COI LR-360                | T  | 10/42.6      |
| L21     | 6110001730 | COI LA-262                  |    |              |
| R1      | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 11.5/34.4    |
| R2      | 7030003230 | S.RES ERJ3GEYJ 180 V (18)   | T  | 9.6/35.2     |
| R3      | 7030003370 | S.RES ERJ3GEYJ 271 V (270)  | T  | 11.6/36      |
| R4      | 7310005390 | S.TRI EVM-3VXS50 BQ3 (472)  | T  | 13/52.3      |
| R5      | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 12.8/48.7    |
| R6      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 14.2/48.7    |
| R7      | 7030006210 | S.RES ERJ12YJ4R7U (4.7)     | T  | 16/38.8      |
| R8      | 7030006270 | S.RES ERJ12YJ221U (220)     | T  | 19.7/31.6    |
| R9      | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | T  | 16.6/41.3    |
| R11     | 7030000220 | S.RES MCR10EZJH 47 (470)    | T  | 32.7/52.2    |
| R12     | 7030000220 | S.RES MCR10EZJH 47 (470)    | T  | 30.5/18      |
| R13     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 32.9/58.9    |
| R14     | 7310005390 | S.TRI EVM-3VXS50 BQ3 (472)  | T  | 38.3/75.6    |
| R15     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 27.4/22.7    |
| R16     | 7310005390 | S.TRI EVM-3VXS50 BQ3 (472)  | T  | 22.5/22.9    |
| R17     | 7030010480 | S.RES ERJ1TYJ 181U (180)    | T  | 46.8/46.1    |
| R18     | 7030010480 | S.RES ERJ1TYJ 181U (180)    | T  | 41.3/12.5    |
| R19     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 34.8/47.3    |
| R20     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 31.4/15.9    |
| R22     | 7030010950 | S.RES ERJ1TYJ 100U (10)     | T  | 63/51.2      |
| R23     | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 10.7/46.8    |
| R28     | 7030011240 | S.RES LRF3W-LF-01-R020F     | T  | 136.9/85.3   |
| R29     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 131/83.5     |
| R30     | 7030011240 | S.RES LRF3W-LF-01-R020F     | T  | 144.3/85.3   |
| R31     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 132.9/84.4   |
| R38     | 7030010570 | S.RES ERJ1TYJ 4R7U (4.7)    | T  | 162.4/54.5   |
| R39     | 7030010570 | S.RES ERJ1TYJ 4R7U (4.7)    | T  | 162.4/58.2   |
| R40     | 7030010570 | S.RES ERJ1TYJ 4R7U (4.7)    | T  | 162.4/61.9   |
| R44     | 7070000681 | RES ERX3SJ 3R9 (3.9)        |    |              |
| R45     | 7030003860 | S.RES ERJ3GE JPW V          | T  | 6.2/24.7     |
| R61     | 7030010520 | S.RES ERJ1TYJ 101U (100)    | T  | 77/32.9      |
| R62     | 7030010410 | S.RES ERJ1TYJ 220U (22)     | T  | 87.2/56.1    |
| R63     | 7030010410 | S.RES ERJ1TYJ 220U (22)     | T  | 87.2/11      |
| R64     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 84.7/63.8    |
| R65     | 7310005450 | S.TRI EVM-3VXS50 BE3 (222)  | T  | 83.2/69      |
| R66     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 74.1/6.1     |
| R67     | 7310005450 | S.TRI EVM-3VXS50 BE3 (222)  | T  | 76.3/69      |
| R69     | 7030010470 | S.RES ERJ1TYJ 5R6U (5.6)    | T  | 80.8/50      |
| R70     | 7030010470 | S.RES ERJ1TYJ 5R6U (5.6)    | T  | 80.8/16      |
| R72     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 80.7/57.6    |
| R73     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 80.7/8.2     |
| R74     | 7030011220 | S.RES ERJ1TY 180U (18)      | T  | 87.6/28.2    |
| R75     | 7030011220 | S.RES ERJ1TY 180U (18)      | T  | 87.3/24.5    |
| R76     | 7030011220 | S.RES ERJ1TYJ 180U (18)     | T  | 87.5/38      |
| R77     | 7030011220 | S.RES ERJ1TY 180U (18)      | T  | 87.3/41.7    |
| R83     | 7030010470 | S.RES ERJ1TYJ 5R6U (5.6)    | T  | 80.8/53.7    |
| R84     | 7030010470 | S.RES ERJ1TYJ 5R6U (5.6)    | T  | 80.8/12.1    |
| R85     | 7510001551 | S.THE NTCG16 4LH 333JT      | T  | 93.2/6.6     |
| R86     | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 91.7/5.4     |
| R87     | 7030003860 | S.RES ERJ3GE JPW V          | T  | 44.8/5.4     |
| R88     | 7030003490 | S.RES ERJ3GEYJ 272 V (2.7K) | T  | 44.8/6.8     |
| R103    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 54.5/16.5    |
| R104    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 51.9/16.5    |
| R105    | 7030008170 | S.RES ERJ12YJ1R0U (1)       | T  | 68.9/12.6    |
| R108    | 7030000340 | S.RES MCR10EZJH 470 (471)   | T  | 59/7.5       |
| R109    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 56.3/10.6    |
| R110    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 53.9/6.1     |
| R111    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)  | T  | 52.4/6.1     |
| R112    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 51.1/6.1     |
| C1      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 14/45        |
| C2      | 4030006860 | S.CER C1608 JB 1H 102K-T    | T  | 11.4/48.7    |
| C3      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 10/48.7      |
| C4      | 4030006860 | S.CER C1608 JB 1H 102K-T    | T  | 16.4/36.3    |
| C5      | 4030011600 | S.CER C1608 JB 1E 104K-T    | T  | 18.9/27.3    |
| C6      | 4030006860 | S.CER C1608 JB 1H 102K-T    | T  | 20.1/27.3    |
| C7      | 4030011340 | S.CER C1608 CH 1H 471J-T    | T  | 14.4/42.1    |

## [PA UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                           | M. | H/V LOCATION |
|---------|------------|---------------------------------------|----|--------------|
| C8      | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 16.4/35.1    |
| C14     | 4030008920 | S.CER C1608 JB 1H 473K-T              | T  | 30.8/57.4    |
| C15     | 4030008920 | S.CER C1608 JB 1H 473K-T              | T  | 26.2/21.5    |
| C16     | 4030012490 | S.CER GRM31M1X2A472JZ01L (GRM42-6 SL) | T  | 38.6/46.9    |
| C17     | 4030012490 | S.CER GRM31M1X2A472JZ01L (GRM42-6 SL) | T  | 33.4/15.8    |
| C19     | 4010005830 | CER HM74SJ SL 151J 500V               |    |              |
| C20     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 61/59        |
| C22     | 4030008920 | S.CER C1608 JB 1H 473K-T              | T  | 82.1/63.8    |
| C23     | 4030008920 | S.CER C1608 JB 1H 473K-T              | T  | 75.4/6.1     |
| C24     | 4030007090 | S.CER C1608 CH 1H 470J-T              | T  | 9.6/38.1     |
| C25     | 4030018530 | S.CER C3216 CH 1H 103J-T              | T  | 32.5/44.9    |
| C26     | 4030018530 | S.CER C3216 CH 1H 103J-T              | T  | 33.7/24.7    |
| C27     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 83.4/63.8    |
| C28     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 76.7/6.1     |
| C30     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 125.3/68.8   |
| C33     | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 132.9/78.9   |
| C34     | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 131/80       |
| C35     | 4030006860 | S.CER C1608 JB 1H 102K-T              | T  | 125.3/67     |
| C36     | 4510004601 | ELE 16 ME 1000 HC                     |    |              |
| C37     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 151.3/79.9   |
| C39     | 4510004601 | ELE 16 ME 1000 HC                     |    |              |
| C40     | 4510004601 | ELE 16 ME 1000 HC                     |    |              |
| C41     | 4030006860 | S.CER C1608 JB 1H 102K-T              | T  | 14/46.3      |
| C42     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 74/84.1      |
| C52     | 4030011740 | S.CER GRM32N2C2H201JV01L (GRM42-2 CH) | T  | 80.7/32.9    |
| C57     | 4030018750 | S.CER C3225 CH 2J 682K-T              | T  | 84.4/45.8    |
| C58     | 4030018750 | S.CER C3225 CH 2J 682K-T              | T  | 84.3/20.3    |
| C62     | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 117.8/51.6   |
| C63     | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 118/14.2     |
| C64     | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) |    |              |
| C65     | 4030011740 | S.CER GRM32N2C2H201JV01L (GRM42-2 CH) | T  | 110.6/33     |
| C66     | 4030011740 | S.CER GRM32N2C2H201JV01L (GRM42-2 CH) | T  | 113.6/33     |
| C67     | 4030011740 | S.CER GRM32N2C2H201JV01L (GRM42-2 CH) | T  | 116.6/33     |
| C68     | 4030011740 | S.CER GRM32N2C2H201JV01L (GRM42-2 CH) | T  | 119.7/33     |
| C71     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 26/66.7      |
| C72     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 31.6/76.7    |
| C73     | 4510009910 | S.ELE 16 CE 10 LH                     | T  | 30/68.8      |
| C74     | 4510009910 | S.ELE 16 CE 10 LH                     | T  | 30/73.6      |
| C75     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 11.2/83.8    |
| C76     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 17.9/85.7    |
| C77     | 4510009920 | S.ELE 16 CE 100 LH                    | T  | 15.6/80.9    |
| C78     | 4510009920 | S.ELE 16 CE 100 LH                    | T  | 23.4/84.5    |
| C79     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 37.1/81.2    |
| C80     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 48.7/81.2    |
| C81     | 4510009910 | S.ELE 16 CE 10 LH                     | T  | 40.7/81.5    |
| C82     | 4510009910 | S.ELE 16 CE 10 LH                     | T  | 45.6/81.5    |
| C89     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 73.2/86.4    |
| C90     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 94.7/5.4     |
| C91     | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 47.5/5.4     |
| C101    | 4510009920 | S.ELE 16 CE 100 LH                    | T  | 147.7/11.4   |
| C102    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 68.9/8.2     |
| C103    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 56.3/7.7     |
| C104    | 4030011600 | S.CER C1608 JB 1E 104K-T              | T  | 55.1/7.7     |
| C107    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 149.9/79.9   |
| C108    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 10.9/12.7    |
| C109    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 14.7/12.7    |
| C110    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 19.7/12.7    |
| C111    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 20.9/12.7    |
| C112    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 15.9/12.7    |
| C113    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 12.1/12.7    |
| C114    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 22.1/12.7    |
| C115    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 18/12.7      |
| C121    | 4550007650 | S.TAN F931V105MAABMA                  | T  | 90.6/71.5    |
| C131    | 4030018750 | S.CER C3225 CH 2J 682K-T              | T  | 74.3/45.3    |
| C132    | 4030018750 | S.CER C3225 CH 2J 682K-T              | T  | 74.2/20.7    |
| C133    | 4030012620 | S.CER GRM55R2C2H102JV01L (GRM44-1)    | T  | 78.5/43.4    |
| C134    | 4030012620 | S.CER GRM55R2C2H102JV01L (GRM44-1)    | T  | 78.5/22.6    |
| C135    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 70.3/44.4    |
| C136    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 70.3/21.6    |
| RL1     | 6330001471 | REL AJS1311F-K2                       |    |              |
| CP1     | 6910009670 | S.CHE HK3-S-T                         | T  | 48.5/10      |
| CP2     | 6910009670 | S.CHE HK3-S-T                         | T  | 48.5/8.2     |
| J1      | 6510007020 | CON TMP-J01X-V6                       |    |              |
| J2      | 6510007020 | CON TMP-J01X-V6                       |    |              |
| J3      | 6510022601 | S.CON 30FMN-BMTTR-A-TBT(LF)(SN)       | T  | 25.4/7.7     |
| J10     | 6510003081 | CON RT01T-1.0B(LF)                    |    |              |
| J101    | 6510018961 | S.CON B2B-PH-SM4-TB(LF)(SN)           | T  | 138.5/10.7   |
| F1      | 5220000400 | HOL FHA010-01F                        |    |              |
| F2      | 5210000940 | FUS 1205                              |    |              |
| W14     | 9016910440 | WIR 23/06/050/D21/W05                 |    |              |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

[PA UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION          | M. | H/V LOCATION |
|---------|------------|----------------------|----|--------------|
| EP2     | 6910019200 | S.BEA N2012ZPS121T50 | T  | 28.1/56.7    |
| EP4     | 6510018330 | TER F4053A           |    |              |
| EP5     | 6510018330 | TER F4053A           |    |              |
| EP6     | 6910019200 | S.BEA N2012ZPS121T50 | T  | 65.2/56.6    |
| EP19    | 6910019200 | S.BEA N2012ZPS121T50 | T  | 60.2/52.8    |
| EP20    | 6910019200 | S.BEA N2012ZPS121T50 | T  | 60.2/49.5    |

[FILTER UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                           | M. | H/V LOCATION |
|---------|------------|---------------------------------------|----|--------------|
| Q101    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 145.4/87.7   |
| Q102    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 145.6/85.1   |
| Q151    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 142.9/87.7   |
| Q152    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 143.1/85.1   |
| Q201    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 140.4/87.7   |
| Q202    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 140.6/85.1   |
| Q251    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 116.8/87.7   |
| Q252    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 117/85.1     |
| Q301    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 114.3/87.7   |
| Q302    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 114.4/85.1   |
| Q351    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 109.3/87.7   |
| Q352    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 109.5/85.1   |
| Q401    | 1590003680 | S.TRA KRC402 RTK/P                    | T  | 106.8/87.7   |
| Q402    | 1590003770 | S.TRA KRA302E-RTK/P                   | T  | 107/85.1     |
| D102    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 154.9/77.3   |
| D152    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 139.4/77.3   |
| D154    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 135.6/86.5   |
| D155    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 137.4/86.5   |
| D202    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 124/77.3     |
| D252    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 106.5/78.6   |
| D302    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 92.5/84      |
| D352    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 61.9/84      |
| D402    | 1750001320 | S.DIO KDS4148U RTK/P                  | T  | 46.6/84      |
| L1      | 6200002041 | S.COI NLV25T-101J                     | T  | 121/84.5     |
| L102    | 6110003540 | COI LA-548 (LA-215A)                  |    |              |
| L103    | 6110003570 | COI LA-550                            |    |              |
| L104    | 6110003550 | COI LA-547 (LA-214A)                  |    |              |
| L152    | 6110002920 | COI LA-481                            |    |              |
| L153    | 6140004750 | COI LR-535                            |    |              |
| L154    | 6140004750 | COI LR-535                            |    |              |
| L202    | 6140003450 | COI LR-387 (T50-10)                   |    |              |
| L203    | 6140003460 | COI LR-388 (T50-10)                   |    |              |
| L204    | 6140003460 | COI LR-388 (T50-10)                   |    |              |
| L252    | 6140001160 | COI LR-141 (T68-2)                    |    |              |
| L253    | 6140001160 | COI LR-141 (T68-2)                    |    |              |
| L254    | 6140001160 | COI LR-141 (T68-2)                    |    |              |
| L302    | 6110002920 | COI LA-481                            |    |              |
| L303    | 6110002910 | COI LA-480                            |    |              |
| L352    | 6140001240 | COI LR-149 (T68-2)                    |    |              |
| L353    | 6140001130 | COI LR-138 (T68-2)                    |    |              |
| L401    | 6200002041 | S.COI NLV25T-101J                     | T  | 38.7/20.9    |
| L402    | 6140002570 | COI LR-294 (T50-2)                    |    |              |
| L403    | 6140002580 | COI LR-295 (T50-2)                    |    |              |
| L501    | 6140003440 | COI LR-386 (FK-100E-5003H)            |    |              |
| L502    | 6140003440 | COI LR-386 (FK-100E-5003H)            |    |              |
| R101    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 158.1/77.3   |
| R102    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 158.1/79.2   |
| R151    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 142.5/77.3   |
| R152    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 142.5/79.1   |
| R201    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 127.2/77.3   |
| R202    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 127.2/79.1   |
| R251    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 110.4/79.4   |
| R252    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 109.2/79.4   |
| R301    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 95.6/84      |
| R302    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 95.6/85.8    |
| R351    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 65/84        |
| R352    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 65/85.8      |
| R401    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 49.7/84      |
| R402    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)            | T  | 49.7/85.8    |
| C101    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 150/21       |
| C105    | 4030011160 | S.CER GRM31M2C2H150JV01L (GRM42-6 CH) | T  | 161.6/26     |
| C106    | 4030011120 | S.CER GRM31M2C2H100JV01L (GRM42-6 CH) | T  | 168.6/34.1   |
| C107    | 4030011190 | S.CER GRM31M2C2H270JV01L (GRM42-6 CH) | T  | 155.4/39.7   |
| C108    | 4030011240 | S.CER GRM31M2C2H470JV01L (GRM42-6 CH) | T  | 155.4/41.8   |
| C109    | 4030011160 | S.CER GRM31M2C2H150JV01L (GRM42-6 CH) | T  | 168.6/44.1   |
| C110    | 4030011240 | S.CER GRM31M2C2H470JV01L (GRM42-6 CH) | T  | 155.2/57.6   |
| C111    | 4030011240 | S.CER GRM31M2C2H470JV01L (GRM42-6 CH) | T  | 155.2/60.4   |
| C112    | 4030011100 | S.CER GRM31M2C2H8R0DV01L (GRM42-6 CH) | T  | 158.8/61.9   |
| C113    | 4030011240 | S.CER GRM31M2C2H470JV01L (GRM42-6 CH) | T  | 155.2/63.5   |
| C114    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 155.2/79.2   |
| C154    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 137.1/18.1   |
| C158    | 4030011180 | S.CER GRM31M2C2H220JV01L (GRM42-6 CH) | T  | 148.8/29.5   |
| C159    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 150.4/36.4   |
| C160    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 150.4/38.5   |
| C162    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 141.4/48.9   |
| C163    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 147.5/48.9   |
| C165    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 147.5/51     |
| C166    | 4030011510 | S.CER GRM31M2C2H560JV01L (GRM42-6 CH) | T  | 140.4/63.4   |
| C170    | 4030014460 | S.CER GRM31M2C2H820JV01L (GRM42-6 CH) | T  | 146.2/65.6   |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount



[FILTER UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                           | M. | H/V LOCATION |
|---------|------------|---------------------------------------|----|--------------|
| C172    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 139.7/79.1   |
| C201    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 122.1/18.1   |
| C203    | 4030011190 | S.CER GRM31M2C2H270JV01L (GRM42-6 CH) | T  | 126.1/32.1   |
| C204    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 126.1/37.3   |
| C206    | 4030011050 | S.CER GRM31M3C2H3R0CY21L (GRM42-6 CJ) | T  | 131.6/48.1   |
| C207    | 4030011190 | S.CER GRM31M2C2H270JV01L (GRM42-6 CH) | T  | 131.6/50.2   |
| C209    | 4030011550 | S.CER GRM31M2C2H680JV01L (GRM42-6 CH) | T  | 123.3/50.1   |
| C210    | 4030011550 | S.CER GRM31M2C2H680JV01L (GRM42-6 CH) | T  | 123.3/48     |
| C211    | 4030011120 | S.CER GRM31M2C2H100JV01L (GRM42-6 CH) | T  | 134.9/57.5   |
| C212    | 4030011210 | S.CER GRM31M2C2H330JV01L (GRM42-6 CH) | T  | 124/62.9     |
| C213    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 124.3/79.1   |
| C251    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 106.7/17.8   |
| C252    | 4010005880 | CER HM95SJ SL 271J 500V               |    |              |
| C253    | 4010005880 | CER HM95SJ SL 271J 500V               |    |              |
| C254    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 102.5/36.2   |
| C255    | 4030011550 | S.CER GRM31M2C2H680JV01L (GRM42-6 CH) | T  | 104.8/36.2   |
| C256    | 4010008300 | CER HM11TJ SL 391J 500V               |    |              |
| C257    | 4010008200 | CER HM11TJ SL 331J 500V               |    |              |
| C260    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 106.5/51.9   |
| C261    | 4010008300 | CER HM11TJ SL 391J 500V               |    |              |
| C262    | 4030011230 | S.CER GRM31M2C2H390JV01L (GRM42-6 CH) | T  | 106.9/69.6   |
| C263    | 4010008300 | CER HM11TJ SL 391J 500V               |    |              |
| C264    | 4010005880 | CER HM95SJ SL 271J 500V               |    |              |
| C265    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 106.8/80.3   |
| C301    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 91.5/16.1    |
| C302    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 96/20.7      |
| C303    | 4030011170 | S.CER GRM31M2C2H180JV01L (GRM42-6 CH) | T  | 94/34.9      |
| C304    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 90.1/45.2    |
| C305    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 90.1/47.7    |
| C306    | 4030011240 | S.CER GRM31M2C2H470JV01L (GRM42-6 CH) | T  | 95.4/55.2    |
| C307    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 95.4/72.1    |
| C308    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 92.8/85.8    |
| C351    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 60.9/16.1    |
| C352    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C353    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C354    | 4010005370 | CER HM11SJ SL 331J 500V               |    |              |
| C355    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C356    | 4010005830 | CER HM74SJ SL 151J 500V               |    |              |
| C357    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C358    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C360    | 4030011730 | S.CER GRM31M2C2H101JV01L (GRM42-6 CH) | T  | 62.8/63.1    |
| C361    | 4010005360 | CER HM11SJ SL 301J 500V               |    |              |
| C362    | 4010008300 | CER HM11TJ SL 391J 500V               |    |              |
| C363    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 62.2/85.8    |
| C401    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 45.4/16      |
| C402    | 4010007590 | CER HM15SJ SL 681J 500V               |    |              |
| C403    | 4010007590 | CER HM15SJ SL 681J 500V               |    |              |
| C404    | 4010007590 | CER HM15SJ SL 681J 500V               |    |              |
| C405    | 4010007590 | CER HM15SJ SL 681J 500V               |    |              |
| C406    | 4010006410 | CER HM13SJ SL 471J 500V               |    |              |
| C407    | 4010008260 | CER HM74TJ SL 151J 500V               |    |              |
| C408    | 4010008200 | CER HM11TJ SL 331J 500V               |    |              |
| C409    | 4010008280 | CER HM95TJ SL 221J 500V               |    |              |
| C410    | 4010005390 | CER HM15SJ SL 621J 500V               |    |              |
| C411    | 4010005390 | CER HM15SJ SL 621J 500V               |    |              |
| C412    | 4010005390 | CER HM15SJ SL 621J 500V               |    |              |
| C413    | 4010008200 | CER HM11TJ SL 331J 500V               |    |              |
| C415    | 4030012480 | S.CER GRM31M2C2H121JV01L (GRM42-6 CH) | T  | 55.5/61.2    |
| C416    | 4010005390 | CER HM15SJ SL 621J 500V               |    |              |
| C417    | 4010005390 | CER HM15SJ SL 621J 500V               |    |              |
| C419    | 4030006900 | S.CER C1608 JB 1H 103K-T              | T  | 46.9/85.8    |
| C501    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 24.5/85.7    |
| C502    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 15.5/85.7    |
| C503    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 26.5/85.7    |
| C504    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 13.5/85.7    |
| C507    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 20/84        |
| C508    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 20/80.5      |
| C513    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 30/47        |
| C514    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 10/47        |
| C515    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 30/44.5      |
| C516    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 10/44.5      |
| C517    | 4510004330 | ELE 35 ME 10 SWB                      |    |              |
| C521    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 33.1/21.4    |
| C522    | 4030006880 | S.CER C1608 JB 1H 472K-T              | T  | 6.8/21.4     |
| C523    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 33.1/19      |
| C524    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 6.8/19       |
| C527    | 4030018980 | S.CER C1608 JB 1H 104K-T              | T  | 20/8.3       |
| C528    | 4510004330 | ELE 35 ME 10 SWB                      |    |              |
| RL101   | 6330001721 | REL ATN207-K1                         |    |              |
| RL102   | 6330001721 | REL ATN207-K1                         |    |              |
| RL151   | 6330001721 | REL ATN207-K1                         |    |              |
| RL152   | 6330001721 | REL ATN207-K1                         |    |              |

[FILTER UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| RL201   | 6330001721 | REL ATN207-K1                   |    |              |
| RL202   | 6330001721 | REL ATN207-K1                   |    |              |
| RL251   | 6330001721 | REL ATN207-K1                   |    |              |
| RL252   | 6330001721 | REL ATN207-K1                   |    |              |
| RL301   | 6330001721 | REL ATN207-K1                   |    |              |
| RL302   | 6330001721 | REL ATN207-K1                   |    |              |
| RL351   | 6330001721 | REL ATN207-K1                   |    |              |
| RL352   | 6330001721 | REL ATN207-K1                   |    |              |
| RL401   | 6330001721 | REL ATN207-K1                   |    |              |
| RL402   | 6330001721 | REL ATN207-K1                   |    |              |
| J1      | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J2      | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J3      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 128.5/86     |
| W9      | 8900009621 | CAB OPC-961A                    |    |              |
| W10     | 8900009631 | CAB OPC-962A                    |    |              |
| EP501   | 6510018330 | TER F4053A                      |    |              |
| EP502   | 6510018330 | TER F4053A                      |    |              |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [CTRL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| IC1     | 1110000960 | S.IC NJM4558M-TE1-#FMZB         | T  | 112.5/54.9   |
| IC21    | 1120002301 | S.IC TC74AC04F(F) S             | T  | 104/68.5     |
| IC22    | 1120002252 | S.IC TC74ACT32F(F)              | T  | 121.5/68.8   |
| IC23    | 1120002242 | S.IC TC74AC112F(F)              | T  | 131.7/69     |
| IC51    | 1110000960 | S.IC NJM4558M-TE1-#FMZB         | T  | 116.6/80.8   |
| IC81    | 1110002690 | S.IC NJM2903M-TE1-#FMZB         | T  | 44.6/10      |
| IC201   | 1140015071 | S.IC R5F212A75NFP(SX-3073B-1)   | T  | 153.9/68.5   |
| IC202   | 1130011570 | S.IC BR24L32FV-WE2              | T  | 172.3/63.6   |
| IC203   | 1110005920 | S.IC S-80851CNMC-B9CT2G         | T  | 142.2/76.8   |
| IC204   | 1180001071 | S.IC TA7805F(TE16L.Q)           | T  | 156.5/35.2   |
| IC251   | 1130012620 | S.IC SN74AHCT1G86DCKR           | T  | 176.5/86.1   |
| IC261   | 1130011530 | S.IC CD74HC4094M96              | T  | 146.4/28.4   |
|         |            |                                 |    |              |
| Q41     | 1560000871 | S.FET 2SK515-T1B-A (X33)        | T  | 104.2/80.2   |
| Q42     | 1590001330 | S.TRA DTA114EUA T106            | T  | 108.2/86.4   |
| Q101    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 14.2/13      |
| Q102    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 30.4/54.2    |
| Q103    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 34.9/53.9    |
| Q104    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 14.2/10.1    |
| Q105    | 1530003960 | S.TRA KTC2875-B-RTK/P           | T  | 19.3/46.8    |
| Q106    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 60.3/91.5    |
| Q107    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 62.8/91.2    |
| Q108    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 38.7/40.7    |
| Q109    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 72.5/16.6    |
| Q110    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 38.5/43.4    |
| Q111    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 69.9/16.3    |
| Q112    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 23.2/61.8    |
| Q131    | 1520000561 | S.TRA 2SB1123 T-TD-E            | T  | 26.7/81.3    |
| Q132    | 1540000441 | S.TRA 2SD1619T-TD-E             | T  | 26.7/68.2    |
| Q133    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 28.9/76.1    |
| Q202    | 1590003770 | S.TRA KRA302E-RTK/P             | T  | 167.6/91.3   |
| Q203    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 170.1/88     |
| Q241    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 184.2/89.1   |
| Q242    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 186.7/89.1   |
| Q243    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 178.9/89.1   |
| Q244    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 181.4/89.1   |
| Q245    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 186/79.1     |
| Q246    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 188.5/79.1   |
| Q247    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 180.6/79.1   |
| Q248    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 183.1/79.1   |
| Q249    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 150/92.5     |
| Q261    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 163/41.8     |
| Q263    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 171.1/77.2   |
| Q264    | 1590003680 | S.TRA KRC402 RTK/P              | T  | 172.2/73.5   |
|         |            |                                 |    |              |
| D1      | 1790000491 | S.DIO HSM88ASTR-E               | T  | 96/49        |
| D2      | 1790000491 | S.DIO HSM88ASTR-E               | T  | 96/60.7      |
| D3      | 1750000201 | S.DIO 1SS319(TE85R,F)           | T  | 120.5/45.7   |
| D21     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 103.7/62.1   |
| D22     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 102.6/75     |
| D23     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 127.9/84.6   |
| D24     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 128.2/79.5   |
| D41     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 97.4/82.2    |
| D42     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 97.4/78.8    |
| D51     | 1750000121 | S.DIO DWA010-TE-E               | T  | 121.5/86.6   |
| D81     | 1790000491 | S.DIO HSM88ASTR-E               | T  | 36.1/10.9    |
| D101    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 14.2/15.2    |
| D102    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 38.2/54.3    |
| D103    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 67.9/91      |
| D104    | 1750000851 | S.DIO MMBV3700LT1G              | T  | 23.7/49      |
| D105    | 1750000851 | S.DIO MMBV3700LT1G              | T  | 26.7/48.9    |
| D106    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 75/16.2      |
| D107    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 38.3/38      |
| D131    | 1710000140 | DIO U05G                        | T  |              |
| D202    | 1750001320 | S.DIO KDS4148U RTK/P            | T  | 160.9/28.6   |
| D241    | 1750000201 | S.DIO 1SS319(TE85R,F)           | T  | 181.5/75.2   |
| D242    | 1750000201 | S.DIO 1SS319(TE85R,F)           | T  | 187.5/75.2   |
| D243    | 1750000201 | S.DIO 1SS319(TE85R,F)           | T  | 179.7/85.5   |
| D244    | 1750000201 | S.DIO 1SS319(TE85R,F)           | T  | 185.8/85.5   |
|         |            |                                 |    |              |
| X201    | 6050009520 | S.XTA CR-520 SMD-49 19.6608 MHz | T  | 167/67       |
|         |            |                                 |    |              |
| L1      | 6140003270 | COI LR-364 (TR10X5X5 3A6)       |    |              |
| L2      | 6200005011 | S.COI NLV25T-100J               | T  | 123.8/51.8   |
| L21     | 6140003270 | COI LR-364 (TR10X5X5 3A6)       |    |              |
| L22     | 6200005011 | S.COI NLV25T-100J               | T  | 133/47       |
| L41     | 6140003270 | COI LR-364 (TR10X5X5 3A6)       |    |              |
| L42     | 6180003300 | COI T6-222J (2.2M)              |    |              |
| L51     | 6200002041 | S.COI NLV25T-101J               | T  | 126.6/52.9   |
| L81     | 6140003270 | COI LR-364 (TR10X5X5 3A6)       |    |              |
| L82     | 6200002041 | S.COI NLV25T-101J               | T  | 56.3/6.6     |
| L83     | 6180003300 | COI T6-222J (2.2M)              |    |              |
| L102    | 6110001560 | COI LA-236                      |    |              |
| L103    | 6110001630 | COI LA-246                      |    |              |
| L133    | 6140004740 | COI LR-533                      |    |              |
| L134    | 6140004740 | COI LR-533                      |    |              |
| L201    | 6200009300 | S.COI ELJPA 100KF 10U           | T  | 161.8/57.5   |
| L202    | 6200002041 | S.COI NLV25T-101J               | T  | 167.2/57.2   |
| L240    | 6200005131 | S.COI NLC453232T-101K-PF        | T  | 169.8/22.5   |
| L251    | 6200002041 | S.COI NLV25T-101J               | T  | 173.9/89.4   |
| L261    | 6200002041 | S.COI NLV25T-101J               | T  | 141.8/38.6   |
| L262    | 6200002041 | S.COI NLV25T-101J               | T  | 124.9/11.9   |
| L291    | 6200005011 | S.COI NLV25T-100J               | T  | 165.6/51.8   |
|         |            |                                 |    |              |
| R1      | 7030010910 | S.RES ERJ1TYJ 150U (15)         | T  | 95.8/52.7    |
| R2      | 7030010910 | S.RES ERJ1TYJ 150U (15)         | T  | 95.8/56.8    |
| R3      | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 104.1/47.1   |
| R4      | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)      | T  | 100.9/59.9   |
| R5      | 7030003720 | S.RES ERJ3GEYJ 224 V (220K)     | T  | 106.2/48.9   |

## [CTRL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R6      | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | T  | 106.9/58.6   |
| R7      | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | T  | 107.8/50.3   |
| R8      | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | T  | 106.9/57.4   |
| R9      | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | T  | 109.1/50.3   |
| R10     | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | T  | 108.8/58.3   |
| R11     | 7030003790 | S.RES ERJ3GEYJ 824 V (820K) | T  | 113.1/60.2   |
| R12     | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 112.5/50.2   |
| R13     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 117.1/47.9   |
| R14     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 117.2/43.8   |
| R18     | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 100.8/62.3   |
| R19     | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | T  | 97.8/71.9    |
| R21     | 7030010540 | S.RES ERJ1TYJ 330U (33)     | T  | 92.4/69.8    |
| R22     | 7030003860 | S.RES ERJ3GE JPW V          | T  | 105/74.6     |
| R23     | 7030003860 | S.RES ERJ3GE JPW V          | T  | 107.4/61.7   |
| R25     | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 106.3/74.6   |
| R26     | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 107.4/63     |
| R27     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 110.2/63     |
| R28     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 115/73.3     |
| R29     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 116.4/68     |
| R30     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 116.4/71.8   |
| R31     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 126.6/71     |
| R32     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 120.9/62.6   |
| R33     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 123.7/62.6   |
| R34     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 126.6/65.9   |
| R35     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 133/62.8     |
| R36     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 124/61.3     |
| R37     | 7030003250 | S.RES ERJ3GEYJ 270 V (27)   | T  | 129.5/75.1   |
| R38     | 7030003280 | S.RES ERJ3GEYJ 470 V (47)   | T  | 130.8/78.2   |
| R39     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 128/77.4     |
| R40     | 7030003500 | S.RES ERJ3GEYJ 332 V (3.3K) | T  | 127.4/82.5   |
| R41     | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | T  | 126.1/81.2   |
| R42     | 7030010550 | S.RES ERJ1TYJ 820U (82)     | T  | 92.4/81.7    |
| R43     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 100.8/78.6   |
| R44     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 100.8/82.7   |
| R45     | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 100.8/79.9   |
| R46     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 103.8/82.7   |
| R47     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 106.9/83.4   |
| R48     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 107.5/81.6   |
| R49     | 7030004710 | S.RES ERJ3GEYJ 475 V (4.7M) | T  | 105.4/86.4   |
| R51     | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 122.8/83.2   |
| R52     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 108.2/83.4   |
| R53     | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 118.8/76.3   |
| R54     | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | T  | 120.1/76.3   |
| R55     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 124.2/80.6   |
| R56     | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | T  | 112.6/76.3   |
| R57     | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | T  | 114/76.3     |
| R58     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 110.1/81.6   |
| R61     | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | T  | 117.4/76.3   |
| R62     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 115.3/84.5   |
| R63     | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 121.3/80.6   |
| R64     | 7030003820 | S.RES ERJ3GEYJ 155 V (1.5M) | T  | 111.8/83.5   |
| R65     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 118.3/85.8   |
| R66     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 113.9/85.8   |
| R67     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 124.8/87.7   |
| R68     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 124.8/89.1   |
| R69     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 150.9/58.3   |
| R70     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 141/66.1     |
| R71     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 148.5/58.3   |
| R72     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 141/64.8     |
| R81     | 7030010910 | S.RES ERJ1TYJ 150U (15)     | T  | 36.1/14.9    |
| R82     | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | T  | 33.6/9.7     |
| R83     | 7030003710 | S.RES ERJ3GEYJ 184 V (180K) | T  | 49.6/12.4    |
| R84     | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | T  | 51.8/8.8     |
| R85     | 7030003660 | S.RES ERJ3GEYJ 683 V (68K)  | T  | 51/12.4      |
| R87     | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 46.8/6.5     |
| R88     | 7030003840 | S.RES ERJ3GEYJ 225 V (2.2M) | T  | 51.8/7.4     |
| R89     | 7030003860 | S.RES ERJ3GE JPW V          | T  | 49.6/6.4     |
| R90     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 51.8/6       |
| R101    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 16.9/46.6    |
| R102    | 7030003390 | S.RES ERJ3GEYJ 391 V (390)  | T  | 17.6/44.7    |
| R103    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 21.6/46.9    |
| R105    | 7030003390 | S.RES ERJ3GEYJ 391 V (390)  | T  | 22.9/45.4    |
| R106    | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 21/44.7      |
| R107    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 25.4/45.4    |
| R108    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | T  | 28.2/45.4    |
| R110    | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | T  | 21/43.4      |
| R112    | 7540000130 | ABS 2P-50A-301              |    |              |
| R114    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 35.6/56.4    |
| R131    | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | T  | 35/83        |
| R132    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 29.6/86.5    |
| R133    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 30.3/59.2    |
| R134    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 29.6/90.4    |
| R135    | 7030004050 | S.RES ERJ3GEYJ 1R0 V (1)    | T  | 30.3/62.9    |
| R136    | 7030012240 | S.RES ERJ1TYJ 471U (47)     | T  | 27.3/59.1    |
| R137    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 25.9/77.4    |
| R138    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | T  | 27.4/72      |
| R139    | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | T  | 27.4/73.2    |
| R140    | 7030003340 | S.RES ERJ3GEYJ 151 V (150)  | T  | 25.9/76.1    |
| R151    | 7410000950 | S.ARR EXB-V8 102JV          | T  | 139.9/87.9   |
| R152    | 7410000950 | S.ARR EXB-V8 102JV          | T  | 142.8/84.7   |
| R153    | 7410000950 | S.ARR EXB-V8 102JV          | T  | 142.8/91.1   |
| R154    | 7410000950 | S.ARR EXB-V8 102JV          | T  | 139.9/94.3   |
| R207    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | T  | 142.2/71     |
| R211    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 142.2/63.6   |
| R213    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 144.7/58.3   |
| R214    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 153.7/58.7   |
| R215    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 154.9/58.7   |
| R216    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | T  | 162.6/61.7   |
| R217    | 7030003860 | S.RES ERJ3GE JPW V          | T  | 139.9/60.6   |
| R218    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | T  | 164.3/75.4   |
| R219    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | T  | 139.4/77.9   |
| R220    | 7030003590 | S.RES ERJ3GEYJ 183 V (18K)  | T  | 145.7/74.9   |
| R221    | 7030003470 | S.RES ERJ3GEYJ 182 V (1.8K) | T  | 146/78.6     |
| R222    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | T  | 163.6/67.1   |

## [CTRL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                            | M. | H/V LOCATION |
|---------|------------|----------------------------------------|----|--------------|
| R223    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)             | T  | 172.5/59     |
| R224    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)             | T  | 171.7/57.7   |
| R226    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)             | T  | 153.7/79.2   |
| R227    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)            | T  | 173.5/71.6   |
| R228    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)             | T  | 173.1/75.4   |
| R229    | 7030003860 | S.RES ERJ3GE JPW V                     | T  | 163.1/45.9   |
| R230    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)              | T  | 156.4/79.4   |
| R231    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)             | T  | 142.2/69.8   |
| R232    | 7030010910 | S.RES ERJ1TVJ 150U (15)                | T  | 162.8/22.5   |
| R241    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 181.3/73     |
| R242    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 183.9/73.7   |
| R243    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 185.1/73.7   |
| R244    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 188/73       |
| R245    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 180.3/83.2   |
| R246    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 182.1/84     |
| R247    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 183.4/84     |
| R248    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)             | T  | 188.2/84     |
| R261    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K)            | T  | 157.7/12.2   |
| R263    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)             | T  | 147.4/16.6   |
| R264    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)             | T  | 144.6/16.6   |
| R265    | 7030003400 | S.RES ERJ3GEYJ 471 V (470)             | T  | 157.2/15.4   |
| R266    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 134.1/19.8   |
| R267    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 129.9/19.8   |
| R268    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 132.7/19.8   |
| R269    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 128.2/19.8   |
| R270    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)             | T  | 146/16.6     |
| R271    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)             | T  | 148.8/16.6   |
| R272    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)              | T  | 155.7/16.7   |
| R273    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 135.5/19.8   |
| R274    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 136.9/19.8   |
| R275    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 131.3/19.8   |
| R276    | 7030003200 | S.RES ERJ3GEYJ 100 V (10)              | T  | 126.8/19.8   |
| R277    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)              | T  | 175.2/17.1   |
| R282    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)             | T  | 110.2/12.3   |
| R291    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)              | T  | 166.1/48.6   |
| R292    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)              | T  | 165.2/45.8   |
| R293    | 7030003360 | S.RES ERJ3GEYJ 221 V (220)             | T  | 106.2/11.4   |
| R298    | 7030003860 | S.RES ERJ3GE JPW V                     | T  | 111/74.4     |
| R507    | 7030003860 | S.RES ERJ3GE JPW V                     | T  | 108.6/52.1   |
| R508    | 7030003860 | S.RES ERJ3GE JPW V                     | T  | 106.9/56.2   |
| C1      | 4030005040 | S.CER C2012 CH 1H 271J-T               | T  | 90.8/56.9    |
| C2      | 4010005530 | CER HM60SJ SL 020C 500V                |    |              |
| C3      | 4010005530 | CER HM60SJ SL 020C 500V                |    |              |
| C5      | 4610001850 | S.TRI TZB4R200AB10R00 (TZBX4R200BA110) | T  | 102.2/54.9   |
| C6      | 4030007110 | S.CER C1608 CH 1H 680J-T               | T  | 100/49.6     |
| C8      | 4030011540 | S.CER C1608 CH 1H 750J-T               | T  | 99.6/59.9    |
| C9      | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 104.9/48.9   |
| C10     | 4030006880 | S.CER C1608 JB 1H 472K-T               | T  | 105.1/56.9   |
| C11     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 116.7/52.1   |
| C12     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 116.2/58.4   |
| C13     | 4510008540 | S.ELE EEE1CA100SR                      | T  | 119.8/51.6   |
| C14     | 4510008540 | S.ELE EEE1CA100SR                      | T  | 120.6/58.4   |
| C15     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 120.4/48.1   |
| C16     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 120.4/43.3   |
| C21     | 4010005540 | CER HM60SJ SL 030C 500V                |    |              |
| C22     | 4030007070 | S.CER C1608 CH 1H 330J-T               | T  | 97.8/66.4    |
| C23     | 4030007070 | S.CER C1608 CH 1H 330J-T               | T  | 95.1/71.9    |
| C24     | 4030007070 | S.CER C1608 CH 1H 330J-T               | T  | 96.5/66.4    |
| C25     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 98.2/63      |
| C26     | 4030007120 | S.CER C1608 CH 1H 820J-T               | T  | 97.1/70.1    |
| C27     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 100.3/74.8   |
| C28     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 110.2/67.6   |
| C29     | 4510008540 | S.ELE EEE1CA100SR                      | T  | 113.3/66.7   |
| C30     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 124.4/74.9   |
| C31     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 130.2/62.8   |
| C32     | 4550007710 | S.TAN TEESVB2 1A 476M8R                | T  | 127.6/58.1   |
| C33     | 4030007170 | S.CER C1608 CH 1H 221J-T               | T  | 127.2/75.5   |
| C34     | 4030007170 | S.CER C1608 CH 1H 221J-T               | T  | 130.8/81.2   |
| C35     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 125.6/83.4   |
| C42     | 4010005520 | CER HM60SJ SL 010C 500V                |    |              |
| C43     | 4030011570 | S.CER CM105 CH 101G 50AT               | T  | 97.3/84.6    |
| C44     | 4030016550 | S.CER CM105 CH 151G 50AT               | T  | 96.7/75.1    |
| C47     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 100.8/84.1   |
| C48     | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 100.8/81.3   |
| C49     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 105.7/83.4   |
| C50     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 99.8/77.1    |
| C51     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 124.2/83.2   |
| C52     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 109.4/83.5   |
| C53     | 4030007170 | S.CER C1608 CH 1H 221J-T               | T  | 121.3/83.2   |
| C54     | 4030007170 | S.CER C1608 CH 1H 221J-T               | T  | 111/85.7     |
| C55     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 118.3/84.5   |
| C56     | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 124/85.8     |
| C57     | 4030011340 | S.CER C1608 CH 1H 471J-T               | T  | 113.9/87.2   |
| C59     | 4030006880 | S.CER C1608 JB 1H 472K-T               | T  | 110.6/83.5   |
| C60     | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 115.4/76.3   |
| C81     | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 32.9/11.6    |
| C83     | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 51.8/10.2    |
| C84     | 4030006860 | S.CER C1608 JB 1H 102K-T               | T  | 52.4/12.4    |
| C85     | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 53.7/8       |
| C86     | 4030007130 | S.CER C1608 CH 1H 101J-T               | T  | 39/11.7      |
| C102    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 13.9/17.7    |
| C103    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 36.6/54      |
| C105    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 13.8/69.8    |
| C108    | 4030007070 | S.CER C1608 CH 1H 330J-T               | T  | 19.4/70.1    |
| C109    | 4030011540 | S.CER C1608 CH 1H 750J-T               | T  | 13.8/65.4    |
| C110    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 65.4/91.3    |
| C111    | 4030007120 | S.CER C1608 CH 1H 820J-T               | T  | 14.9/63.1    |
| C112    | 4030007030 | S.CER C1608 CH 1H 150J-T               | T  | 14.6/57.1    |
| C114    | 4030007090 | S.CER C1608 CH 1H 470J-T               | T  | 19.3/57.1    |
| C115    | 4030011600 | S.CER C1608 JB 1E 104K-T               | T  | 26.6/45.4    |
| C117    | 4030006900 | S.CER C1608 JB 1H 103K-T               | T  | 38.6/35.9    |

## [CTRL UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                             | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------------|----|--------------|
| C118    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 76.9/16.5    |
| C135    | 4030018790 | S.CER       | C3225 JB 2E 104K-T          | T  | 59.6/84.1    |
| C136    | 4030018790 | S.CER       | C3225 JB 2E 104K-T          | T  | 59.2/61.6    |
| C137    | 4030006860 | S.CER       | C1608 JB 1H 102K-T          | T  | 32.5/83      |
| C138    | 4030006860 | S.CER       | C1608 JB 1H 102K-T          | T  | 35/66.5      |
| C139    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 33.7/83      |
| C140    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 33.7/66.5    |
| C141    | 4030006880 | S.CER       | C1608 JB 1H 472K-T          | T  | 32.5/66.5    |
| C142    | 4030018960 | S.CER       | C3216 JB 1C 106MT-N         | T  | 25.1/86.1    |
| C143    | 4030018960 | S.CER       | C3216 JB 1C 106MT-N         | T  | 26.2/64.1    |
| C151    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/89.1     |
| C152    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/88.3   |
| C153    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/87.5     |
| C154    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/86.7   |
| C155    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/85.9     |
| C156    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/85.1   |
| C157    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/84.3     |
| C158    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/83.5   |
| C159    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/89.9   |
| C160    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/90.7     |
| C161    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/91.5   |
| C162    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/92.3     |
| C163    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/93.1   |
| C164    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134/93.9     |
| C165    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.2/94.7   |
| C201    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 146.1/58.3   |
| C202    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 147.3/58.3   |
| C203    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 149.7/58.3   |
| C204    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 152.1/58.3   |
| C205    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 159/57.4     |
| C206    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 145.7/76.1   |
| C207    | 4510008870 | S.ELE       | EEE1AA471UP                 | T  | 154.3/43.8   |
| C208    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 174.4/59.7   |
| C209    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 164.1/36.6   |
| C210    | 4030007020 | S.CER       | C1608 CH 1H 120J-T          | T  | 163.1/69.7   |
| C211    | 4030007020 | S.CER       | C1608 CH 1H 120J-T          | T  | 162.4/67.1   |
| C212    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 167.7/89.5   |
| C213    | 4510008510 | S.ELE       | EEE1CA471P                  | T  | 169/29.8     |
| C215    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 150/88.1     |
| C221    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 161.8/69.7   |
| C222    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 160.1/30.8   |
| C223    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 104.6/38     |
| C241    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/56     |
| C242    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/51.2   |
| C243    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/46.4   |
| C244    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/41.6   |
| C245    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/36.8   |
| C246    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/32     |
| C247    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/27.2   |
| C248    | 4510008550 | S.ELE       | EEE1HA010SR                 | T  | 186.7/22.4   |
| C251    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | T  | 174.5/86.1   |
| C261    | 4510008540 | S.ELE       | EEE1CA100SR                 | T  | 147/38.8     |
| C262    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 147/35.6     |
| C266    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 122/12.9     |
| C267    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 126.8/15.8   |
| C268    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 132.7/15.8   |
| C269    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 136.9/15.8   |
| C270    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 129.9/15.8   |
| C271    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 135.5/15.8   |
| C272    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 134.1/15.8   |
| C273    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 131.3/15.8   |
| C274    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 128.2/15.8   |
| C281    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 168.4/11.8   |
| C282    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | T  | 142.5/10.4   |
| C283    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 168.7/19.3   |
| C284    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | T  | 172/19.3     |
| RL101   | 6330000800 | REL         | G5A-237P DC12V              |    |              |
| RL102   | 6330001770 | REL         | SIP-1A-12Y                  |    |              |
| RL103   | 6330001770 | REL         | SIP-1A-12Y                  |    |              |
| RL104   | 6330001460 | REL         | FTR-F1CA012V                |    |              |
| RL105   | 6330001460 | REL         | FTR-F1CA012V                |    |              |
| CP1     | 6910009670 | S.CHE       | HK3-S-T                     | T  | 111.6/45.9   |
| J3      | 6510017150 | CON         | TMP-S01X-C1                 |    |              |
| J101    | 6510017150 | CON         | TMP-S01X-C1                 |    |              |
| J102    | 6510017150 | CON         | TMP-S01X-C1                 |    |              |
| J103    | 6510017150 | CON         | TMP-S01X-C1                 |    |              |
| J151    | 6510022591 | S.CON       | 22FMN-BMTTR-A-TBT(LF)(SN)   | T  | 111.6/92.7   |
| J241    | 6510022031 | S.CON       | 10B-ZR-SM4-TF(LF)(SN)       | T  | 180.2/42.9   |
| J261    | 6510022621 | S.CON       | 10FMN-BMTTR-A-TBT(LF)(SN)   | T  | 132.3/8.4    |
| J262    | 6510022581 | S.CON       | 24FMN-BMTTR-A-TBT(LF)(SN)   | T  | 158.2/8.4    |
| J291    | 6510018971 | S.CON       | B4B-PH-SM4-TB(LF)(SN)       | T  | 171.8/46.8   |
| W1      | 7120000490 | JUM         | ERD25T0                     |    |              |
| W2      | 7120000490 | JUM         | ERD25T0                     |    |              |
| EP131   | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 31/79.6      |
| EP132   | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 24.3/54.9    |
| EP263   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 159.7/15.7   |
| EP264   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 162.5/17.8   |
| EP265   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 167.7/16.5   |
| EP267   | 6910014690 | S.BEA       | MPZ1608S221A-T              | T  | 142.5/8.4    |
| EP268   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 165.7/16     |
| EP269   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 106.2/9      |
| EP270   | 6910014730 | S.BEA       | MPZ2012S331A-T              | T  | 110.2/10.2   |



# [TUNER UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| Q1      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 124.5/89     |
| Q2      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 104.5/78.3   |
| Q3      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 77.6/60.7    |
| Q4      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 72.1/60.7    |
| Q5      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 66.6/60.7    |
| Q6      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 61.1/60.7    |
| Q7      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 57/60.7      |
| Q8      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 53.2/60.7    |
| Q9      | 1590003680 | S.TRA KRC402 RTK/P                | T  | 53/78        |
| Q10     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 108.9/81     |
| Q11     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 91/78.2      |
| Q12     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 114.4/81     |
| Q13     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 95.5/78.2    |
| Q14     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 119.4/81     |
| Q15     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 100/78.2     |
| Q16     | 1590003680 | S.TRA KRC402 RTK/P                | T  | 49.8/70.2    |
| D1      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 124.5/85     |
| D2      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 103/75.7     |
| D3      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 77.6/56.7    |
| D4      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 72.1/56.7    |
| D5      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 66.6/56.7    |
| D6      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 61.1/56.7    |
| D7      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 57/56.7      |
| D8      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 53.2/56.7    |
| D9      | 1750001180 | S.DIO KDS122 RTK/P                | T  | 49/76.2      |
| D10     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 108.9/77.1   |
| D11     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 89.5/75.7    |
| D12     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 114.4/77.1   |
| D13     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 94/75.7      |
| D14     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 119.4/77.1   |
| D15     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 98.5/75.7    |
| D16     | 1750001180 | S.DIO KDS122 RTK/P                | T  | 49.8/66.2    |
| L3      | 6110003600 | COI LA-555                        |    |              |
| L4      | 6110003590 | COI LA-554                        |    |              |
| L5      | 6110003020 | COI LA-489                        |    |              |
| L6      | 6110003030 | COI LA-490                        |    |              |
| L7      | 6110003020 | COI LA-489                        |    |              |
| L8      | 6110003030 | COI LA-490                        |    |              |
| L9      | 6140004520 | COI LR-511                        |    |              |
| L10     | 6140004510 | COI LR-510                        |    |              |
| L11     | 6140002700 | COI LR-307 (T130-2)               |    |              |
| L12     | 6140002700 | COI LR-307 (T130-2)               |    |              |
| L13     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L14     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L15     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L16     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L17     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L18     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L19     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| L20     | 6180003291 | COI BM27-400-6A-LF                |    |              |
| R46     | 7410000950 | S.ARR EXB-V8V 102JV               | T  | 106.8/88.5   |
| R47     | 7410000950 | S.ARR EXB-V8V 102JV               | T  | 110.8/88.5   |
| R48     | 7410000950 | S.ARR EXB-V8V 102JV               | T  | 94.8/88.5    |
| R49     | 7410000950 | S.ARR EXB-V8V 102JV               | T  | 98.8/88.5    |
| C3      | 4010005130 | CER DEC1X3J470JC4B (DE0910SL470J) |    |              |
| C4      | 4010004790 | CER DEC1X3J680JC4B (DE1210SL680J) |    |              |
| C11     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 123.3/82.7   |
| C12     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 124.6/87     |
| C13     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 109/84       |
| C17     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 124.5/93.7   |
| C19     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 89/91.3      |
| C21     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 102.1/71.7   |
| C22     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 120.3/5.4    |
| C31     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 76.5/54.7    |
| C32     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 77.8/58.7    |
| C33     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 100/84       |
| C34     | 4010008550 | CER DEA1X3F390JC3B (DE0607SL390J) |    |              |
| C35     | 4010008550 | CER DEA1X3F390JC3B (DE0607SL390J) |    |              |
| C36     | 4010004800 | CER DEC1X3J820JC4B (DE1210SL820J) |    |              |
| C37     | 4010004780 | CER DEC1X3J560JC4B (DE1010SL560J) |    |              |
| C38     | 4010004830 | CER DEC1X3J151JC4B (DE1510SL151J) |    |              |
| C39     | 4010008560 | CER DEA1X3F151JA3B (DE1107SL151J) |    |              |
| C40     | 4010008690 | CER DEA1X3F101JA3B                |    |              |
| C41     | 4010004820 | CER DEC1X3J121JC4B (DE1410SL121J) |    |              |
| C42     | 4010004790 | CER DEC1X3J680JC4B (DE1210SL680J) |    |              |
| C43     | 4010004790 | CER DEC1X3J680JC4B (DE1210SL680J) |    |              |
| C44     | 4620000160 | VAR KV-150-05 150P                |    |              |
| C45     | 4620000160 | VAR KV-150-05 150P                |    |              |
| C46     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 71/54.7      |
| C47     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 72.3/58.7    |
| C48     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 98.7/84      |
| C51     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 65.5/54.7    |
| C52     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 66.8/58.7    |
| C53     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 97.5/84      |
| C61     | 4030006900 | S.CER C1608 JB 1H 103K-T          | T  | 60/54.7      |

# [TUNER UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| C62     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 61.3/58.7    |
| C63     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 96.2/84      |
| C71     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 55.8/54.7    |
| C72     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 57.1/58.7    |
| C73     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 95/84        |
| C81     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 52/54.7      |
| C82     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 53.3/58.7    |
| C83     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 93.7/84      |
| C91     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 51.2/74.5    |
| C92     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 51/77.8      |
| C93     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 91.2/84      |
| C101    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 107.7/75.2   |
| C102    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 109/79       |
| C103    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 110.2/84     |
| C111    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 88.6/71.7    |
| C112    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 102.6/5.4    |
| C113    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 105.2/84     |
| C121    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 113.2/75.2   |
| C122    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 114.5/79     |
| C123    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 111.5/84     |
| C131    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 93.1/71.7    |
| C132    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 107.4/5.4    |
| C133    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 106.5/84     |
| C141    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 118.2/75.2   |
| C142    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 119.5/79     |
| C143    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 112.7/84     |
| C151    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 97.6/71.7    |
| C152    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 115.3/5.4    |
| C153    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 107.7/84     |
| C161    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 48.7/64.2    |
| C162    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 50/68.2      |
| C163    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 92.5/84      |
| RL1     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL2     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL3     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL4     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL5     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL6     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL7     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL8     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL9     | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL10    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL11    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL12    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL13    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL14    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL15    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| RL16    | 6330001610 | REL NY-12W-K-IE                 |    |              |
| J3      | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J4      | 6510007020 | CON TMP-J01X-V6                 |    |              |
| J5      | 6510022591 | S.CON 22FMN-BMTTR-A-TBT(LF)(SN) | T  | 102.9/93.3   |
| MF1     | 2710000800 | MOT MP24ZA                      |    |              |
| MF2     | 2710000800 | MOT MP24ZA                      |    |              |
| W1      | 8900018420 | CAB OPC-1889                    |    |              |
| EP2     | 6910014730 | S.BEA MPZ2012S331A-T            | T  | 87.1/91.6    |
| EP4     | 6910014730 | S.BEA MPZ2012S331A-T            | T  | 122.7/92.1   |

# [FRONT UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| W1      | 8900018460 | CAB OPC-1950 (P1,N10,L60) <TJM>   |    |              |
| W2      | 8900009231 | CAB OPC-908A (P1,N10,L60) <TJM>   |    |              |
| W3      | 8900017820 | CAB OPC-852A (P1,N16,L60) <TJM>   |    |              |
| W4      | 8900009231 | CAB OPC-908A (P1,N10,L60) <TJM>   |    |              |
| W5      | 8900009231 | CAB OPC-908A (P1,N10,L60) <TJM>   |    |              |
| W6      | 8900009231 | CAB OPC-908A (P1,N10,L60) <TJM>   |    |              |
| W7      | 8900018480 | CAB OPC-1952 (P0.5,N30,L65) <TJM> |    |              |
| W8      | 8900018480 | CAB OPC-1952 (P0.5,N30,L65) <TJM> |    |              |
| EP1     | 6910020500 | E.O RMS20-250-201-1B (-1P/E)      |    |              |
| EP2     | 6910015650 | E.O S-G2218-3#01 (MOUNT PLATE)    |    |              |
| EP3     | 6910015650 | E.O S-G2218-3#01 (MOUNT PLATE)    |    |              |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

## [DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                      | M. | H/V LOCATION |
|---------|------------|----------------------------------|----|--------------|
| IC1     | 1130011510 | S.IC BU2099FV-E2                 | B  | 146.1/95.4   |
| IC11    | 1130011880 | S.IC CD4051BPWR                  | B  | 46.3/40.8    |
| IC12    | 1130011880 | S.IC CD4051BPWR                  | B  | 96.3/37.2    |
| IC13    | 1130011880 | S.IC CD4051BPWR                  | B  | 81/39.9      |
| IC51    | 1130011551 | S.IC RX-4581NB-F                 | B  | 105.1/66.7   |
| IC61    | 1130012620 | S.IC SN74AHC1T1G86DCKR           | B  | 109.5/82.4   |
| IC101   | 1140014421 | S.IC M30622M6P-535GP(SX-3009B-1) | B  | 131.3/39.6   |
| IC151   | 1110005731 | S.IC S-80928CNMC-G8Y-G           | B  | 82.9/61.6    |
| IC171   | 1130013470 | S.IC CD4071BNSR                  | B  | 292.9/50.9   |
| IC304   | 1120003080 | S.IC ADD8505WRUZ-REEL7 <FE>      | B  | 196.5/74     |
| IC305   | 1120003080 | S.IC ADD8505WRUZ-REEL7 <FE>      | B  | 196.5/66.3   |
| IC406   | 1180003360 | S.REG R1211N002B-TR-F            | B  | 139.2/78.3   |
| IC431   | 1110002700 | S.IC NJM2904M-TE1-#FMZB          | B  | 52.6/97.2    |
| IC452   | 1130014580 | S.IC LS230673P00                 | B  | 167.4/77.4   |
| IC603   | 1180003370 | S.REG BD6067GU-E2                | B  | 269.5/70.7   |
| IC604   | 1180003370 | S.REG BD6067GU-E2                | B  | 249.4/70.7   |
|         |            |                                  |    |              |
| Q1      | 1590003770 | S.TRA KRA302E-RTK/P              | B  | 9.7/95.3     |
| Q2      | 1590003680 | S.TRA KRC402 RTK/P               | B  | 12.7/94.9    |
| Q3      | 1590003680 | S.TRA KRC402 RTK/P               | B  | 76.3/89.8    |
| Q31     | 1590003680 | S.TRA KRC402 RTK/P               | B  | 45.5/53.3    |
| Q51     | 1590003680 | S.TRA KRC402 RTK/P               | B  | 107.1/58     |
| Q52     | 1510000771 | S.TRA 2SA1586-GR(TE85L,F)        | B  | 102.6/58.4   |
| Q61     | 1520000651 | S.TRA 2SB1201S-TL-E              | B  | 101.7/89.2   |
| Q62     | 1530003900 | S.TRA KTC4075 BL-RTK/P           | B  | 103.9/82.6   |
| Q101    | 1590003680 | S.TRA KRC402 RTK/P               | B  | 148/62.5     |
| Q102    | 1590003680 | S.TRA KRC402 RTK/P               | B  | 148/65.1     |
| Q103    | 1560001260 | S.FET 2SK3018 T106               | B  | 13.2/97.4    |
| Q181    | 1560001260 | S.FET 2SK3018 T106               | B  | 120.7/62.4   |
| Q182    | 1510000771 | S.TRA 2SA1586-GR(TE85L,F)        | B  | 118.6/60     |
| Q401    | 1560001660 | S.FET RUF015N02 TL               | B  | 137.1/82.1   |
| Q403    | 1590003680 | S.TRA KRC402 RTK/P               | B  | 113.8/72     |
| Q404    | 1550000160 | S.FET CPH3313-TL-E               | B  | 117.6/71.8   |
| Q405    | 1590003770 | S.TRA KRA302E-RTK/P              | B  | 120.4/92.5   |
| Q406    | 1590003680 | S.TRA KRC402 RTK/P               | B  | 123.2/93.9   |
|         |            |                                  |    |              |
| D31     | 1750001710 | S.DIO RB751V-40 TE-17            | B  | 37.1/54.7    |
| D32     | 1750001180 | S.DIO KDS122 RTK/P               | B  | 75/69.5      |
| D33     | 1750001180 | S.DIO KDS122 RTK/P               | B  | 75/66.9      |
| D51     | 1750001320 | S.DIO KDS4148U RTK/P             | B  | 101.6/61     |
| D61     | 1730002591 | S.ZEN MAZ8033GHL                 | B  | 101.8/82.7   |
| D101    | 1750001710 | S.DIO RB751V-40 TE-17            | B  | 134.6/28.6   |
| D401    | 1750000880 | S.DIO RB551V-30TE-17             | B  | 131.7/76.7   |
| D402    | 1750001180 | S.DIO KDS122 RTK/P               | B  | 128/82.2     |
| D403    | 1750001180 | S.DIO KDS122 RTK/P               | B  | 128/79.2     |
| D404    | 1750001180 | S.DIO KDS122 RTK/P               | B  | 128/91.2     |
| D405    | 1750001180 | S.DIO KDS122 RTK/P               | B  | 128/88.2     |
| D406    | 1750001180 | S.DIO KDS122 RTK/P               | B  | 128/85.2     |
| D407    | 1750001320 | S.DIO KDS4148U RTK/P             | B  | 118.1/94.2   |
| D601    | 1790001450 | S.DIO RB160L-40 TE-25            | B  | 263.3/80.6   |
| D602    | 1790001450 | S.DIO RB160L-40 TE-25            | B  | 242.4/80.5   |
| D603    | 1730002531 | S.ZEN NNCD6.2G-T1-A              | B  | 285.5/8.9    |
|         |            |                                  |    |              |
| X101    | 6050011550 | S.XTA CR-747 SMD-49TA 9.8304 MHz | B  | 110.9/39.6   |
|         |            |                                  |    |              |
| L51     | 6200005011 | S.COI NLV25T-100J                | B  | 98.1/56.3    |
| L151    | 6200005011 | S.COI NLV25T-100J                | B  | 198.5/88.9   |
| L152    | 6200005011 | S.COI NLV25T-100J                | B  | 199/102.1    |
| L401    | 6200013500 | S.COI CDRH4D16NP-680MC 68U       | B  | 135.5/86.7   |
| L402    | 6200001981 | S.COI NLV25T-100J                | B  | 123.8/74.1   |
| L602    | 6200013510 | S.COI CDRH4D16NP-220MC 22U       | B  | 261.5/75.2   |
| L603    | 6200013510 | S.COI CDRH4D16NP-220MC 22U       | B  | 239.9/75.4   |
|         |            |                                  |    |              |
| R1      | 7030003360 | S.RES ERJ3GEYJ 221 V (220)       | B  | 9.9/98       |
| R2      | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 63.8/54.5    |
| R3      | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 63.8/88.7    |
| R4      | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 26.7/77      |
| R5      | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 65.2/50      |
| R6      | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 65.2/84.5    |
| R7      | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 28.9/79.42   |
| R8      | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 9.5/92.5     |
| R9      | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 9.5/86.2     |
| R11     | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K)      | B  | 10/40.6      |
| R13     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 33.2/47.2    |
| R14     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 35.7/48.2    |
| R15     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 33.2/49.2    |
| R16     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 35.7/50.2    |
| R17     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 58.7/33.7    |
| R18     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 59.9/33.7    |
| R19     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 61.1/33.7    |
| R20     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 62.3/33.7    |
| R21     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 9/37.6       |
| R22     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 11/37.1      |
| R23     | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 100.4/30.4   |
| R24     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 98.3/43.9    |
| R25     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 97/43.9      |
| R26     | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 81.3/32      |
| R27     | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K)      | B  | 83.8/32      |
| R31     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 67.7/70      |
| R32     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 67.7/71.2    |
| R36     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 42.4/83.1    |
| R37     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 70.5/71.2    |
| R39     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 71/72.6      |
| R40     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 71.2/68.2    |
| R41     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)        | B  | 71.2/67      |
| R42     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)       | B  | 43.2/54.1    |
| R51     | 7030003860 | S.RES ERJ3GE JPW V               | B  | 109.1/57.8   |
| R52     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)      | B  | 105.1/58.1   |
| R53     | 7030003640 | S.RES ERJ3GEYJ 473 V (4.7K)      | B  | 104.1/61.4   |

## [DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R54     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 106.1/61.4   |
| R61     | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 111.8/82.4   |
| R62     | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | B  | 106.6/81.7   |
| R63     | 7030003660 | S.RES ERJ3GEYJ 683 V (68K)  | B  | 106.6/84.4   |
| R64     | 7030003360 | S.RES ERJ3GEYJ 221 V (220)  | B  | 103.3/79.6   |
| R65     | 7030008240 | S.RES ERJ12Y0R00U           | B  | 94.5/85.8    |
| R71     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 288/79.5     |
| R72     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 290.5/79.5   |
| R73     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 289.2/79.5   |
| R74     | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 291.7/79.5   |
| R75     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 286.7/73.8   |
| R76     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 289.2/72.8   |
| R77     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 286.7/71.8   |
| R78     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 289.2/70.8   |
| R79     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 286.7/69.8   |
| R80     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 289.2/68.8   |
| R81     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 283/37.7     |
| R82     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 304.5/66.7   |
| R83     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 270.5/100.5  |
| R84     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 254.7/100.5  |
| R85     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 239/100.5    |
| R86     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 226.4/100.2  |
| R87     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/36.7   |
| R88     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 142.9/36     |
| R89     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 143/34.5     |
| R90     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/35.2   |
| R91     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/38.2   |
| R92     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 143/37.5     |
| R93     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/42.2   |
| R94     | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 143/33       |
| R101    | 7030004730 | S.RES ERJ3GEYF 222 V (2.2K) | B  | 130.1/27.6   |
| R102    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 132.1/28.2   |
| R104    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 123.5/28.7   |
| R105    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 122.7/30.8   |
| R106    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 114.3/39.5   |
| R107    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 129.4/53     |
| R108    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 130.6/53     |
| R109    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 125.2/53     |
| R110    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 134.7/50.4   |
| R111    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 128/28.3     |
| R113    | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | B  | 274.3/13.6   |
| R115    | 7030003670 | S.RES ERJ3GEYJ 823 V (82K)  | B  | 273/13.6     |
| R118    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 273.8/11.7   |
| R119    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 273.7/9.7    |
| R121    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 132.5/53.2   |
| R122    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 133.2/50.5   |
| R123    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 134/53.2     |
| R124    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 135.5/53.2   |
| R125    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 136.2/50.4   |
| R126    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 137/53.2     |
| R127    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 137.7/50.4   |
| R128    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 138.5/53.2   |
| R129    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/46.7   |
| R130    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 142.9/46     |
| R131    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/45.2   |
| R132    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 142.9/44.5   |
| R133    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 142.9/43     |
| R134    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/43.7   |
| R135    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 145.7/33.7   |
| R141    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 61/44.6      |
| R142    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/43.9      |
| R143    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 61/45.9      |
| R144    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 61/47.1      |
| R145    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/48.7      |
| R146    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/50        |
| R147    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/51.2      |
| R148    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/52.5      |
| R149    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 58/53.7      |
| R151    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | B  | 86.7/62.4    |
| R152    | 7030003620 | S.RES ERJ3GEYJ 333 V (33K)  | B  | 86.7/59.6    |
| R153    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 85.4/63.6    |
| R154    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 208.2/100.4  |
| R155    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 208.2/99.2   |
| R156    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 204.4/100    |
| R157    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 204.4/101.2  |
| R161    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 190/91.2     |
| R162    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 191.2/91.2   |
| R171    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 291/45.2     |
| R172    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 296/45.2     |
| R173    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 291/43.9     |
| R174    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 296/43.9     |
| R175    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 291/41.2     |
| R176    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 296/41.2     |
| R177    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 292.9/41.9   |
| R178    | 7030003720 | S.RES ERJ3GEYJ 224 V (220K) | B  | 294.1/41.9   |
| R181    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 116.5/59.9   |
| R182    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 121.6/59.9   |
| R183    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 120.3/57.8   |
| R184    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 15.3/97.3    |
| R302    | 7030006041 | S.RES ERA3YED 622V (6.2K)   | B  | 207.7/81     |
| R303    | 7030011990 | S.RES ERJ3GEYJ 431V (430)   | B  | 207.7/77.9   |
| R304    | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | B  | 207.7/77.8   |
| R305    | 7030003300 | S.RES ERJ3GEYJ 680 V (68)   | B  | 207.7/77.2   |
| R306    | 7030004770 | S.RES ERJ3GEYF 113 V (11K)  | B  | 207.7/76     |
| R307    | 7030006571 | S.RES ERA3YED 392V (3.9K)   | B  | 207.7/74.7   |
| R308    | 7030011190 | S.RES ERA3YEB 103V (10K)    | B  | 207.7/73.5   |
| R309    | 7030003300 | S.RES ERJ3GEYJ 680 V (68)   | B  | 207.7/77.2   |
| R310    | 7030004770 | S.RES ERJ3GEYF 113 V (11K)  | B  | 207.7/71     |
| R311    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | B  | 207.7/69.7   |
| R312    | 7030005321 | S.RES ERA3YED 103V (10K)    | B  | 207.7/68.5   |
| R313    | 7030005361 | S.RES ERA3YED 751V (750)    | B  | 207.7/67.2   |
| R314    | 7030005200 | S.RES ERJ3GEYJ 752 V (7.5K) | B  | 207.7/66     |
| R315    | 7030003410 | S.RES ERJ3GEYJ 561 V (560)  | B  | 207.7/64.7   |
| R316    | 7030012000 | S.RES ERJ3GEYJ 133V (13K)   | B  | 207.7/63.5   |

## [DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                 | M. | H/V LOCATION |
|---------|------------|-----------------------------|----|--------------|
| R317    | 7030012010 | S.RES ERJ3GEYJ 112V (1.1K)  | B  | 207.7/62.2   |
| R318    | 7030011770 | S.RES ERA3YED 512V (5.1K)   | B  | 207.7/61     |
| R319    | 7030012020 | S.RES ERJ3GEYJ 911V (910)   | B  | 207.7/59.7   |
| R320    | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 207.7/58.5   |
| R321    | 7030003530 | S.RES ERJ3GEYJ 562 V (5.6K) | B  | 207.7/57.2   |
| R322    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 176.2/90     |
| R323    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 177.5/90     |
| R324    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 178.7/90     |
| R327    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 182.4/91.5   |
| R328    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 157.2/86     |
| R330    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 160.2/90.7   |
| R331    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 163.9/90.7   |
| R332    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 167.6/90.3   |
| R333    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 171.3/90.3   |
| R334    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | B  | 203.7/81     |
| R335    | 7030012030 | S.RES ERJ3GEYJ 912V (9.1K)  | B  | 202.4/79.7   |
| R336    | 7030003420 | S.RES ERJ3GEYJ 681 V (680)  | B  | 202.4/78.5   |
| R337    | 7030003300 | S.RES ERJ3GEYJ 680 V (68)   | B  | 202.9/77.2   |
| R338    | 7030003510 | S.RES ERJ3GEYJ 392 V (3.9K) | B  | 202.9/76     |
| R339    | 7030004770 | S.RES ERJ3GEYF 113 V (11K)  | B  | 202.9/74.7   |
| R340    | 7030011190 | S.RES ERA3YEB 103V (10K)    | B  | 202.4/73.5   |
| R341    | 7030003300 | S.RES ERJ3GEYJ 680 V (68)   | B  | 202.4/72.2   |
| R342    | 7030003350 | S.RES ERJ3GEYJ 181 V (180)  | B  | 202.4/71     |
| R343    | 7030004770 | S.RES ERJ3GEYF 113 V (11K)  | B  | 202.4/69.7   |
| R344    | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | B  | 202.9/68.5   |
| R345    | 7030012040 | S.RES ERJ3GEYJ 242V (2.4K)  | B  | 202.9/67.2   |
| R346    | 7030003380 | S.RES ERJ3GEYJ 331 V (330)  | B  | 203.7/65.1   |
| R347    | 7030003550 | S.RES ERJ3GEYJ 822 V (8.2K) | B  | 203.7/63.8   |
| R348    | 7030006591 | S.RES ERA3YED 511V (510)    | B  | 203.7/62.5   |
| R349    | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | B  | 203.7/61.2   |
| R350    | 7030007731 | S.RES ERA3YED 241V (240)    | B  | 203.7/59.9   |
| R351    | 7030006041 | S.RES ERA3YED 622V (6.2K)   | B  | 203.7/58.6   |
| R352    | 7030005361 | S.RES ERA3YED 751V (750)    | B  | 203.7/57.3   |
| R353    | 7030003570 | S.RES ERJ3GEYJ 123 V (12K)  | B  | 203.7/56     |
| R354    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 181.2/82.9   |
| R356    | 7030003450 | S.RES ERJ3GEYJ 122 V (1.2K) | B  | 200/60       |
| R357    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 178.5/83.9   |
| R359    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 200/61.5     |
| R360    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 183.2/81.4   |
| R361    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 153/77.7     |
| R364    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 155.8/79.8   |
| R366    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 155.8/81.2   |
| R370    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 189.7/75     |
| R371    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 155.7/75     |
| R372    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 189.7/72.5   |
| R375    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 191.1/68.6   |
| R376    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 195.9/56.8   |
| R377    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 47.9/96.9    |
| R379    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 145.9/78.3   |
| R380    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 153/73.5     |
| R384    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 153/70.7     |
| R385    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 155.7/70     |
| R389    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 183.6/91.5   |
| R391    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 173.3/66.7   |
| R392    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 174.5/66.7   |
| R393    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 185.5/61.5   |
| R394    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 186.2/58.7   |
| R395    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 186.9/61.5   |
| R396    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 187.6/58.7   |
| R397    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 188.3/61.5   |
| R398    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 174.8/58.7   |
| R399    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 175.5/61.5   |
| R400    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 176.9/61.5   |
| R401    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 176.2/58.7   |
| R402    | 7030003260 | S.RES ERJ3GEYJ 330 V (33)   | B  | 177.6/58.7   |
| R403    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 178.3/61.5   |
| R404    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 114.4/69.2   |
| R405    | 7030003320 | S.RES ERJ3GEYJ 101 V (100)  | B  | 126.4/94.5   |
| R407    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 160.1/64.2   |
| R408    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 163.9/64.2   |
| R409    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 167.6/64.2   |
| R410    | 7410001180 | S.ARR EXB-V8V 330JV (33)    | B  | 171.3/64.2   |
| R411    | 7030003460 | S.RES ERJ3GEYJ 152 V (1.5K) | B  | 126.5/72.2   |
| R412    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 122.5/78.5   |
| R413    | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | B  | 120.5/79.2   |
| R414    | 7030003800 | S.RES ERJ3GEYJ 105 V (1M)   | B  | 117.6/75.6   |
| R415    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 117.8/91.3   |
| R416    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K) | B  | 114.5/74.3   |
| R417    | 7030003860 | S.RES ERJ3GE JPW V          | B  | 117.6/68.7   |
| R418    | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | B  | 117.8/92.5   |
| R419    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 142/76.5     |
| R431    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)  | B  | 48.5/101.8   |
| R432    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 51.3/101.8   |
| R433    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 54/101.8     |
| R488    | 7030005200 | S.RES ERJ3GEYJ 752 V (7.5K) | B  | 71.8/77.1    |
| R490    | 7030003660 | S.RES ERJ3GEYJ 683 V (68K)  | B  | 74.4/77.1    |
| R500    | 7030003400 | S.RES ERJ3GEYJ 471 V (470)  | B  | 200/58.7     |
| R601    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 276.7/73.4   |
| R602    | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | B  | 275.2/73.4   |
| R603    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | B  | 276.6/71     |
| R604    | 7030003640 | S.RES ERJ3GEYJ 473 V (47K)  | B  | 256.2/73.9   |
| R605    | 7030003610 | S.RES ERJ3GEYJ 273 V (27K)  | B  | 254.6/73.9   |
| R606    | 7030003650 | S.RES ERJ3GEYJ 563 V (56K)  | B  | 255.3/71.9   |
| R611    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 277.5/75.7   |
| R614    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 257/76       |
| R619    | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 253.7/70.7   |
| R621    | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 253.7/69.5   |
| R623    | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 273.7/70.7   |
| R626    | 7030004040 | S.RES ERJ3GEYJ 4R7 V (4.7)  | B  | 273.7/69     |
| R631    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)   | B  | 247/59       |
| R1001   | 7030003480 | S.RES ERJ3GEYJ 222 V (2.2K) | B  | 226.4/95.5   |
| R1002   | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K) | B  | 226.4/83.7   |
| R1003   | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)  | B  | 226.4/72     |
| R1004   | 7030003540 | S.RES ERJ3GEYJ 682 V (6.8K) | B  | 225/95.5     |

## [DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION |                             | M. | H/V LOCATION |
|---------|------------|-------------|-----------------------------|----|--------------|
| R1005   | 7030003540 | S.RES       | ERJ3GEYJ 682 V (6.8K)       | B  | 242.7/99     |
| R1006   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | B  | 240.2/99     |
| R1007   | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K)       | B  | 240.2/91.2   |
| R1008   | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)        | B  | 241.8/85.1   |
| R1009   | 7030003540 | S.RES       | ERJ3GEYJ 682 V (6.8K)       | B  | 258.5/99     |
| R1010   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | B  | 256/99       |
| R1011   | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K)       | B  | 256/91.2     |
| R1012   | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)        | B  | 256/83.2     |
| R1013   | 7030003540 | S.RES       | ERJ3GEYJ 682 V (6.8K)       | B  | 274.5/99     |
| R1014   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | B  | 272/99       |
| R1015   | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K)       | B  | 272/91.2     |
| R1016   | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)        | B  | 273.8/85.6   |
| R1017   | 7030003540 | S.RES       | ERJ3GEYJ 682 V (6.8K)       | B  | 284.3/37.7   |
| R1018   | 7030003540 | S.RES       | ERJ3GEYJ 682 V (6.8K)       | B  | 303.7/69.4   |
| R1019   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | B  | 305.2/72     |
| R1020   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | B  | 315/37       |
| R1021   | 7030003450 | S.RES       | ERJ3GEYJ 122 V (1.2K)       | B  | 90.2/104     |
| R1022   | 7030003390 | S.RES       | ERJ3GEYJ 391 V (390)        | B  | 303.4/75     |
| R1023   | 7030003420 | S.RES       | ERJ3GEYJ 681 V (680)        | B  | 114.3/104.2  |
| R1024   | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K)       | B  | 316.7/72     |
| R1025   | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K)       | B  | 300.2/35.7   |
| R1026   | 7030003390 | S.RES       | ERJ3GEYJ 391 V (390)        | B  | 306.4/75     |
| R1027   | 7030003430 | S.RES       | ERJ3GEYJ 821 V (820)        | B  | 149.4/104    |
| R1028   | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)        | B  | 300.2/34.5   |
| R1029   | 7030003390 | S.RES       | ERJ3GEYJ 391 V (390)        | B  | 319.5/75     |
| R1030   | 7030003420 | S.RES       | ERJ3GEYJ 681 V (680)        | B  | 202.3/103.3  |
| R1100   | 7030003400 | S.RES       | ERJ3GEYJ 471 V (470)        | B  | 10/99.5      |
| R1101   | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K)       | B  | 44/46.7      |
| R1102   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | B  | 28.1/77      |
| R1103   | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)        | B  | 54/77.3      |
| R1104   | 7030003450 | S.RES       | ERJ3GEYJ 122 V (1.2K)       | B  | 23.7/87.5    |
| R1105   | 7030003400 | S.RES       | ERJ3GEYJ 471 V (470)        | B  | 23.7/88.8    |
| R1106   | 7030003390 | S.RES       | ERJ3GEYJ 391 V (390)        | B  | 40.5/50.5    |
| R1107   | 7030003400 | S.RES       | ERJ3GEYJ 471 V (470)        | B  | 44.5/94.2    |
| R1108   | 7030003390 | S.RES       | ERJ3GEYJ 391 V (390)        | B  | 48.2/49.3    |
| R1109   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | B  | 63.8/84.5    |
| R1110   | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K)       | B  | 63.8/75.9    |
| R1111   | 7030003580 | S.RES       | ERJ3GEYJ 153 V (15K)        | B  | 63.8/67.2    |
| R1112   | 7030003480 | S.RES       | ERJ3GEYJ 222 V (2.2K)       | B  | 63.8/50      |
| R1113   | 7030003520 | S.RES       | ERJ3GEYJ 472 V (4.7K)       | B  | 63.8/41.5    |
|         |            |             |                             |    |              |
| C1      | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 148.9/91.2   |
| C11     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 24.3/43.1    |
| C12     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 71/28.7      |
| C13     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 39.3/37.9    |
| C14     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 39.3/39.2    |
| C15     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 39.3/40.4    |
| C16     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 39.3/41.7    |
| C17     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 100.5/40.1   |
| C18     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 84.1/46.5    |
| C19     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 49.2/37.3    |
| C20     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 53.4/37.5    |
| C22     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 53.4/38.7    |
| C24     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 53.4/39.9    |
| C25     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 95.4/30.4    |
| C26     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 53.4/41.1    |
| C27     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 97.8/30.4    |
| C28     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 99/30.4      |
| C29     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 94.5/43.9    |
| C30     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 95.8/43.9    |
| C31     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 29.5/62.8    |
| C32     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 82.6/32      |
| C33     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 85.1/32      |
| C34     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 82.5/46.5    |
| C35     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 81.3/46.5    |
| C36     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 80/46.5      |
| C37     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 78.8/46.5    |
| C38     | 4030006880 | S.CER       | C1608 JB 1H 472K-T          | B  | 57.9/57.7    |
| C51     | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 101.6/62.7   |
| C52     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 100.2/64.3   |
| C61     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 109.4/84.4   |
| C62     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 106.6/80.2   |
| C71     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 225/92.5     |
| C72     | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 301/67.5     |
| C73     | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 291.8/68     |
| C74     | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 300.3/69.8   |
| C101    | 4030007020 | S.CER       | C1608 CH 1H 120J-T          | B  | 115.7/38.1   |
| C102    | 4030007020 | S.CER       | C1608 CH 1H 120J-T          | B  | 115.7/41.2   |
| C103    | 4030006900 | S.CER       | C1608 JB 1H 103K-T          | B  | 130.1/29     |
| C104    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 121.3/40.5   |
| C105    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 140.4/52.7   |
| C106    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 141.9/40.8   |
| C107    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 126.6/29.4   |
| C111    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 272.5/7      |
| C141    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 58.4/55.1    |
| C151    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 85.4/60.9    |
| C152    | 4030008880 | S.CER       | C1608 JB 1H 223K-T          | B  | 80.4/61.9    |
| C153    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 199.9/99.8   |
| C154    | 4030019500 | S.CER       | GRM21BB31A106KE18 (GRM40 B) | B  | 194.5/86.5   |
| C155    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 196.6/88.3   |
| C156    | 4550007710 | S.TAN       | TEESVB2 1A 476M8R           | B  | 195.2/81.7   |
| C157    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 198.6/85.3   |
| C158    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 194.7/88.3   |
| C159    | 4030006860 | S.CER       | C1608 JB 1H 102K-T          | B  | 198.6/84     |
| C160    | 4030006860 | S.CER       | C1608 JB 1H 102K-T          | B  | 202.5/91.5   |
| C161    | 4550007710 | S.TAN       | TEESVB2 1A 476M8R           | B  | 204.1/87.9   |
| C162    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 202.5/90.2   |
| C171    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 286.7/48     |
| C172    | 4030006860 | S.CER       | C1608 JB 1H 102K-T          | B  | 296/42.7     |
| C173    | 4030006860 | S.CER       | C1608 JB 1H 102K-T          | B  | 291/42.7     |
| C174    | 4030011600 | S.CER       | C1608 JB 1E 104K-T          | B  | 301.9/27.1   |



[DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                          | M. | H/V LOCATION |
|---------|------------|--------------------------------------|----|--------------|
| C301    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 206.2/82.2   |
| C305    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 203.7/54.7   |
| C308    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 164.9/87.5   |
| C309    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 174.1/87.2   |
| C310    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 177/83.2     |
| C311    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 155.8/84.1   |
| C312    | 4030017490 | S.CER C1608 JB 1A 105K-T             | B  | 190.6/65.7   |
| C313    | 4030017490 | S.CER C1608 JB 1A 105K-T             | B  | 194.3/78.2   |
| C314    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 177.7/77.4   |
| C315    | 4030017490 | S.CER C1608 JB 1A 105K-T             | B  | 155.7/76.4   |
| C316    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 196.7/60.5   |
| C317    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 153/76.3     |
| C318    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 177.6/73     |
| C320    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 164.9/67.2   |
| C321    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 168.9/67.2   |
| C401    | 4030019090 | S.CER C2012 JB 1C 225M-T             | B  | 192/60.7     |
| C402    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 191.6/58     |
| C403    | 4030006860 | S.CER C1608 JB 1H 102K-T             | B  | 191.6/59.2   |
| C405    | 4030018980 | S.CER C1608 JB 1H 104K-T             | B  | 194.4/59.2   |
| C406    | 4030006860 | S.CER C1608 JB 1H 102K-T             | B  | 194.4/58     |
| C411    | 4030006860 | S.CER C1608 JB 1H 102K-T             | B  | 162.7/57.2   |
| C412    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 183.7/58     |
| C413    | 4030006860 | S.CER C1608 JB 1H 102K-T             | B  | 183.7/59.2   |
| C414    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 162.7/58.4   |
| C418    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 143.1/78.5   |
| C419    | 4030011810 | S.CER C1608 JB 1A 224K-T             | B  | 144.5/78.5   |
| C420    | 4030017490 | S.CER C1608 JB 1A 105K-T             | B  | 183.7/60.4   |
| C422    | 4030009580 | S.CER C1608 JB 1H 681K-T             | B  | 140.1/74.9   |
| C423    | 4030019090 | S.CER C2012 JB 1C 225M-T             | B  | 135.3/77.3   |
| C424    | 4030019090 | S.CER C2012 JB 1C 225M-T             | B  | 133.9/80.6   |
| C425    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 131/91.2     |
| C426    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 131/88.2     |
| C427    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 131/85.2     |
| C428    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 131/82.2     |
| C429    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 131/79.2     |
| C430    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 128.4/72     |
| C431    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 125.8/82.2   |
| C432    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 125.8/79.2   |
| C433    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 125.8/91.2   |
| C434    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 125.8/88.2   |
| C435    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 125.8/85.2   |
| C436    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 124.5/79.2   |
| C437    | 4030018980 | S.CER C1608 JB 1H 104K-T             | B  | 124.5/91.2   |
| C438    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 120.8/72     |
| C439    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 117.6/74.3   |
| C440    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 49.1/96.9    |
| C606    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 278.2/73.4   |
| C607    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 257.7/73.8   |
| C608    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 265.4/70.8   |
| C609    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B)    | B  | 245.5/70.7   |
| C613    | 4030016990 | S.CER GRM32RR11H105KA01L (GRM42-2 R) | B  | 270.2/76.2   |
| C614    | 4030018980 | S.CER C1608 JB 1H 104K-T             | B  | 269.3/73.3   |
| C616    | 4030016990 | S.CER GRM32RR11H105KA01L (GRM42-2 R) | B  | 250.1/75.2   |
| C617    | 4030018980 | S.CER C1608 JB 1H 104K-T             | B  | 249.2/73.1   |
| C653    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 267/70       |
| C654    | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 247.2/70     |
| C1001   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 273.2/99     |
| C1002   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 257.2/99     |
| C1003   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 241.5/99     |
| C1004   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 223.7/95.5   |
| C1006   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 305.2/70.7   |
| C1007   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 281.7/37.7   |
| C1101   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 65.2/88.7    |
| C1102   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 29.5/77      |
| C1103   | 4030011600 | S.CER C1608 JB 1E 104K-T             | B  | 65.2/54.5    |
| J4      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN)      | B  | 296/70.3     |
| J21     | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN)      | B  | 63.8/29.4    |
| J31     | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN)      | B  | 58.6/70.7    |
| J33     | 6510018971 | S.CON B4B-PH-SM4-TB(LF)(SN)          | B  | 38.8/87.8    |
| J107    | 6510026080 | CON XM7A-0441                        |    |              |
| J113    | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN)      | B  | 309.8/29.5   |
| J114    | 6510018971 | S.CON B4B-PH-SM4-TB(LF)(SN)          | B  | 280.7/10.7   |
| J141    | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN)      | B  | 53.6/49.7    |
| J301    | 6510021722 | S.CON 30FLT-SM2-TB(LF)(SN)(M)        | B  | 176.9/96.5   |
| J407    | 6510026740 | S.CON IMSA-9637S-60Y922              | B  | 177.4/52.1   |
| J601    | 6510026730 | S.CON IMSA-9637S-08Y902              | B  | 208.5/48.6   |
| J603    | 6510022611 | S.CON 16FMN-BMTTR-A-TBT(LF)(SN)      | B  | 27.6/52.7    |
| J604    | 6510021722 | S.CON 30FLT-SM2-TB(LF)(SN)(M)        | B  | 196.7/96.1   |
| DS51    | 5040003420 | S.LED SMLE12BC7T T86                 | T  | 9.7/40.7     |
| DS1001  | 5040003390 | S.LED FR1111C-TR                     | T  | 90.1/104     |
| DS1002  | 5040002930 | S.LED SML-512MW T86                  | T  | 296.1/73.9   |
| DS1003  | 5040002930 | S.LED SML-512MW T86                  | T  | 111.1/104    |
| DS1004  | 5040002930 | S.LED SML-512MW T86                  | T  | 309.6/73.9   |
| DS1005  | 5040003400 | S.LED SMLE12WBC7W1AR                 | T  | 149.6/104    |
| DS1006  | 5040003380 | S.LED FY1111C-TR                     | T  | 194.6/104    |
| DS1007  | 5040002930 | S.LED SML-512MW T86                  | T  | 323.6/73.9   |
| DS1100  | 5040002930 | S.LED SML-512MW T86                  | T  | 9.7/99.6     |
| DS1101  | 5040003390 | S.LED FR1111C-TR                     | T  | 9.7/98.3     |
| DS1102  | 5040003390 | S.LED FR1111C-TR                     | T  | 27.7/87      |
| DS1103  | 5040002930 | S.LED SML-512MW T86                  | T  | 27.7/88.3    |
| DS1104  | 5040002930 | S.LED SML-512MW T86                  | T  | 30.3/48.6    |

[DISPLAY UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION          | M. | H/V LOCATION |
|---------|------------|----------------------|----|--------------|
| DS1105  | 5040002930 | S.LED SML-512MW T86  | T  | 45.7/88.3    |
| DS1106  | 5040002930 | S.LED SML-512MW T86  | T  | 48.7/48.6    |
| S1001   | 2260002740 | S.SWI LS8J2M-T       | T  | 228.9/101.2  |
| S1002   | 2260002740 | S.SWI LS8J2M-T       | T  | 228.9/89.6   |
| S1003   | 2260002740 | S.SWI LS8J2M-T       | T  | 228.9/78.1   |
| S1004   | 2260002740 | S.SWI LS8J2M-T       | T  | 228.9/66.5   |
| S1005   | 2260002740 | S.SWI LS8J2M-T       | T  | 228.9/53.5   |
| S1006   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/103    |
| S1007   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/95.1   |
| S1008   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/87.3   |
| S1009   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/79.4   |
| S1010   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/71.6   |
| S1011   | 2260002740 | S.SWI LS8J2M-T       | T  | 244.3/63.7   |
| S1012   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/103    |
| S1013   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/95.1   |
| S1014   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/87.3   |
| S1015   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/79.4   |
| S1016   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/71.6   |
| S1017   | 2260002740 | S.SWI LS8J2M-T       | T  | 260.2/63.7   |
| S1018   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/103    |
| S1019   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/95.1   |
| S1020   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/87.3   |
| S1021   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/79.4   |
| S1022   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/71.6   |
| S1023   | 2260002740 | S.SWI LS8J2M-T       | T  | 276.1/63.7   |
| S1024   | 2260002740 | S.SWI LS8J2M-T       | T  | 277.5/53.5   |
| S1025   | 2260002740 | S.SWI LS8J2M-T       | T  | 295.8/69.4   |
| S1026   | 2260002740 | S.SWI LS8J2M-T       | T  | 295.8/32.3   |
| S1027   | 2260002740 | S.SWI LS8J2M-T       | T  | 286.8/2.3    |
| S1028   | 2260002740 | S.SWI LS8J2M-T       | T  | 309.8/69.4   |
| S1029   | 2260002740 | S.SWI LS8J2M-T       | T  | 309.8/32.3   |
| S1030   | 2260002740 | S.SWI LS8J2M-T       | T  | 323.8/69.4   |
| S1031   | 2260002740 | S.SWI LS8J2M-T       | T  | 323.8/32.3   |
| S1101   | 2260002740 | S.SWI LS8J2M-T       | T  | 10/95.2      |
| S1102   | 2260002740 | S.SWI LS8J2M-T       | T  | 10/83.7      |
| S1103   | 2260002740 | S.SWI LS8J2M-T       | T  | 28/83.7      |
| S1104   | 2260002740 | S.SWI LS8J2M-T       | T  | 30.6/44.2    |
| S1105   | 2260002740 | S.SWI LS8J2M-T       | T  | 46/83.7      |
| S1106   | 2260002740 | S.SWI LS8J2M-T       | T  | 49/44.2      |
| S1107   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/88.8    |
| S1108   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/80.2    |
| S1109   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/71.6    |
| S1110   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/63      |
| S1111   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/54.4    |
| S1112   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/45.8    |
| S1113   | 2260002740 | S.SWI LS8J2M-T       | T  | 66.3/37.2    |
| S1201   | 2260002740 | S.SWI LS8J2M-T       | T  | 91.7/12.7    |
| S1202   | 2260002740 | S.SWI LS8J2M-T       | T  | 91.7/6.1     |
| S1203   | 2260002740 | S.SWI LS8J2M-T       | T  | 113.2/12.7   |
| S1204   | 2260002740 | S.SWI LS8J2M-T       | T  | 113.2/6.1    |
| S1205   | 2260002740 | S.SWI LS8J2M-T       | T  | 134.7/12.7   |
| S1206   | 2260002740 | S.SWI LS8J2M-T       | T  | 134.7/6.1    |
| S1207   | 2260002740 | S.SWI LS8J2M-T       | T  | 156.2/12.7   |
| S1208   | 2260002740 | S.SWI LS8J2M-T       | T  | 156.2/6.1    |
| S1209   | 2260002740 | S.SWI LS8J2M-T       | T  | 213.6/6.1    |
| S1210   | 2260002740 | S.SWI LS8J2M-T       | T  | 177.7/12.7   |
| S1211   | 2260002740 | S.SWI LS8J2M-T       | T  | 177.7/6.1    |
| S1212   | 2260002740 | S.SWI LS8J2M-T       | T  | 223.8/6.1    |
| S1213   | 2260002740 | S.SWI LS8J2M-T       | T  | 199.2/12.7   |
| S1214   | 2260002740 | S.SWI LS8J2M-T       | T  | 199.2/6.1    |
| S1215   | 2260002740 | S.SWI LS8J2M-T       | T  | 218.6/12.7   |
| EP2     | 6910020190 | UNI L5S30853P00      |    |              |
| EP11    | 6910014730 | S.BEA MPZ2012S331A-T | B  | 6.5/38.3     |
| EP12    | 6910014730 | S.BEA MPZ2012S331A-T | B  | 14.5/36.9    |
| EP31    | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 68/72.6      |
| EP32    | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 68.5/68.2    |
| EP33    | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 68.5/67      |
| EP40    | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 54/75.5      |
| EP41    | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 54/74.2      |
| EP42    | 6910014690 | S.BEA MPZ1608S221A-T | B  | 42/55.6      |
| EP43    | 6910014690 | S.BEA MPZ1608S221A-T | B  | 54.7/58.4    |
| EP101   | 6910014690 | S.BEA MPZ1608S221A-T | B  | 139.7/56.1   |
| EP1051  | 6910014690 | S.BEA MPZ1608S221A-T | B  | 196.4/92.5   |
| EP152   | 6910014690 | S.BEA MPZ1608S221A-T | B  | 197.6/92.5   |
| EP161   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 188.5/91.2   |
| EP162   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 192.8/91.2   |
| EP163   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 199.7/92.2   |
| EP401   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 143.3/89.3   |
| EP402   | 6910020910 | S.BEA MPZ1608S300AT  | B  | 131.7/73.8   |
| EP403   | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 111.9/71.6   |
| EP404   | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 126.4/76     |
| EP405   | 6910012350 | S.BEA MMZ1608Y 102BT | B  | 123.4/76     |
| EP602   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 257.4/64.8   |
| EP603   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 234.7/66.6   |
| EP605   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 266.6/74.3   |
| EP606   | 6910014730 | S.BEA MPZ2012S331A-T | B  | 245.4/74.2   |
| EP607   | 6910014690 | S.BEA MPZ1608S221A-T | B  | 181.6/61.1   |
| EP608   | 6910014690 | S.BEA MPZ1608S221A-T | B  | 183.2/83.8   |
| EP611   | 6910020910 | S.BEA MPZ1608S300AT  | B  | 266.2/78.1   |
| EP612   | 6910020910 | S.BEA MPZ1608S300AT  | B  | 245.8/77.9   |

M

### [MIC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| L1      | 6200003261 | S.COI NLV32T-101J               | T  | 9/15         |
| L2      | 6200003261 | S.COI NLV32T-101J               | T  | 2.7/15       |
| L3      | 6200003261 | S.COI NLV32T-101J               | T  | 6/15         |
| C1      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 8.2/9.1      |
| C2      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 11.5/16.3    |
| C3      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 8.2/5.7      |
| C4      | 4030007130 | S.CER C1608 CH 1H 101J-T        | T  | 20.2/1.6     |
| C5      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 16.5/16.3    |
| C6      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 22.3/10.4    |
| C7      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 13.6/10.6    |
| C8      | 4030007090 | S.CER C1608 CH 1H 470J-T        | T  | 9.5/9.1      |
| J1      | 6510000191 | CON FM214-8SS(P)-1              | T  | 4/6.5        |
| J2      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  |              |
| EP2     | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 17.7/14.9    |
| EP3     | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 21.1/10.4    |
| EP4     | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 9.7/4.5      |
| EP5     | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 12/14.5      |
| EP6     | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 16/10.9      |
| EP7     | 6910015130 | S.BEA MMZ1608D 301BT            | T  | 12.1/2       |
| EP8     | 6910015130 | S.BEA MMZ1608D 301BT            | T  | 12.1/3.3     |
| EP9     | 6910015130 | S.BEA MMZ1608D 301BT            | T  | 18.2/2.3     |
| EP10    | 6910015130 | S.BEA MMZ1608D 301BT            | T  | 17/2.4       |
| EP11    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 9/12.4       |
| EP12    | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 8.5/3.1      |

### [JACK UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| R1      | 7030006240 | S.RES ERJ12YJ181U (180)         | T  | 8.1/18.1     |
| R2      | 7030006240 | S.RES ERJ12YJ181U (180)         | T  | 8.2/26.5     |
| R486    | 7030003580 | S.RES ERJ3GEYJ 153 V (15K)      | T  | 6.1/7.6      |
| R487    | 7310004300 | S.TRI EVM-3SSX50 B13            | T  | 11/8         |
| C1      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 2.5/10.4     |
| C2      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 5.2/13.2     |
| C101    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 3.7/32.5     |
| C102    | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 3.7/31       |
| J1      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 3.7/21.8     |
| J2      | 6510023891 | CON S-G4617#01F                 | T  |              |
| J102    | 6510023900 | CON LGR4619-7000                | T  |              |
| EP1     | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 4.4/11.1     |
| EP2     | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 2.8/13.2     |
| EP3     | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 4/13.2       |
| EP101   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 7.2/32.5     |
| EP102   | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 7.2/31       |

### [VR-A UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| R1      | 7210002970 | VAR RV-314(RK0972210 10KB/10KB) |    |              |
| R2      | 7210002970 | VAR RV-314(RK0972210 10KB/10KB) |    |              |
| R3      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 6.5/12.3     |
| R4      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 6.5/13.6     |
| R5      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 43.4/12.3    |
| R6      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 43.4/13.6    |
| R33     | 7030003860 | S.RES ERJ3GE JPW V              | T  | 34.2/8.3     |
| R34     | 7030003860 | S.RES ERJ3GE JPW V              | T  | 32.9/8.3     |
| R35     | 7030003860 | S.RES ERJ3GE JPW V              | T  | 31.6/8.3     |
| R38     | 7030003860 | S.RES ERJ3GE JPW V              | T  | 31.6/11.1    |
| C1      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 39.9/13.6    |
| C2      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 39.9/12.3    |
| C3      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 10/13.6      |
| C4      | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 10/12.3      |
| J32     | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 35/4         |
| J33     | 6510022611 | S.CON 16FMN-BMTTR-A-TBT(LF)(SN) | T  | 17/4         |
| EP34    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 40.7/8.3     |
| EP35    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 39.4/8.3     |
| EP36    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 38.1/8.3     |
| EP37    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 36.8/8.3     |
| EP38    | 6910014690 | S.BEA MPZ1608S221A-T            | T  | 35.5/8.3     |
| EP39    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 30.3/8.3     |
| EP43    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 28.5/8.3     |
| EP44    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 27.2/8.3     |
| EP45    | 6910012350 | S.BEA MMZ1608Y 102BT            | T  | 25.9/8.3     |

### [VA-B UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| R1      | 7210002970 | VAR RV-314(RK0972210 10KB/10KB) |    |              |
| R2      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 44/9.8       |
| R3      | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 44/11.1      |
| J1      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 25.1/4.3     |
| S1      | 2250000410 | ENC TP90D96E20-30F-2178-1       |    |              |

### [VA-C UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| R1      | 7210001130 | VAR RK097111T005A (10KB)        |    |              |
| R2      | 7210001130 | VAR RK097111T005A (10KB)        |    |              |
| R3      | 7210001130 | VAR RK097111T005A (10KB)        |    |              |
| R4      | 7210001130 | VAR RK097111T005A (10KB)        |    |              |
| R11     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 22/10.6      |
| R12     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 19/10.6      |
| R13     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 13/10.6      |
| R14     | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)     | T  | 16/10.6      |
| C11     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 20.5/10.6    |
| C12     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 17.6/10.6    |
| C13     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 11.5/10.6    |
| C14     | 4030006900 | S.CER C1608 JB 1H 103K-T        | T  | 14.5/10.6    |
| J1      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 14.7/5.4     |

### [RIT UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                     | M. | H/V LOCATION |
|---------|------------|---------------------------------|----|--------------|
| J1      | 6510022621 | S.CON 10FMN-BMTTR-A-TBT(LF)(SN) | T  | 4/9          |
| S1      | 2250000650 | ENC EVEGC2F2524B                |    |              |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount

[DCDC UNIT]

| REF NO. | PARTS NO.  | DESCRIPTION                       | M. | H/V LOCATION |
|---------|------------|-----------------------------------|----|--------------|
| IC101   | 1180003100 | S.REG BD9302FP-E2                 | T  | 51.2/22.5    |
| IC201   | 1190002450 | S.IC BD9851FEV-E2                 | T  | 11/12.7      |
| Q201    | 1550000230 | S.FET SSM3J117TU(TE85L)           | T  | 22.8/15.8    |
| D101    | 1750000960 | S.DIO RB081L-20                   | T  | 59.9/21.7    |
| D102    | 1750000960 | S.DIO RB081L-20                   | T  | 42.4/21.7    |
| D201    | 1790001450 | S.DIO RB160L-40 TE-25             | T  | 23.4/27.3    |
| L101    | 6200010881 | S.COI CDRH124NP-330MC             | T  | 64/11.8      |
| L102    | 6200013280 | S.COI SLF10145T-330M1R6-PF        | T  | 67.2/24.2    |
| L103    | 6200013280 | S.COI SLF10145T-330M1R6-PF        | T  | 35.1/24.2    |
| L201    | 6200011551 | S.COI CDRH6D28NP-270NC            | T  | 7.4/28.5     |
| L202    | 6200011300 | S.COI EXCML16A270U                | T  | 22.6/31.5    |
| L203    | 6180003501 | S.COI SLF6028T-100M1R3-PF         | T  | 21.5/20.6    |
| L204    | 6200011300 | S.COI EXCML16A270U                | T  | 19.7/16.5    |
| R101    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)        | T  | 52.6/30.8    |
| R102    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)        | T  | 49.8/30.8    |
| R103    | 7030003680 | S.RES ERJ3GEYJ 104 V (100K)       | T  | 55.4/32.1    |
| R104    | 7030003600 | S.RES ERJ3GEYJ 223 V (22K)        | T  | 47/30.8      |
| R105    | 7030005451 | S.RES ERA3YED 153V (15K)          | T  | 52.6/29.5    |
| R106    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)        | T  | 57.4/28.7    |
| R107    | 7030003560 | S.RES ERJ3GEYJ 103 V (10K)        | T  | 44.9/28.7    |
| R108    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 60.1/30.8    |
| R109    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 44.2/30.8    |
| R110    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)       | T  | 47/32.1      |
| R111    | 7030003520 | S.RES ERJ3GEYJ 472 V (4.7K)       | T  | 58/30.8      |
| R201    | 7030005691 | S.RES ERA3YED 123V (12K)          | T  | 23.8/8.4     |
| R202    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 22.5/8.4     |
| R203    | 7030007230 | S.RES ERA3YED 102V (1K)           | T  | 20.5/6.4     |
| R204    | 7030006461 | S.RES ERA3YED 152V (1.5K)         | T  | 20.5/9       |
| R205    | 7030005981 | S.RES ERA3YED 333V (33K)          | T  | 15.6/9.6     |
| R206    | 7030003700 | S.RES ERJ3GEYJ 154 V (150K)       | T  | 21.3/12.3    |
| R207    | 7030005451 | S.RES ERA3YED 153V (15K)          | T  | 19.2/10.3    |
| R208    | 7030005321 | S.RES ERA3YED 103V (10K)          | T  | 18.5/8.2     |
| R209    | 7030003440 | S.RES ERJ3GEYJ 102 V (1K)         | T  | 19.2/11.6    |
| R210    | 7030003740 | S.RES ERJ3GEYJ 334 V (330K)       | T  | 23.2/13      |
| C101    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 55.4/30.8    |
| C102    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 49.6/32.1    |
| C103    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 55.4/29.5    |
| C104    | 4030008650 | S.CER C1608 JB 1H 332K-T          | T  | 47/29.5      |
| C105    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 47/28.2      |
| C106    | 4030007130 | S.CER C1608 CH 1H 101J-T          | T  | 55.4/28.2    |
| C107    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 52.4/28.2    |
| C108    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 49.8/29.5    |
| C109    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 55.7/17.2    |
| C110    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 46.6/17.2    |
| C111    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 52.7/17.2    |
| C112    | 4510009700 | S.ELE EEEFK1C101P                 | T  | 47.4/10      |
| C113    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 59.1/27.7    |
| C114    | 4030018960 | S.CER C3216 JB 1C 106MT-N         | T  | 52.8/13.9    |
| C115    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 41.5/27.7    |
| C116    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 60.8/27.7    |
| C117    | 4030019500 | S.CER GRM21BB31A106KE18 (GRM40 B) | T  | 43.3/27.7    |
| C201    | 4510009700 | S.ELE EEEFK1C101P                 | T  | 7.7/20.8     |
| C202    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 14/26        |
| C203    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 18.6/24.7    |
| C204    | 4030018960 | S.CER C3216 JB 1C 106MT-N         | T  | 19.1/26.4    |
| C205    | 4030018960 | S.CER C3216 JB 1C 106MT-N         | T  | 17.2/16.5    |
| C206    | 4030010020 | S.CER C1608 JB 1H 122K-T          | T  | 20.5/7.7     |
| C207    | 4030007070 | S.CER C1608 CH 1H 330J-T          | T  | 16.9/10.1    |
| C208    | 4030008860 | S.CER C1608 JB 1H 153K-T          | T  | 19.2/12.9    |
| C209    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 23.2/11.7    |
| C210    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 6.4/8.9      |
| C211    | 4030019090 | S.CER C2012 JB 1C 225M-T          | T  | 12.4/26.3    |
| C212    | 4030011600 | S.CER C1608 JB 1E 104K-T          | T  | 5.6/13.4     |
| C213    | 4030017490 | S.CER C1608 JB 1A 105K-T          | T  | 5/11.4       |
| C214    | 4030018960 | S.CER C3216 JB 1C 106MT-N         | T  | 19.1/28.6    |
| J1      | 6910020210 | CON IMSA-9180S-12Z900             |    |              |
| F1      | 5210001050 | S.FUS ICP-S0.5TN                  | T  | 51.5/41.1    |
| EP101   | 6910014730 | S.BEA MPZ2012S331A-T              | T  | 61.7/31      |
| EP102   | 6910014730 | S.BEA MPZ2012S331A-T              | T  | 40.9/31      |
| EP103   | 6910014730 | S.BEA MPZ2012S331A-T              | T  | 71.3/16.1    |
| EP201   | 6910014730 | S.BEA MPZ2012S331A-T              | T  | 19.2/31.5    |
| EP202   | 6910014730 | S.BEA MPZ2012S331A-T              | T  | 12.4/31      |

M.=Mounted side (T: Mounted on the Top side, B: Mounted on the Bottom side)  
S.=Surface mount



# SECTION 6

# MECHANICAL PARTS

## [FRONT UNIT] (FR)

| REF NO. | ORDER NO.  | DESCRIPTION                            | QTY. |
|---------|------------|----------------------------------------|------|
| W1      | 8900018460 | OPC-1950                               | 1    |
| W2      | 8900009231 | OPC-908A                               | 1    |
| W3      | 8900017820 | OPC-852A                               | 1    |
| W4      | 8900009231 | OPC-908A                               | 1    |
| W5      | 8900009231 | OPC-908A                               | 1    |
| W6      | 8900009231 | OPC-908A                               | 1    |
| W7      | 8900018480 | OPC-1952                               | 1    |
| W8      | 8900018480 | OPC-1952                               | 1    |
| EP1     | 6910020500 | RMS20-250-201-1P/E                     | 1    |
| EP2     | 6910015650 | MOUNT PLATE (S-G2218-3#01)             | 1    |
| EP3     | 6910015650 | MOUNT PLATE (S-G2218-3#01)             | 1    |
| MP1     | 8210025390 | 3073 FRONT PANEL (Incl. MP13-15)       | 1    |
| MP2     | 8010021410 | 3073 SUB CHASSIS (Incl. MP3)           | 1    |
| MP3     | 8930077140 | 3073 JACK PLATE                        | 1    |
| MP4     | 8310072650 | 3073 WINDOW PLATE                      | 1    |
| MP5     | 8510019120 | 3073 LOGIC COVER                       | 1    |
| MP11    | 8930076840 | 3073 A-LENS                            | 3    |
| MP12    | 8930076850 | 3073 B-LENS                            | 5    |
| MP13    | 8930076860 | 3073 C-LENS                            | 1    |
| MP14    | 8930076870 | 3073 D-LENS                            | 3    |
| MP15    | 8930076880 | 3073 E-LENS                            | 1    |
| MP21    | 8610013940 | KNOB K-281 (Incl. MP11)                | 1    |
| MP22    | 8610013950 | KNOB K-282 (Incl. MP11)                | 1    |
| MP23    | 8610013960 | KNOB K-283 (Incl. MP12)                | 1    |
| MP24    | 8610013810 | KNOB K-284                             | 1    |
| MP25    | 8610013820 | KNOB K-285                             | 1    |
| MP26    | 8610013830 | KNOB K-286                             | 1    |
| MP27    | 8610013970 | KNOB K-287 (Incl. MP12)                | 1    |
| MP28    | 8610013850 | KNOB K-288                             | 1    |
| MP29    | 8610013860 | KNOB K-289                             | 1    |
| MP30    | 8930076890 | 3073 KEYBOARD                          | 1    |
| MP31    | 8610013870 | KNOB N-378                             | 3    |
| MP32    | 8610013880 | KNOB N-379                             | 1    |
| MP33    | 8610013290 | KNOB N-361 (Incl. MP39)                | 3    |
| MP34    | 8610011830 | KNOB N-301 (Incl. MP39)                | 1    |
| MP35    | 8610013900 | KNOB N-380 (Incl. MP37, 39)            | 1    |
| MP36    | 8610011741 | KNOB N-307-1 (Incl. MP38)              | 4    |
| MP37    | 8610013320 | KNOB N-362 RING                        | 1    |
| MP38    | 8610009240 | KNOB SPRING NO.7800P                   | 4    |
| MP39    | 8610007420 | KNOB SPRING NO.6601                    | 5    |
| MP42    | 8610010040 | KNOB N-239 FINGER REST                 | 1    |
| MP43    | 8930076900 | 3073 D-RUBBER                          | 1    |
| MP44    | 8930060190 | 2591 N-SPRING                          | 1    |
| MP45    | 8930076990 | 3073 BRAKE PLATE                       | 1    |
| MP46    | 8930076910 | 3073 BRAKE BUTTON (Incl. MP45)         | 1    |
| MP47    | 8610013921 | KNOB N-268 BASE-3 (Incl. MP42, 44, 51) | 1    |
| MP48    | 8310072900 | 3073 NAME PLATE                        | 1    |
| MP51    | 8930077340 | 3073 BRAKE SHEET                       | 1    |
| MP52    | 8930077360 | 3073 BRAKE PAD                         | 2    |
| MP53    | 8930077370 | DOUBLE SIDE TAPE (BB)                  | 2    |
| MP54    | 8930077380 | DOUBLE SIDE TAPE (BC)                  | 2    |
| MP55    | 8930074750 | FERRITE SHEET (V)                      | 1    |
| MP56    | 8930059330 | SHIELD SPONGE (W)                      | 1    |
| MP57    | 8930074750 | FERRITE SHEET (V)                      | 1    |
| MP58    | 8930029050 | THERMAL SHEET (AL)                     | 2    |
| MP61    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)            | 4    |
| MP62    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)            | 6    |
| MP63    | 8810008761 | SCREW BT B0 2X8 NI-ZC3 (BT)            | 17   |
| MP64    | 8930079010 | SPONGE (KK)                            | 4    |
| MP65    | 8930061490 | SHIELD SPONGE (AB)                     | 1    |
| MP66    | 8930055981 | SHIELD SPONGE (F)-1                    | 1    |
| MP67    | 8930055981 | SHIELD SPONGE (F)-1                    | 1    |
| MP68    | 8930055981 | SHIELD SPONGE (F)-1                    | 1    |
| MP69    | 8930059330 | SHIELD SPONGE (W)                      | 1    |

## [LOGIC UNIT] (LG)

| REF NO. | ORDER NO.  | DESCRIPTION                  | QTY. |
|---------|------------|------------------------------|------|
| J801*   | 6510021722 | 30FLT-SM2-TB (LF) (SN) (M)   | 1    |
| J802*   | 6510021722 | 30FLT-SM2-TB (LF) (SN) (M)   | 1    |
| J901*   | 6510018921 | B8B-PH-SM4-TB (LF) (SN)      | 1    |
| J1001*  | 6510024151 | 50FY-BMT-TB (LF) (SN)        | 1    |
| J1002*  | 6510022191 | B3B-PH-SM4-TB (LF) (SN)      | 1    |
| J1101*  | 6510024151 | 50FY-BMT-TB (LF) (SN)        | 1    |
| S51*    | 2260002740 | LS8J2M                       | 1    |
| MP1     | 8930078890 | 3073 EARTH SPRING            | 1    |
| MP2     | 8930065741 | 2590 D-EARTH SPRING-1        | 1    |
| MP4     | 8930058170 | SHIELD SPONGE (O)            | 1    |
| MP101   | 8510002280 | VCO SHIELD PLATE (A) (FX-15) | 1    |
| MP102   | 8930058700 | SHIELD SPONGE (R)            | 1    |
| MP103   | 8930079230 | 3073 SHIELD SPRING           | 1    |
| MP104   | 8930071550 | SHIELD SPONGE (BM)           | 2    |
| MP202   | 8930079230 | 3073 SHIELD SPRING           | 1    |
| MP203   | 8930071550 | SHIELD SPONGE (BM)           | 2    |
| MP601   | 8930065741 | 2590 D-EARTH SPRING-1        | 1    |
| MP851   | 8510015720 | 2590 DC-DC A-CASE            | 1    |
| MP852   | 8930063980 | SHIELD SPONGE (AL)           | 1    |
| MP871   | 8510015720 | 2590 DC-DC A-CASE            | 1    |
| MP872   | 8930063980 | SHIELD SPONGE (AL)           | 1    |

## [DISPLAY UNIT] (DS)

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| J4*     | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J21*    | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J31*    | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J33*    | 6510018971 | B4B-PH-SM4-TB (LF) (SN)     | 1    |
| J107    | 6510026080 | XM7A-0441                   | 1    |
| J113*   | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J114*   | 6510018971 | B4B-PH-SM4-TB (LF) (SN)     | 1    |
| J301*   | 6510021722 | 30FLT-SM2-TB (LF) (SN) (M)  | 1    |
| J407*   | 6510026740 | IMSA-9637S-60Y922           | 1    |
| J601*   | 6510026730 | IMSA-9637S-08Y902           | 1    |
| J603*   | 6510022611 | 16FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J604*   | 6510021722 | 30FLT-SM2-TB (LF) (SN) (M)  | 1    |
| S1001*  | 2260002740 | LS8J2M                      | 1    |
| S1002*  | 2260002740 | LS8J2M                      | 1    |
| S1003*  | 2260002740 | LS8J2M                      | 1    |
| S1004*  | 2260002740 | LS8J2M                      | 1    |
| S1005*  | 2260002740 | LS8J2M                      | 1    |
| S1006*  | 2260002740 | LS8J2M                      | 1    |
| S1007*  | 2260002740 | LS8J2M                      | 1    |
| S1008*  | 2260002740 | LS8J2M                      | 1    |
| S1009*  | 2260002740 | LS8J2M                      | 1    |
| S1010*  | 2260002740 | LS8J2M                      | 1    |
| S1011*  | 2260002740 | LS8J2M                      | 1    |
| S1012*  | 2260002740 | LS8J2M                      | 1    |
| S1013*  | 2260002740 | LS8J2M                      | 1    |
| S1014*  | 2260002740 | LS8J2M                      | 1    |
| S1015*  | 2260002740 | LS8J2M                      | 1    |
| S1016*  | 2260002740 | LS8J2M                      | 1    |
| S1017*  | 2260002740 | LS8J2M                      | 1    |
| S1018*  | 2260002740 | LS8J2M                      | 1    |
| S1019*  | 2260002740 | LS8J2M                      | 1    |
| S1020*  | 2260002740 | LS8J2M                      | 1    |
| S1021*  | 2260002740 | LS8J2M                      | 1    |
| S1022*  | 2260002740 | LS8J2M                      | 1    |
| S1023*  | 2260002740 | LS8J2M                      | 1    |
| S1024*  | 2260002740 | LS8J2M                      | 1    |
| S1025*  | 2260002740 | LS8J2M                      | 1    |
| S1026*  | 2260002740 | LS8J2M                      | 1    |
| S1027*  | 2260002740 | LS8J2M                      | 1    |
| S1028*  | 2260002740 | LS8J2M                      | 1    |
| S1029*  | 2260002740 | LS8J2M                      | 1    |
| S1030*  | 2260002740 | LS8J2M                      | 1    |
| S1031*  | 2260002740 | LS8J2M                      | 1    |
| S1101*  | 2260002740 | LS8J2M                      | 1    |
| S1102*  | 2260002740 | LS8J2M                      | 1    |
| S1103*  | 2260002740 | LS8J2M                      | 1    |
| S1104*  | 2260002740 | LS8J2M                      | 1    |
| S1105*  | 2260002740 | LS8J2M                      | 1    |
| S1106*  | 2260002740 | LS8J2M                      | 1    |
| S1107*  | 2260002740 | LS8J2M                      | 1    |
| S1108*  | 2260002740 | LS8J2M                      | 1    |
| S1109*  | 2260002740 | LS8J2M                      | 1    |
| S1110*  | 2260002740 | LS8J2M                      | 1    |
| S1111*  | 2260002740 | LS8J2M                      | 1    |
| S1112*  | 2260002740 | LS8J2M                      | 1    |
| S1113*  | 2260002740 | LS8J2M                      | 1    |
| S1201*  | 2260002740 | LS8J2M                      | 1    |

\*: Refer to "BOARD LAYOUTS" for the location.

\*\*\*: Refer to "GENERAL WIRING" for the connection.

**Screw abbreviations** A, B0, BT: Self-tapping PH: Pan head ZK: Black NI-ZU: Nickel-Zinc SUS: Stainless

### [DISPLAY UNIT] (DS)

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| S1202*  | 2260002740 | LS8J2M                      | 1    |
| S1203*  | 2260002740 | LS8J2M                      | 1    |
| S1204*  | 2260002740 | LS8J2M                      | 1    |
| S1205*  | 2260002740 | LS8J2M                      | 1    |
| S1206*  | 2260002740 | LS8J2M                      | 1    |
| S1207*  | 2260002740 | LS8J2M                      | 1    |
| S1208*  | 2260002740 | LS8J2M                      | 1    |
| S1209*  | 2260002740 | LS8J2M                      | 1    |
| S1210*  | 2260002740 | LS8J2M                      | 1    |
| S1211*  | 2260002740 | LS8J2M                      | 1    |
| S1212*  | 2260002740 | LS8J2M                      | 1    |
| S1213*  | 2260002740 | LS8J2M                      | 1    |
| S1214*  | 2260002740 | LS8J2M                      | 1    |
| S1215*  | 2260002740 | LS8J2M                      | 1    |
| EP2     | 6910020190 | L5S30853P00                 | 1    |
| MP1     | 8930077470 | 3073 EARTH SHIELD           | 1    |
| MP2     | 8930077470 | 3073 EARTH SHIELD           | 1    |
| MP3     | 8510002280 | VCOSHIELD PLATE (A) (FX-15) | 1    |
| MP4     | 8510002280 | VCOSHIELD PLATE (A) (FX-15) | 1    |
| MP11    | 8930077000 | 3073 LCD HOLDER             | 1    |
| MP12    | 8930078950 | 3073 A-LCD SPONGE           | 1    |
| MP13    | 8930062550 | SPONGE (HP)                 | 4    |
| MP23    | 8930043610 | INSULATION SHEET (EZ)       | 1    |
| MP24    | 8930043610 | INSULATION SHEET (EZ)       | 1    |
| MP33    | 8930072060 | SHIELD SPONGE (BU)          | 1    |
| MP34    | 8930072060 | SHIELD SPONGE (BU)          | 1    |
| MP35    | 8930055981 | SHIELD SPONGE (F)-1         | 1    |
| MP36    | 8930055981 | SHIELD SPONGE (F)-1         | 1    |
| MP37    | 8930055981 | SHIELD SPONGE (F)-1         | 1    |
| MP38    | 8930049131 | SHIELD TAPE (D)-1           | 1    |
| MP39    | 8930049131 | SHIELD TAPE (D)-1           | 1    |
| MP40    | 8930049131 | SHIELD TAPE (D)-1           | 1    |
| MP41    | 8930049131 | SHIELD TAPE (D)-1           | 1    |
| MP51    | 8930058700 | SHIELD SPONGE (R)           | 1    |
| MP52    | 8930058700 | SHIELD SPONGE (R)           | 1    |
| MP53    | 8930058700 | SHIELD SPONGE (R)           | 1    |

### [RIT UNIT] (RIT)

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| J1*     | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| S1      | 2250000650 | EVEGC2F2524B                | 1    |

### [MIC UNIT] (MIC)

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| J1      | 6510000191 | FM214-8SS (P)-1             | 1    |
| J2*     | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN) | 1    |

### [JACK UNIT] (JCK)

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| J1*     | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J2      | 6510023891 | S-G4617#01F                 | 1    |
| J102    | 6510023900 | LGR4619-7000                | 1    |

### [VR-A UNIT] (VRA)

| REF NO. | ORDER NO.  | DESCRIPTION                  | QTY. |
|---------|------------|------------------------------|------|
| R1      | 7210002970 | RV-314 (RK0972210 10KB/10KB) | 1    |
| R2      | 7210002970 | RV-314 (RK0972210 10KB/10KB) | 1    |
| J32*    | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN)  |      |
| J33*    | 6510022611 | 16FMN-BMTTR-A-TBT (LF) (SN)  |      |

### [VR-B UNIT] (VRB)

| REF NO. | ORDER NO.  | DESCRIPTION                  | QTY. |
|---------|------------|------------------------------|------|
| R1      | 7210002970 | RV-314 (RK0972210 10KB/10KB) | 1    |
| J1*     | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN)  | 1    |
| S1      | 2250000410 | TP90D96E20-30F-2178-1        | 1    |


### [VR-C UNIT] (VRC)

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| R1      | 7210001130 | RK097111T005A 10KB          | 1    |
| R2      | 7210001130 | RK097111T005A 10KB          | 1    |
| R3      | 7210001130 | RK097111T005A 10KB          | 1    |
| R4      | 7210001130 | RK097111T005A 10KB          | 1    |
| J1*     | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN) | 1    |

\*: Refer to “**BOARD LAYOUTS**” for the location.

\*\*: Refer to “**GENERAL WIRING**” for the connection.

**Screw abbreviations**      A, B0, BT: Self-tapping    PH: Pan head    ZK: Black    NI-ZU: Nickel-Zinc    SUS: Stainless

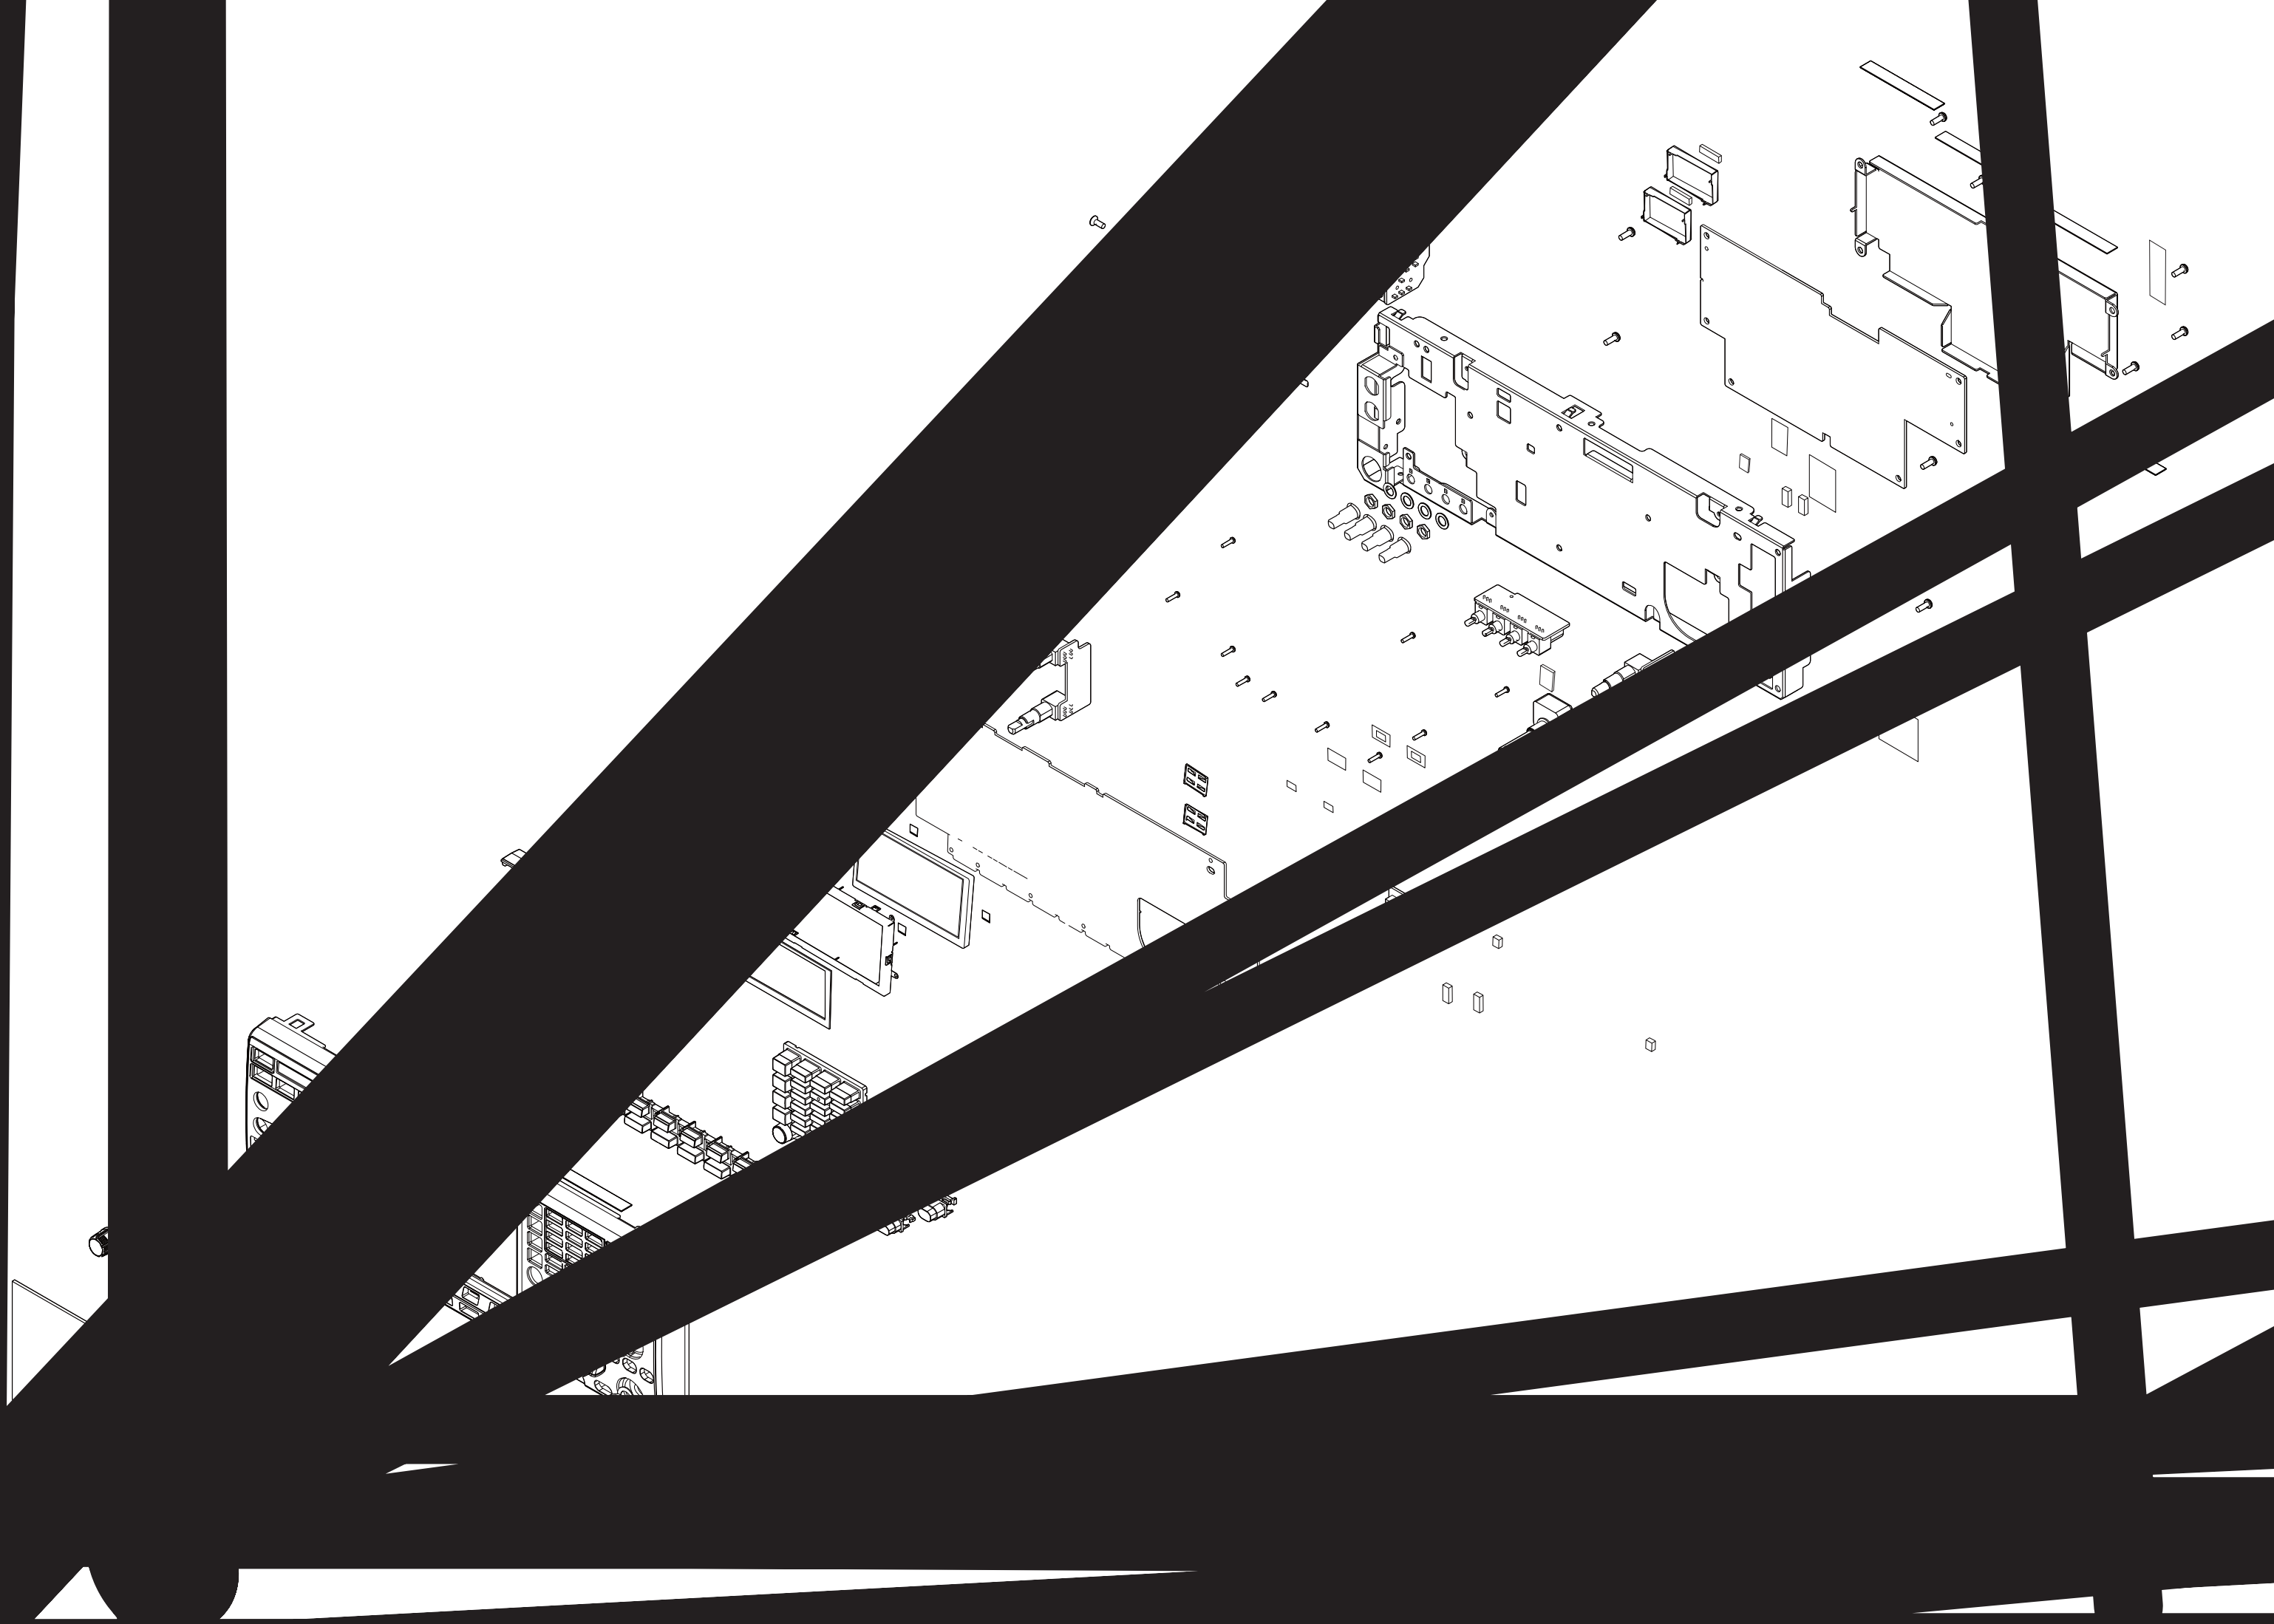



# [CHASSIS PARTS] (CH)

| REF NO. | ORDER NO.  | DESCRIPTION                    | QTY. |
|---------|------------|--------------------------------|------|
| J5      | 6510000370 | MR-DS                          | 1    |
| J6      | 6510000370 | MR-DS                          | 1    |
| P15     | 6510009330 | 51006-0200                     | 1    |
| SP1     | 2510000761 | SM-C77KY0208                   | 1    |
| MF1     | 2710000630 | FBA08T12HC                     | 1    |
| W1      | 8900014720 | OPC-909A                       | 1    |
| W2      | 8900015160 | OPC-916A                       | 1    |
| W3      | 8900018470 | OPC-1951                       | 1    |
| W4      | 8900017130 | OPC-926A                       | 1    |
| W5      | 8900017130 | OPC-926A                       | 1    |
| W6      | 8900015170 | OPC-918A                       | 1    |
| W7      | 8900018640 | OPC-1964                       | 1    |
| W8      | 8900018640 | OPC-1964                       | 1    |
| W11     | 8900018430 | OPC-1891                       | 1    |
| W12     | 8900018440 | OPC-1944                       | 1    |
| W13     | 8900018720 | OPC-1967                       | 1    |
| W15     | 9030730010 | 51/99/220/A14A/W11A            | 1    |
| W16     | 9012410001 | WIRE 00 A                      | 1    |
| W17     | 8900018450 | OPC-1948                       | 1    |
| W21     | 9025900110 | 62/99/300/C31/C31              | 1    |
| W22     | 9011450130 | WIRE /08/                      | 1    |
| W23     | 9025900590 | 62/99/360/C31/C31              | 1    |
| W24     | 9011450130 | WIRE /08/                      | 1    |
| W25     | 9030730040 | 62/99/200/C31/C31              | 1    |
| W26     | 9011450130 | WIRE /08/                      | 1    |
| W27     | 9025900560 | 62/99/330/C31/C31              | 1    |
| W28     | 9011450130 | WIRE /08/                      | 1    |
| W29     | 9025900270 | 62/99/240/C31/C31              | 1    |
| W30     | 9011450130 | WIRE /08/                      | 1    |
| W31     | 9025900540 | 62/99/270/C31/C31              | 1    |
| W32     | 9011450130 | WIRE /08/                      | 1    |
| W33     | 9030730040 | 62/99/200/C31/C31              | 1    |
| W34     | 9011450130 | WIRE /08/                      | 1    |
| W35     | 9025900290 | 62/99/150/C31/C31              | 1    |
| W36     | 9011450130 | WIRE /08/                      | 1    |
| W37     | 9025900110 | 62/99/300/C31/C31              | 1    |
| W38     | 9011450130 | WIRE /08/                      | 1    |
| W39     | 9024290050 | 62/99/130/C31/C31              | 1    |
| W40     | 9011450130 | WIRE /08/                      | 1    |
| W41     | 9030730030 | 62/99/650/C31/C31              | 1    |
| W42     | 9011450130 | WIRE /08/                      | 1    |
| W43     | 9025900110 | 62/99/300/C31/C31              | 1    |
| W44     | 9011450130 | WIRE /08/                      | 1    |
| W45     | 9030730040 | 62/99/200/C31/C31              | 1    |
| W46     | 9011450130 | WIRE /08/                      | 1    |
| W47     | 9026200020 | 62/99/190/C31/C31              | 1    |
| W48     | 9011450130 | WIRE /08/                      | 1    |
| W49     | 9026200020 | 62/99/190/C31/C31              | 1    |
| W50     | 9011450130 | WIRE /08/                      | 1    |
| EP1     | 6910000340 | P101 KD MYLAR SHEET            | 1    |
| EP2     | 6910000310 | B312D INSULATION BUSH          | 1    |
| MP1     | 8010021340 | 3073 CHASSIS                   | 1    |
| MP2     | 8110009680 | 3073 U-COVER (Incl. MP19, 113) | 1    |
| MP3     | 8110009600 | 3073 L-COVER                   | 1    |
| MP4     | 8930077240 | 3073 MAIN PLATE                | 1    |
| MP5     | 8510010731 | 1876 B-PLATE-1                 | 1    |
| MP6     | 8510010740 | 1876 C-PLATE                   | 1    |
| MP7     | 8510010752 | 1876 D-PLATE-2                 | 1    |
| MP8     | 8930077030 | 3073 MAIN STAND                | 2    |
| MP9     | 8930077040 | 3073 SUB STAND                 | 2    |
| MP11    | 8930077020 | 3073 A-STAND SHEET             | 2    |
| MP12    | 8930077490 | 3073 B-STAND SHEET             | 2    |
| MP13    | 8930029731 | 1413 FAN HOLDER-1              | 1    |
| MP15    | 8930037001 | 1691 EARTH PLATE-1             | 2    |
| MP16    | 8930078210 | 3073 IC CLIP                   | 2    |
| MP17    | 8930035240 | 1546 TR-B CLIP                 | 1    |
| MP18    | 8950003640 | COATING CLIP CS-2              | 1    |
| MP19    | 8930036070 | 1528 SP NET                    | 1    |
| MP20    | 8810005771 | SCREW BIH M3X8 ZK3             | 10   |
| MP21    | 8810005771 | SCREW BIH M3X8 ZK3             | 6    |
| MP22    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 4    |
| MP23    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 11   |
| MP24    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 3    |
| MP25    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 6    |
| MP26    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 2    |
| MP27    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 2    |
| MP28    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 2    |
| MP31    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 4    |
| MP32    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 7    |
| MP33    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 5    |
| MP34    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 4    |
| MP35    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 4    |
| MP36    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 10   |
| MP37    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 8    |
| MP38    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 4    |
| MP40    | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT)    | 3    |
| MP41    | 8810008160 | HEX HEAD BOLT (+) M5X18 NI     | 1    |
| MP42    | 8830000211 | NUT M5 BS-CD NI                | 1    |

# [CHASSIS PARTS] (CH)

| REF NO. | ORDER NO.  | DESCRIPTION                        | QTY. |
|---------|------------|------------------------------------|------|
| MP43    | 8830000360 | BUTTERFLY NUT M5 NI                | 1    |
| MP44    | 8850000150 | FLAT WASHER M5 BS NI               | 3    |
| MP45    | 8850000440 | S-WASHER M5 NI                     | 1    |
| MP46    | 8810003171 | SETSCREW (A) 3X8 ZC3               | 3    |
| MP47    | 8810003171 | SETSCREW (A) 3X8 ZC3               | 4    |
| MP48    | 8810000421 | SCREW PH M4X18 ZC3                 | 2    |
| MP49    | 8810009651 | SCREW FLAT-HEAD B0 3X8 NI-ZC3 (BT) | 4    |
| MP53    | 8930077650 | 3073 SIDE HANDLE                   | 1    |
| MP54    | 8810010870 | SCREW PAN-HEAD M4X12 ZK3           | 2    |
| MP57    | 8930027900 | SPONGE (DD)                        | 2    |
| MP58    | 8930038820 | ALUMINIUM SHEET (V)                | 1    |
| MP61    | 8810003161 | SETSCREW (A) 3X6 ZC3               | 2    |
| MP63    | 8810003161 | SETSCREW (A) 3X6 ZC3               | 2    |
| MP65    | 8930043281 | SPONGE (EW)-1                      | 1    |
| MP66    | 8930043800 | DOUBLESIDED TAPE (S)               | 1    |
| MP67    | 8930029050 | THERMAL SHEET (AL)                 | 1    |
| MP68    | 8930032130 | HIMELON SHEET (AQ)                 | 2    |
| MP69    | 8930029050 | THERMAL SHEET (AL)                 | 1    |
| MP70    | 8930008670 | SPONGE (AQ)                        | 2    |
| MP71    | 8930043490 | SPONGE (FB)                        | 1    |
| MP72    | 8930007840 | THERMAL SHEET (K)                  | 2    |
| MP88    | 8930052271 | SHIELD SPONGE (D)-1                | 1    |
| MP89    | 8930052271 | SHIELD SPONGE (D)-1                | 1    |
| MP90    | 8930052271 | SHIELD SPONGE (D)-1                | 1    |
| MP91    | 8930039570 | RUBBER SHEET (U)                   | 3    |
| MP92    | 8930069610 | SPONGE (IV)                        | 1    |
| MP93    | 8930059520 | NONWOVENS SHEET (CG)               | 2    |
| MP94    | 8930057950 | DOUBLESIDED TAPE (AH)              | 1    |
| MP95    | 8930071700 | PJ-21B                             | 1    |
| MP106   | 8930075440 | 3015 RUG SPRING                    | 2    |
| MP109   | 8930040590 | RUBBER REG (K)                     | 2    |
| MP110   | 8930046120 | RUBBER REG (M)                     | 4    |
| MP111   | 8930079200 | THERMALLY SHEET (BR)               | 1    |
| MP112   | 8930079060 | 3073 DC PLATE                      | 1    |
| MP113   | 8930077500 | 3073 A-NET                         | 1    |
| MP114   | 8930070740 | 1958 MAGNETIC SHIELD               | 1    |
| MP115   | 8930079000 | SHIELD SPONGE (CN)                 | 1    |
| MP116   | 8930070510 | THERMALLY SHEET (BF)               | 1    |
| MP153   | 8930058170 | SHIELD SPONGE (O)                  | 1    |
| MP154   | 8930058170 | SHIELD SPONGE (O)                  | 1    |
| MP155   | 8930058170 | SHIELD SPONGE (O)                  | 1    |
| MP156   | 8930058170 | SHIELD SPONGE (O)                  | 1    |
| MP157   | 8930066040 | SPONGE (IK)                        | 1    |
| MP158   | 8930071220 | SPONGE (JI)                        | 1    |
| MP159   | 8930048121 | SHIELD TAPE (A)-1                  | 2    |
| MP160   | 8930058840 | SHIELD SPONGE (T)                  | 2    |

# [PA UNIT] (PA)

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| RL1     | 6330001471 | AJS1311F-K2                 | 1    |
| CP1*    | 6910009670 | HK3-S-T                     | 1    |
| CP2*    | 6910009670 | HK3-S-T                     | 1    |
| J1      | 6510007020 | TMP-J01X-V6                 | 1    |
| J2      | 6510007020 | TMP-J01X-V6                 | 1    |
| J3*     | 6510022601 | 30FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J10     | 6510003081 | RT01T-1.0B (LF)             | 1    |
| J101*   | 6510018961 | B2B-PH-SM4-TB (LF) (SN)     | 1    |
| F1      | 5220000400 | FHA010-01F                  | 1    |
| F2      | 5210000940 | 1205                        | 1    |
| W14     | 8970023510 | 23/06/050/D21/W05           | 1    |
| EP4     | 6510018330 | F4053A                      | 1    |
| EP5     | 6510018330 | F4053A                      | 1    |

\*: Refer to “BOARD LAYOUTS” for the location.

\*\*: Refer to “GENERAL WIRING” for the connection.

**Screw abbreviations** A, B0, BT: Self-tapping PH: Pan head ZK: Black NI-ZU: Nickel-Zinc SUS: Stainless

**[FILTER UNIT] (FIT)**

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| RL101*  | 6330001721 | ATN207-K1                   | 1    |
| RL102*  | 6330001721 | ATN207-K1                   | 1    |
| RL151*  | 6330001721 | ATN207-K1                   | 1    |
| RL152*  | 6330001721 | ATN207-K1                   | 1    |
| RL201*  | 6330001721 | ATN207-K1                   | 1    |
| RL202*  | 6330001721 | ATN207-K1                   | 1    |
| RL251*  | 6330001721 | ATN207-K1                   | 1    |
| RL252*  | 6330001721 | ATN207-K1                   | 1    |
| RL301*  | 6330001721 | ATN207-K1                   | 1    |
| RL302*  | 6330001721 | ATN207-K1                   | 1    |
| RL351*  | 6330001721 | ATN207-K1                   | 1    |
| RL352*  | 6330001721 | ATN207-K1                   | 1    |
| RL401*  | 6330001721 | ATN207-K1                   | 1    |
| RL402*  | 6330001721 | ATN207-K1                   | 1    |
| J1      | 6510007020 | TMP-J01X-V6                 | 1    |
| J2      | 6510007020 | TMP-J01X-V6                 | 1    |
| J3*     | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| W9      | 8900009621 | OPC-961A                    | 1    |
| W10     | 8900009631 | OPC-962A                    | 1    |
| EP501   | 6510018330 | F4053A                      | 1    |
| EP502   | 6510018330 | F4053A                      | 1    |

**[CTRL UNIT] (CTR)**

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| RL101*  | 6330000800 | G5A-237P DC12V              | 1    |
| RL102*  | 6330001770 | SIP-1A-12Y                  | 1    |
| RL103*  | 6330001770 | SIP-1A-12Y                  | 1    |
| RL104*  | 6330001460 | FTR-F1 CA012V               | 1    |
| RL105*  | 6330001460 | FTR-F1 CA012V               | 1    |
| CP1*    | 6910009670 | HK3-S-T                     | 1    |
| J3      | 6510017150 | TMP-S01X-C1                 | 1    |
| J101    | 6510017150 | TMP-S01X-C1                 | 1    |
| J102    | 6510017150 | TMP-S01X-C1                 | 1    |
| J103    | 6510017150 | TMP-S01X-C1                 | 1    |
| J151*   | 6510022591 | 22FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J241*   | 6510022031 | B10B-ZR-SM4-TF (LF) (SN)    | 1    |
| J261*   | 6510022621 | 10FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J262*   | 6510022581 | 24FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J291*   | 6510018971 | B4B-PH-SM4-TB (LF) (SN)     | 1    |
| W1      | 7120000490 | ERD25T0                     | 1    |
| W2      | 7120000490 | ERD25T0                     | 1    |
| MP1*    | 8510002020 | MIXSHIELD CASE (SX-155)     | 1    |

**[MAIN UNIT] (MA)**

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| RL2301* | 6330001721 | ATN207-K1                   | 1    |
| RL2302* | 6330001721 | ATN207-K1                   | 1    |
| CP1253* | 6910009670 | HK3-S-T                     | 1    |
| J1002*  | 6510024151 | 50FY-BMT-TB (LF) (SN)       | 1    |
| J1003   | 6510021861 | BH-800-4GG                  | 1    |
| J1051*  | 6510024151 | 50FY-BMT-TB (LF) (SN)       | 1    |
| J1501*  | 6510022601 | 30FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J1601*  | 6510022581 | 24FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J1701*  | 6510022581 | 24FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J1801*  | 6510022581 | 24FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J1901   | 6510024311 | B4B-PH-K-S (LF) (SN)        | 1    |
| J2001   | 6510023671 | TCS4480-0141577             | 1    |
| J2002   | 6510023661 | TCS4470-0141577             | 1    |
| J2101   | 6510026540 | UBB-4R-D14T-4D (LF) (SN)    | 1    |
| J2201   | 6510023720 | LGY6501-0600C               | 1    |
| J2301   | 6510024311 | B4B-PH-K-S (LF) (SN)        | 1    |
| J2302   | 6510023720 | LGY6501-0600C               | 1    |
| J2401   | 6510023720 | LGY6501-0600C               | 1    |
| J2501   | 6510023900 | LGR4619-7000                | 1    |
| J2502   | 6510024311 | B4B-PH-K-S (LF) (SN)        | 1    |
| J3001   | 6510007020 | TMP-J01X-V6                 | 1    |
| J3401   | 6510007020 | TMP-J01X-V6                 | 1    |
| J3701   | 6510007020 | TMP-J01X-V6                 | 1    |
| J3702   | 6510007020 | TMP-J01X-V6                 | 1    |
| J4101*  | 6510022801 | B10B-PH-SM4-TB (LF) (SN)    | 1    |
| J6001   | 6510007020 | TMP-J01X-V6                 | 1    |
| J6002   | 6510007020 | TMP-J01X-V6                 | 1    |
| J6102   | 6510026920 | IMSA-9180B-12B-PT1          | 1    |
| BT1001  | 3020000110 | CR2032                      | 1    |
| W6001   | 7120000490 | ERD25T0                     | 1    |

**[MAIN UNIT] (MA)**

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| MP2101  | 8510015720 | 2590 DC-DC A-CASE           | 1    |
| MP2201  | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |
| MP2301  | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |
| MP2501  | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |
| MP3001* | 8510015900 | 2590 M-2LO CASE             | 1    |
| MP3201* | 8510012400 | 2177 D/A CASE               | 1    |
| MP3202* | 8510012400 | 2177 D/A CASE               | 1    |
| MP3601* | 6910001130 | 10M SHIELD CASE             | 1    |
| MP3602* | 8510005150 | 602 SHIELD CASE             | 1    |
| MP3603  | 8510005160 | 602 SHIELD CASE COVER       | 1    |
| MP3604  | 8510002280 | VCOSHIELD PLATE (A) (FX-15) | 1    |
| MP3605  | 8930059380 | SHIELD SPONGE (X)           | 1    |
| MP3606  | 8930058840 | SHIELD SPONGE (T)           | 1    |
| MP4501  | 8510010460 | 1691 MAIN SHIELD PLATE      | 1    |
| MP4502  | 8510002280 | VCOSHIELD PLATE (A) (FX-15) | 1    |
| MP4503  | 8930065720 | SHIELD SPONGE (AP)          | 1    |
| MP5001  | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |
| MP5101  | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |
| MP6001* | 8510012400 | 2177 D/A CASE               | 1    |
| MP6002* | 8510012400 | 2177 D/A CASE               | 1    |
| MP6003* | 8510013140 | 2241 DC-A CASE              | 1    |
| MP6004* | 8510013140 | 2241 DC-A CASE              | 1    |
| MP6005* | 8510019400 | 3073 M-CASE                 | 1    |
| MP6006  | 8510019410 | 3073 M-COVER                | 1    |
| MP6007  | 8510013820 | 2356 A-SHIELD PLATE         | 1    |
| MP6008  | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |
| MP6009  | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |

**[MCF-N UNIT] (M-N)**

| REF NO. | ORDER NO.  | DESCRIPTION  | QTY. |
|---------|------------|--------------|------|
| EP6001* | 6910002161 | CASE-BM7H-LF | 1    |
| EP6002* | 6910002161 | CASE-BM7H-LF | 1    |

**[MCF-M UNIT] (M-M)**

| REF NO. | ORDER NO.  | DESCRIPTION  | QTY. |
|---------|------------|--------------|------|
| EP5001* | 6910002161 | CASE-BM7H-LF | 1    |
| EP5002* | 6910002161 | CASE-BM7H-LF | 1    |
| EP7001* | 6910002161 | CASE-BM7H-LF | 1    |
| EP7002* | 6910002161 | CASE-BM7H-LF | 1    |

**[MCF-W UNIT] (M-W)**

| REF NO. | ORDER NO.  | DESCRIPTION  | QTY. |
|---------|------------|--------------|------|
| EP7001* | 6910002161 | CASE-BM7H-LF | 1    |
| EP7002* | 6910002161 | CASE-BM7H-LF | 1    |

\*: Refer to **"BOARD LAYOUTS"** for the location.

\*\*\*: Refer to **"GENERAL WIRING"** for the connection.

**Screw abbreviations** A, B0, BT: Self-tapping PH: Pan head ZK: Black NI-ZU: Nickel-Zinc SUS: Stainless

**[RF UNIT] (RF)**

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| RL101   | 6330001860 | UA2-12NU                    | 1    |
| RL102   | 6330001860 | UA2-12NU                    | 1    |
| RL103   | 6330001860 | UA2-12NU                    | 1    |
| RL104   | 6330001860 | UA2-12NU                    | 1    |
| RL105   | 6330001860 | UA2-12NU                    | 1    |
| RL161   | 6330000540 | OMR-109F                    | 1    |
| J101    | 6510007020 | TMP-J01X-V6                 | 1    |
| J102    | 6450001130 | JPJ2042-01-110              | 1    |
| J103    | 6450001800 | JPJ1044-01-010              | 1    |
| J161    | 6450001130 | JPJ2042-01-110              | 1    |
| J201    | 6510007020 | TMP-J01X-V6                 | 1    |
| J451*   | 6510022581 | 24FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J801    | 6910016430 | IMSA-9210B-1-05Z869-PT1     | 1    |
| J802    | 6910016430 | IMSA-9210B-1-05Z869-PT1     | 1    |
| J803    | 6910016430 | IMSA-9210B-1-05Z869-PT1     | 1    |
| J804    | 6910016430 | IMSA-9210B-1-05Z869-PT1     | 1    |
| J805    | 6910016430 | IMSA-9210B-1-05Z869-PT1     | 1    |
| J807    | 6910016430 | IMSA-9210B-1-05Z869-PT1     | 1    |
| J809    | 6910016430 | IMSA-9210B-1-05Z869-PT1     | 1    |
| J951    | 6510007020 | TMP-J01X-V6                 | 1    |
| J1101   | 6510007020 | TMP-J01X-V6                 | 1    |
| J1301   | 6510007020 | TMP-J01X-V6                 | 1    |
| J1651   | 6510007020 | TMP-J01X-V6                 | 1    |
| J1701   | 6510007020 | TMP-J01X-V6                 | 1    |
| J1702   | 6910004741 | IMSA-9202B-1-03Z041-PT1     | 1    |
| J1703   | 6910004741 | IMSA-9202B-1-03Z041-PT1     | 1    |
| J1704   | 6910004741 | IMSA-9202B-1-03Z041-PT1     | 1    |
| J1705   | 6910004741 | IMSA-9202B-1-03Z041-PT1     | 1    |
| J1706   | 6910004741 | IMSA-9202B-1-03Z041-PT1     | 1    |
| J1707   | 6910004741 | IMSA-9202B-1-03Z041-PT1     | 1    |
| J1708   | 6910004741 | IMSA-9202B-1-03Z041-PT1     | 1    |
| J1709   | 6910004741 | IMSA-9202B-1-03Z041-PT1     | 1    |
| J2001   | 6510007020 | TMP-J01X-V6                 | 1    |
| MP1     | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |
| MP2     | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |
| MP3     | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |
| MP1001* | 8510016730 | 2178 1MIX CASE              | 1    |
| MP1002  | 8510016721 | 2178 1MIX COVER-1           | 1    |
| MP1201* | 8510016730 | 2178 1MIX CASE              | 1    |
| MP1202  | 8510016721 | 2178 1MIX COVER-1           | 1    |
| MP1203  | 8930055981 | SHIELD SPONGE (F)-1         | 1    |
| MP1451* | 8510012400 | 2177 D/A CASE               | 1    |

**[PLL UNIT] (PLL)**

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| J1*     | 6510022581 | 24FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| J51     | 6510007020 | TMP-J01X-V6                 | 1    |
| J81     | 6510007020 | TMP-J01X-V6                 | 1    |
| J351    | 6510007020 | TMP-J01X-V6                 | 1    |
| J651    | 6510007020 | TMP-J01X-V6                 | 1    |
| J701    | 6510007020 | TMP-J01X-V6                 | 1    |
| J831    | 6510007020 | TMP-J01X-V6                 | 1    |
| J851    | 6510007020 | TMP-J01X-V6                 | 1    |
| MP1     | 8930065741 | 2590 D-EARTH SPRING-1       | 1    |
| MP51    | 8510015900 | 2590 M-2LO CASE             | 1    |
| MP101*  | 8510018770 | 3009 PLL CASE               | 1    |
| MP102   | 8510002280 | VCOSHIELD PLATE (A) (FX-15) | 1    |
| MP103   | 8930078840 | SHIELD SPONGE (CM)          | 1    |
| MP201*  | 8510012541 | 2178 VCO CASE-1             | 1    |
| MP202   | 8510011521 | 2072 VCO COVER-1            | 1    |
| MP203   | 8510011710 | 2072 VCO SHIELD             | 1    |
| MP204   | 8810003961 | SETSCREW (A) 2.6X5 ZC3      | 8    |
| MP205   | 8930077460 | RUBBER SHEET (CF)           | 1    |
| MP206   | 8930078840 | SHIELD SPONGE (CM)          | 1    |
| MP207   | 8930078840 | SHIELD SPONGE (CM)          | 1    |
| MP208   | 8930078840 | SHIELD SPONGE (CM)          | 1    |
| MP209   | 8930078840 | SHIELD SPONGE (CM)          | 1    |
| MP301*  | 8510019110 | 3073 PLL CASE               | 1    |
| MP381*  | 8510012550 | 2178 DDS CASE               | 1    |
| MP382   | 8510012580 | 2178 DDS COVER              | 1    |
| MP401   | 8510010760 | 1876 DDS CASE               | 1    |
| MP402   | 8510010770 | 1876 DDS COVER              | 1    |
| MP403*  | 8510010850 | 1897 D/A CASE               | 1    |
| MP451*  | 8510012550 | 2178 DDS CASE               | 1    |
| MP452   | 8510012580 | 2178 DDS COVER              | 1    |
| MP501   | 8510012541 | 2178 VCO CASE-1             | 1    |
| MP502   | 8510011521 | 2072 VCO COVER-1            | 1    |
| MP503   | 8510011710 | 2072 VCO SHIELD             | 1    |
| MP601*  | 8510019110 | 3073 PLL CASE               | 1    |
| MP701*  | 8510018770 | 3009 PLL CASE               | 1    |
| MP702   | 8930078840 | SHIELD SPONGE (CM)          | 1    |
| MP821*  | 8510012400 | 2177 D/A CASE               | 1    |

**[DCDC UNIT] (DC)**


| REF NO. | ORDER NO.  | DESCRIPTION       | QTY. |
|---------|------------|-------------------|------|
| J1      | 6910020210 | IMSA-9180S-12A    | 1    |
| F1      | 5210001050 | ICP-S0.5          | 1    |
| MP1*    | 8510019150 | 3073 DC-DC SHIELD | 1    |
| MP2*    | 8510019140 | 3073 DC-DC CASE   | 1    |
| MP3     | 8510019300 | 3073 DC-DC PLATE  | 1    |

**[TUNER UNIT] (TUN)**

| REF NO. | ORDER NO.  | DESCRIPTION                 | QTY. |
|---------|------------|-----------------------------|------|
| RL1     | 6330001610 | NY-12W-K-IE                 | 1    |
| RL2     | 6330001610 | NY-12W-K-IE                 | 1    |
| RL3     | 6330001610 | NY-12W-K-IE                 | 1    |
| RL4     | 6330001610 | NY-12W-K-IE                 | 1    |
| RL5     | 6330001610 | NY-12W-K-IE                 | 1    |
| RL6     | 6330001610 | NY-12W-K-IE                 | 1    |
| RL7     | 6330001610 | NY-12W-K-IE                 | 1    |
| RL8     | 6330001610 | NY-12W-K-IE                 | 1    |
| RL9     | 6330001610 | NY-12W-K-IE                 | 1    |
| RL10    | 6330001610 | NY-12W-K-IE                 | 1    |
| RL11    | 6330001610 | NY-12W-K-IE                 | 1    |
| RL12    | 6330001610 | NY-12W-K-IE                 | 1    |
| RL13    | 6330001610 | NY-12W-K-IE                 | 1    |
| RL14    | 6330001610 | NY-12W-K-IE                 | 1    |
| RL15    | 6330001610 | NY-12W-K-IE                 | 1    |
| RL16    | 6330001610 | NY-12W-K-IE                 | 1    |
| J3      | 6510007020 | TMP-J01X-V6                 | 1    |
| J4      | 6510007020 | TMP-J01X-V6                 | 1    |
| J5*     | 6510022591 | 22FMN-BMTTR-A-TBT (LF) (SN) | 1    |
| MF1     | 2710000800 | MP24ZA                      | 1    |
| MF2     | 2710000800 | MP24ZA                      | 1    |
| W1      | 8900018420 | OPC-1889                    | 1    |
| MP1     | 8930041091 | 1876 A-ANGLE-1              | 1    |
| MP2     | 8810008661 | SCREW BT B0 3X8 NI-ZC3 (BT) | 1    |
| MP3     | 8810009061 | SCREW M3X6 ZK3              | 4    |
| MP4     | 8930041111 | 1876 B-ANGLE-1              | 1    |
| MP5     | 8810009061 | SCREW M3X6 ZK3              | 2    |
| MP6     | 8820000881 | 1528 SCREW-1                | 4    |
| MP7     | 8930030112 | 1414 PLATE-2                | 2    |
| MP8     | 8950003200 | UJ6-5 (UNIVERSAL COUPLINGS) | 2    |
| MP9*    | 8930051580 | 2178 TUNER PLATE            | 1    |
| MP10    | 8930079540 | 3073 TUNER PLATE            | 1    |

**[ACCESSORIES] (ACC)**

| REF NO. | ORDER NO.  | DESCRIPTION | QTY. |
|---------|------------|-------------|------|
| P1      | 5610000410 | AP-319      | 1    |
| MC1     | (Optional) | HM-36-1     | 1    |
| F1      | 5210000840 | ATC 30      | 2    |
| F2      | 5210000940 | 1205        | 1    |
| W1      | 8900013980 | OPC-1457    | 1    |

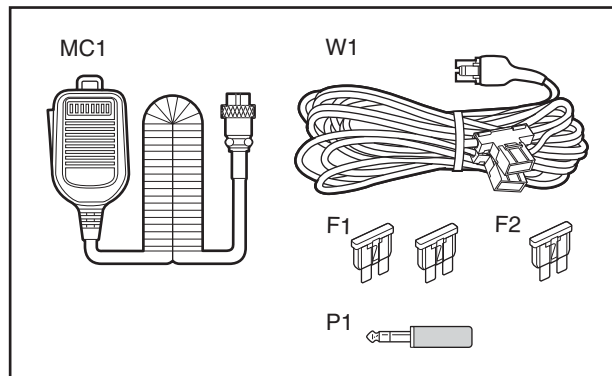


\*: Refer to **"BOARD LAYOUTS"** for the location.


\*\* : Refer to **"GENERAL WIRING"** for the connection.

**Screw abbreviations** A, B0, BT: Self-tapping PH: Pan head ZK: Black NI-ZU: Nickel-Zinc SUS: Stainless



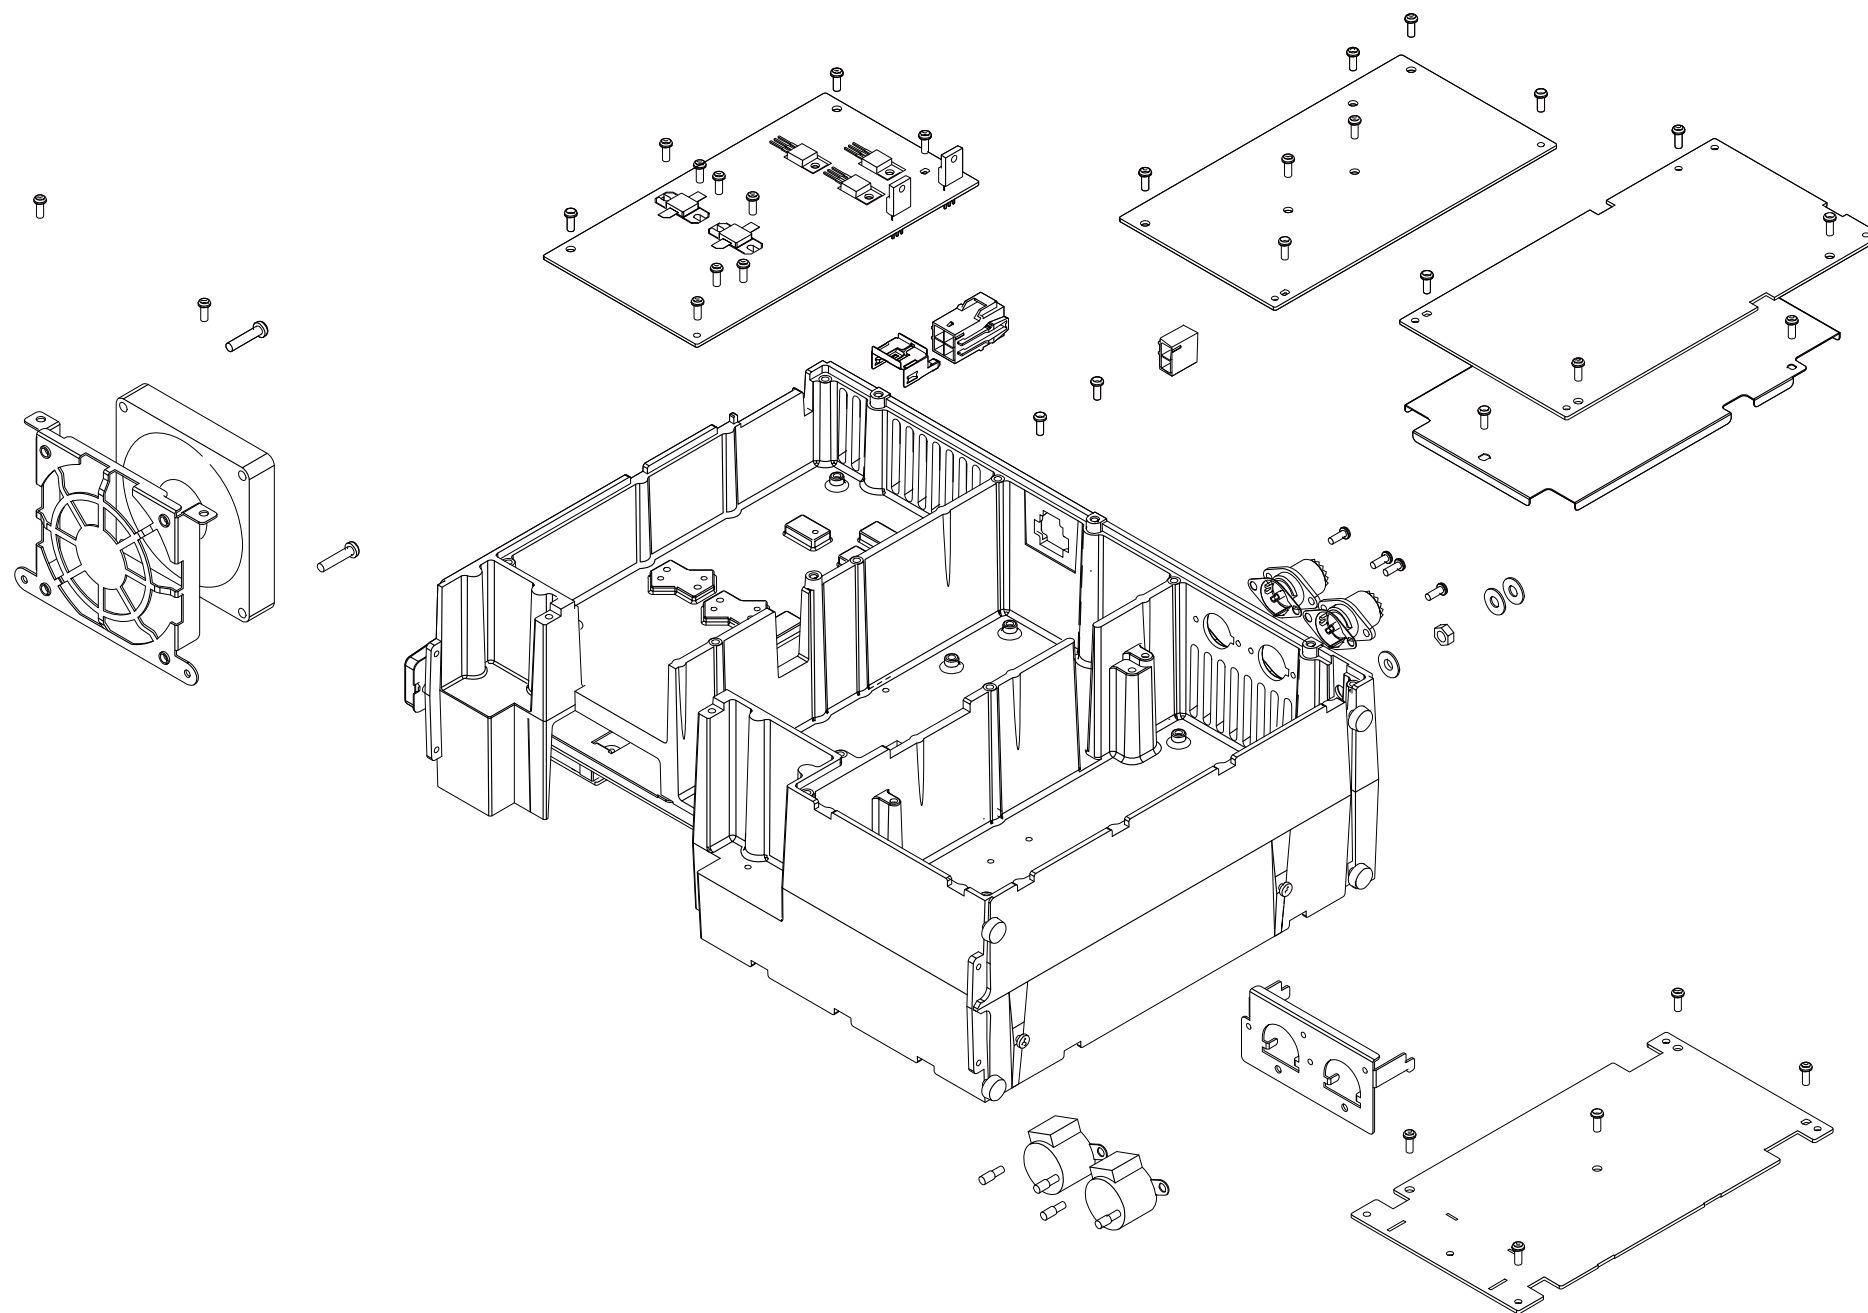


- **CHASSIS (BOTTOM SIDE)**

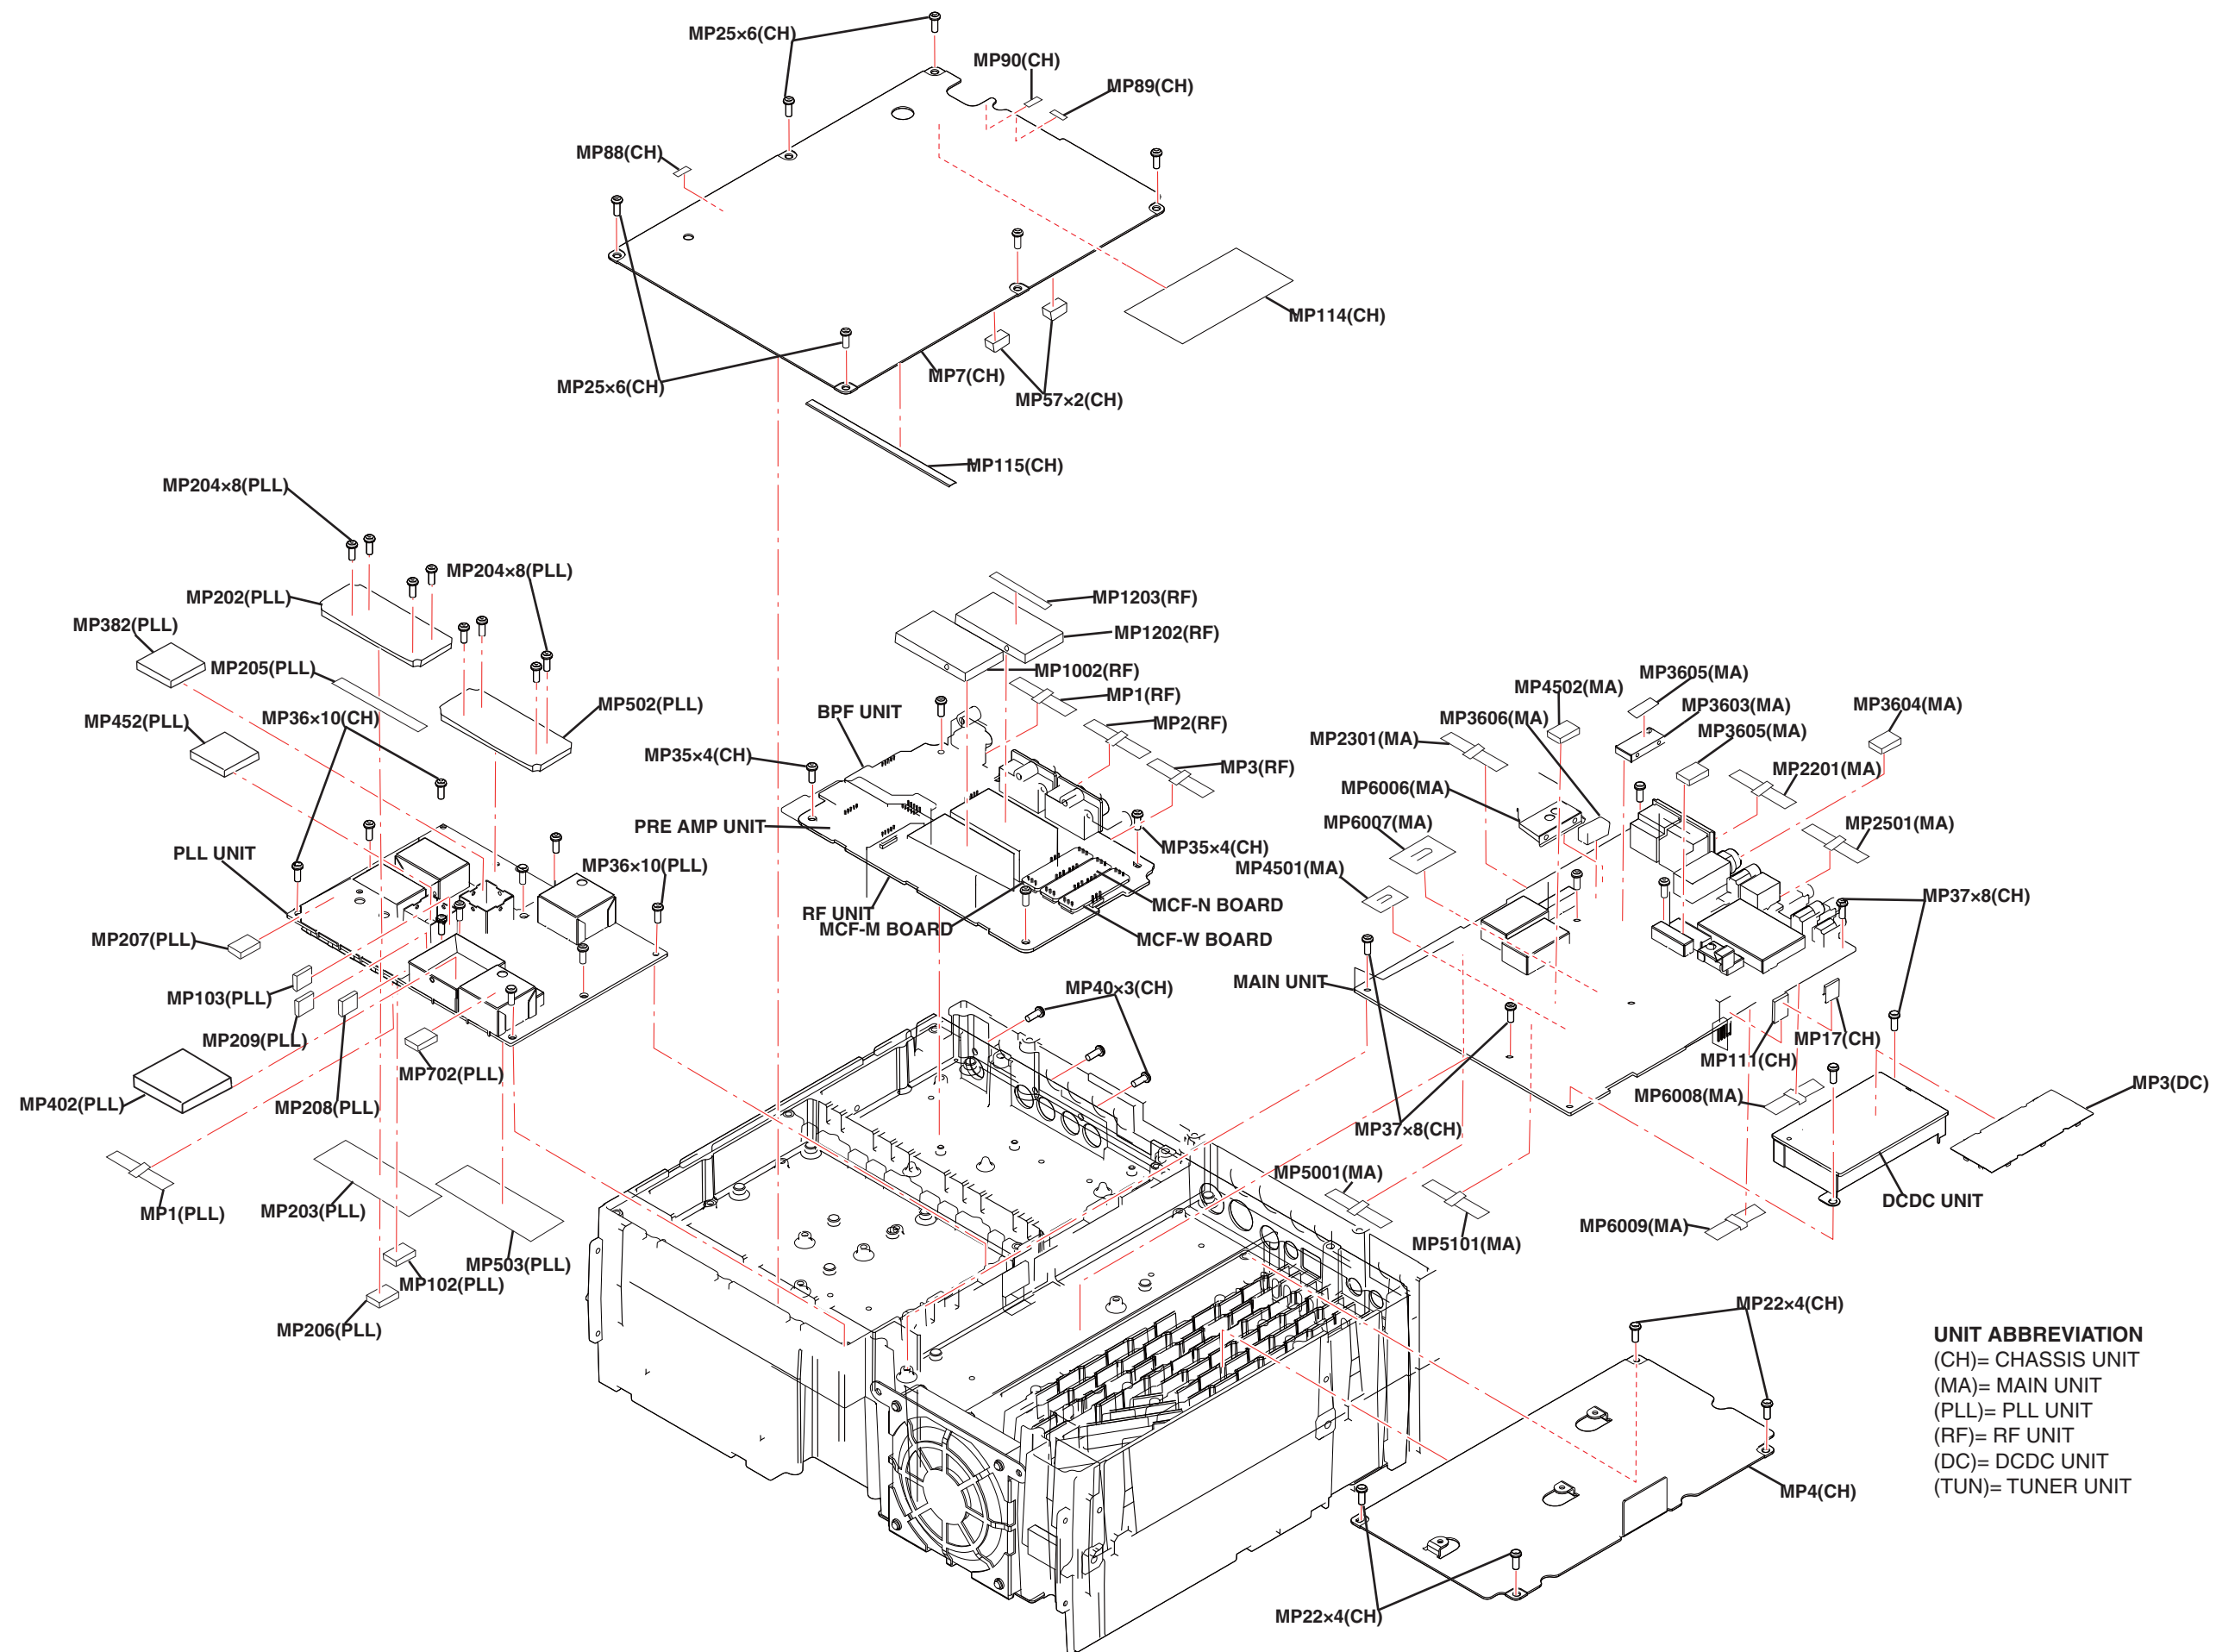







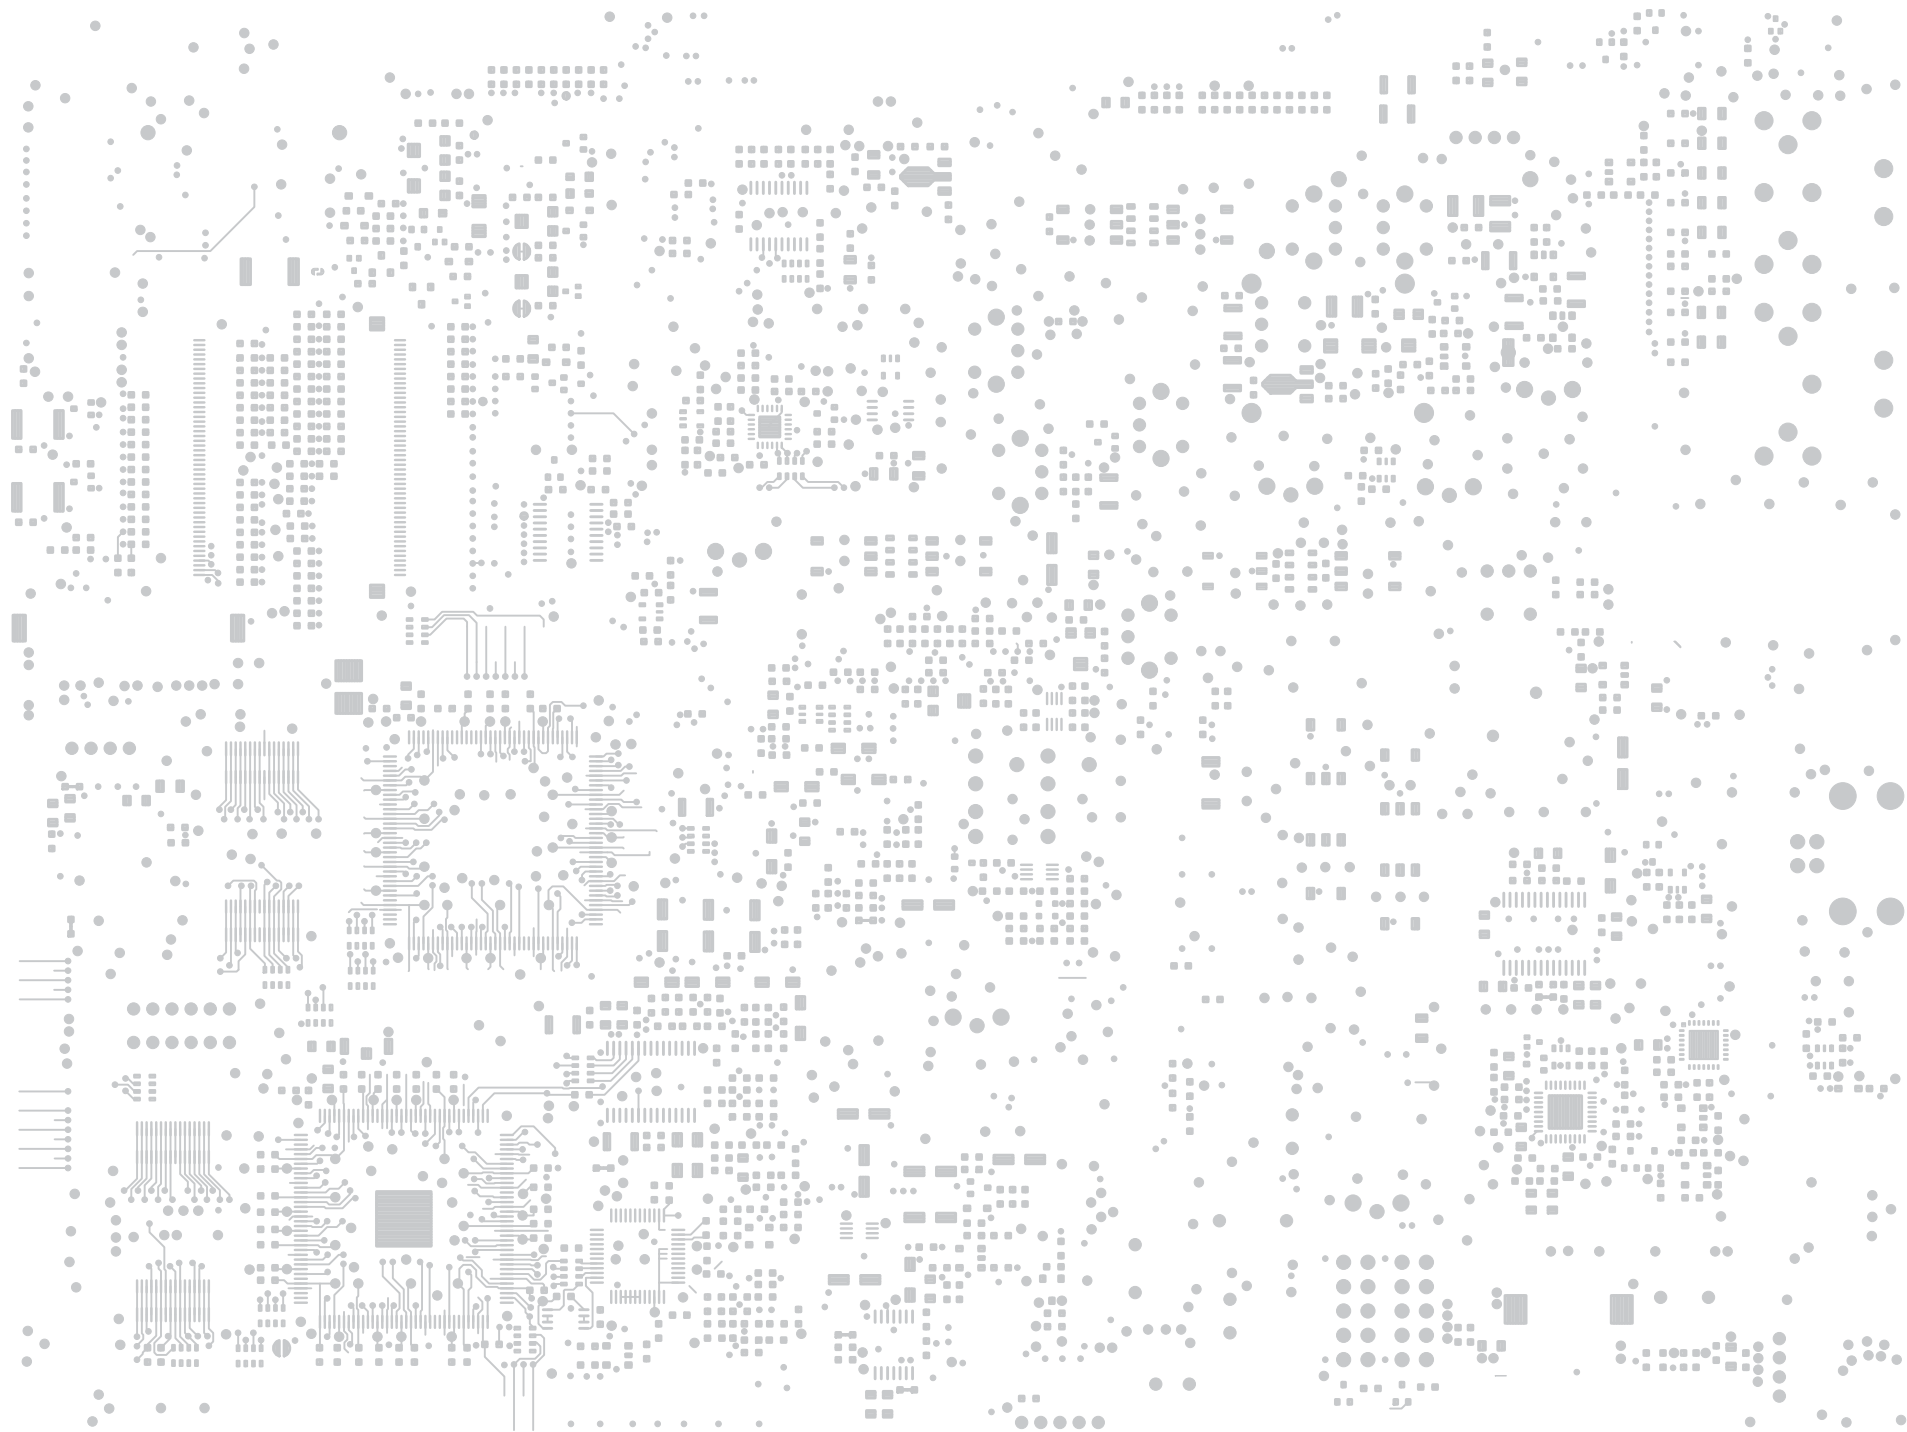



P.1


V 1 V 1 5 W 1 4 W 5 1 4 W 5 5 W 8 W 5 2 W 7 8 W 5






The combination of this side and the bottom side shows the board layout in the same configuration as the actual P.C.Board.


• PRE AMP BOARD  
(BOTTOM VIEW)

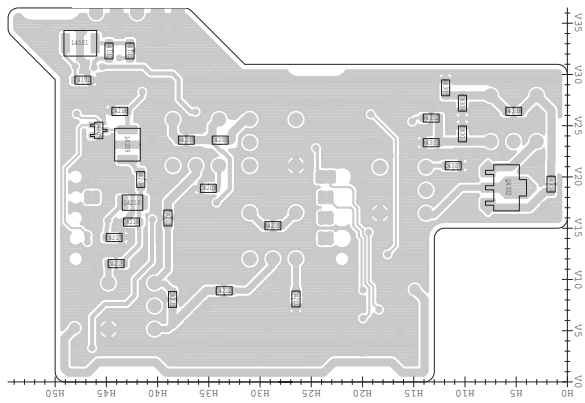


• DCDC BOARD  
(BOTTOM VIEW)

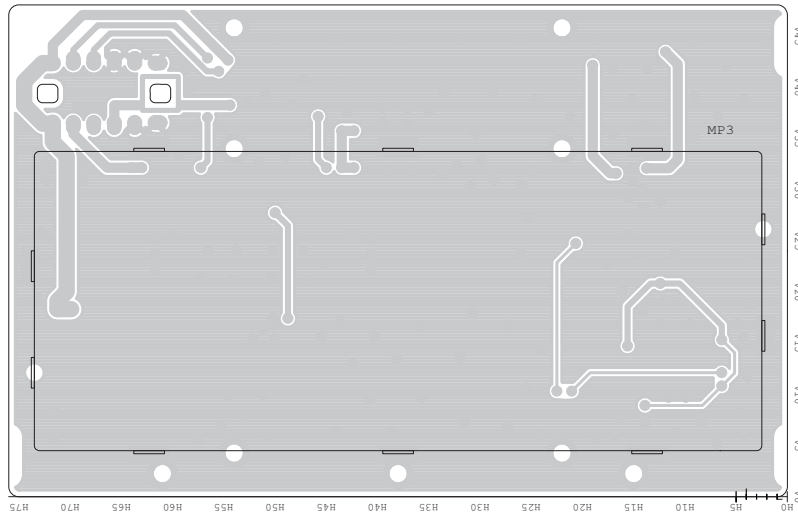

• PLL UNIT  
(BOTTOM VIEW)

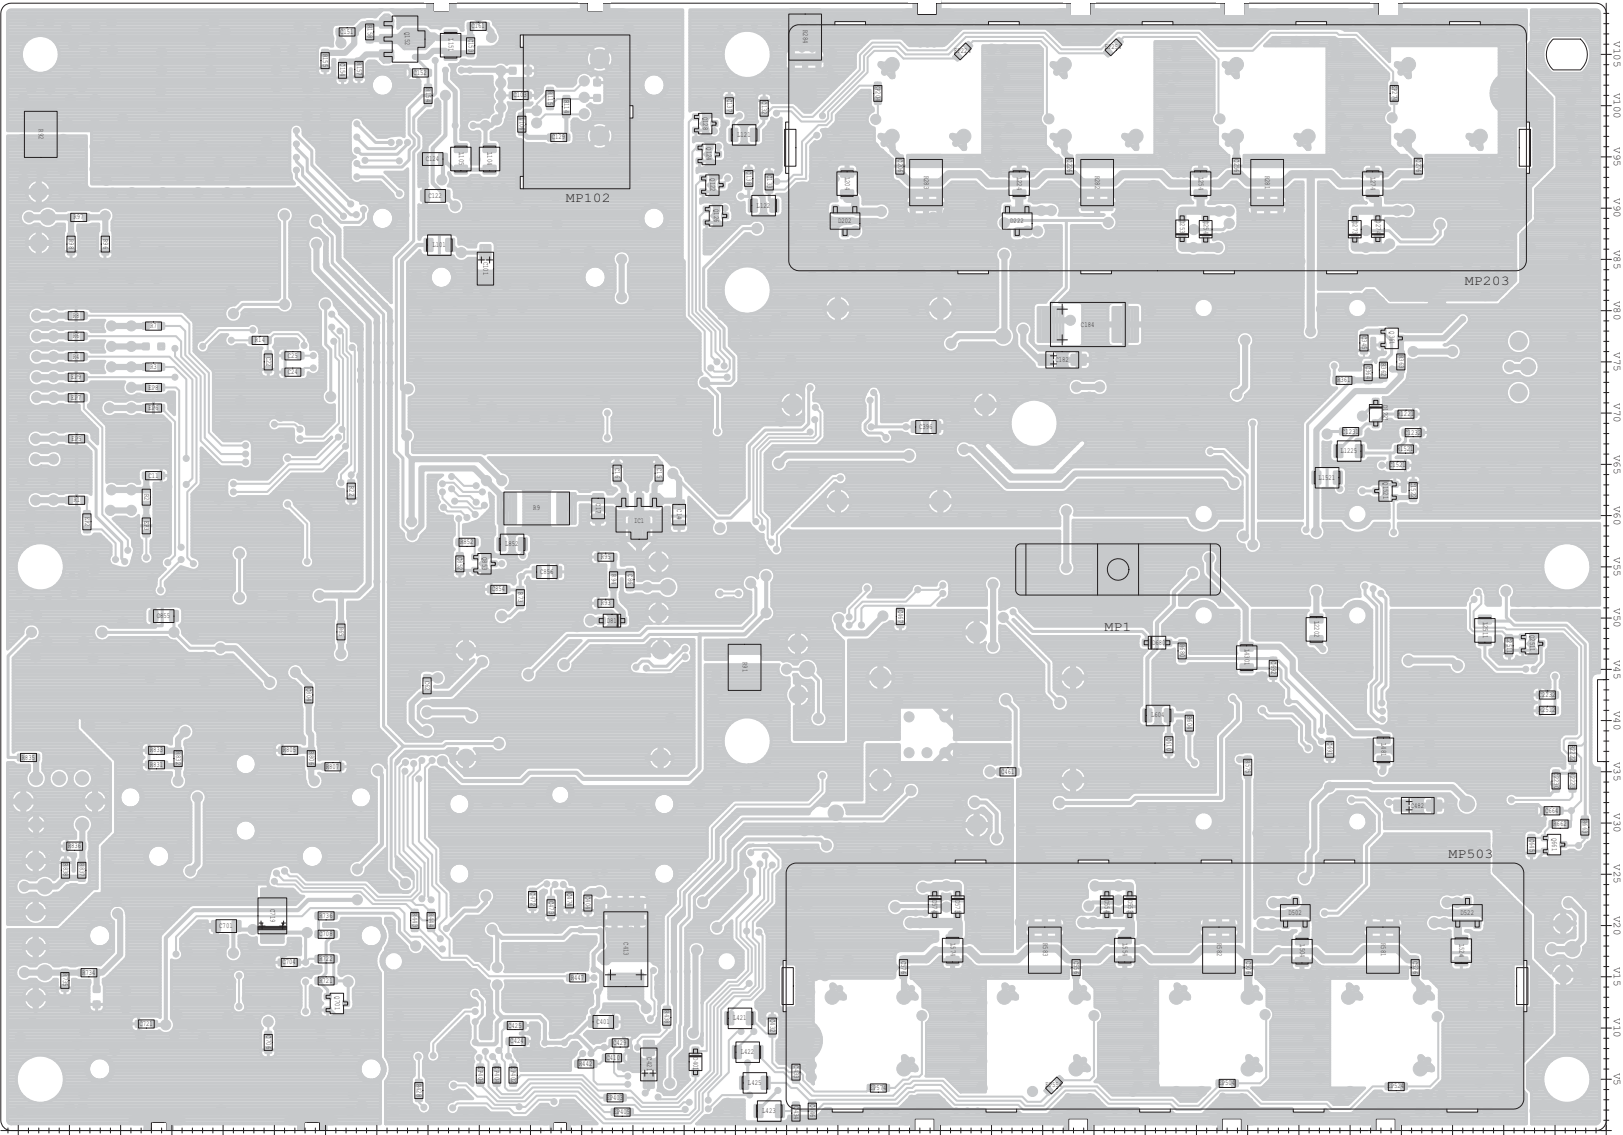


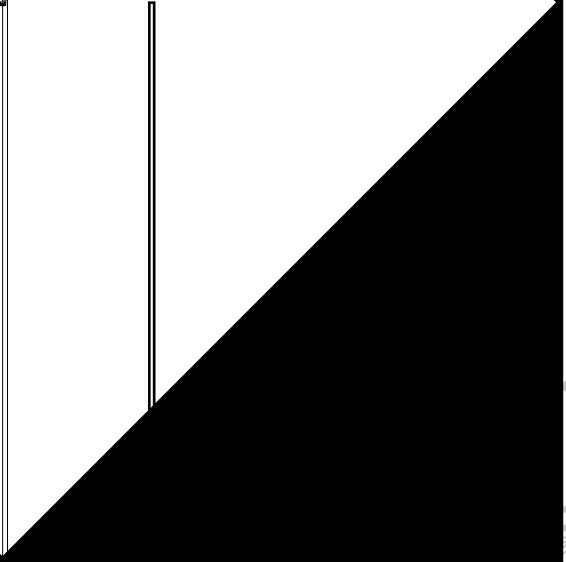




The combination of this side and the bottom side shows the board layout in the same configuration as the actual P.C.Board.


• BPF BOARD  
(BOTTOM VIEW)

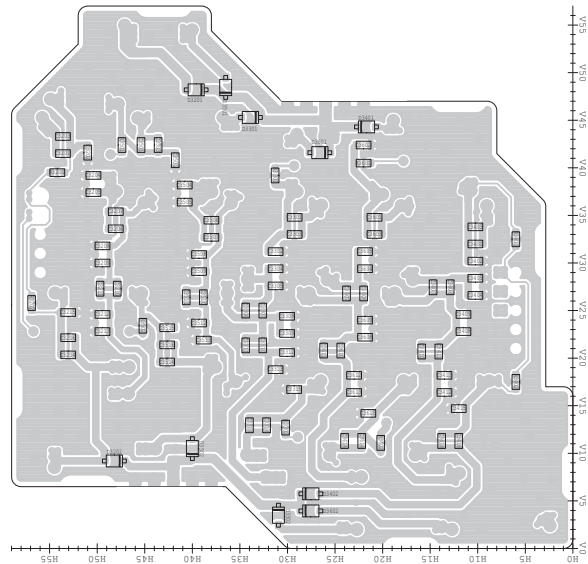


• RIT BOARD  
(BOTTOM VIEW)




• MCF-M BOARD  
(BOTTOM VIEW)

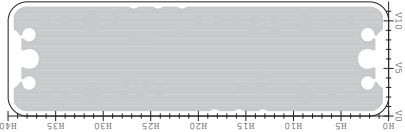


• MCF-N BOARD  
(BOTTOM VIEW)

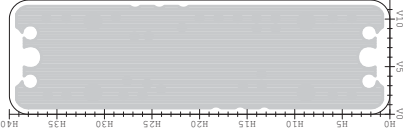


• MCF-W BOARD  
(BOTTOM VIEW)

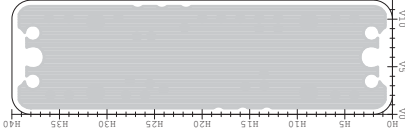


• JACK BOARD  
(BOTTOM VIEW)

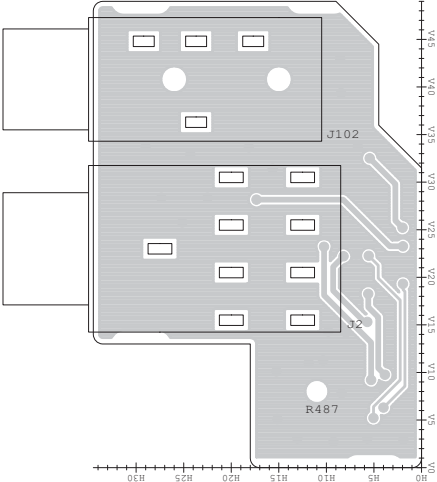


• RF UNIT  
(BOTTOM VIEW)

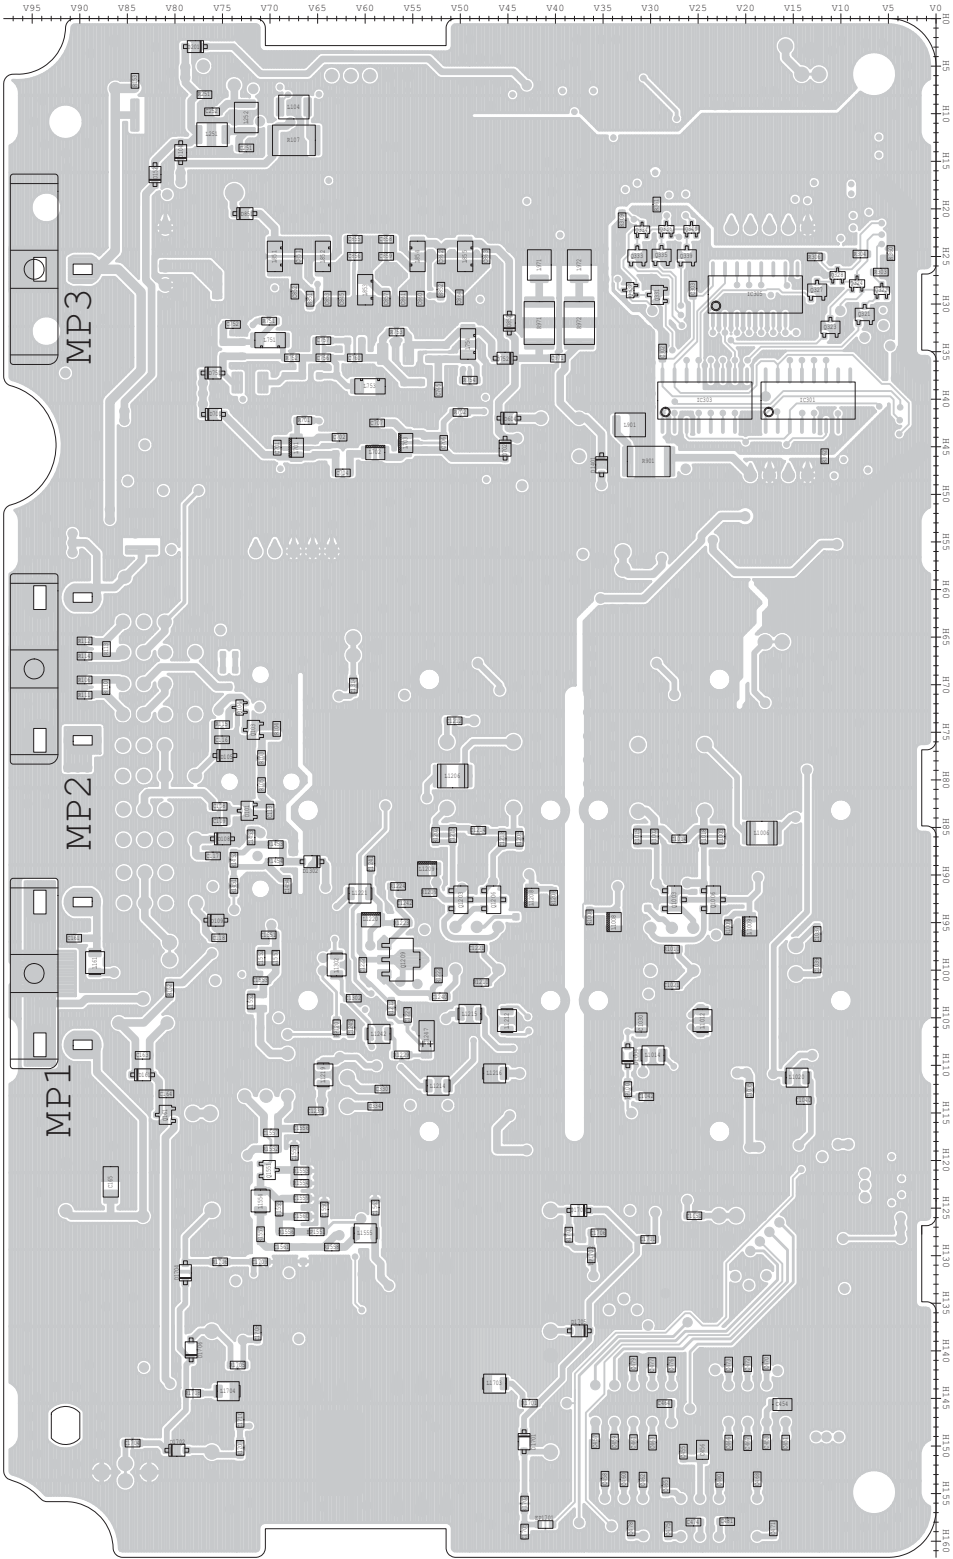


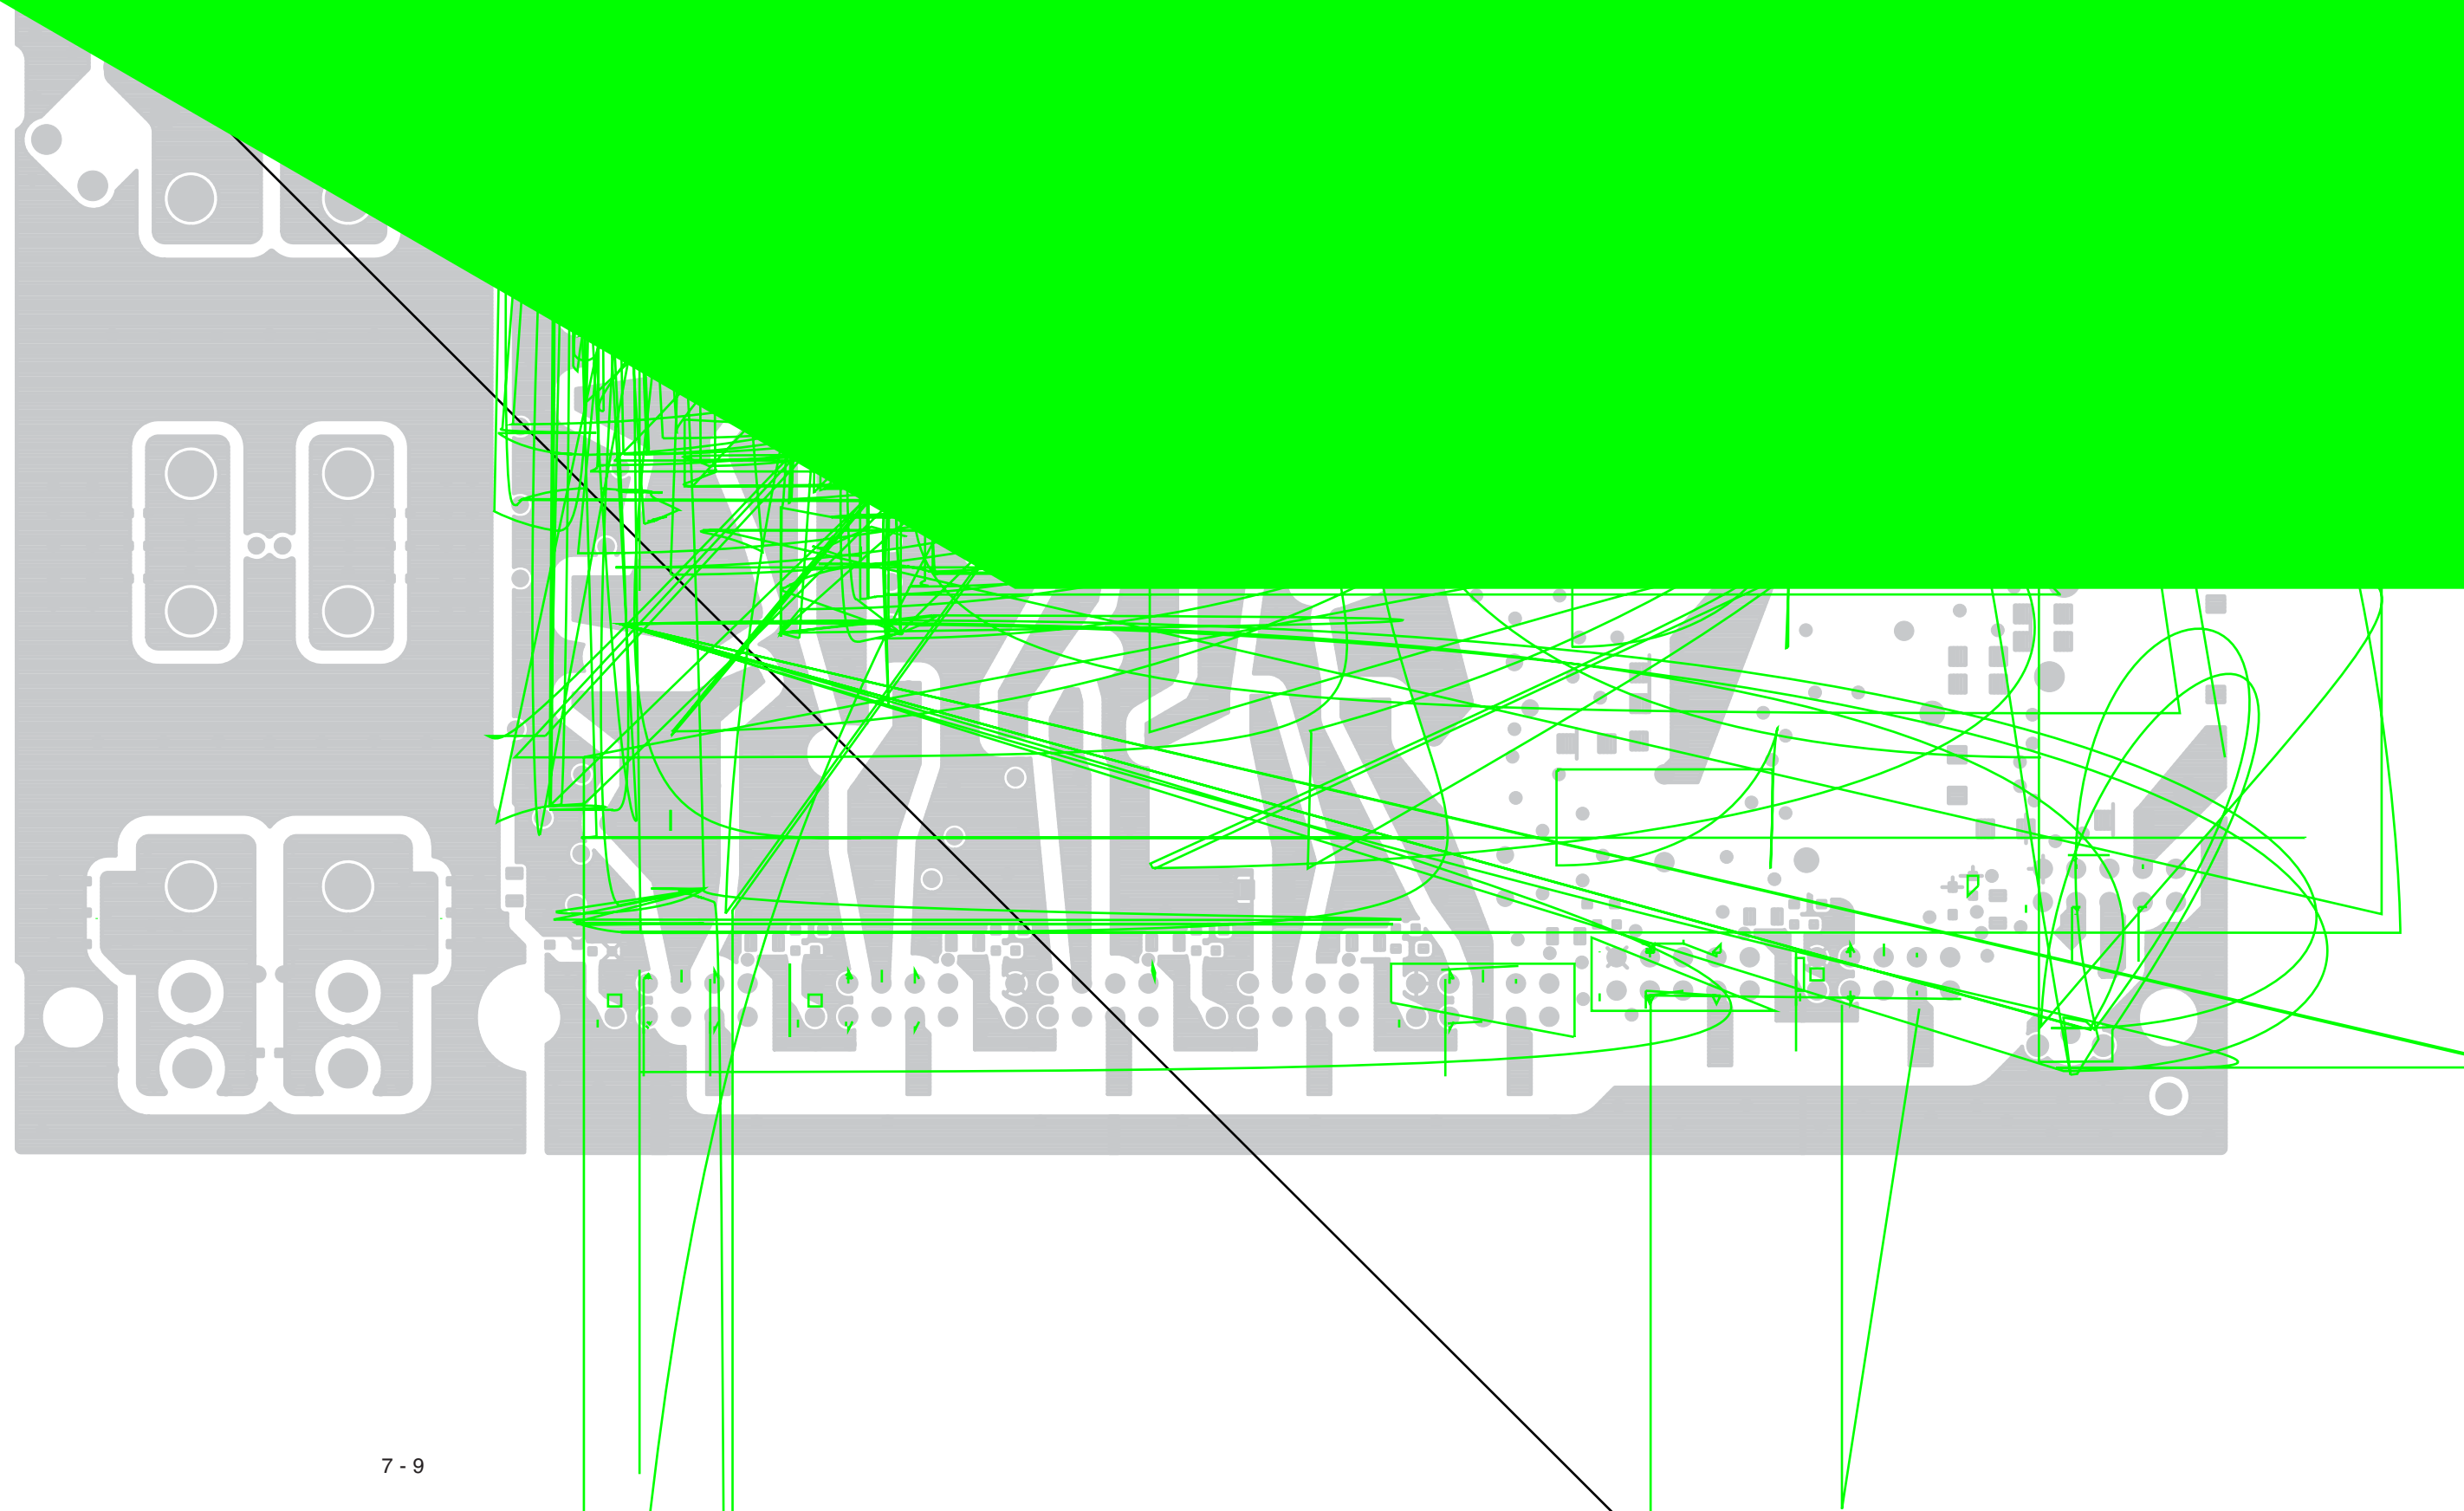

• FILTER UNIT  
(BOTTOM VIEW)

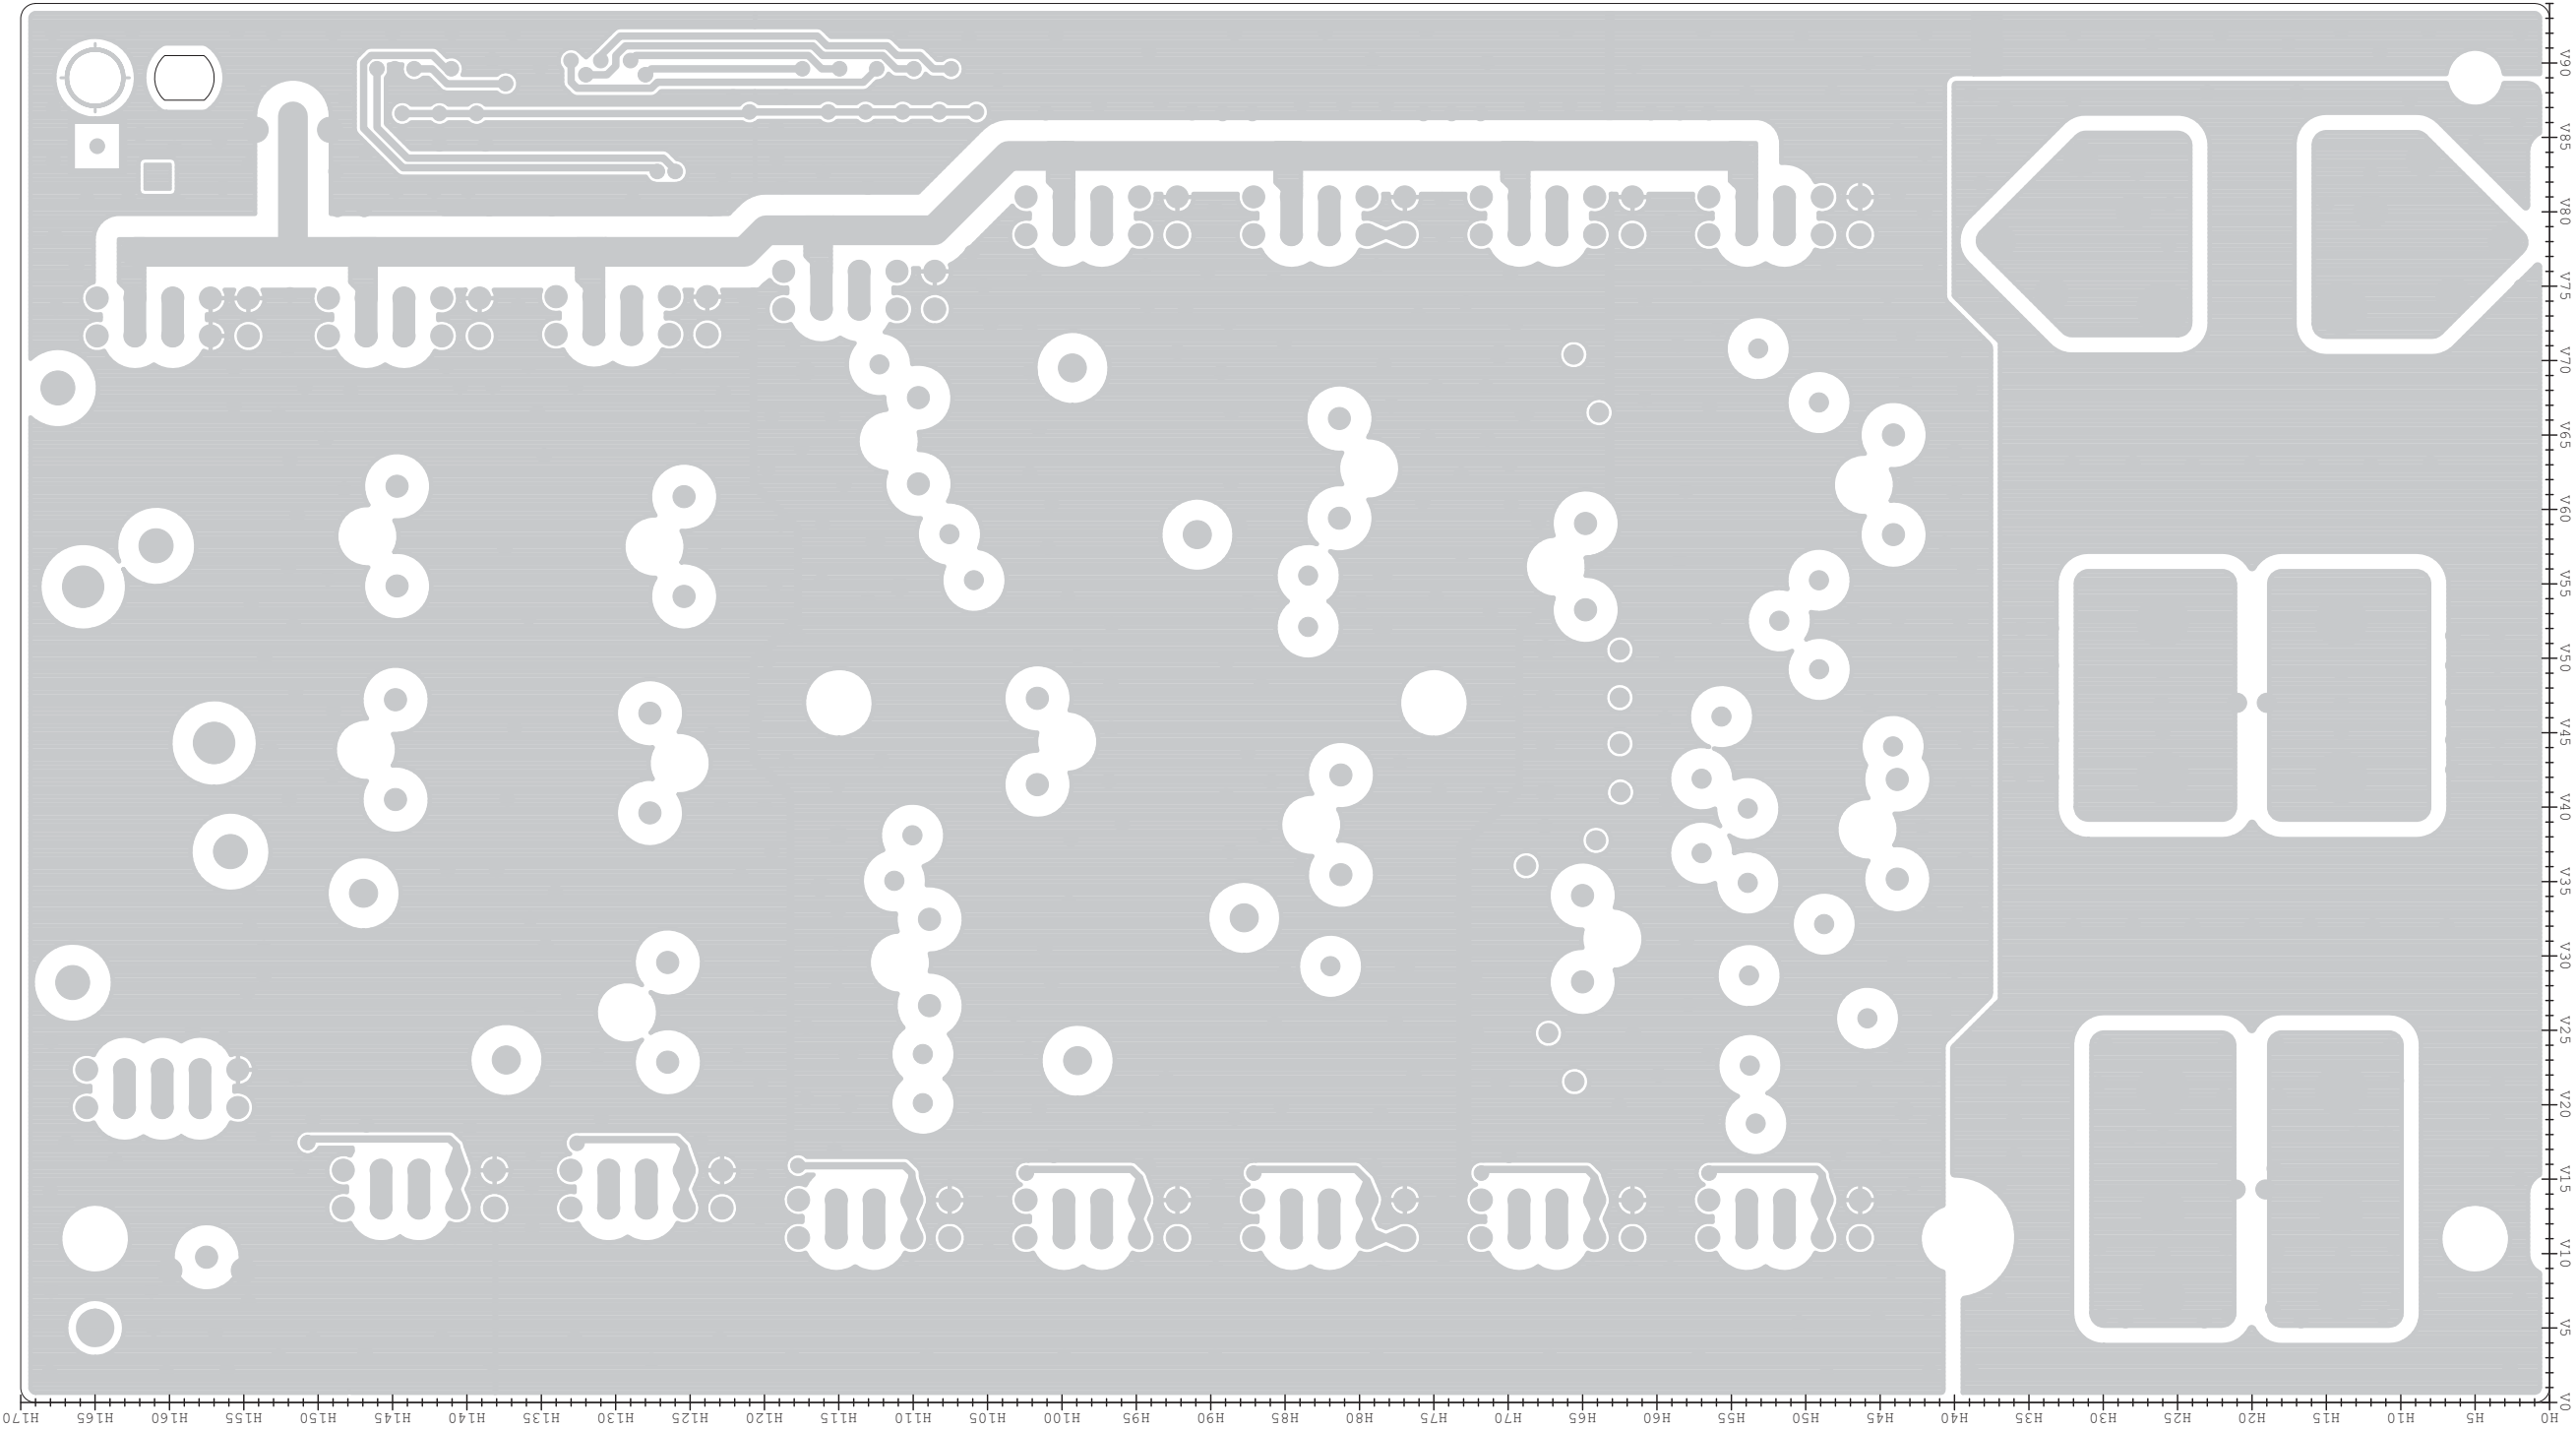




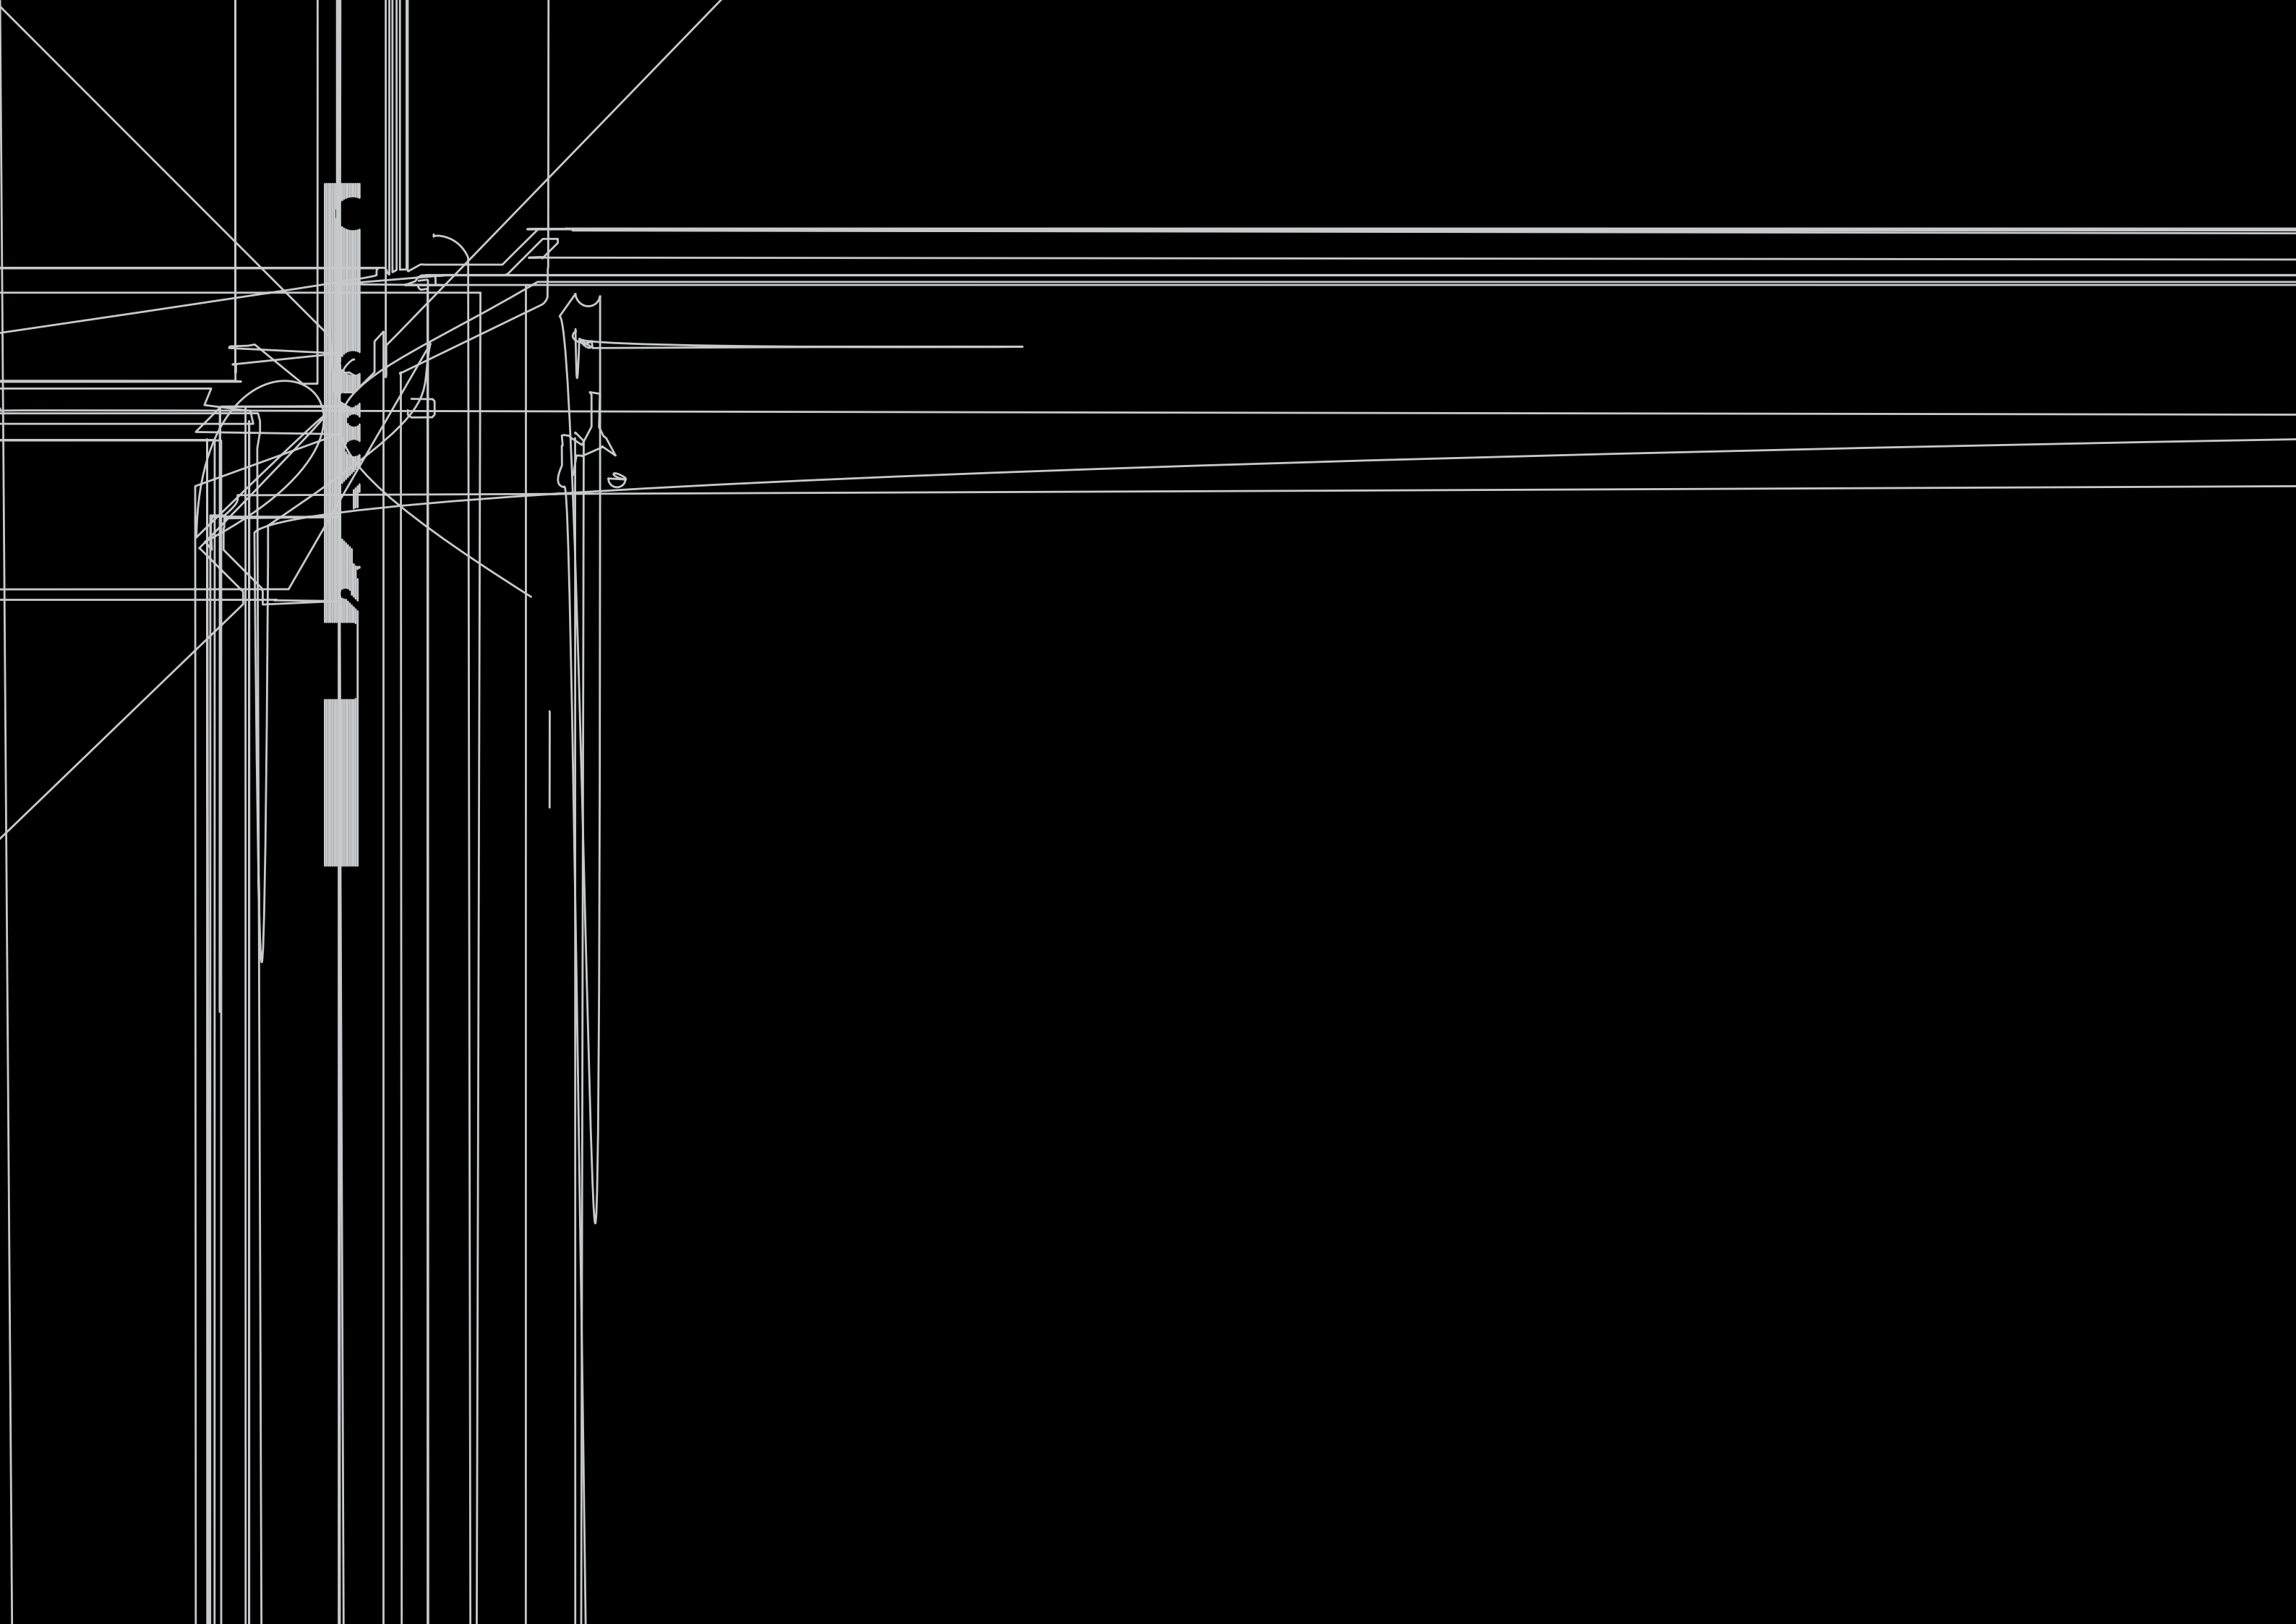

• TUNER UNIT  
(BOTTOM VIEW)




• CTRL UNIT  
(BOTTOM VIEW)

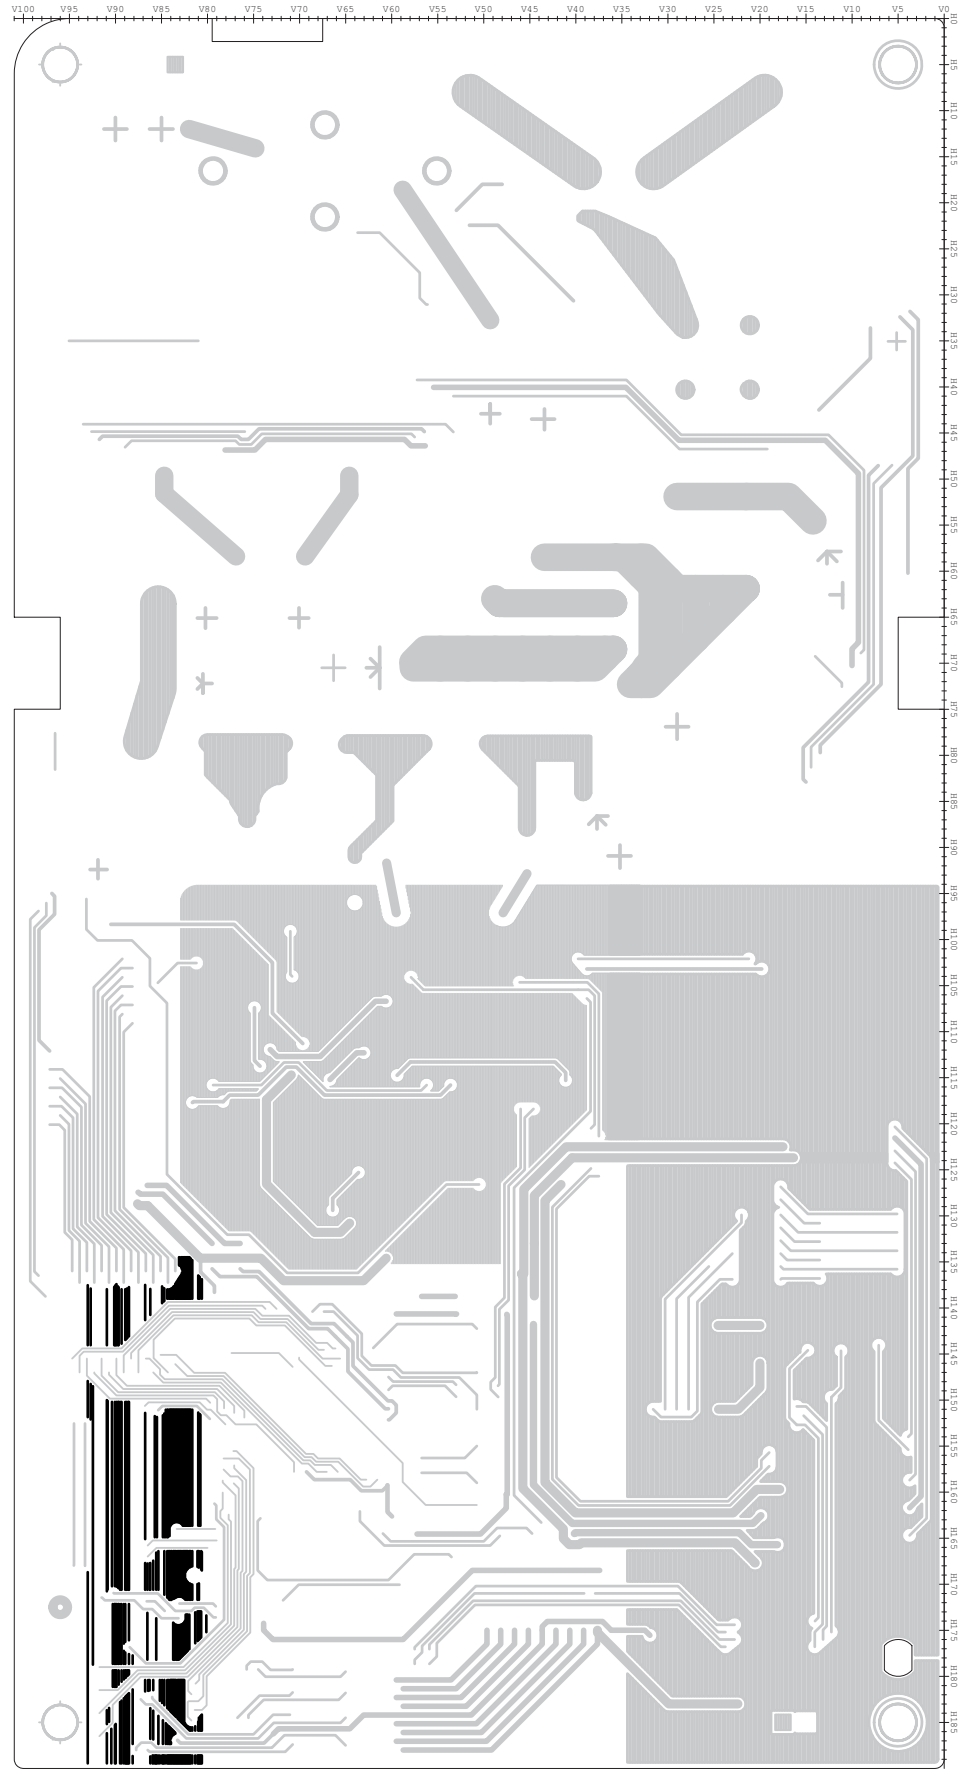


The combination of this side and the bottom side shows the board layout in the same configuration as the actual P.C.Board.

The combination of this side and the bottom side shows the board layout in the same configuration as the actual P.C.Board.

- **DISPLAY UNIT  
(TOP VIEW)**

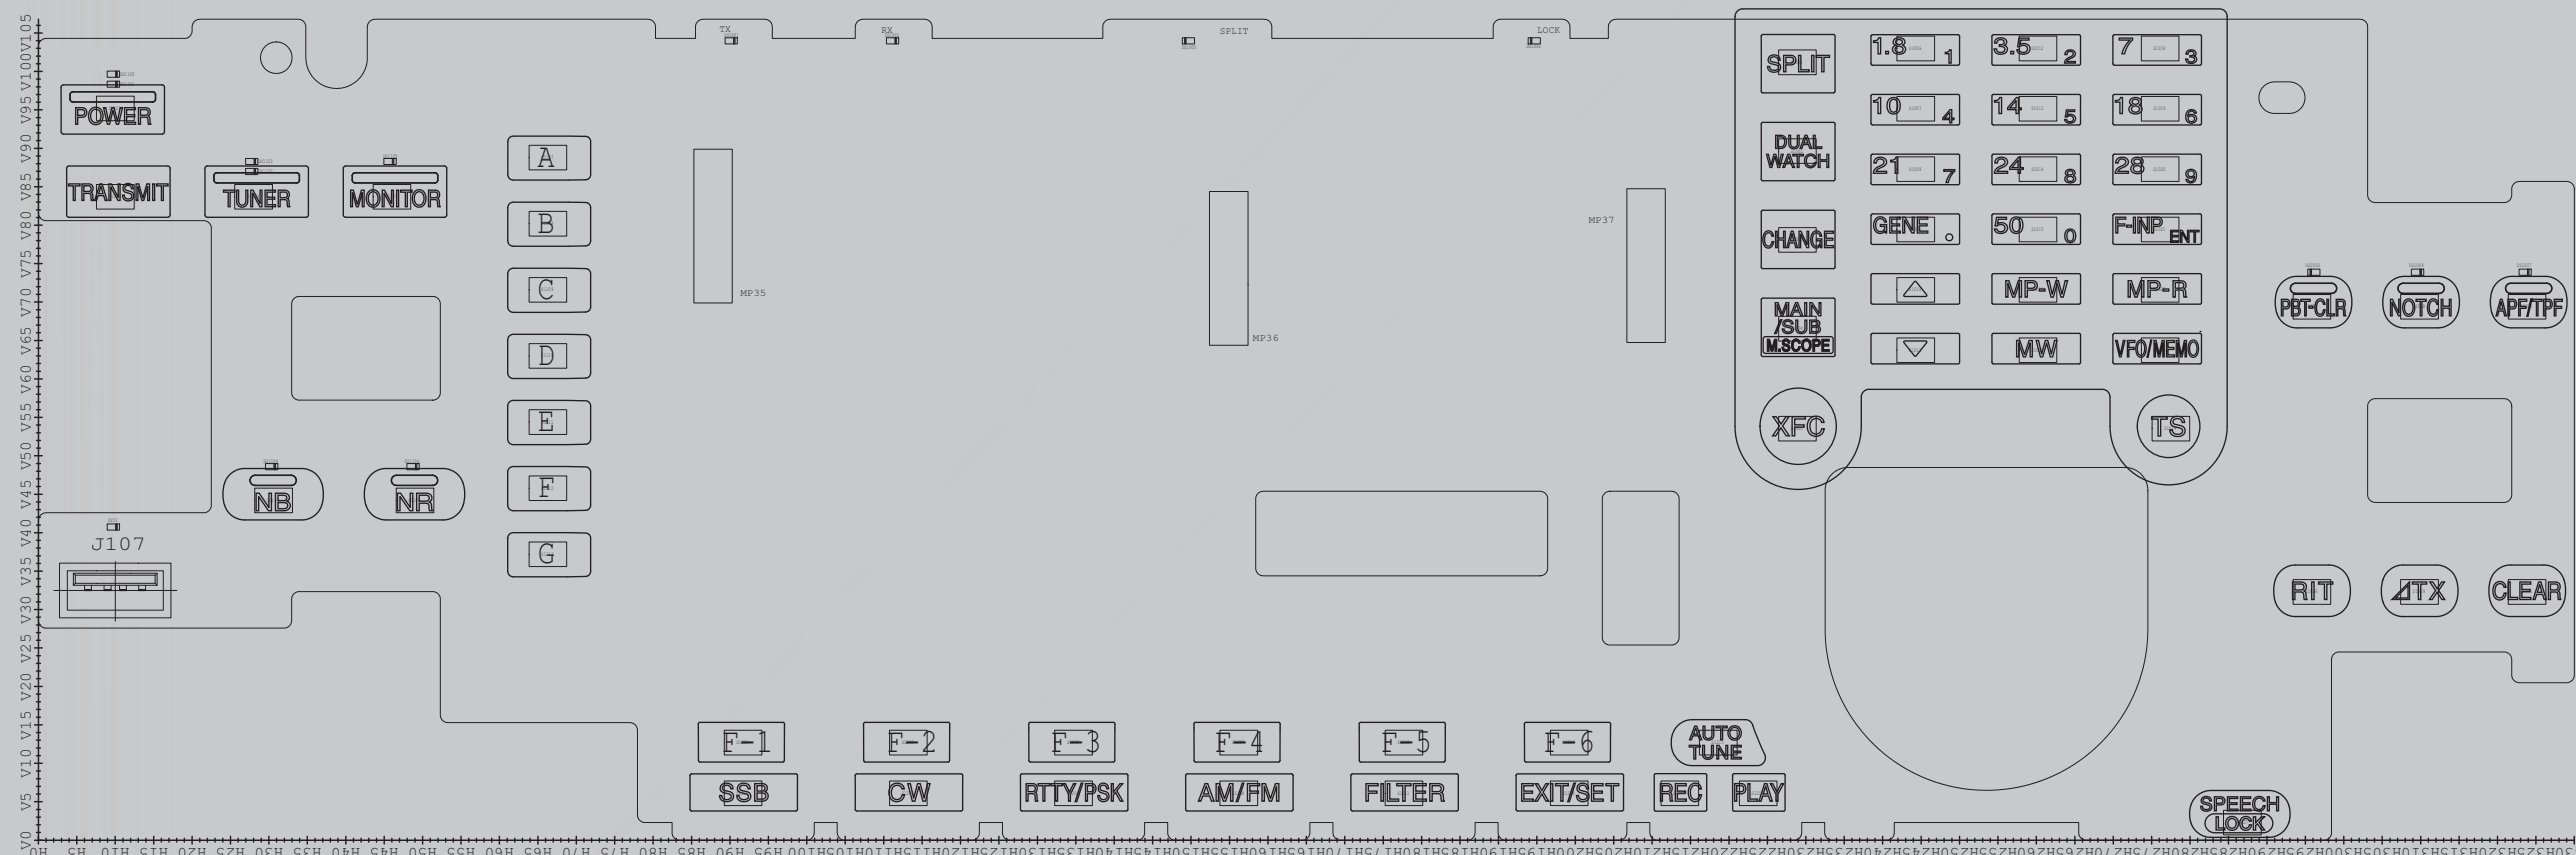


- MIC BOARD (TOP VIEW)




The combination of this side and the bottom side shows the board layout in the same configuration as the actual P.C.Board.


- **DISPLAY UNIT  
(BOTTOM VIEW)**

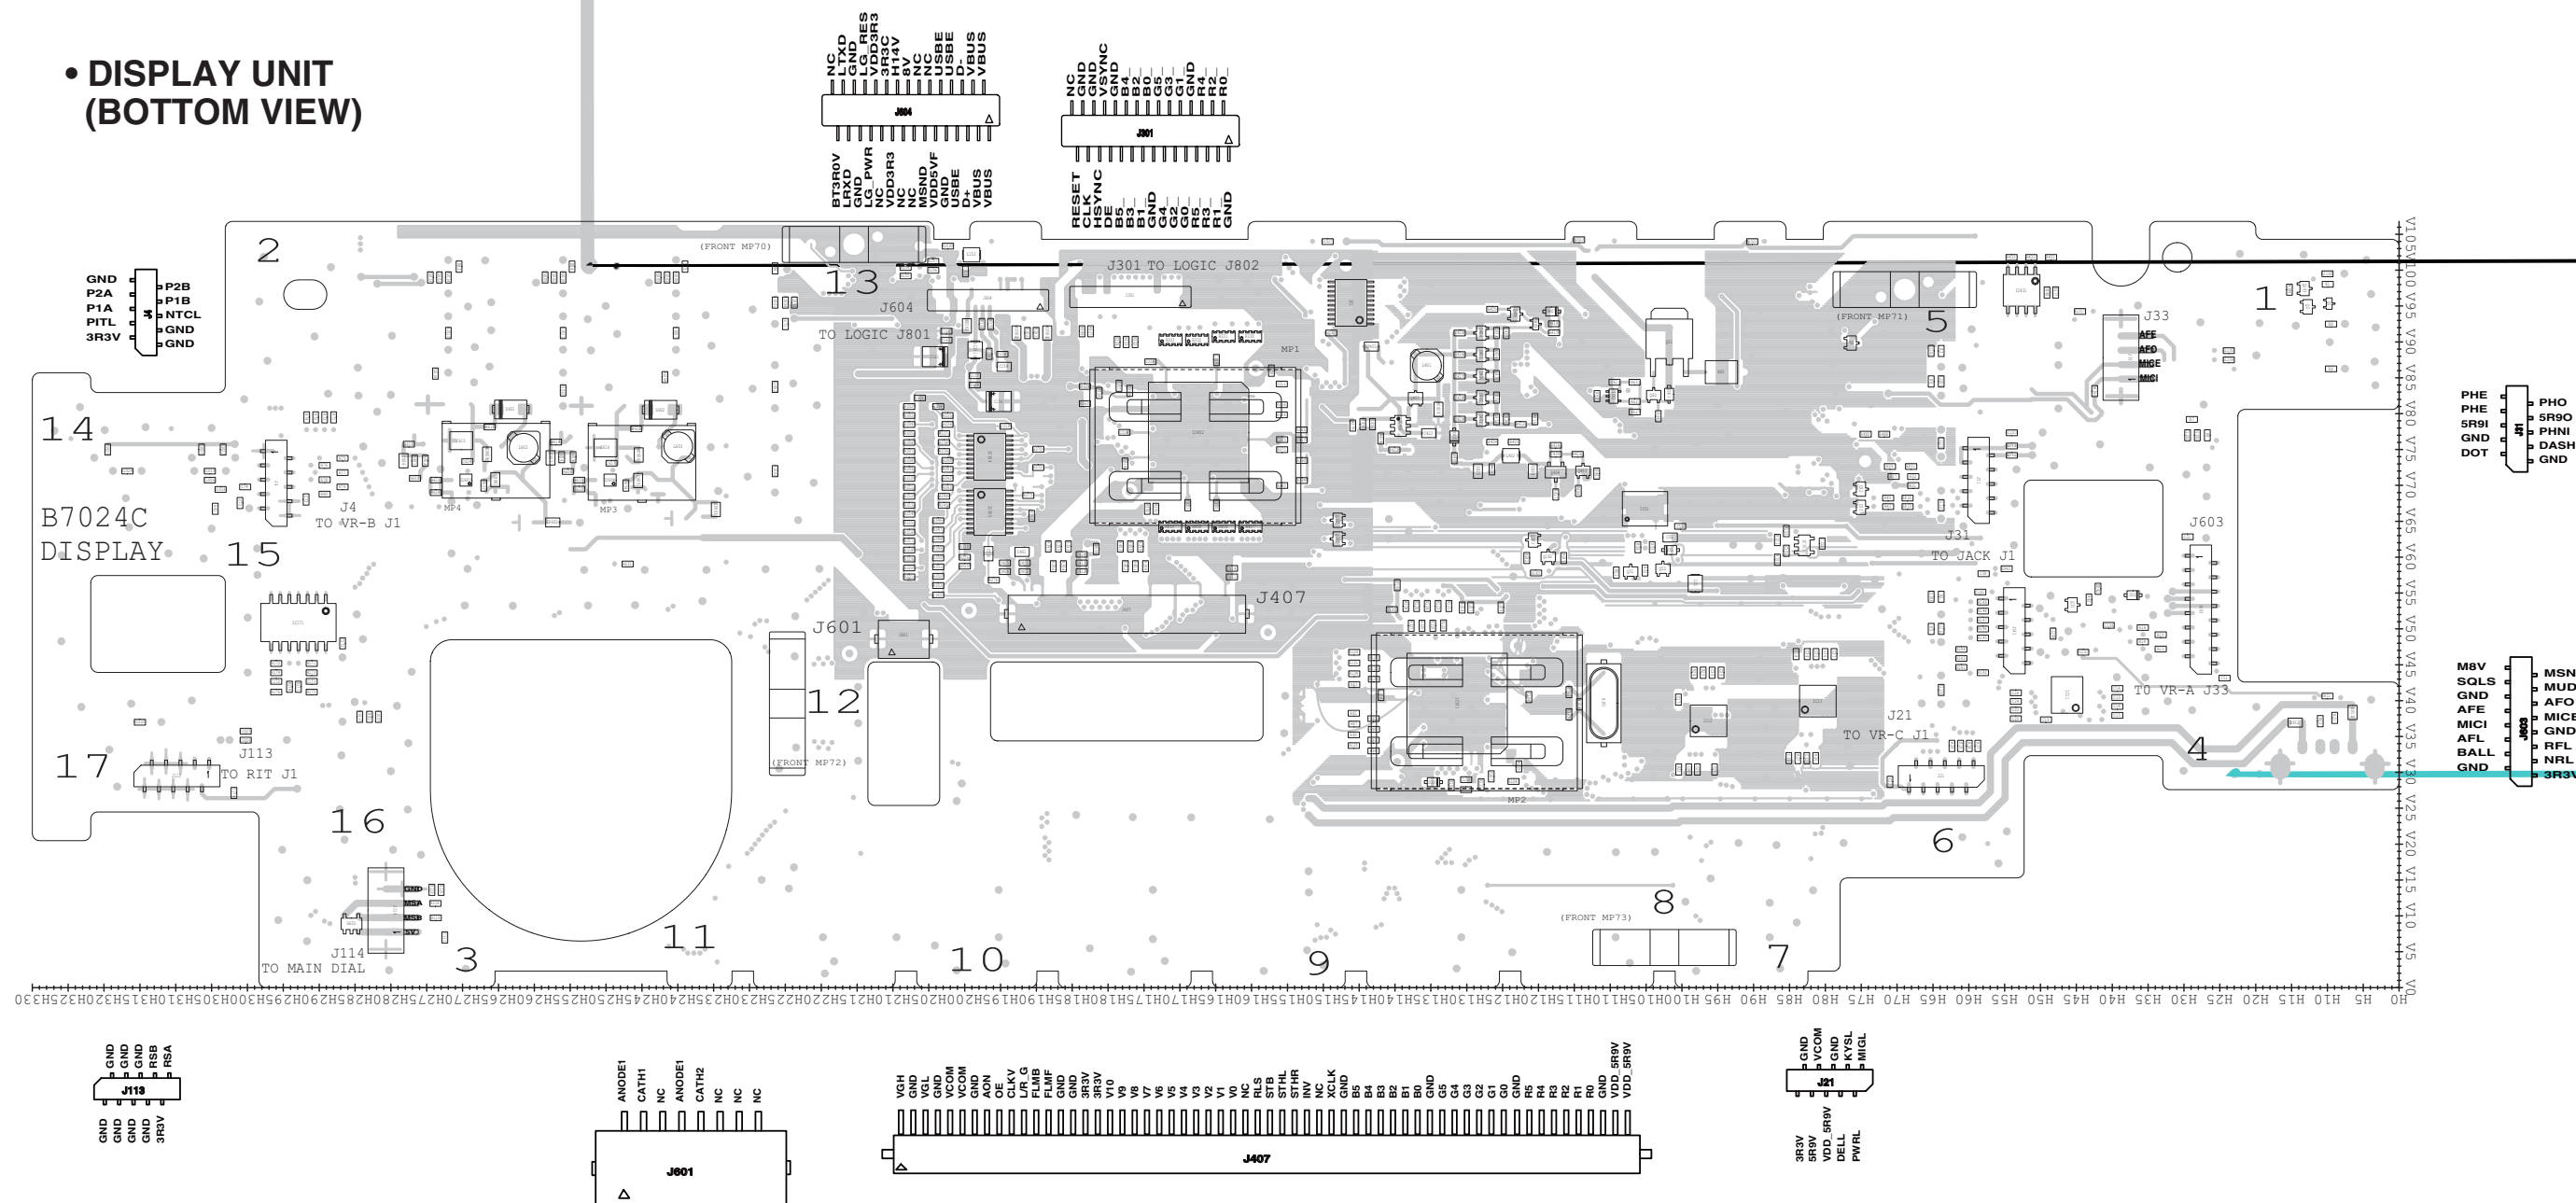


- **MIC BOARD  
(BOTTOM VIEW)**





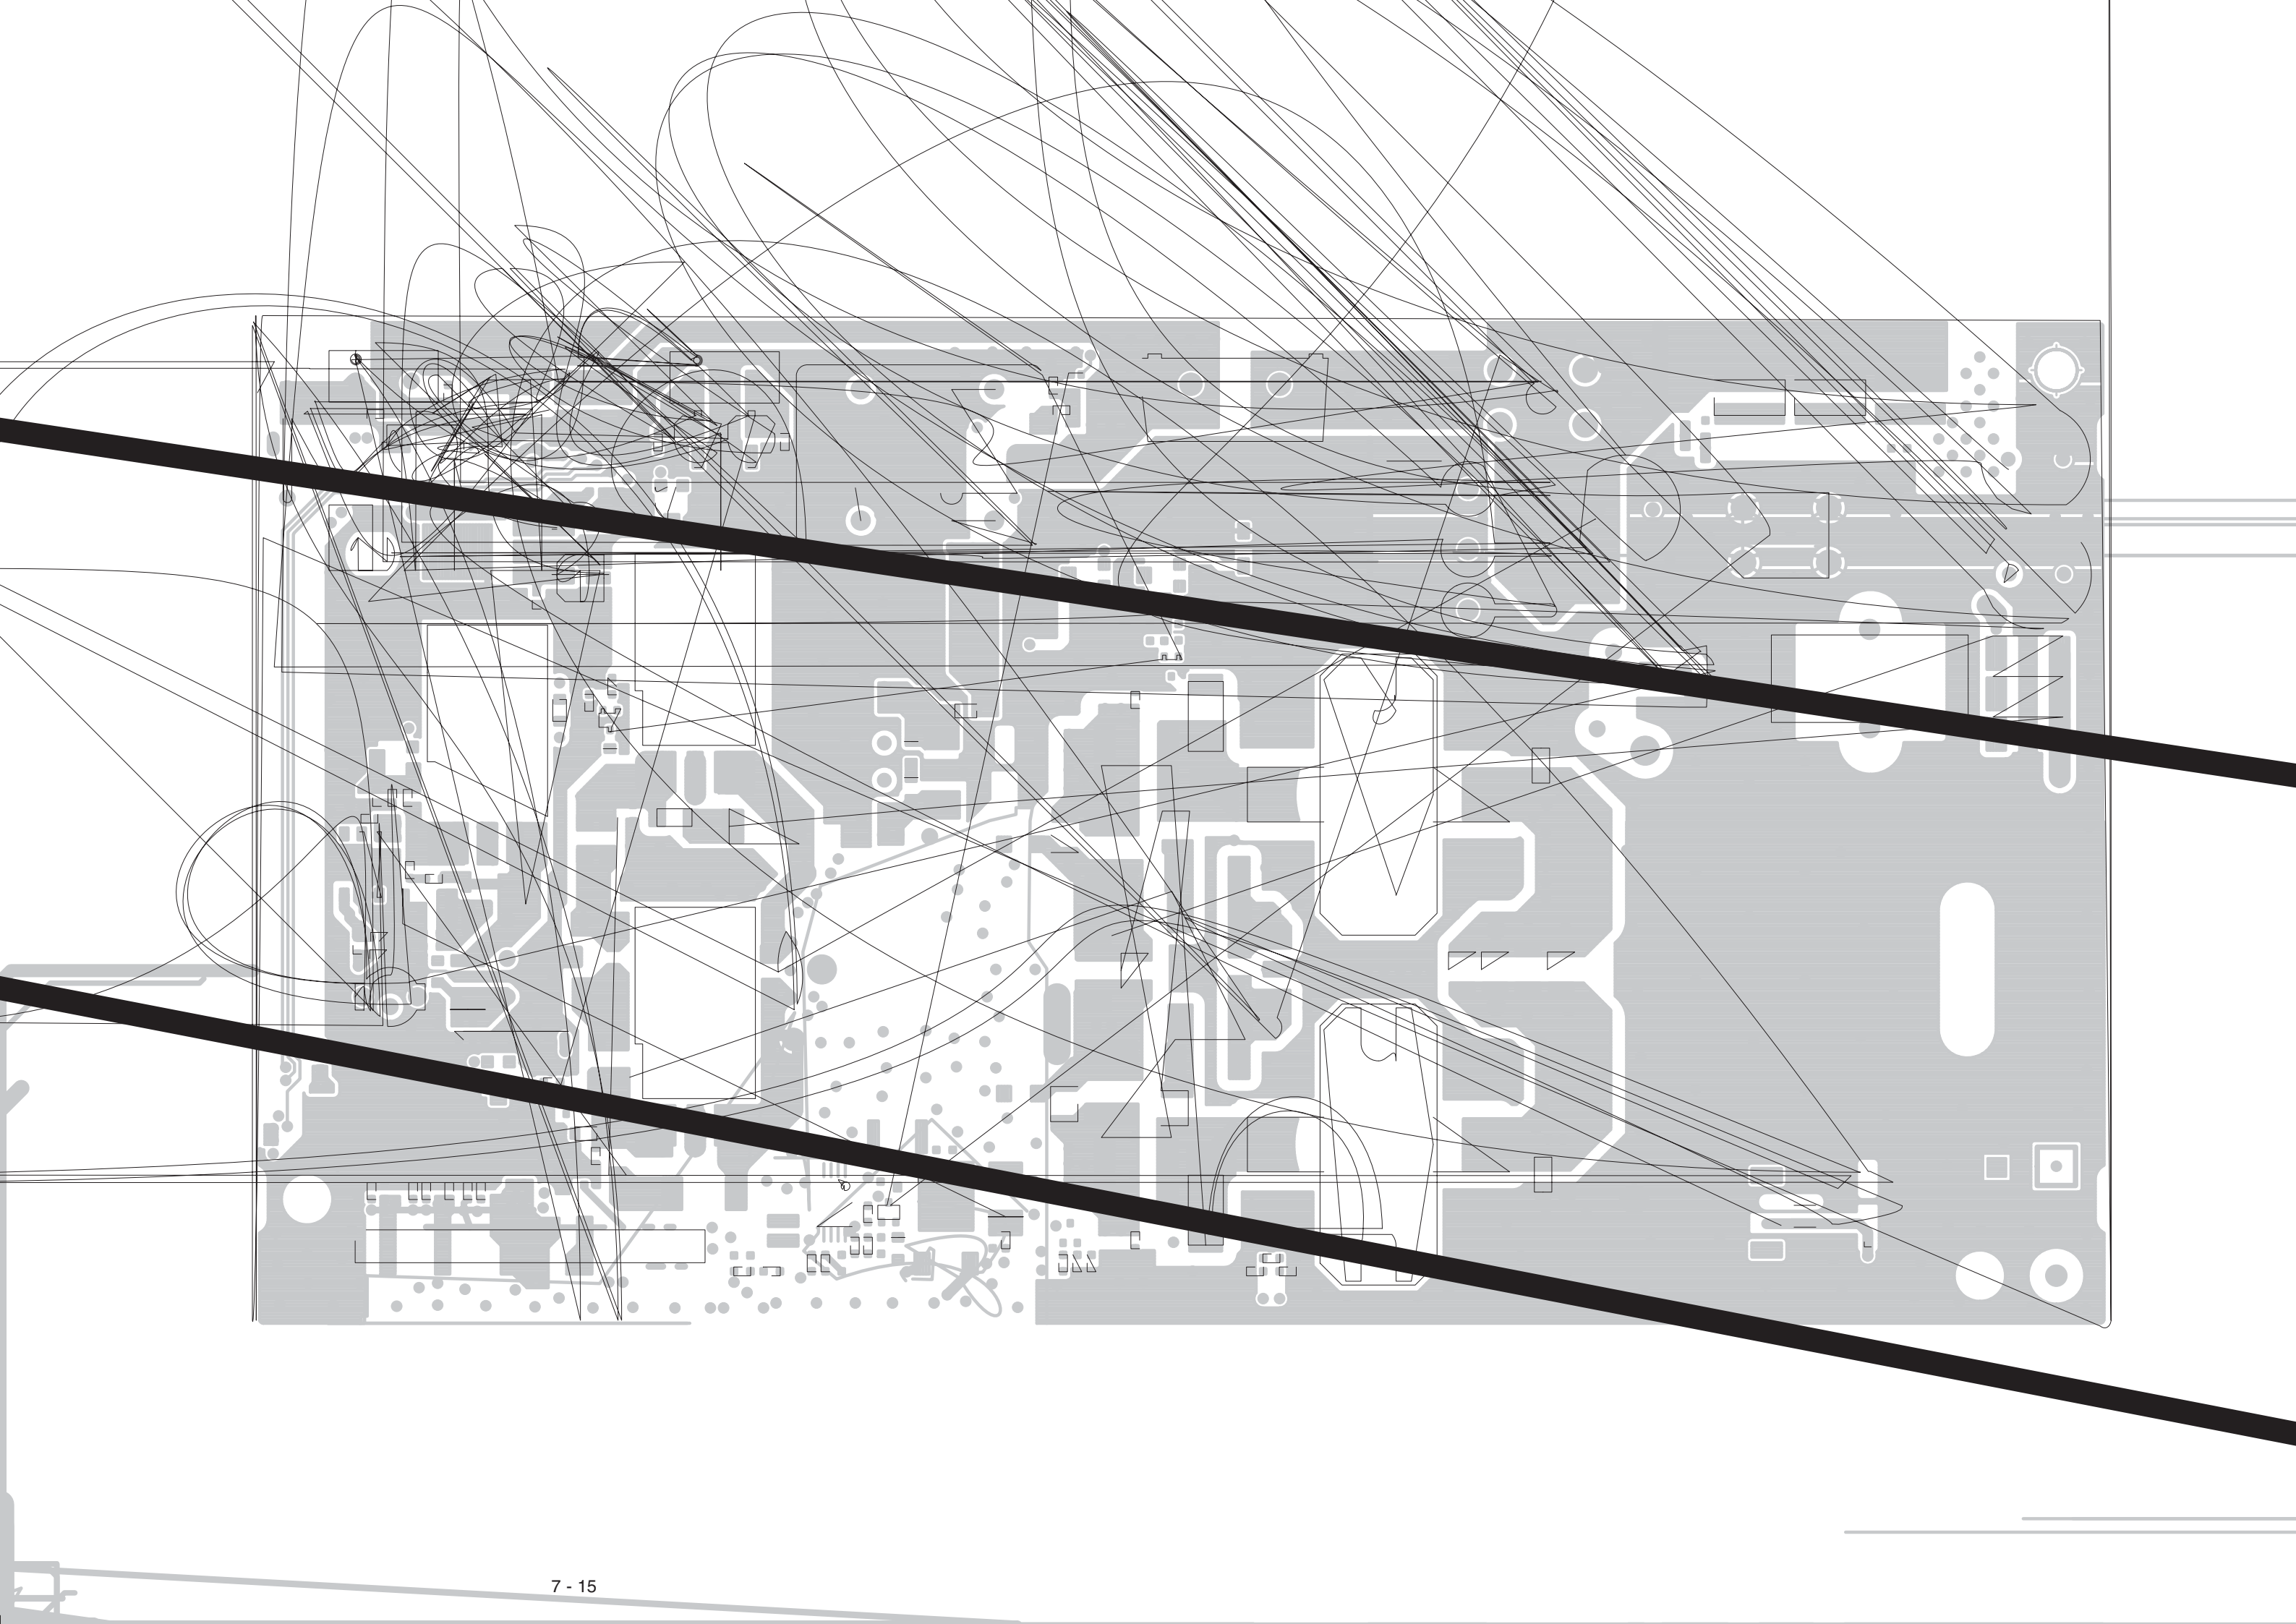


• PA UNIT  
(BOTTOM VIEW)

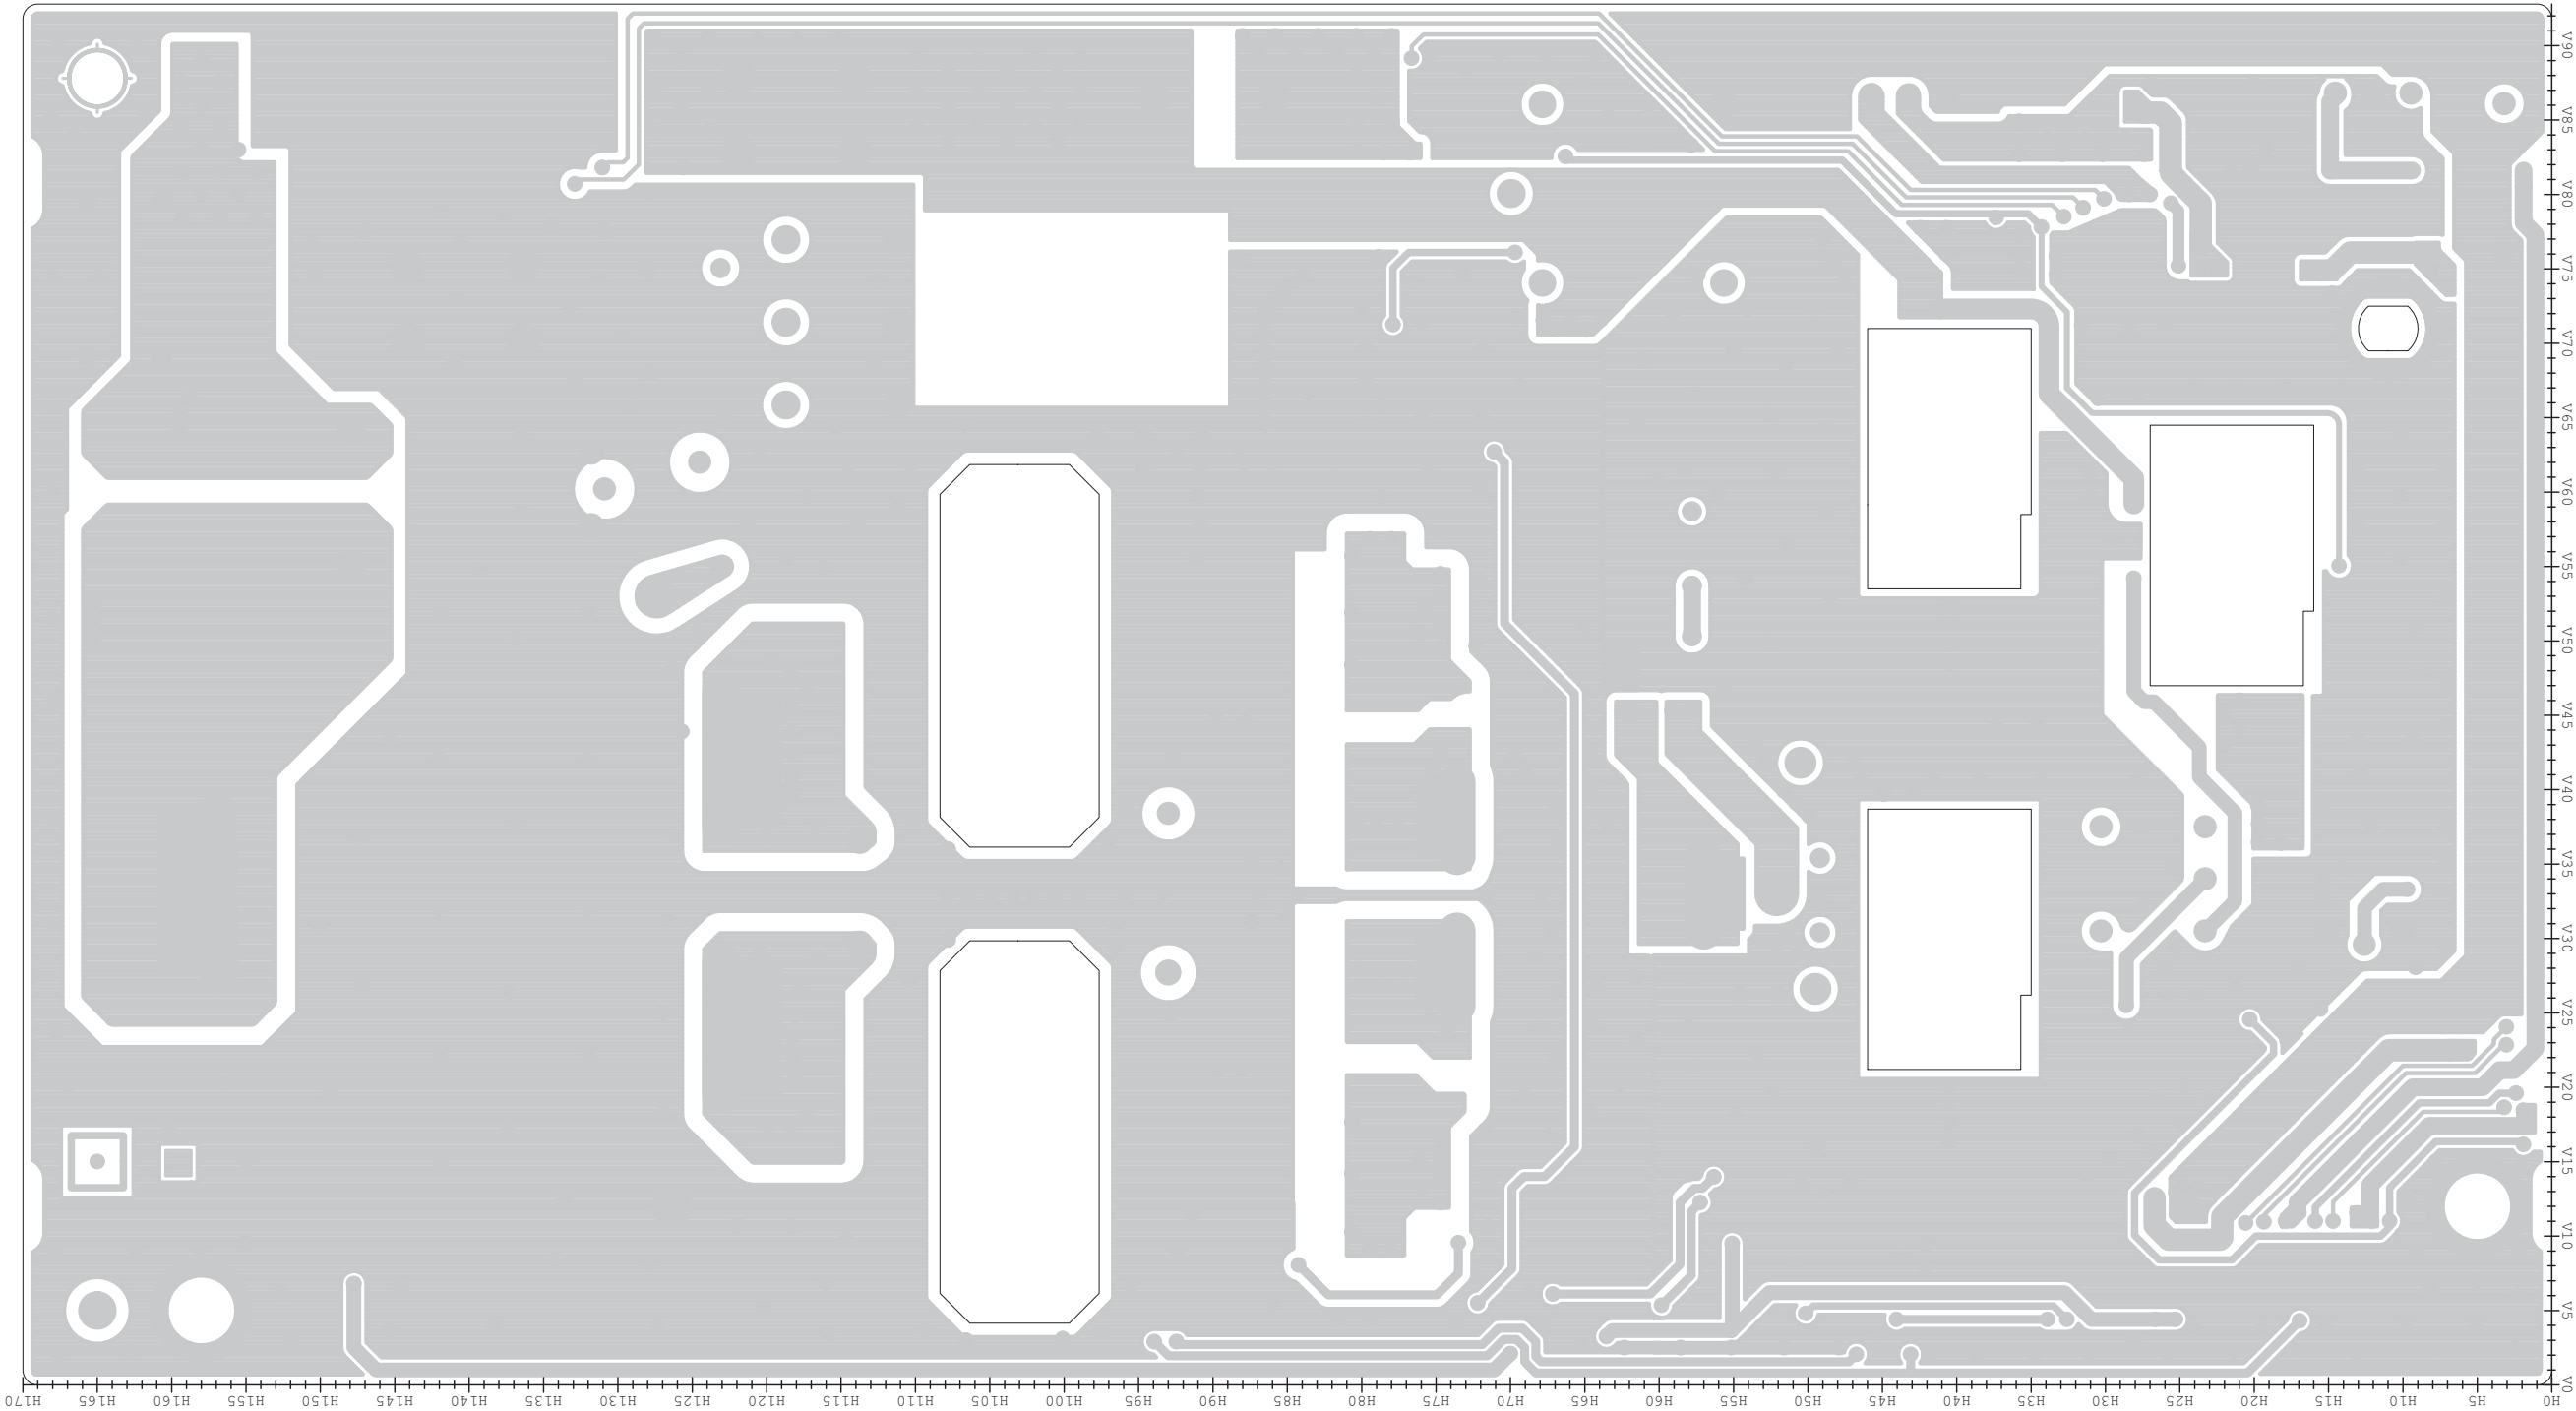


## SECTION 8

## GENERAL WIRING

## GENERAL WIRING (1/2)

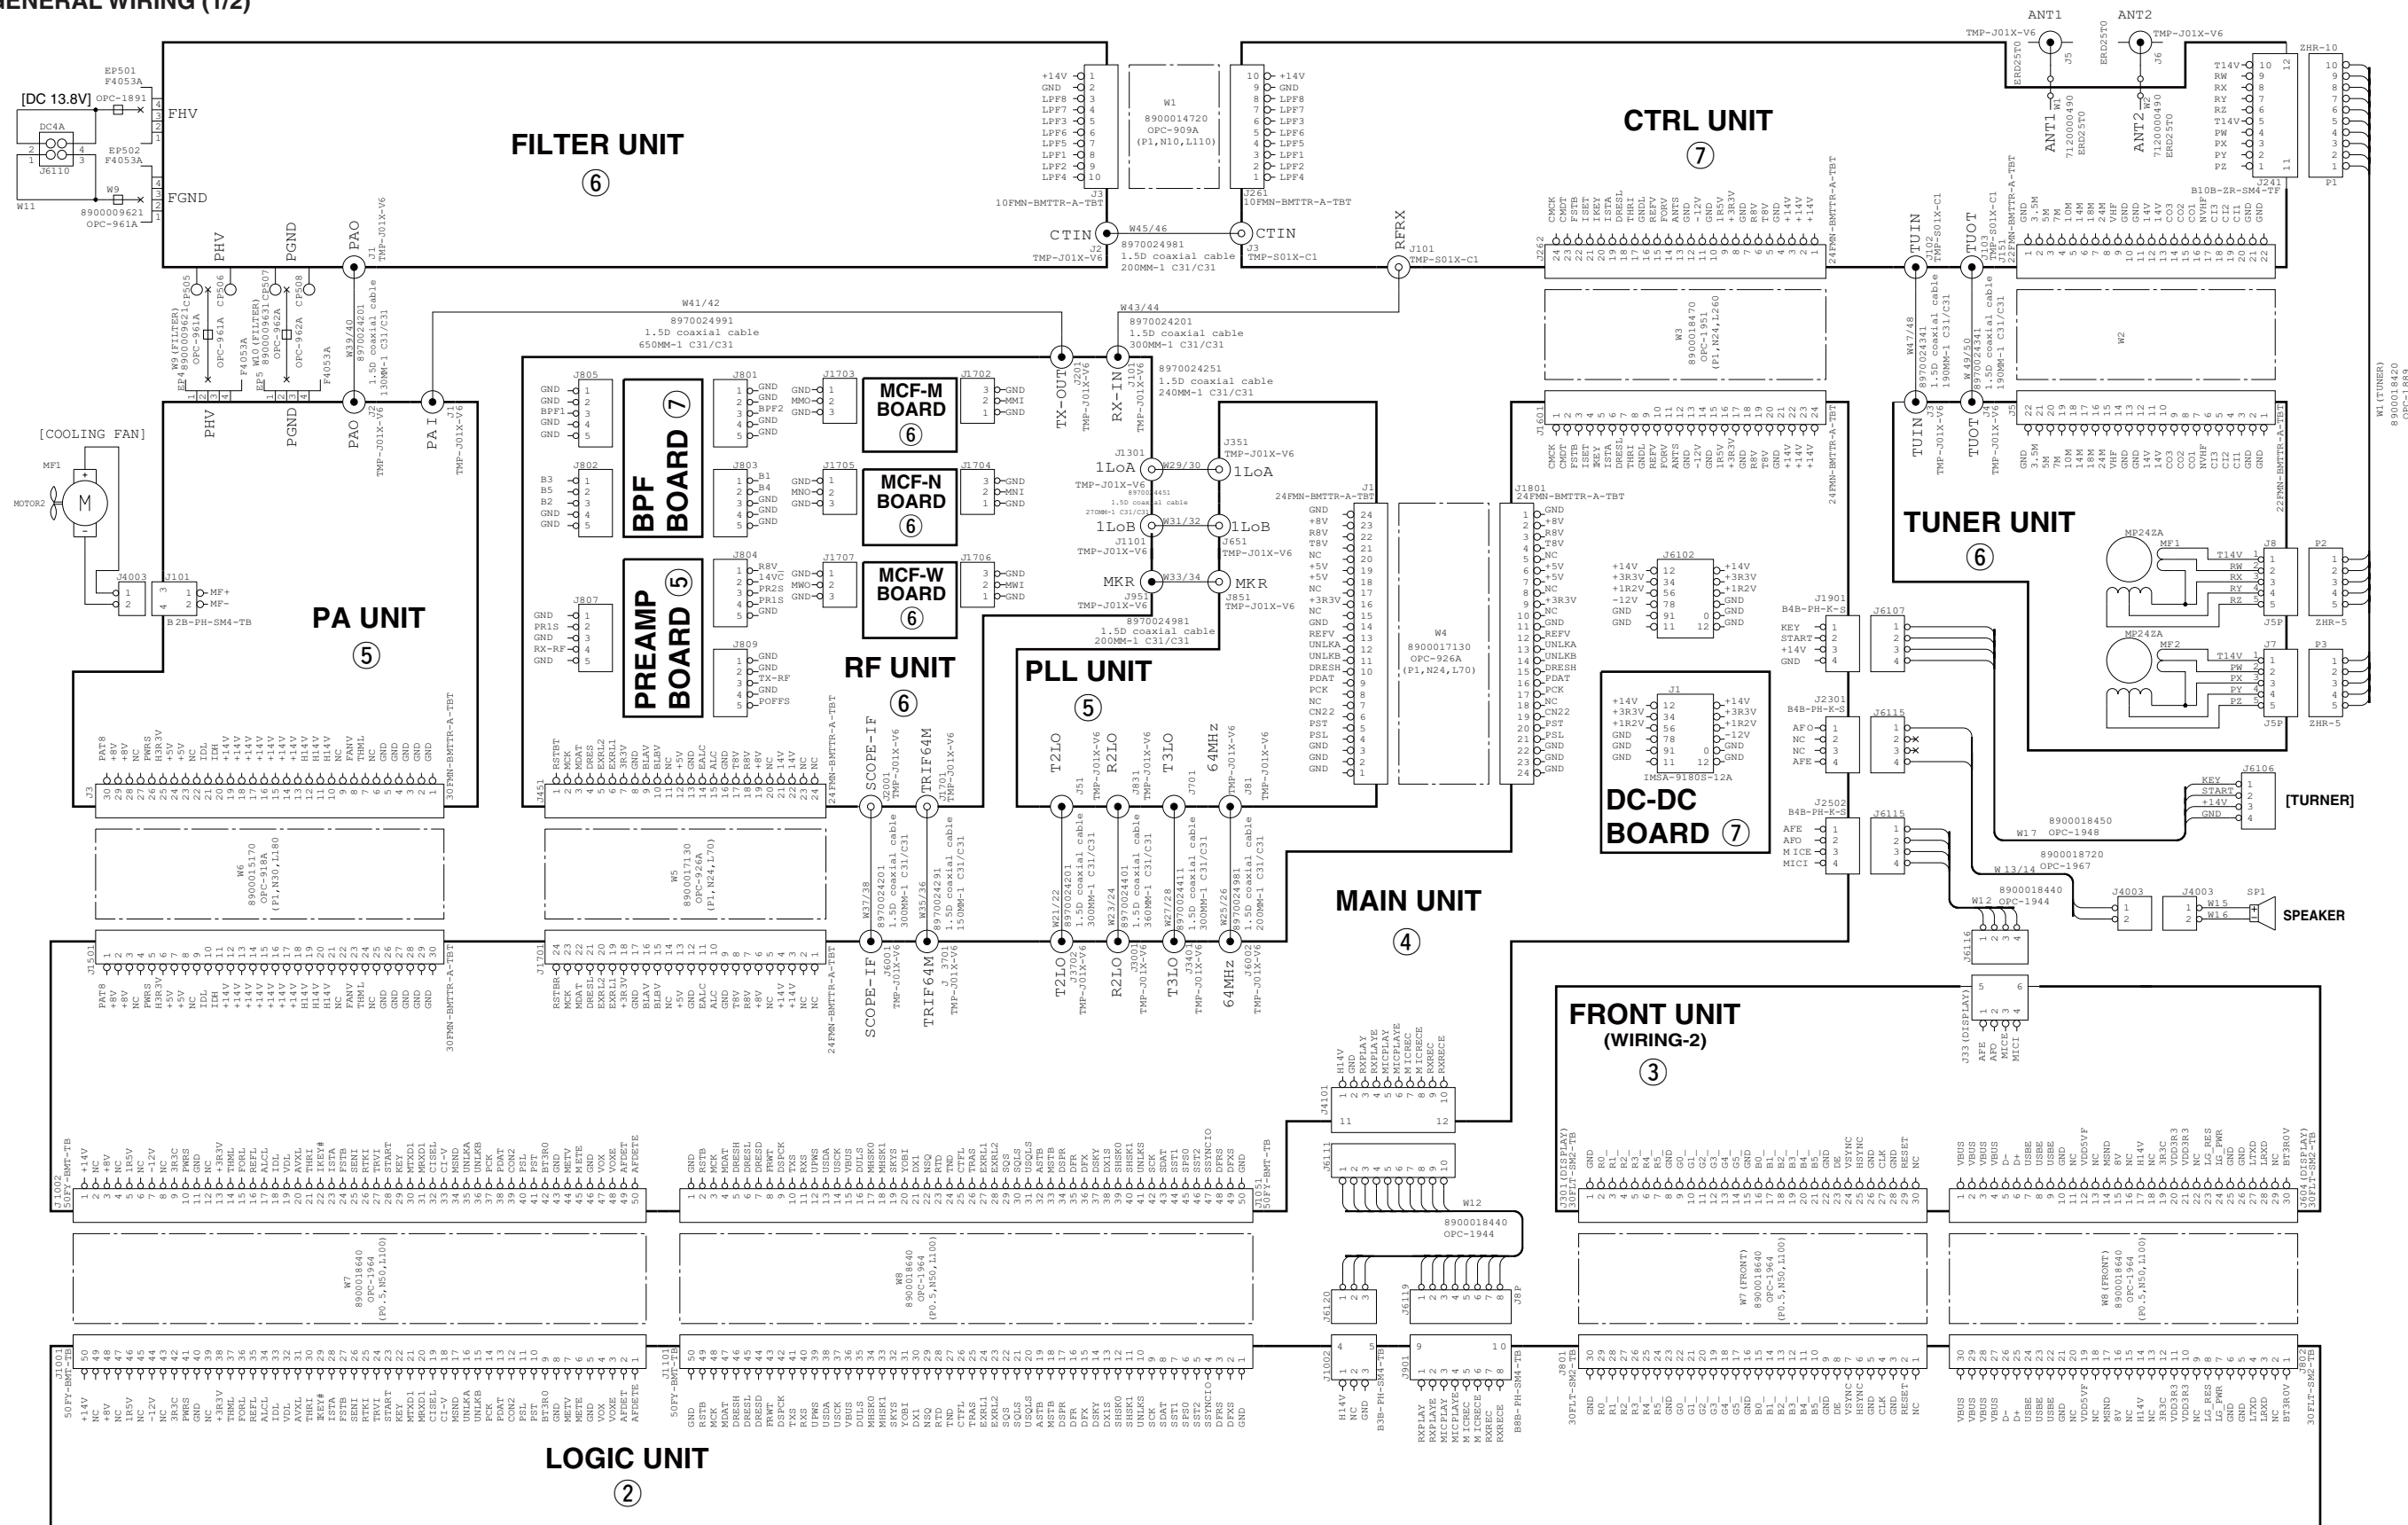


GENERAL WIRING (2/2)

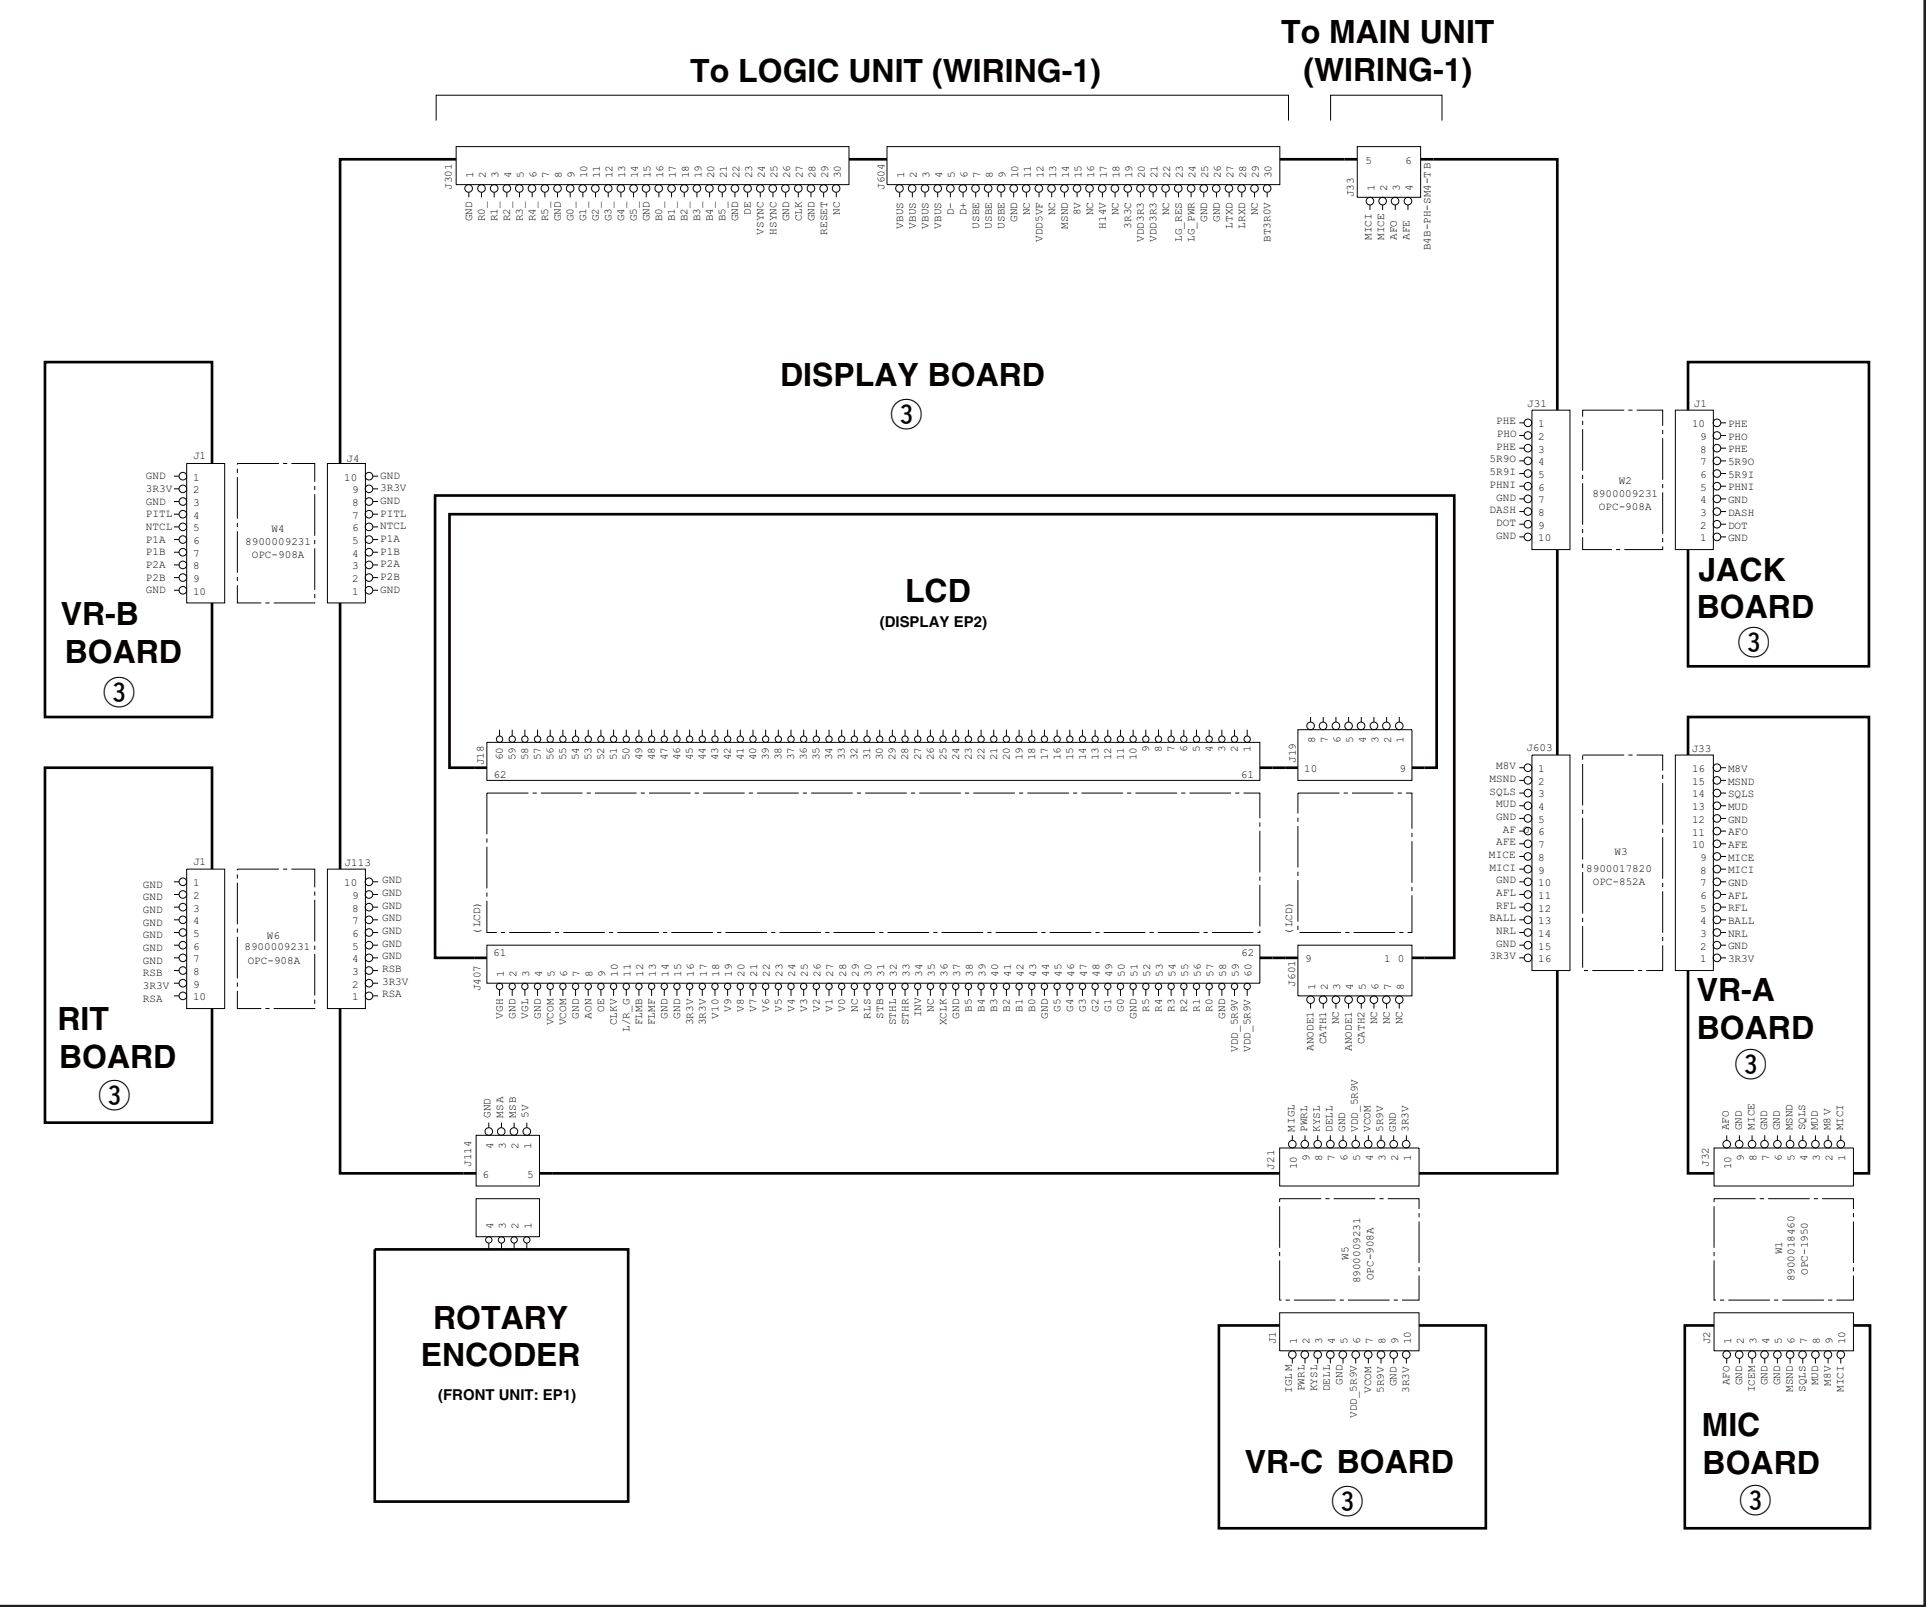





BLOCK DIAGRAM (2/3)

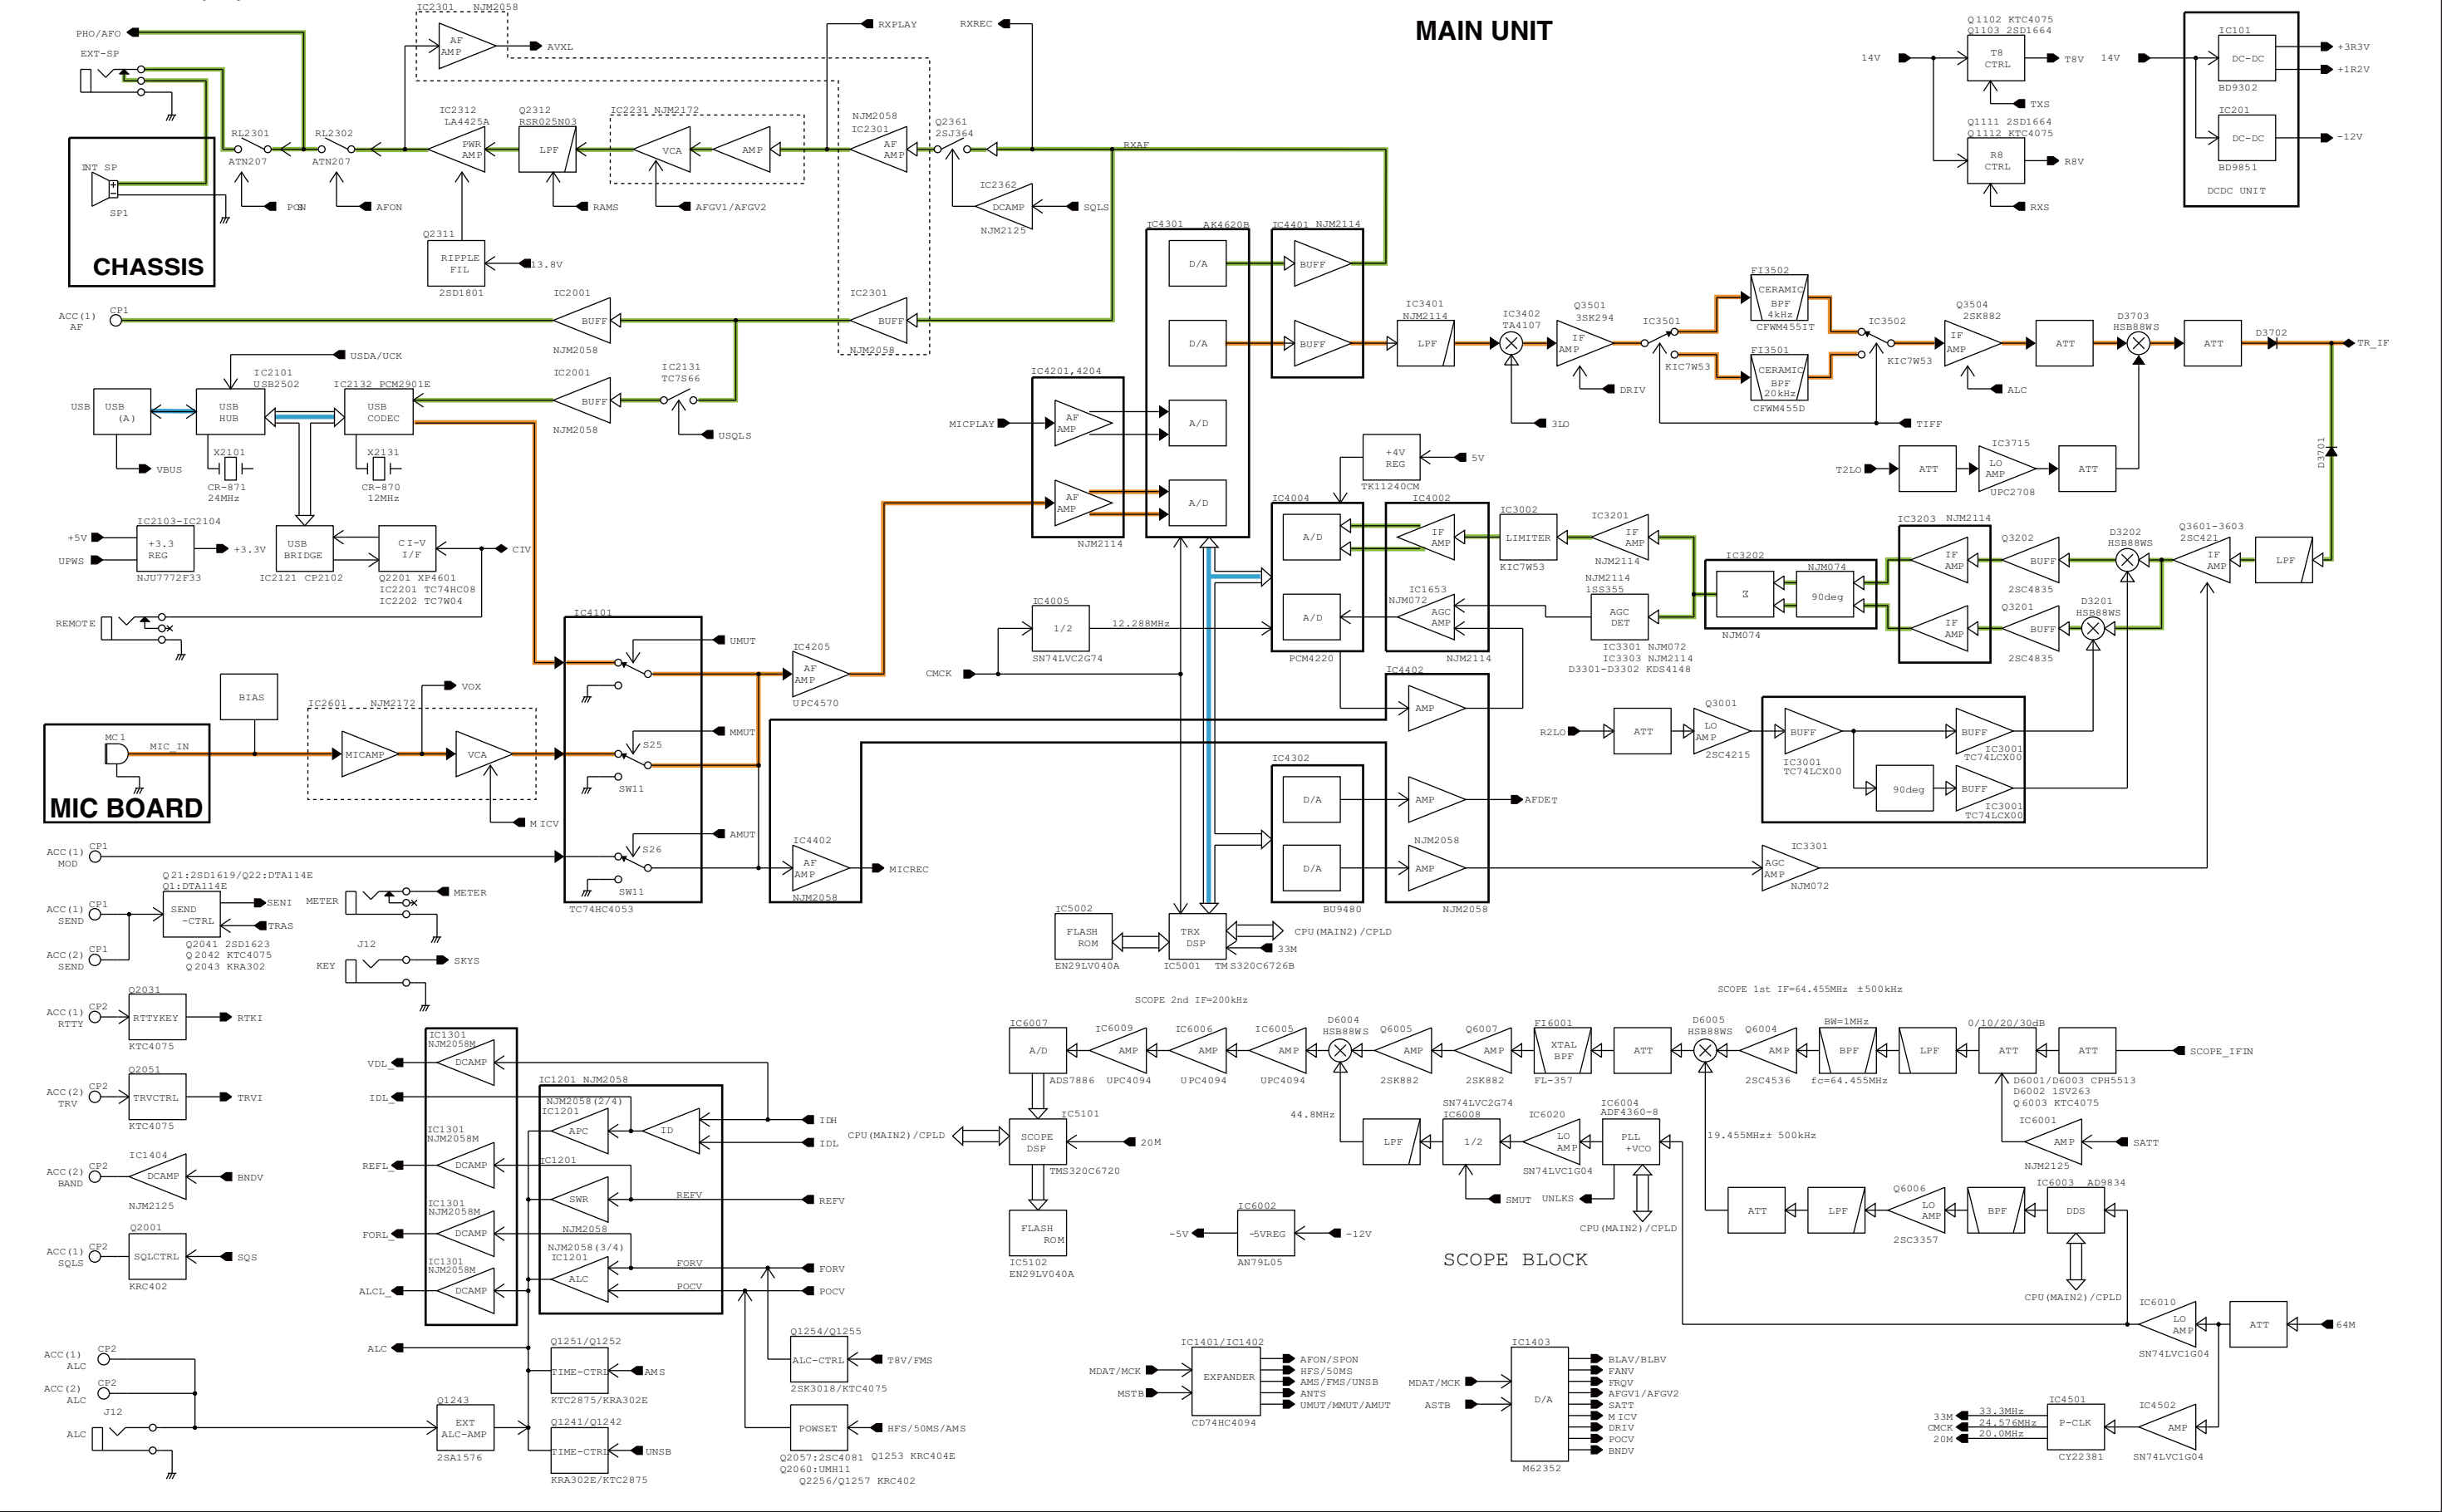

**[ELEC-KEY]**

**[PHONES]**

**[POWER]**

**[MAIN DIAL]**

**[RIT]**


**FRONT UNIT  
(DISPLAY/VR-A/VR-B/MIC/JACK BOARDS)**

**LOGIC UNIT**

SECTION 10


VOLTAGE DIAGRAM

LOGIC UNIT (1/4)

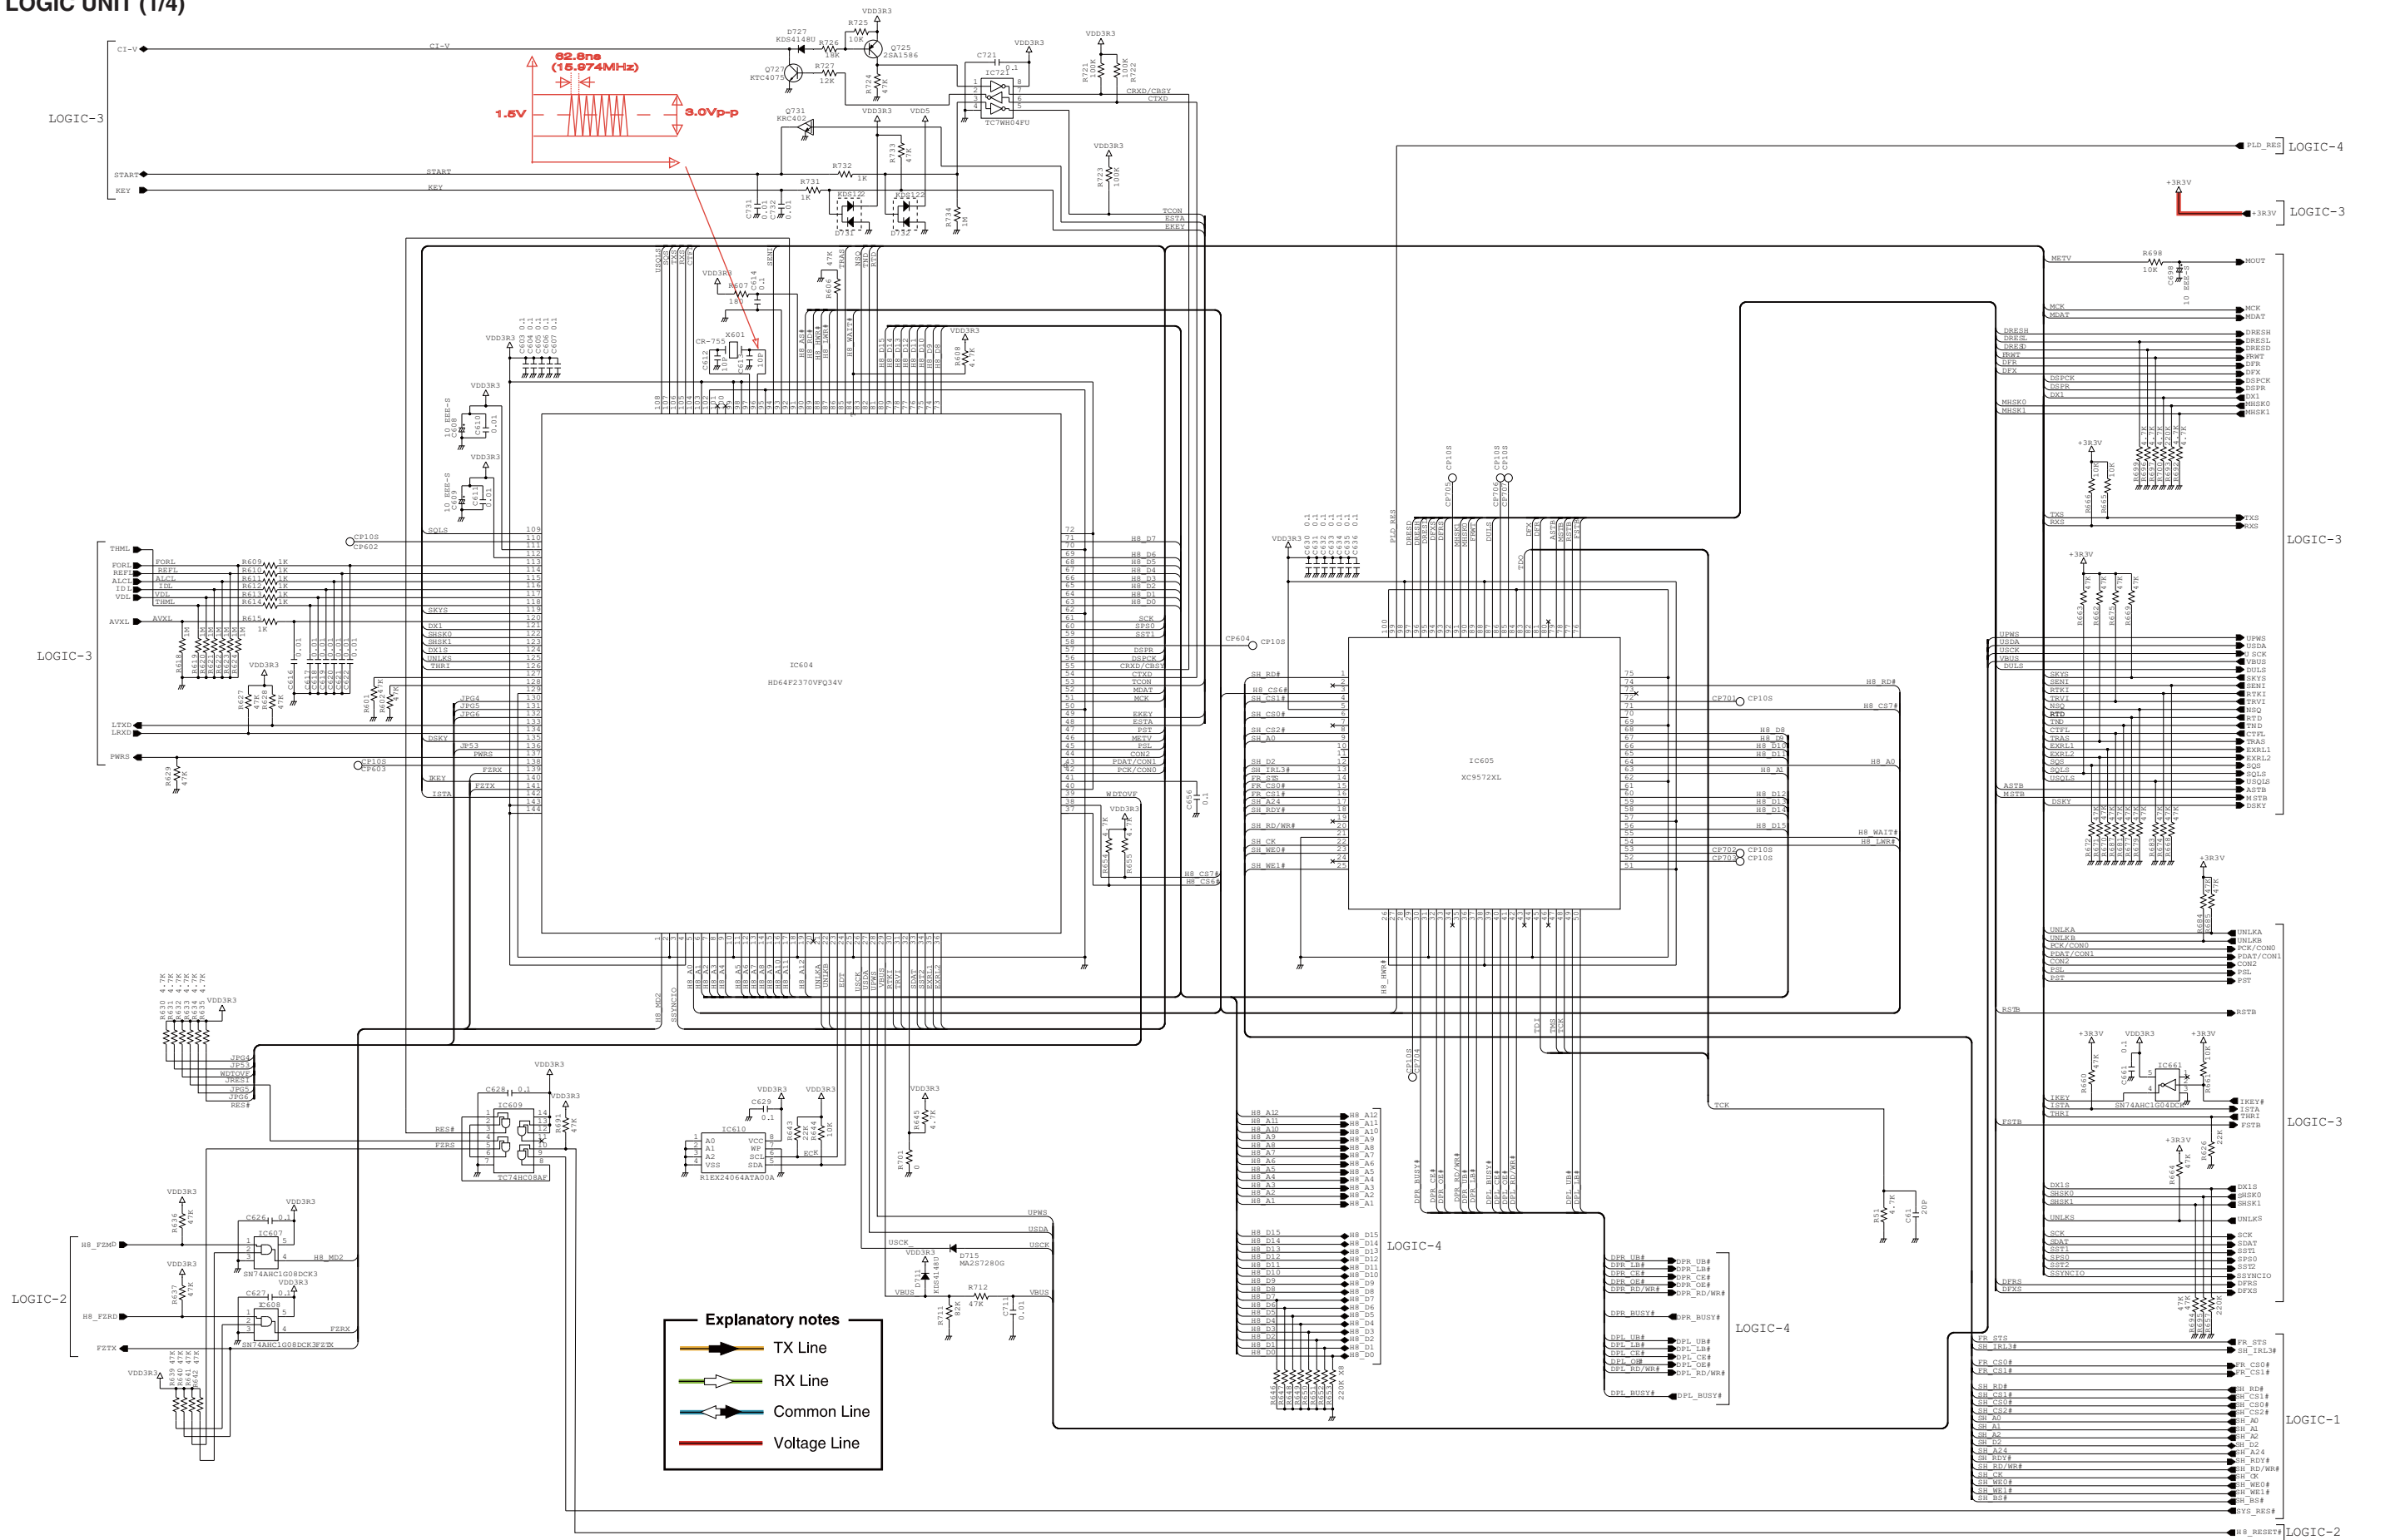


\*; Refer to "PARTS LIST."






## LOGIC UNIT (3/4)

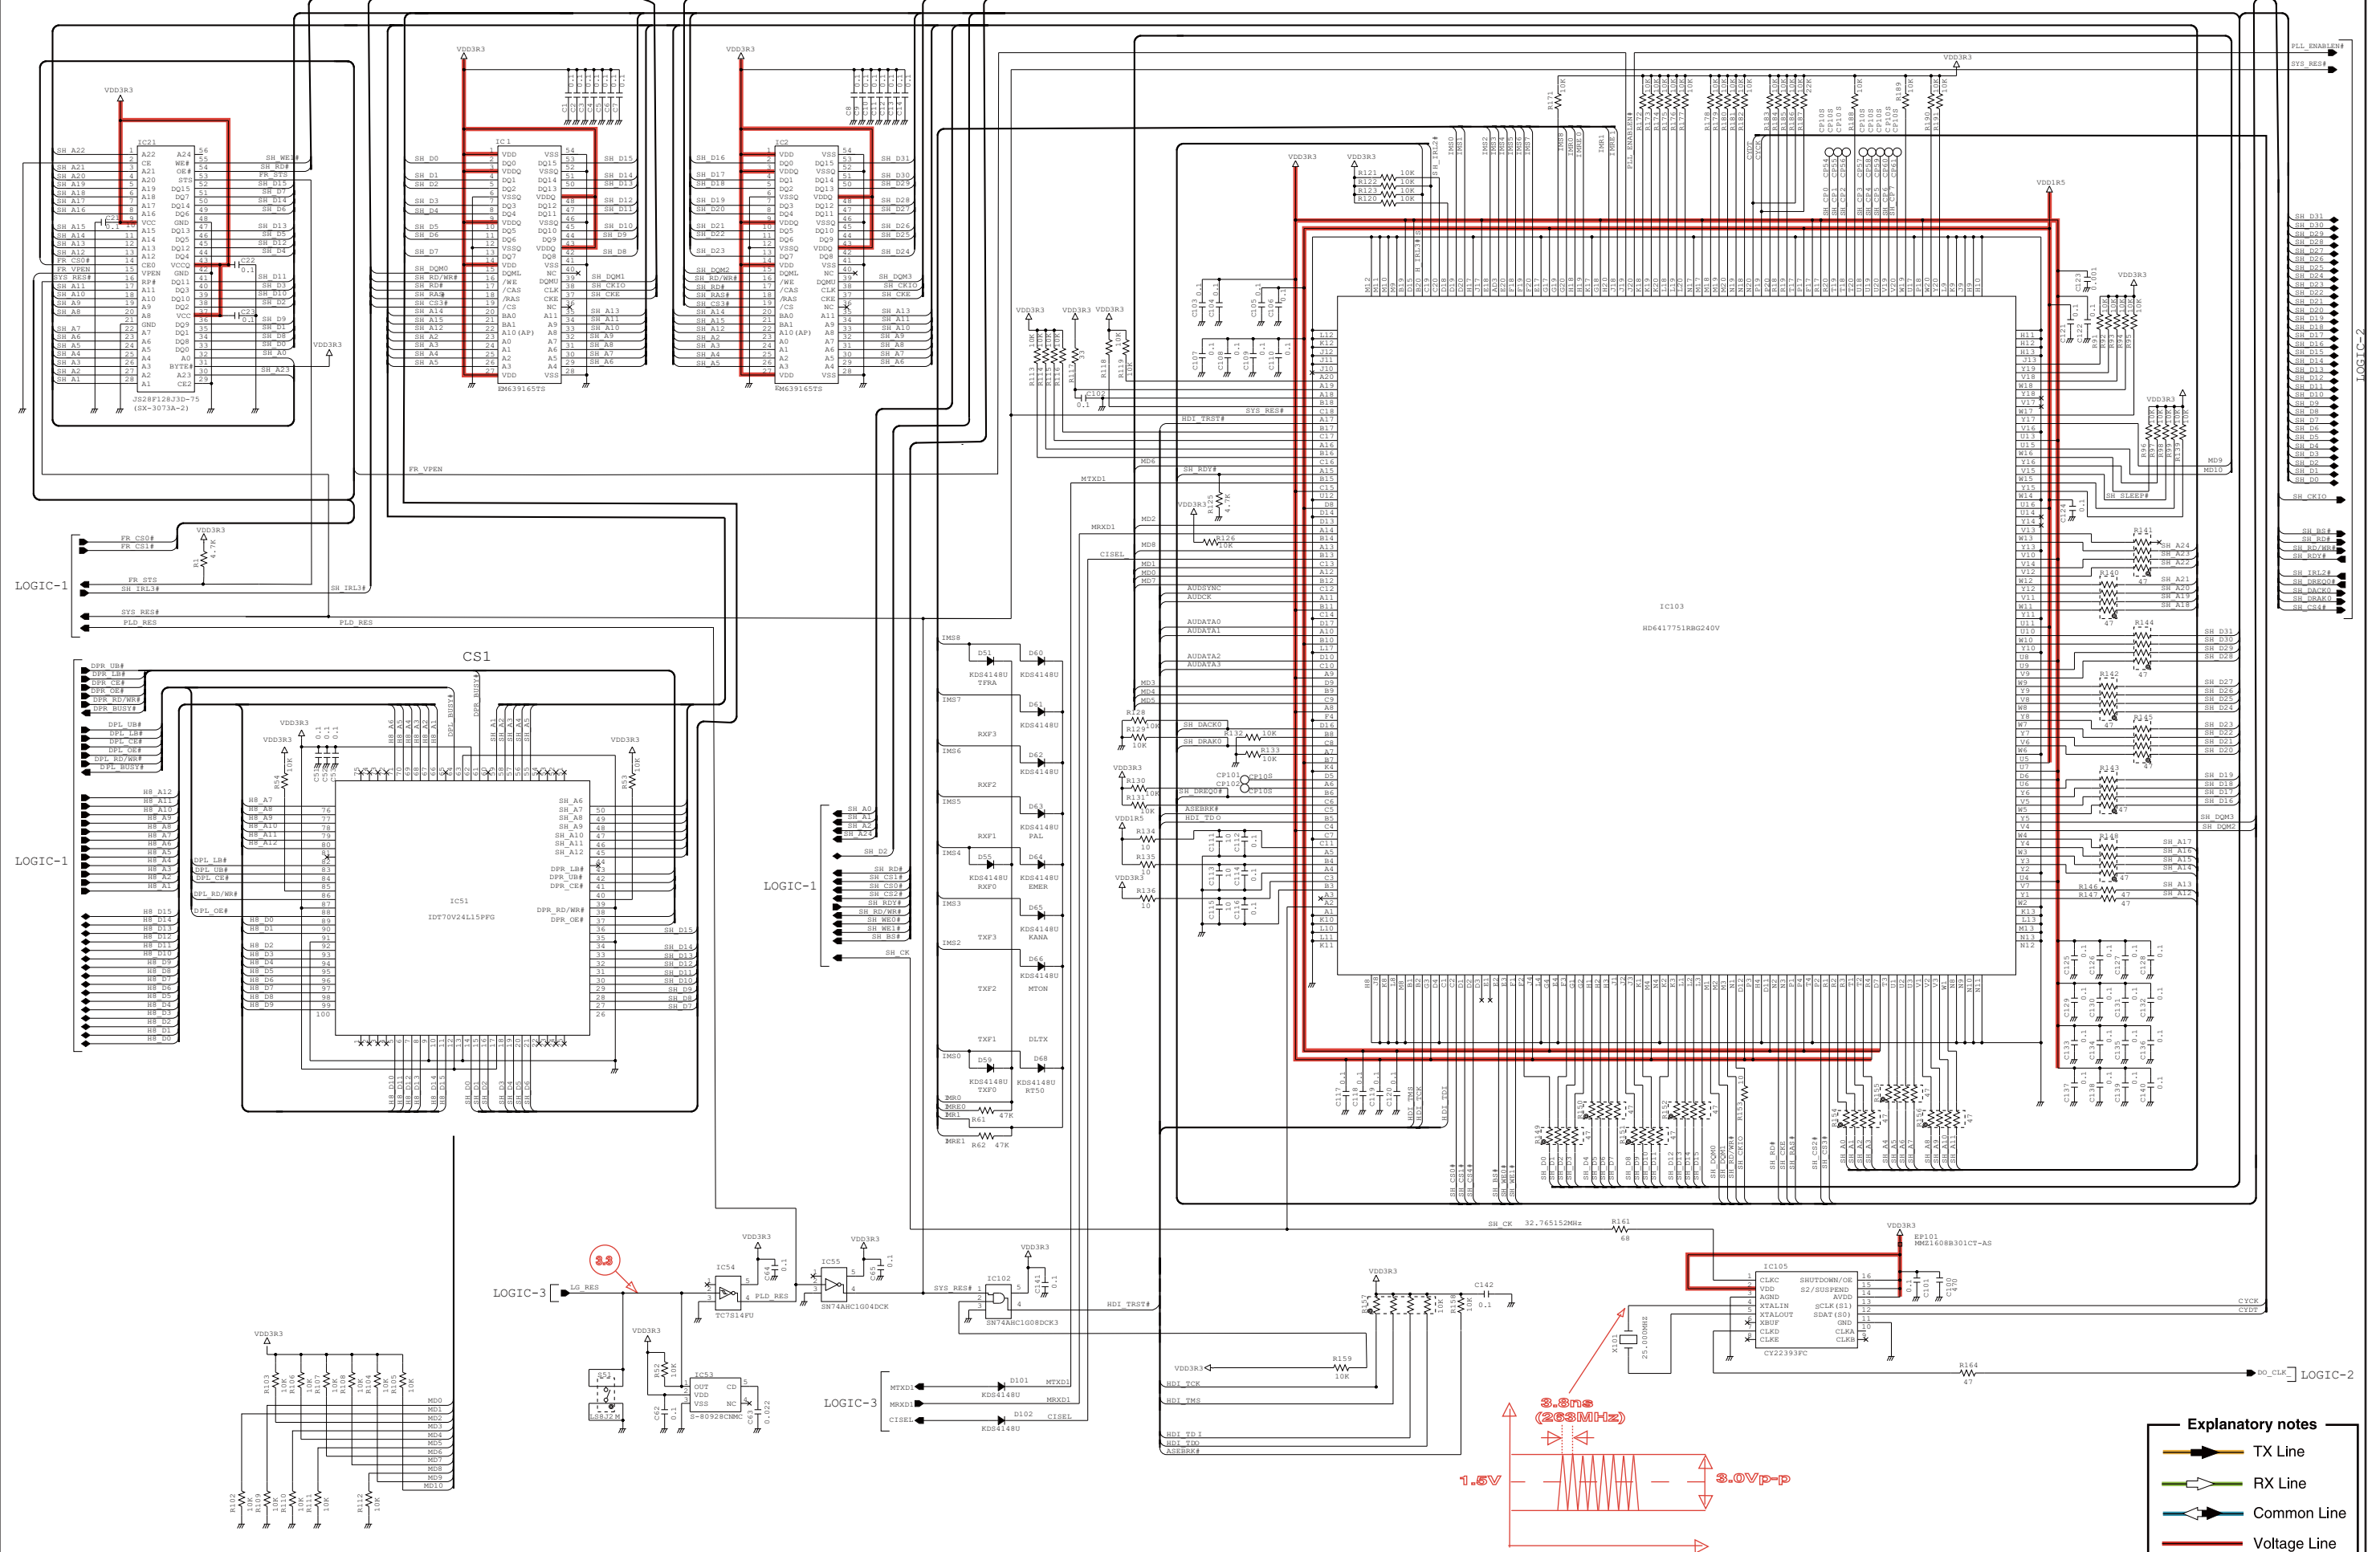

\*; Refer to "PARTS LIST."

# LOGIC UNIT (4/4)

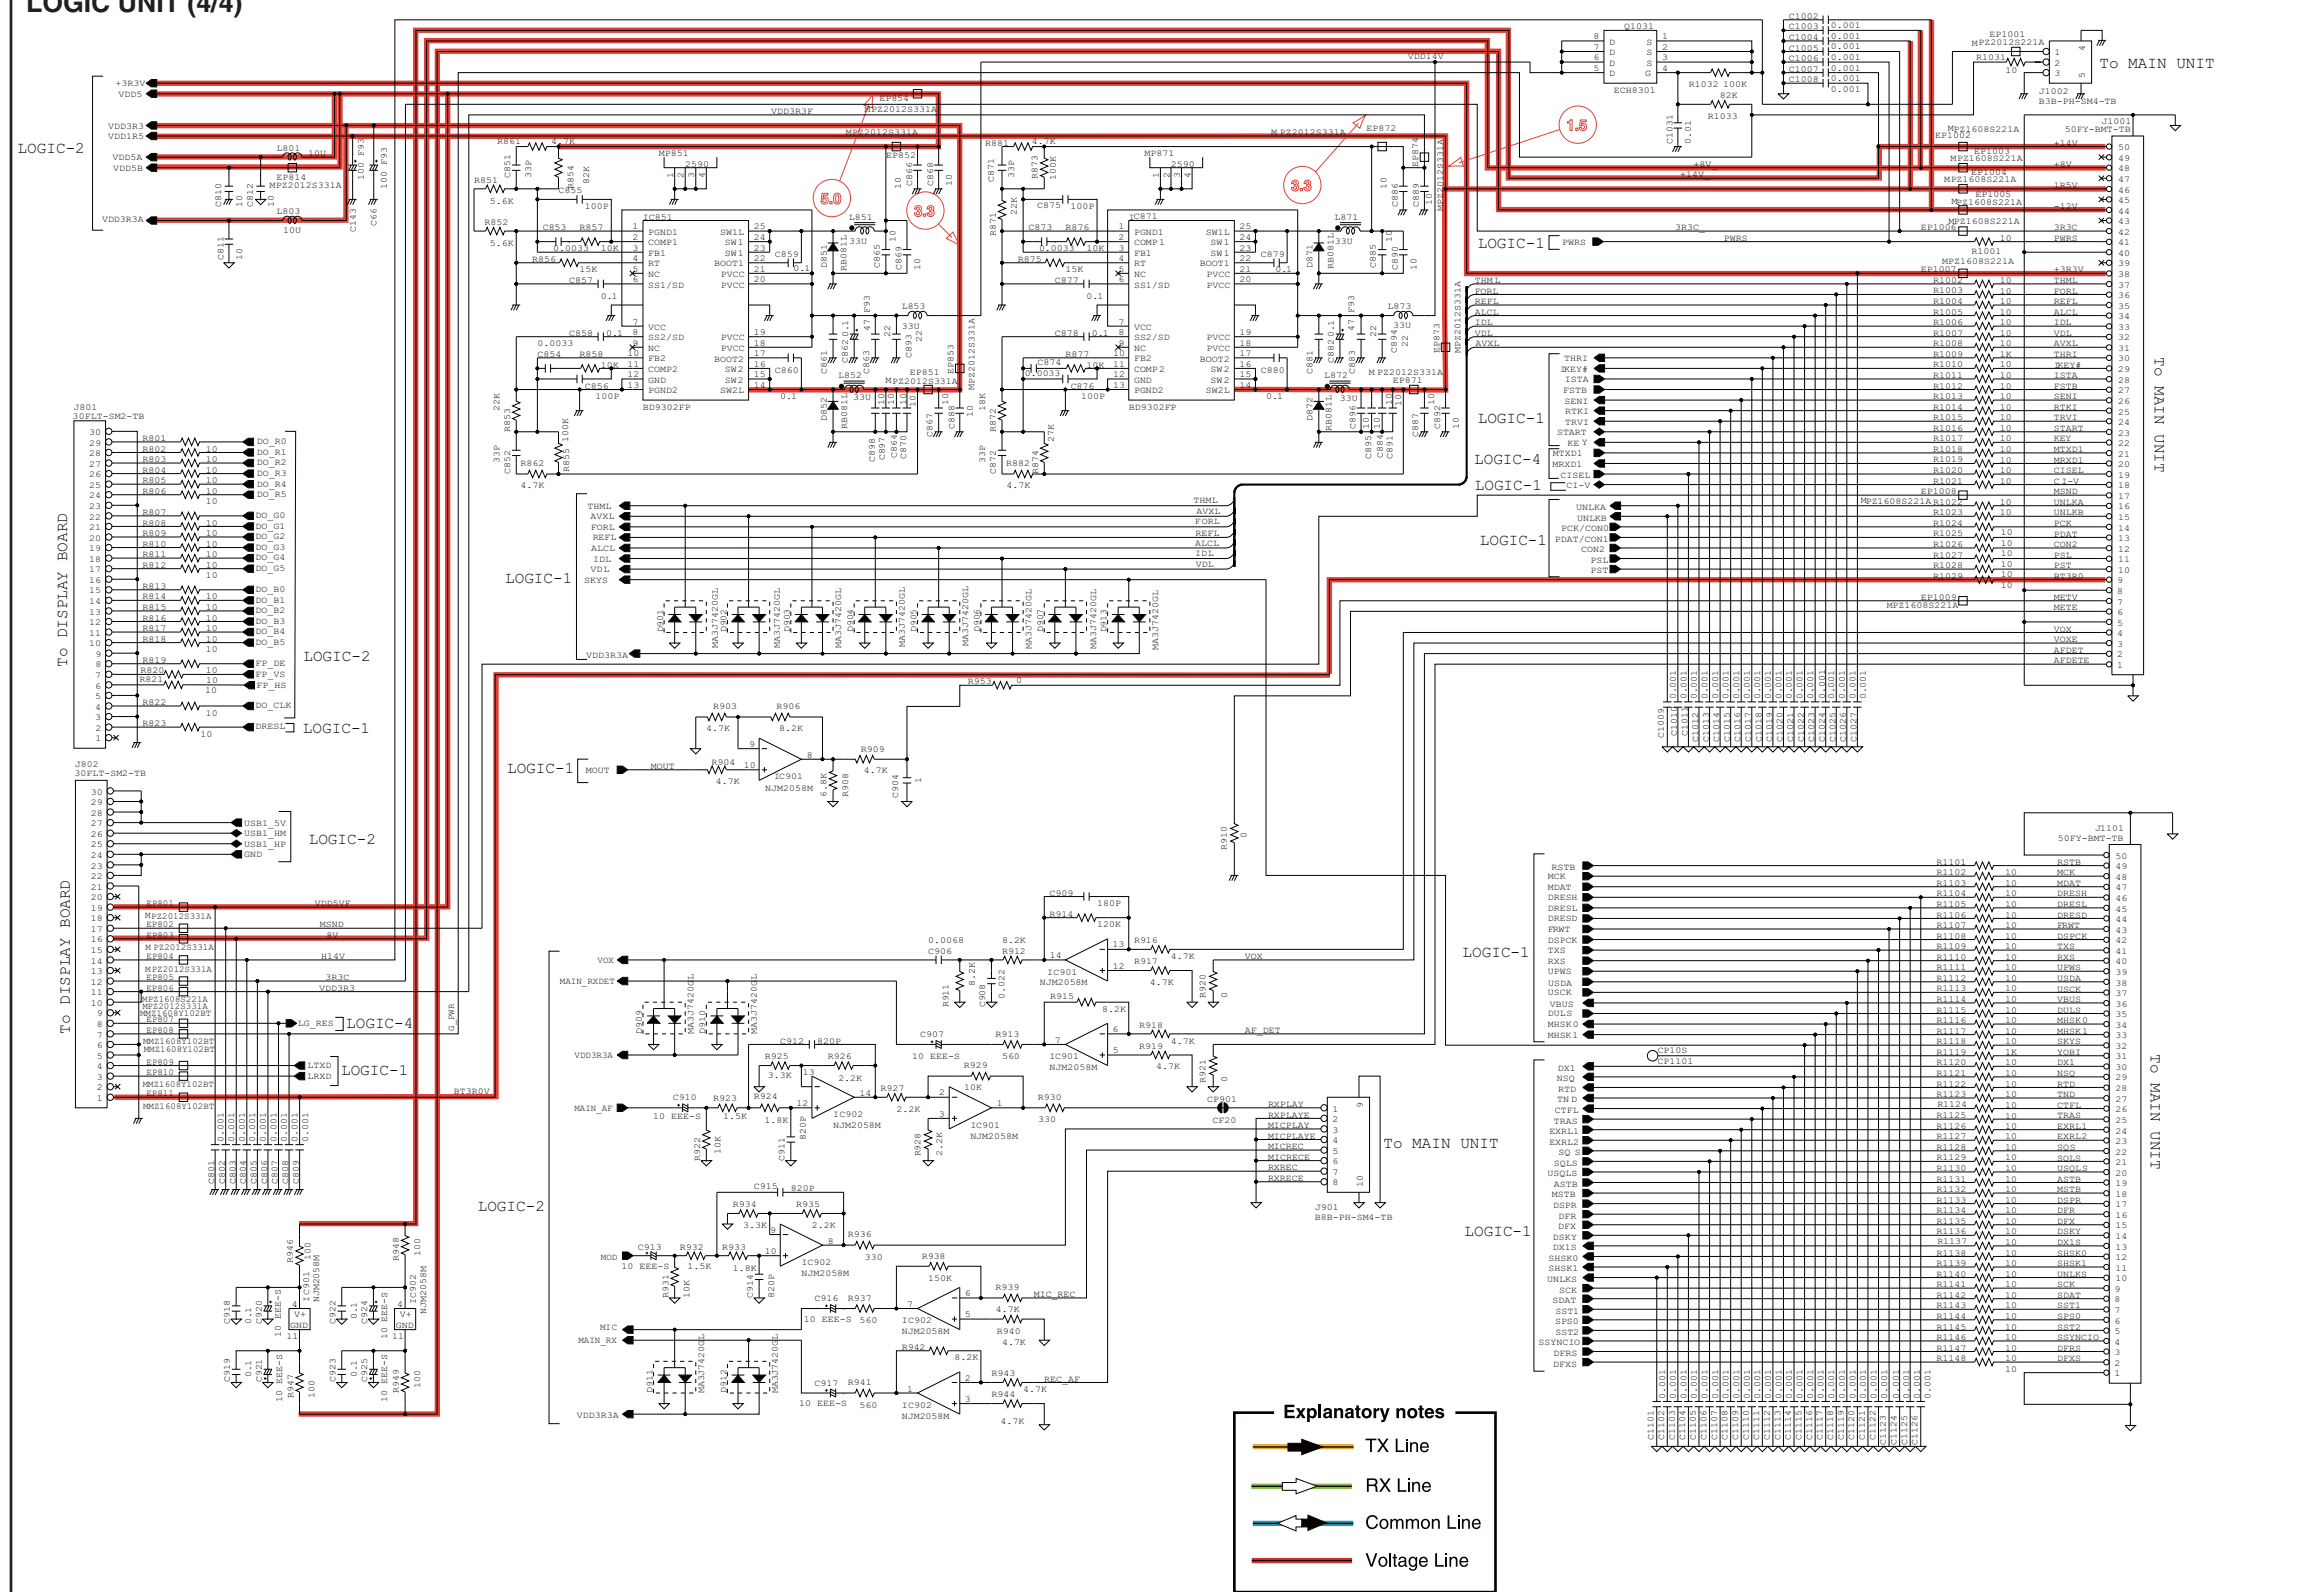

\*; Refer to "PARTS LIST."

The schematic diagram illustrates the internal wiring of a radio receiver, organized into several functional boards and display units. The boards are interconnected using a complex network of lines, color-coded to represent different signal types: orange for TX (Transmit), green for RX (Receive), blue for Common, and red for Voltage. Key components include integrated circuits (ICs), resistors (R), capacitors (C), and various connectors (J). The boards shown are:

- VR-A BOARD**: Includes [BAL - NR] and [AF - RF/SOL] sections.
- VR-B BOARD**: Includes [TWIN-BRT] and [NOTCH CW PITCH] sections.
- VR-C BOARD**: Includes [MIC GAIN], [RF POWER], [BLK-IN DELAY], and [KEY SPEED] sections.
- MIC BOARD**: Includes [MICROPHONE JACK] and [MIC] sections.
- JACK BOARD**: Includes [PHONES] and [ELEC-KEY] sections.
- DISPLAY-4**: A central display unit.
- DISPLAY-2**, **DISPLAY-3**, and **DISPLAY-3**: Additional display units.
- RIT BOARD**: Includes [RIT] and [MAIN DIA] sections.

The schematic also includes a legend for line types and a reference to a "PARTS LIST".

**Explanatory notes**


- TX Line
- RX Line
- Common Line
- Voltage Line

\*; Refer to "PARTS LIST"

10 - 5



## DISPLAY UNIT (2/5)

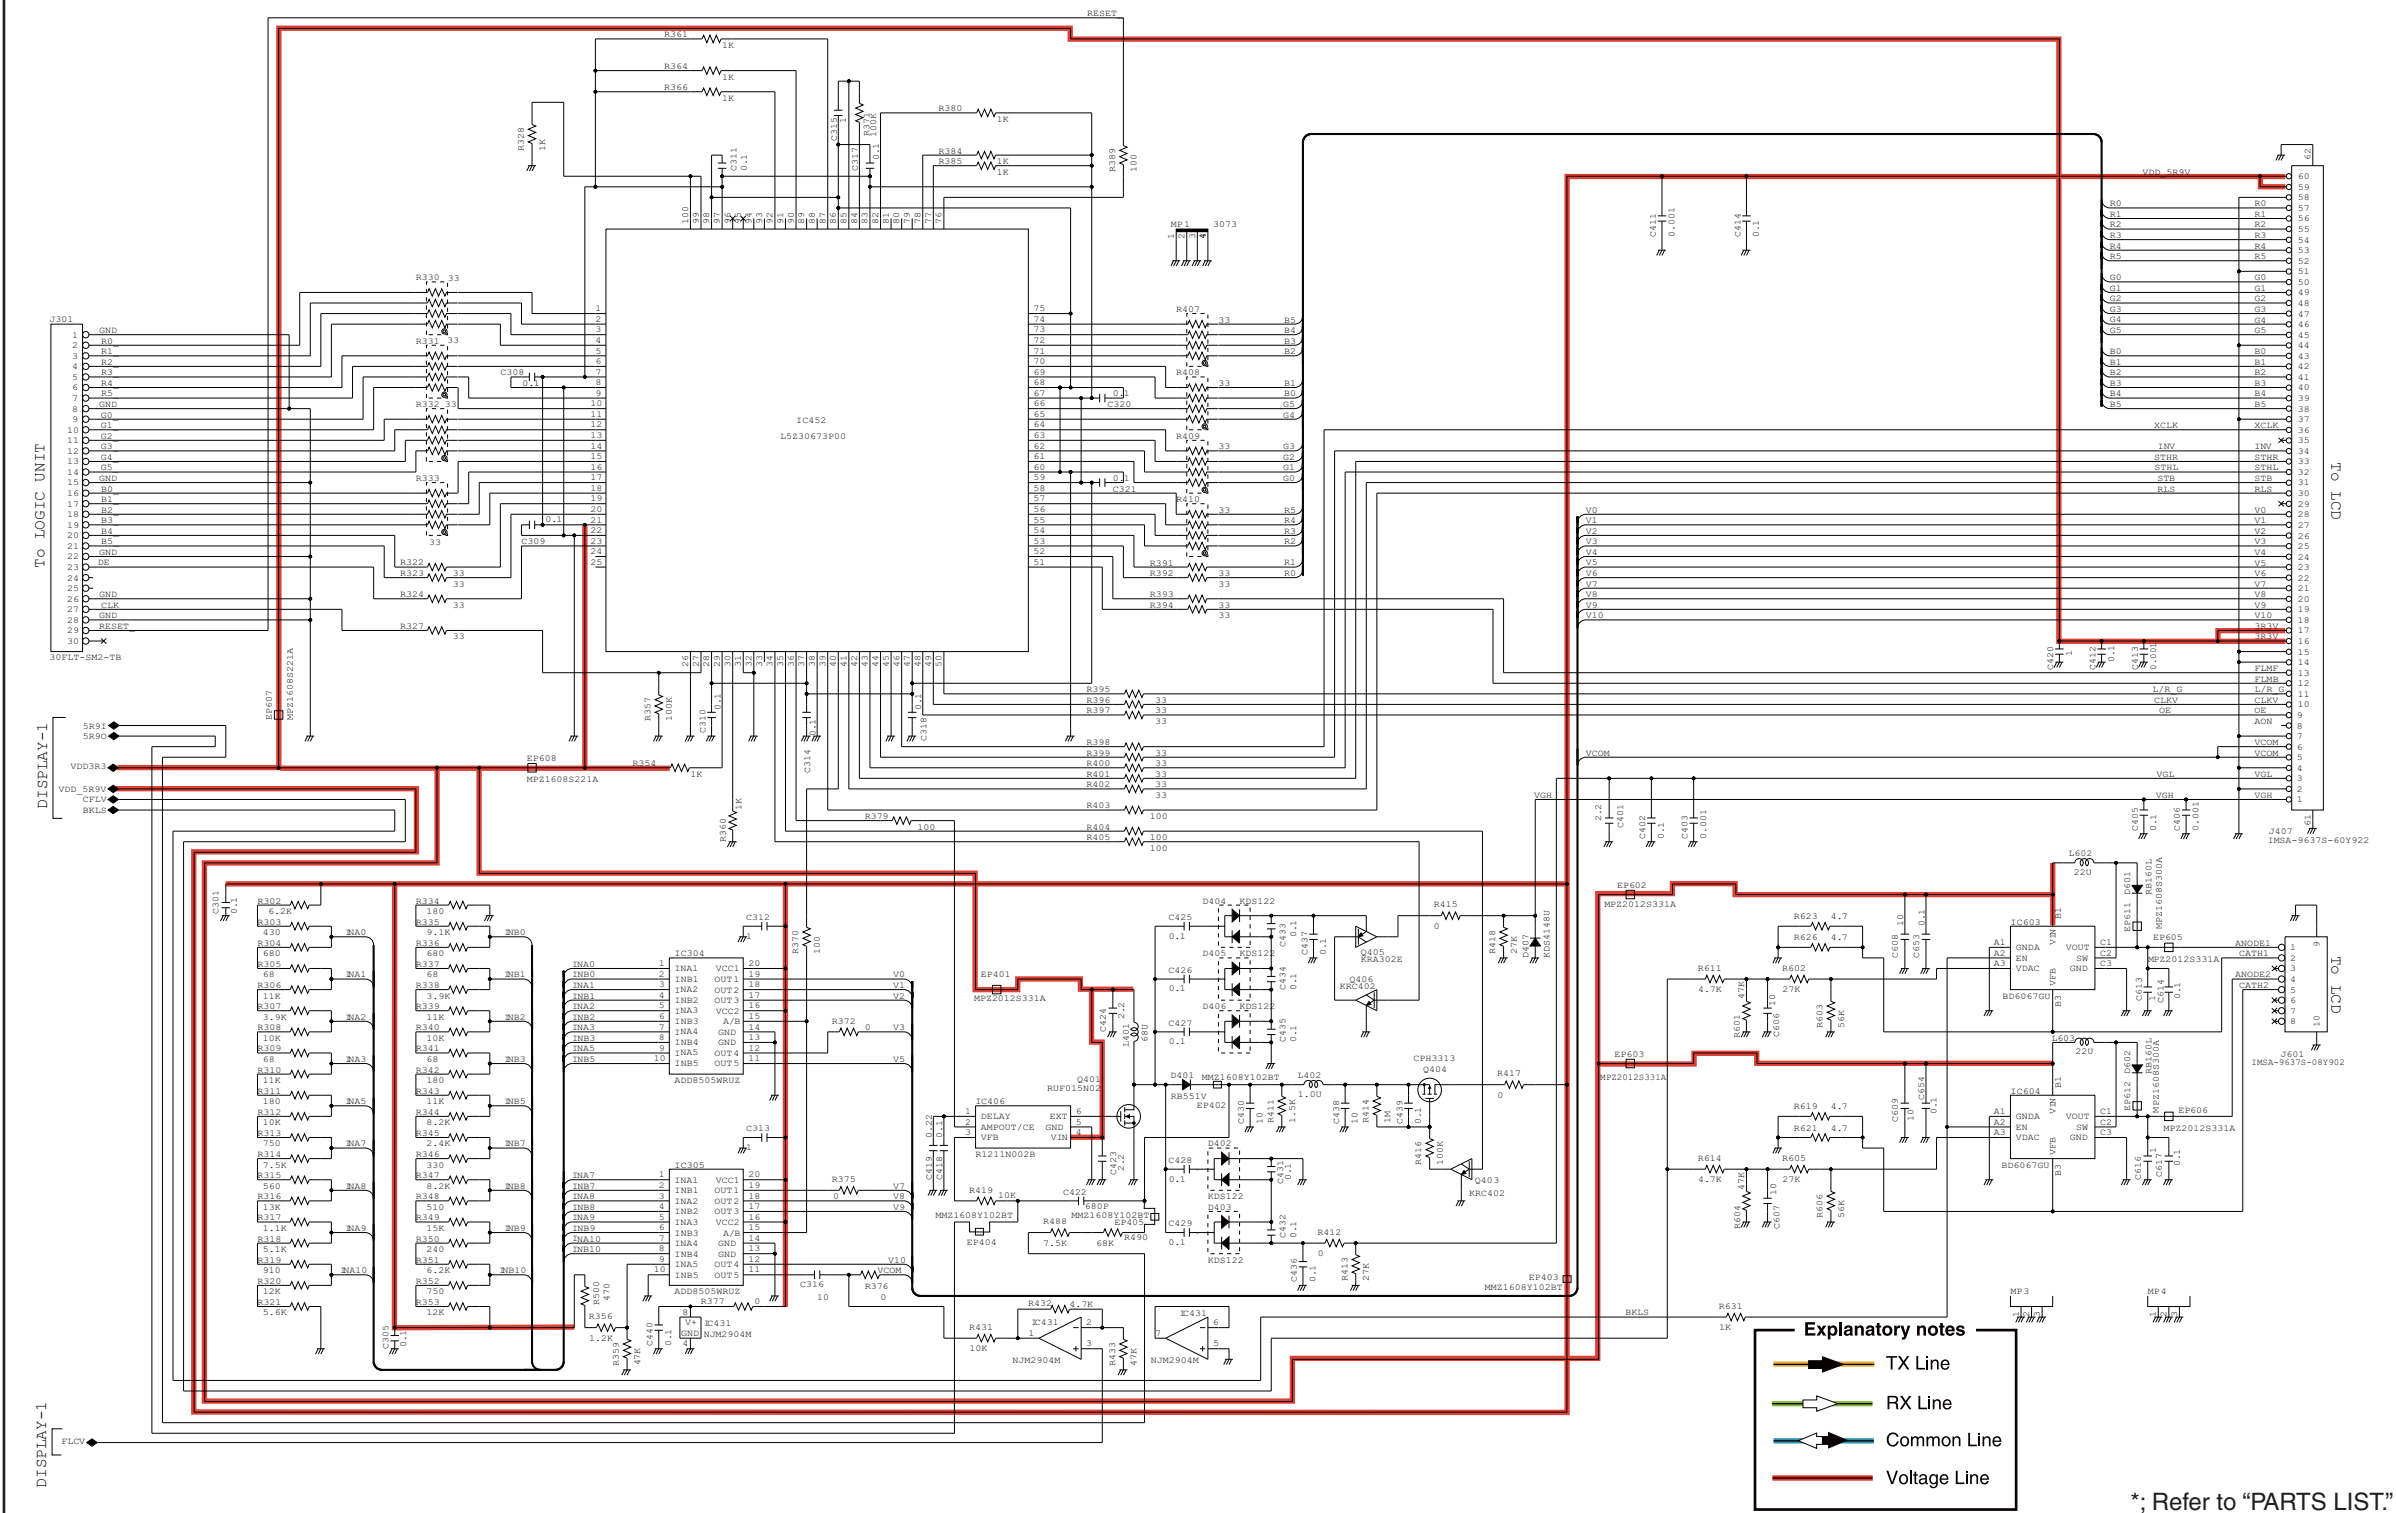

\*; Refer to "PARTS LIST."

The schematic diagram illustrates the power supply circuitry of a color television set. The primary power source is a 100V AC input, which passes through a series of components including a fuse (F100), a resistor network (R100, R101, R102, R103, R104, R105, R106, R107, R108, R109, R110, R111, R112, R113, R114, R115, R116, R117, R118, R119, R120, R121, R122, R123, R124, R125, R126, R127, R128, R129, R130, R131, R132, R133, R134, R135, R136, R137, R138, R139, R140, R141, R142, R143, R144, R145, R146, R147, R148, R149, R150, R151, R152, R153, R154, R155, R156, R157, R158, R159, R160, R161, R162, R163, R164, R165, R166, R167, R168, R169, R170, R171, R172, R173, R174, R175, R176, R177, R178, R179, R180, R181, R182, R183, R184, R185, R186, R187, R188, R189, R190, R191, R192, R193, R194, R195, R196, R197, R198, R199, R200, R201, R202, R203, R204, R205, R206, R207, R208, R209, R210, R211, R212, R213, R214, R215, R216, R217, R218, R219, R220, R221, R222, R223, R224, R225, R226, R227, R228, R229, R230, R231, R232, R233, R234, R235, R236, R237, R238, R239, R240, R241, R242, R243, R244, R245, R246, R247, R248, R249, R250, R251, R252, R253, R254, R255, R256, R257, R258, R259, R260, R261, R262, R263, R264, R265, R266, R267, R268, R269, R270, R271, R272, R273, R274, R275, R276, R277, R278, R279, R280, R281, R282, R283, R284, R285, R286, R287, R288, R289, R290, R291, R292, R293, R294, R295, R296, R297, R298, R299, R300, R301, R302, R303, R304, R305, R306, R307, R308, R309, R310, R311, R312, R313, R314, R315, R316, R317, R318, R319, R320, R321, R322, R323, R324, R325, R326, R327, R328, R329, R330, R331, R332, R333, R334, R335, R336, R337, R338, R339, R340, R341, R342, R343, R344, R345, R346, R347, R348, R349, R350, R351, R352, R353, R354, R355, R356, R357, R358, R359, R360, R361, R362, R363, R364, R365, R366, R367, R368, R369, R370, R371, R372, R373, R374, R375, R376, R377, R378, R379, R380, R381, R382, R383, R384, R385, R386, R387, R388, R389, R390, R391, R392, R393, R394, R395, R396, R397, R398, R399, R400, R401, R402, R403, R404, R405, R406, R407, R408, R409, R410, R411, R412, R413, R414, R415, R416, R417, R418, R419, R420, R421, R422, R423, R424, R425, R426, R427, R428, R429, R430, R431, R432, R433, R434, R435, R436, R437, R438, R439, R440, R441, R442, R443, R444, R445, R446, R447, R448, R449, R450, R451, R452, R453, R454, R455, R456, R457, R458, R459, R460, R461, R462, R463, R464, R465, R466, R467, R468, R469, R470, R471, R472, R473, R474, R475, R476, R477, R478, R479, R480, R481, R482, R483, R484, R485, R486, R487, R488, R489, R490, R491, R492, R493, R494, R495, R496, R497, R498, R499, R500, R501, R502, R503, R504, R505, R506, R507, R508, R509, R510, R511, R512, R513, R514, R515, R516, R517, R518, R519, R520, R521, R522, R523, R524, R525, R526, R527, R528, R529, R530, R531, R532, R533, R534, R535, R536, R537, R538, R539, R540, R541, R542, R543, R544, R545, R546, R547, R548, R549, R550, R551, R552, R553, R554, R555, R556, R557, R558, R559, R560, R561, R562, R563, R564, R565, R566, R567, R568, R569, R570, R571, R572, R573, R574, R575, R576, R577, R578, R579, R580, R581, R582, R583, R584, R585, R586, R587, R588, R589, R590, R591, R592, R593, R594, R595, R596, R597, R598, R599, R600, R601, R602, R603, R604, R605, R606, R607, R608, R609, R610, R611, R612, R613, R614, R615, R616, R617, R618, R619, R620, R621, R622, R623, R624, R625, R626, R627, R628, R629, R630, R631, R632, R633, R634, R635, R636, R637, R638, R639, R640, R641, R642, R643, R644, R645, R646, R647, R648, R649, R650, R651, R652, R653, R654, R655, R656, R657, R658, R659, R660, R661, R662, R663, R664, R665, R666, R667, R668, R669, R670, R671, R672, R673, R674, R675, R676, R677, R678, R679, R680, R681, R682, R683, R684, R685, R686, R687, R688, R689, R690, R691, R692, R693, R694, R695, R696, R697, R698, R699, R700, R701, R702, R703, R704, R705, R706, R707, R708, R709, R710, R711, R712, R713, R714, R715, R716, R717, R718, R719, R720, R721, R722, R723, R724, R725, R726, R727, R728, R729, R730, R731, R732, R733, R734, R735, R736, R737, R738, R739, R740, R741, R742, R743, R744, R745, R746, R747, R748, R749, R750, R751, R752, R753, R754, R755, R756, R757, R758, R759, R760, R761, R762, R763, R764, R765, R766, R767, R768, R769, R770, R771, R772, R773, R774, R775, R776, R777, R778, R779, R780, R781, R782, R783, R784, R785, R786, R787, R788, R789, R790, R791, R792, R793, R794, R795, R796, R797, R798, R799, R800, R801, R802, R803, R804, R805, R806, R807, R808, R809, R810, R811, R812, R813, R814, R815, R816, R817, R818, R819, R820, R821, R822, R823, R824, R825, R826, R827, R828, R829, R830, R831, R832, R833, R834, R835, R836, R837, R838, R839, R840, R841, R842, R843, R844, R845, R846, R847, R848, R849, R850, R851, R852, R853, R854, R855, R856, R857, R858, R859, R860, R861, R862, R863, R864, R865, R866, R867, R868, R869, R870, R871, R872, R873, R874, R875, R876, R877, R878, R879, R880, R881, R882, R883, R884, R885, R886, R887, R888, R889, R890, R891, R892, R893, R894, R895, R896, R897, R898, R899

The diagram illustrates the DISPLAY-1 circuit, which is a multi-functional display unit. It features a central display area with 12 segments, each labeled with a number (1-12) and a voltage level (1.0V or 1.6V). The display is connected to a series of input and output lines, including F1K, F2K, F3K, F4K, F5K, F6K, S1K, S2K, S3K, S4K, S5K, S6K, S7K, S8K, S9K, S10K, S11K, S12K, S13K, S14K, S15K, S16K, S17K, S18K, S19K, S20K, S21K, S22K, S23K, S24K, S25K, S26K, S27K, S28K, S29K, S30K, S31K, S32K, S33K, S34K, S35K, S36K, S37K, S38K, S39K, S40K, S41K, S42K, S43K, S44K, S45K, S46K, S47K, S48K, S49K, S50K, S51K, S52K, S53K, S54K, S55K, S56K, S57K, S58K, S59K, S60K, S61K, S62K, S63K, S64K, S65K, S66K, S67K, S68K, S69K, S70K, S71K, S72K, S73K, S74K, S75K, S76K, S77K, S78K, S79K, S80K, S81K, S82K, S83K, S84K, S85K, S86K, S87K, S88K, S89K, S90K, S91K, S92K, S93K, S94K, S95K, S96K, S97K, S98K, S99K, S100K, S101K, S102K, S103K, S104K, S105K, S106K, S107K, S108K, S109K, S110K, S111K, S112K, S113K, S114K, S115K, S116K, S117K, S118K, S119K, S120K, S121K, S122K, S123K, S124K, S125K, S126K, S127K, S128K, S129K, S130K, S131K, S132K, S133K, S134K, S135K, S136K, S137K, S138K, S139K, S140K, S141K, S142K, S143K, S144K, S145K, S146K, S147K, S148K, S149K, S150K, S151K, S152K, S153K, S154K, S155K, S156K, S157K, S158K, S159K, S160K, S161K, S162K, S163K, S164K, S165K, S166K, S167K, S168K, S169K, S170K, S171K, S172K, S173K, S174K, S175K, S176K, S177K, S178K, S179K, S180K, S181K, S182K, S183K, S184K, S185K, S186K, S187K, S188K, S189K, S190K, S191K, S192K, S193K, S194K, S195K, S196K, S197K, S198K, S199K, S200K, S201K, S202K, S203K, S204K, S205K, S206K, S207K, S208K, S209K, S210K, S211K, S212K, S213K, S214K, S215K, S216K, S217K, S218K, S219K, S220K, S221K, S222K, S223K, S224K, S225K, S226K, S227K, S228K, S229K, S230K, S231K, S232K, S233K, S234K, S235K, S236K, S237K, S238K, S239K, S240K, S241K, S242K, S243K, S244K, S245K, S246K, S247K, S248K, S249K, S250K, S251K, S252K, S253K, S254K, S255K, S256K, S257K, S258K, S259K, S260K, S261K, S262K, S263K, S264K, S265K, S266K, S267K, S268K, S269K, S270K, S271K, S272K, S273K, S274K, S275K, S276K, S277K, S278K, S279K, S280K, S281K, S282K, S283K, S284K, S285K, S286K, S287K, S288K, S289K, S290K, S291K, S292K, S293K, S294K, S295K, S296K, S297K, S298K, S299K, S300K, S301K, S302K, S303K, S304K, S305K, S306K, S307K, S308K, S309K, S310K, S311K, S312K, S313K, S314K, S315K, S316K, S317K, S318K, S319K, S320K, S321K, S322K, S323K, S324K, S325K, S326K, S327K, S328K, S329K, S330K, S331K, S332K, S333K, S334K, S335K, S336K, S337K, S338K, S339K, S340K, S341K, S342K, S343K, S344K, S345K, S346K, S347K, S348K, S349K, S350K, S351K, S352K, S353K, S354K, S355K, S356K, S357K, S358K, S359K, S360K, S361K, S362K, S363K, S364K, S365K, S366K, S367K, S368K, S369K, S370K, S371K, S372K, S373K, S374K, S375K, S376K, S377K, S378K, S379K, S380K, S381K, S382K, S383K, S384K, S385K, S386K, S387K, S388K, S389K, S390K, S391K, S392K, S393K, S394K, S395K, S396K, S397K, S398K, S399K, S400K, S401K, S402K, S403K, S404K, S405K, S406K, S407K, S408K, S409K, S410K, S411K, S412K, S413K, S414K, S415K, S416K, S417K, S418K, S419K, S420K, S421K, S422K, S423K, S424K, S425K, S426K, S427K, S428K, S429K, S430K, S431K, S432K, S433K, S434K, S435K, S436K, S437K, S438K, S439K, S440K, S441K, S442K, S443K, S444K, S445K, S446K, S447K, S448K, S449K, S450K, S451K, S452K, S453K, S454K, S455K, S456K, S457K, S458K, S459K, S460K, S461K, S462K, S463K, S464K, S465K, S466K, S467K, S468K, S469K, S470K, S471K, S472K, S473K, S474K, S475K, S476K, S477K, S478K, S479K, S480K, S481K, S482K, S483K, S484K, S485K, S486K, S487K, S488K, S489K, S490K, S491K, S492K, S493K, S494K, S495K, S496K, S497K, S498K, S499K, S500K, S501K, S502K, S503K, S504K, S505K, S506K, S507K, S508K, S509K, S510K, S511K, S512K, S513K, S514K, S515K, S516K, S517K, S518K, S519K, S520K, S521K, S522K, S523K, S524K, S525K, S526K, S527K, S528K, S529K, S530K, S531K, S532K, S533K, S534K, S535K, S536K, S537K, S538K, S539K, S540K, S541K, S542K, S543K, S544K, S545K, S546K, S547K, S548K, S549K, S550K, S551K, S552K, S553K, S554K, S555K, S556K, S557K, S558K, S559K, S560K, S561K, S562K, S563K, S564K, S565K, S566K, S567K, S568K, S569K, S570K, S571K, S572K, S573K, S574K, S575K, S576K, S577K, S578K, S579K, S580K, S581K, S582K, S583K, S584K, S585K, S586K, S587K, S588K, S589K, S590K, S591K, S592K, S593K, S594K, S595K, S596K, S597K, S598K, S599K, S600K, S601K, S602K, S603K, S604K, S605K, S606K, S607K, S608K, S609K, S610K, S611K, S612K, S613K, S614K, S615K, S616K, S617K, S618K, S619K, S620K, S621K, S622K, S623K, S624K, S625K, S626K, S627K, S628K, S629K, S630K, S631K, S632K, S633K, S634K, S635K, S636K, S637K, S638K, S639K, S640K, S641K, S642K, S643K, S644K, S645K, S646K, S647K, S648K, S649K, S650K, S651K, S652K, S653K, S654K, S655K, S656K, S657K, S658K, S659K, S660K, S661K, S662K, S663K, S664K, S665K, S666K, S667K, S668K, S669K, S670K, S671K, S672K, S673K, S674K, S675K, S676K, S677K, S678K, S679K, S680K, S681K,


TX Line

RX Line


Common Line

Voltage Line

10 - 7

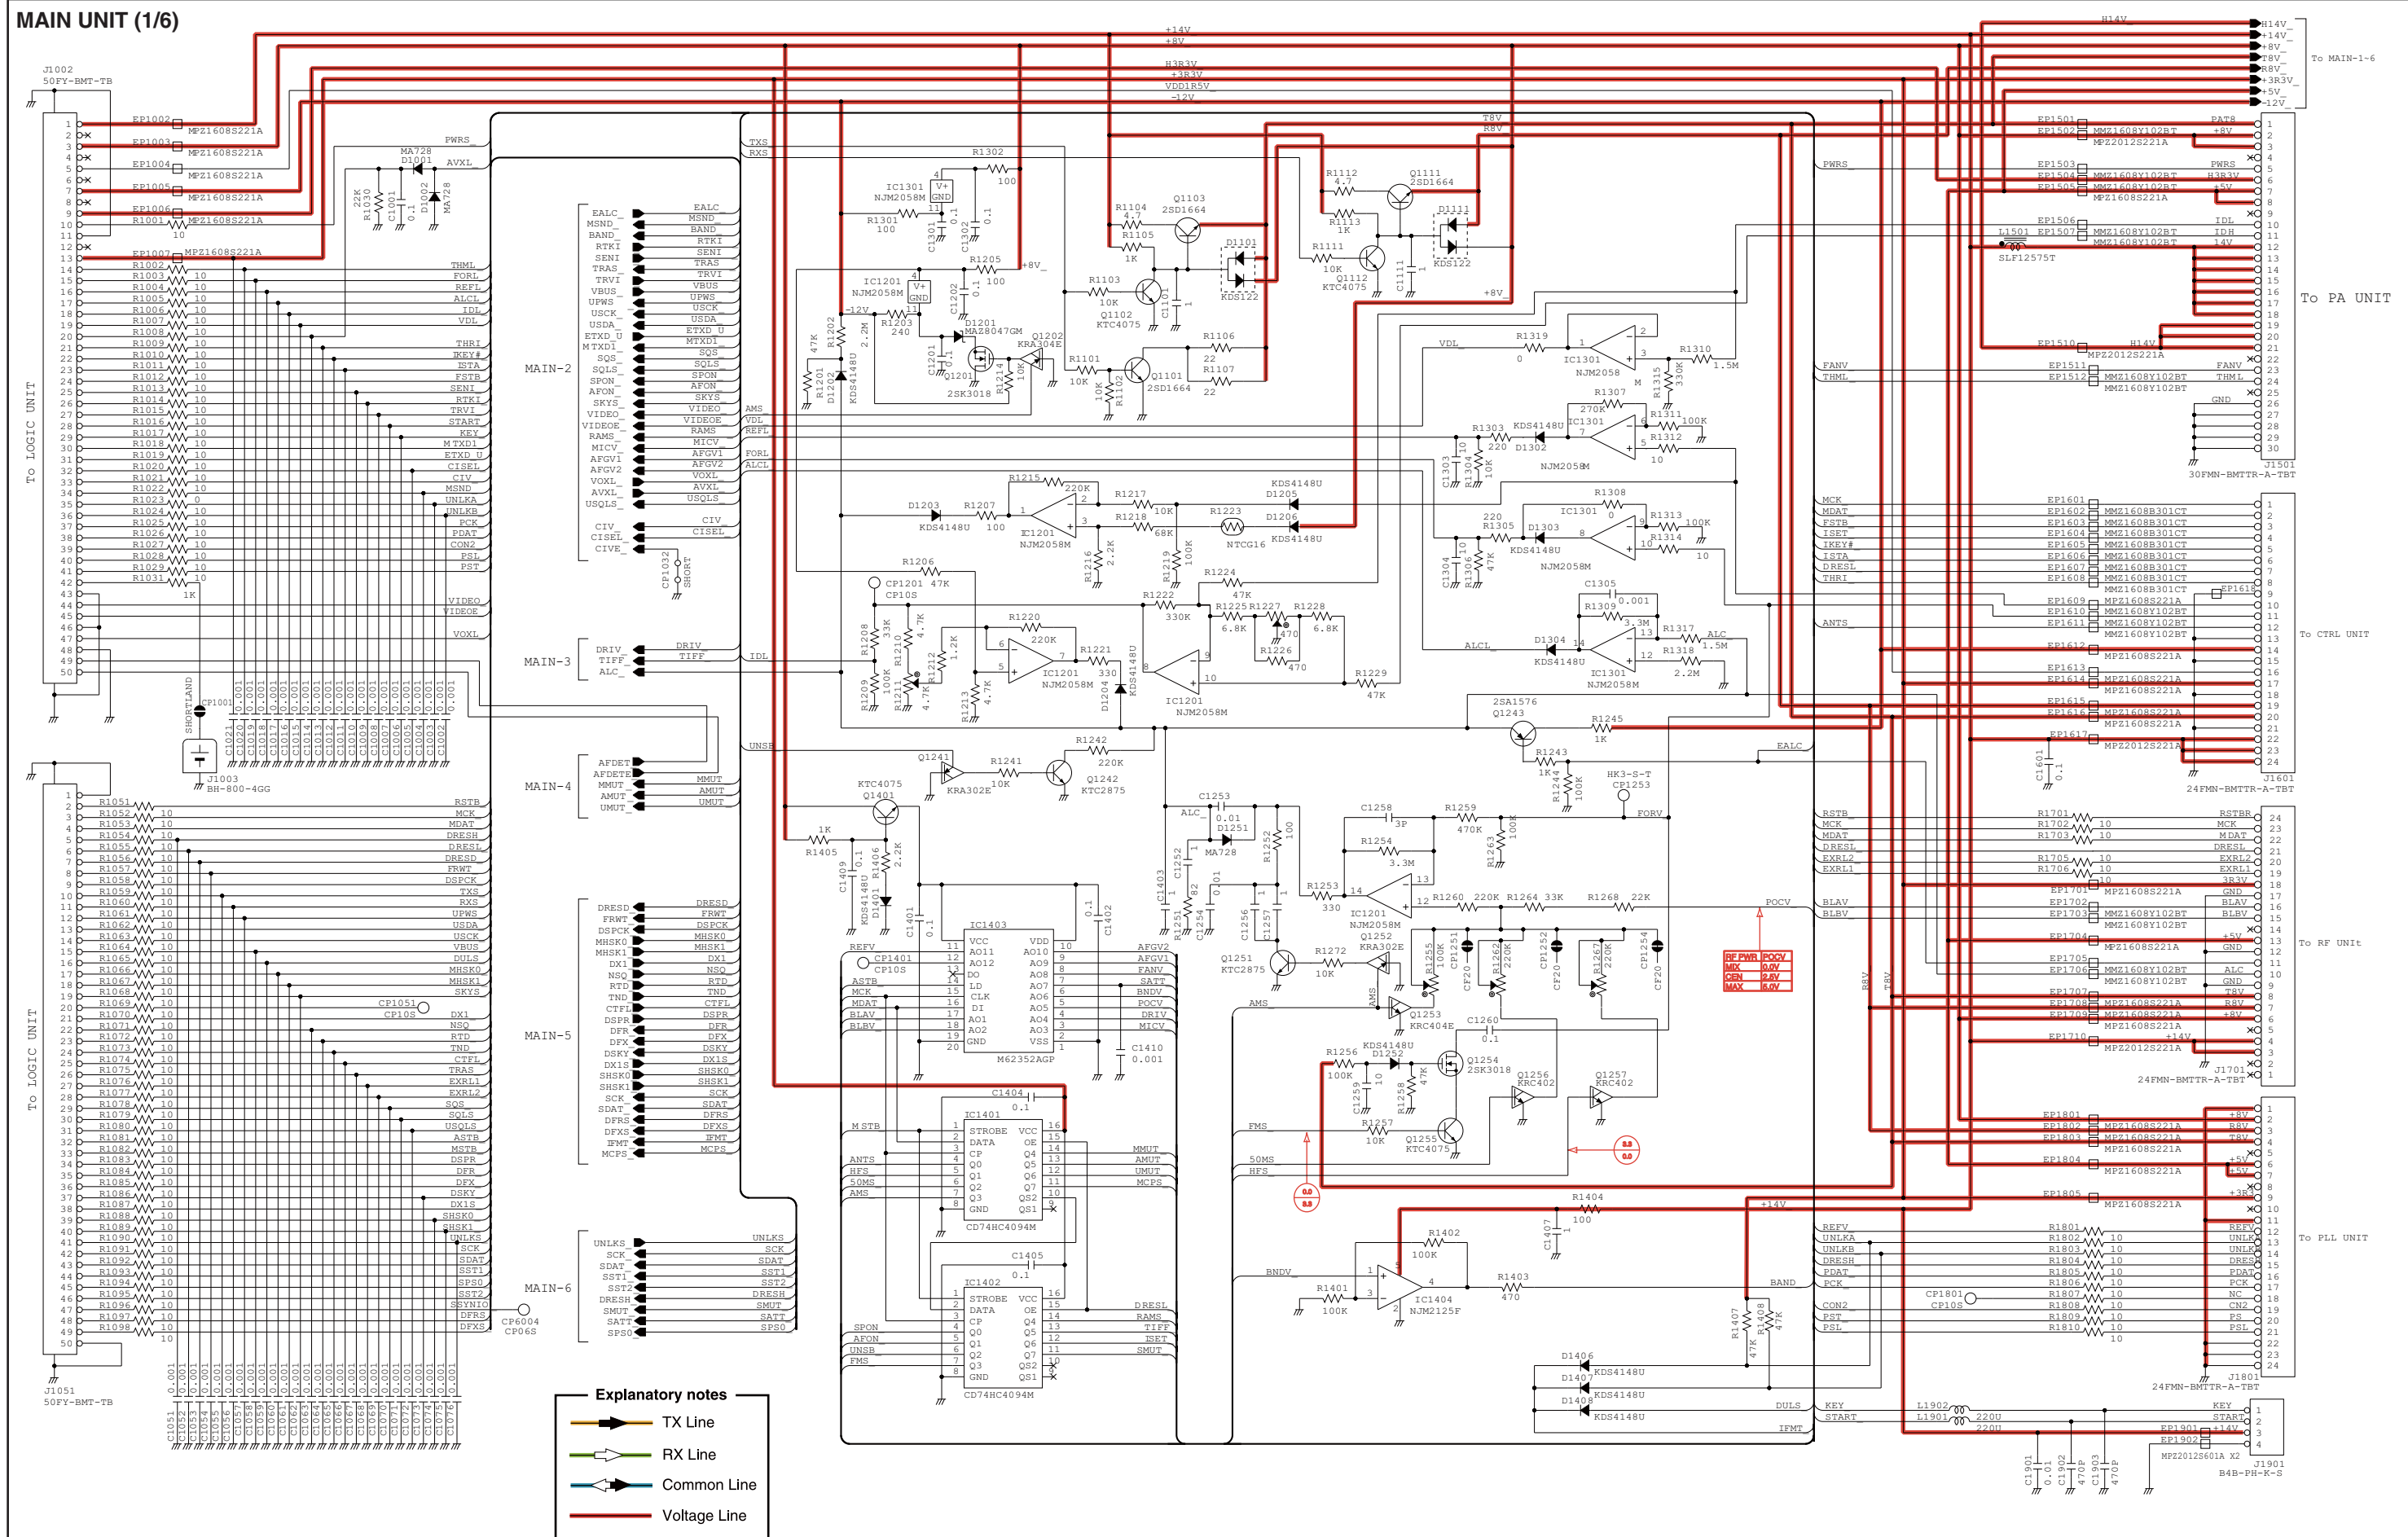**MAIN UNIT (1/6)**


\*; Refer to "PARTS LIST."

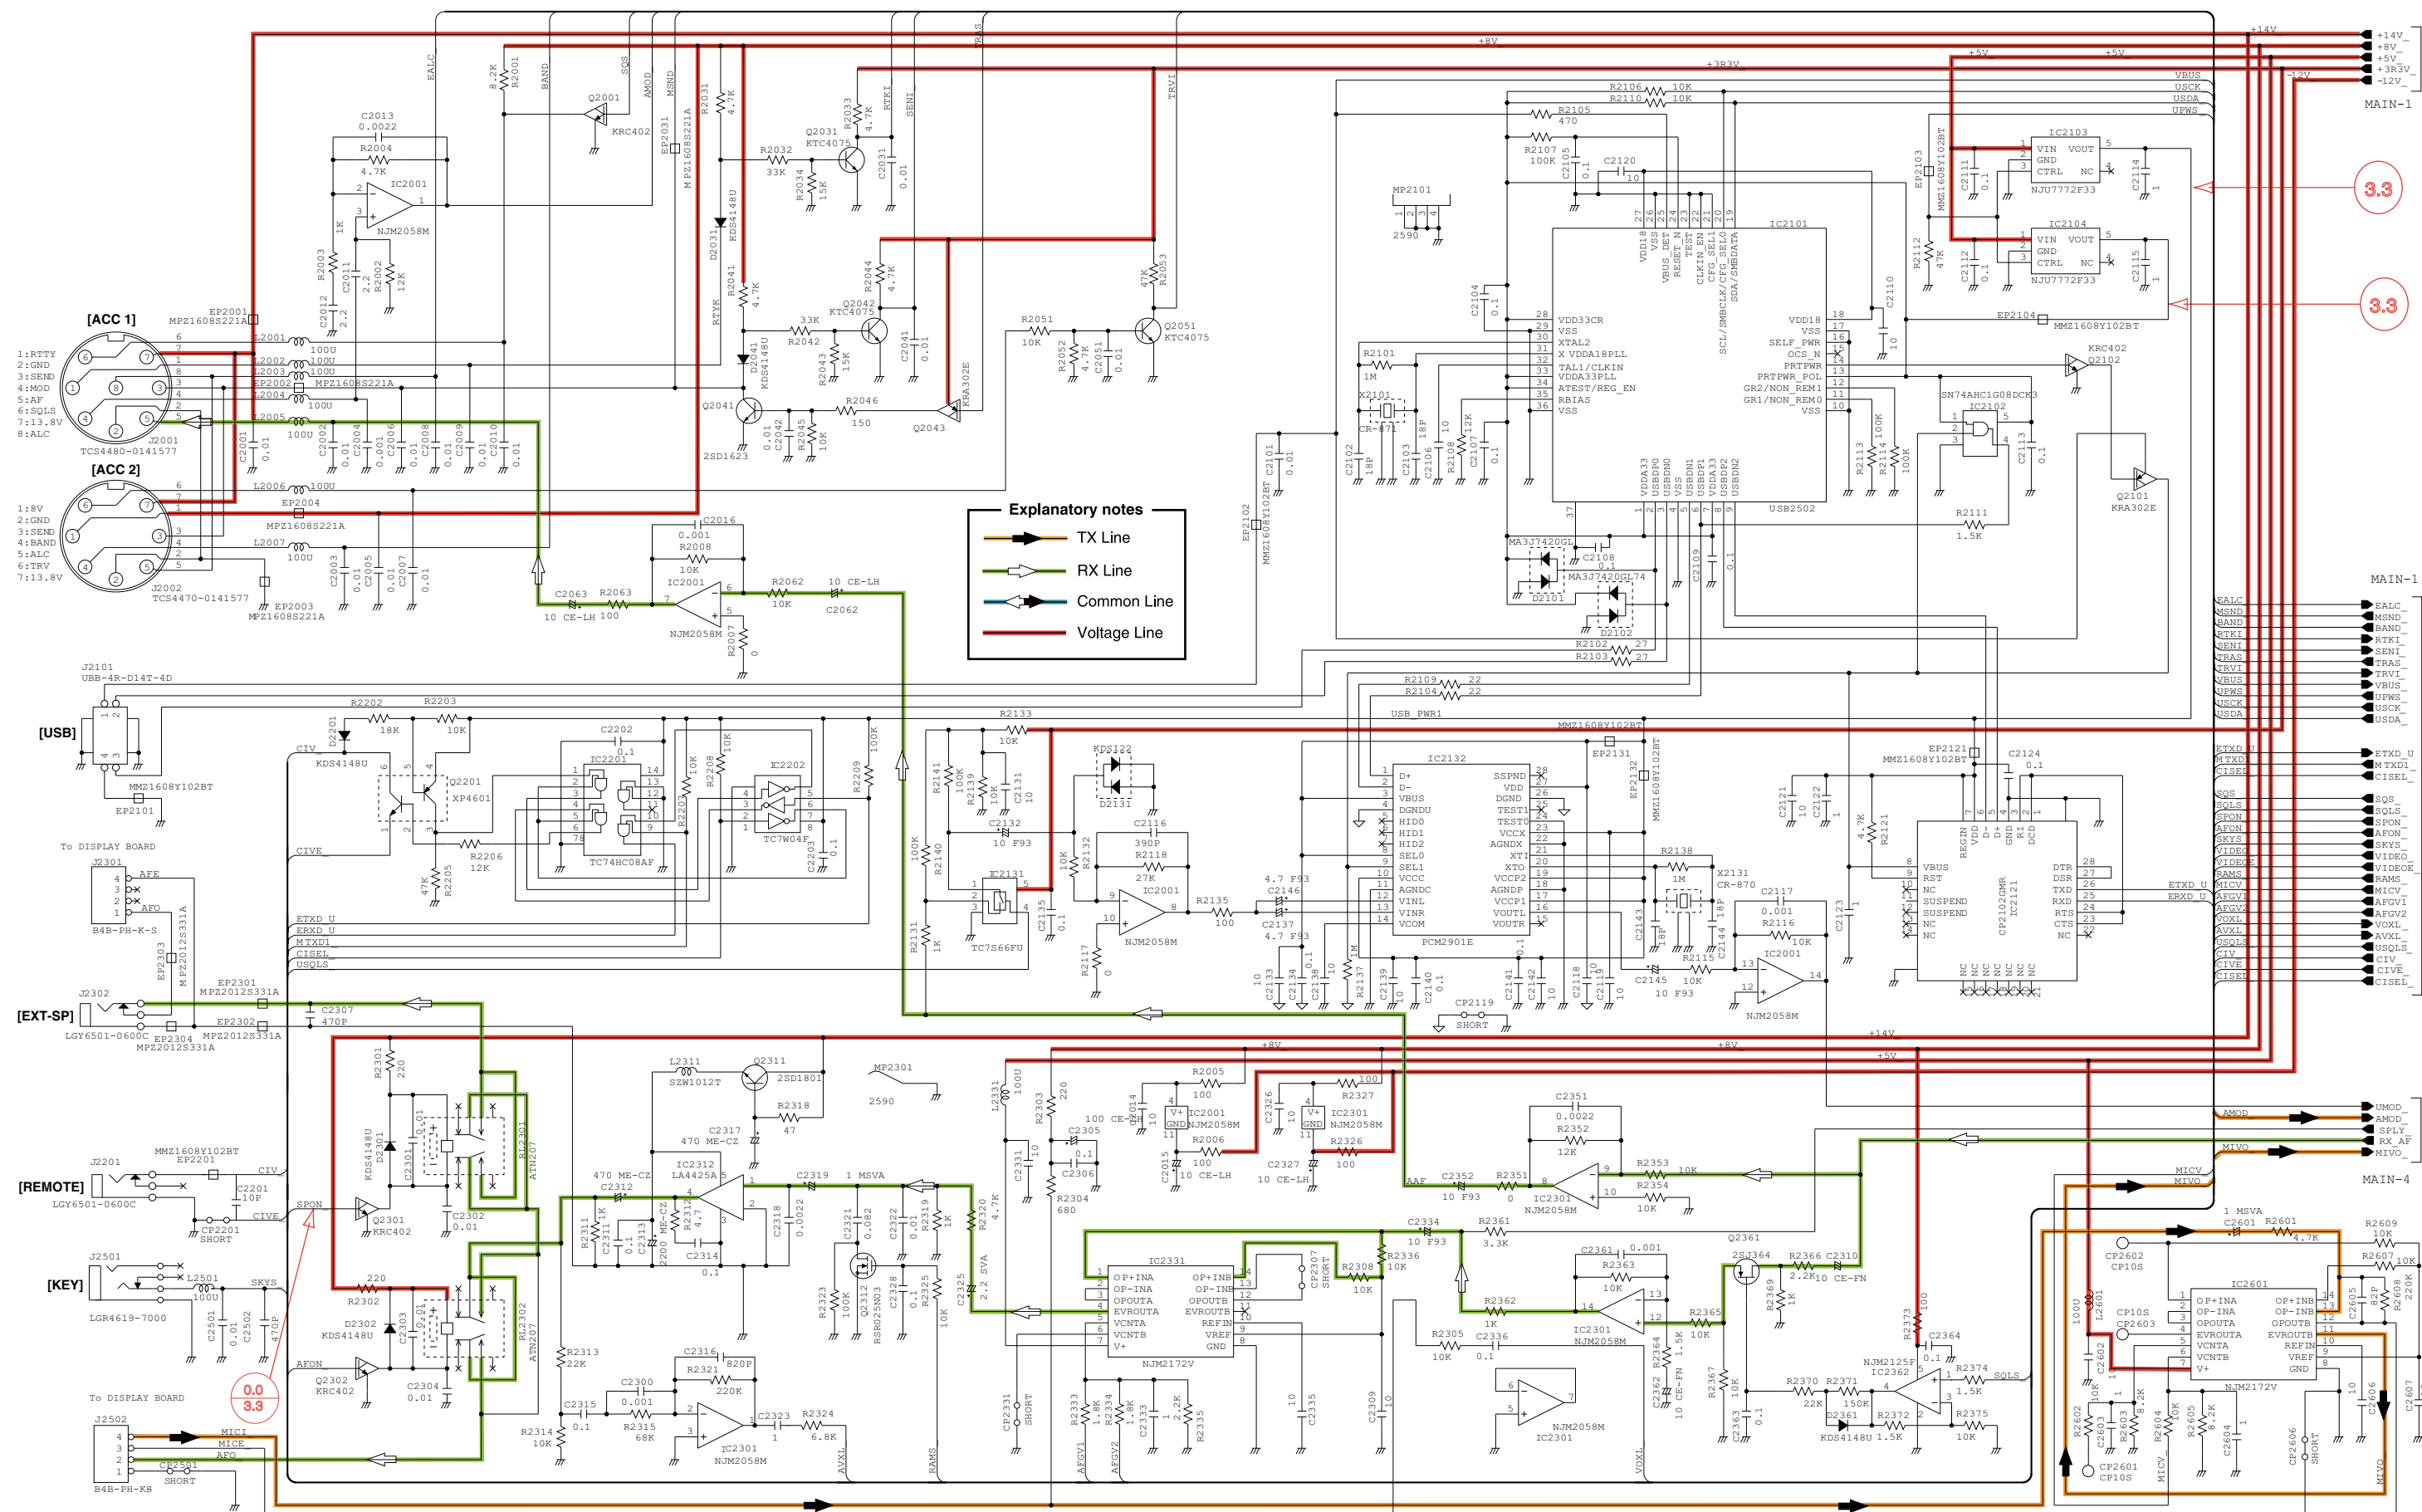**MAIN UNIT (2/6)**

\*; Refer to "PARTS LIST."




**MAIN UNIT (3/6)**

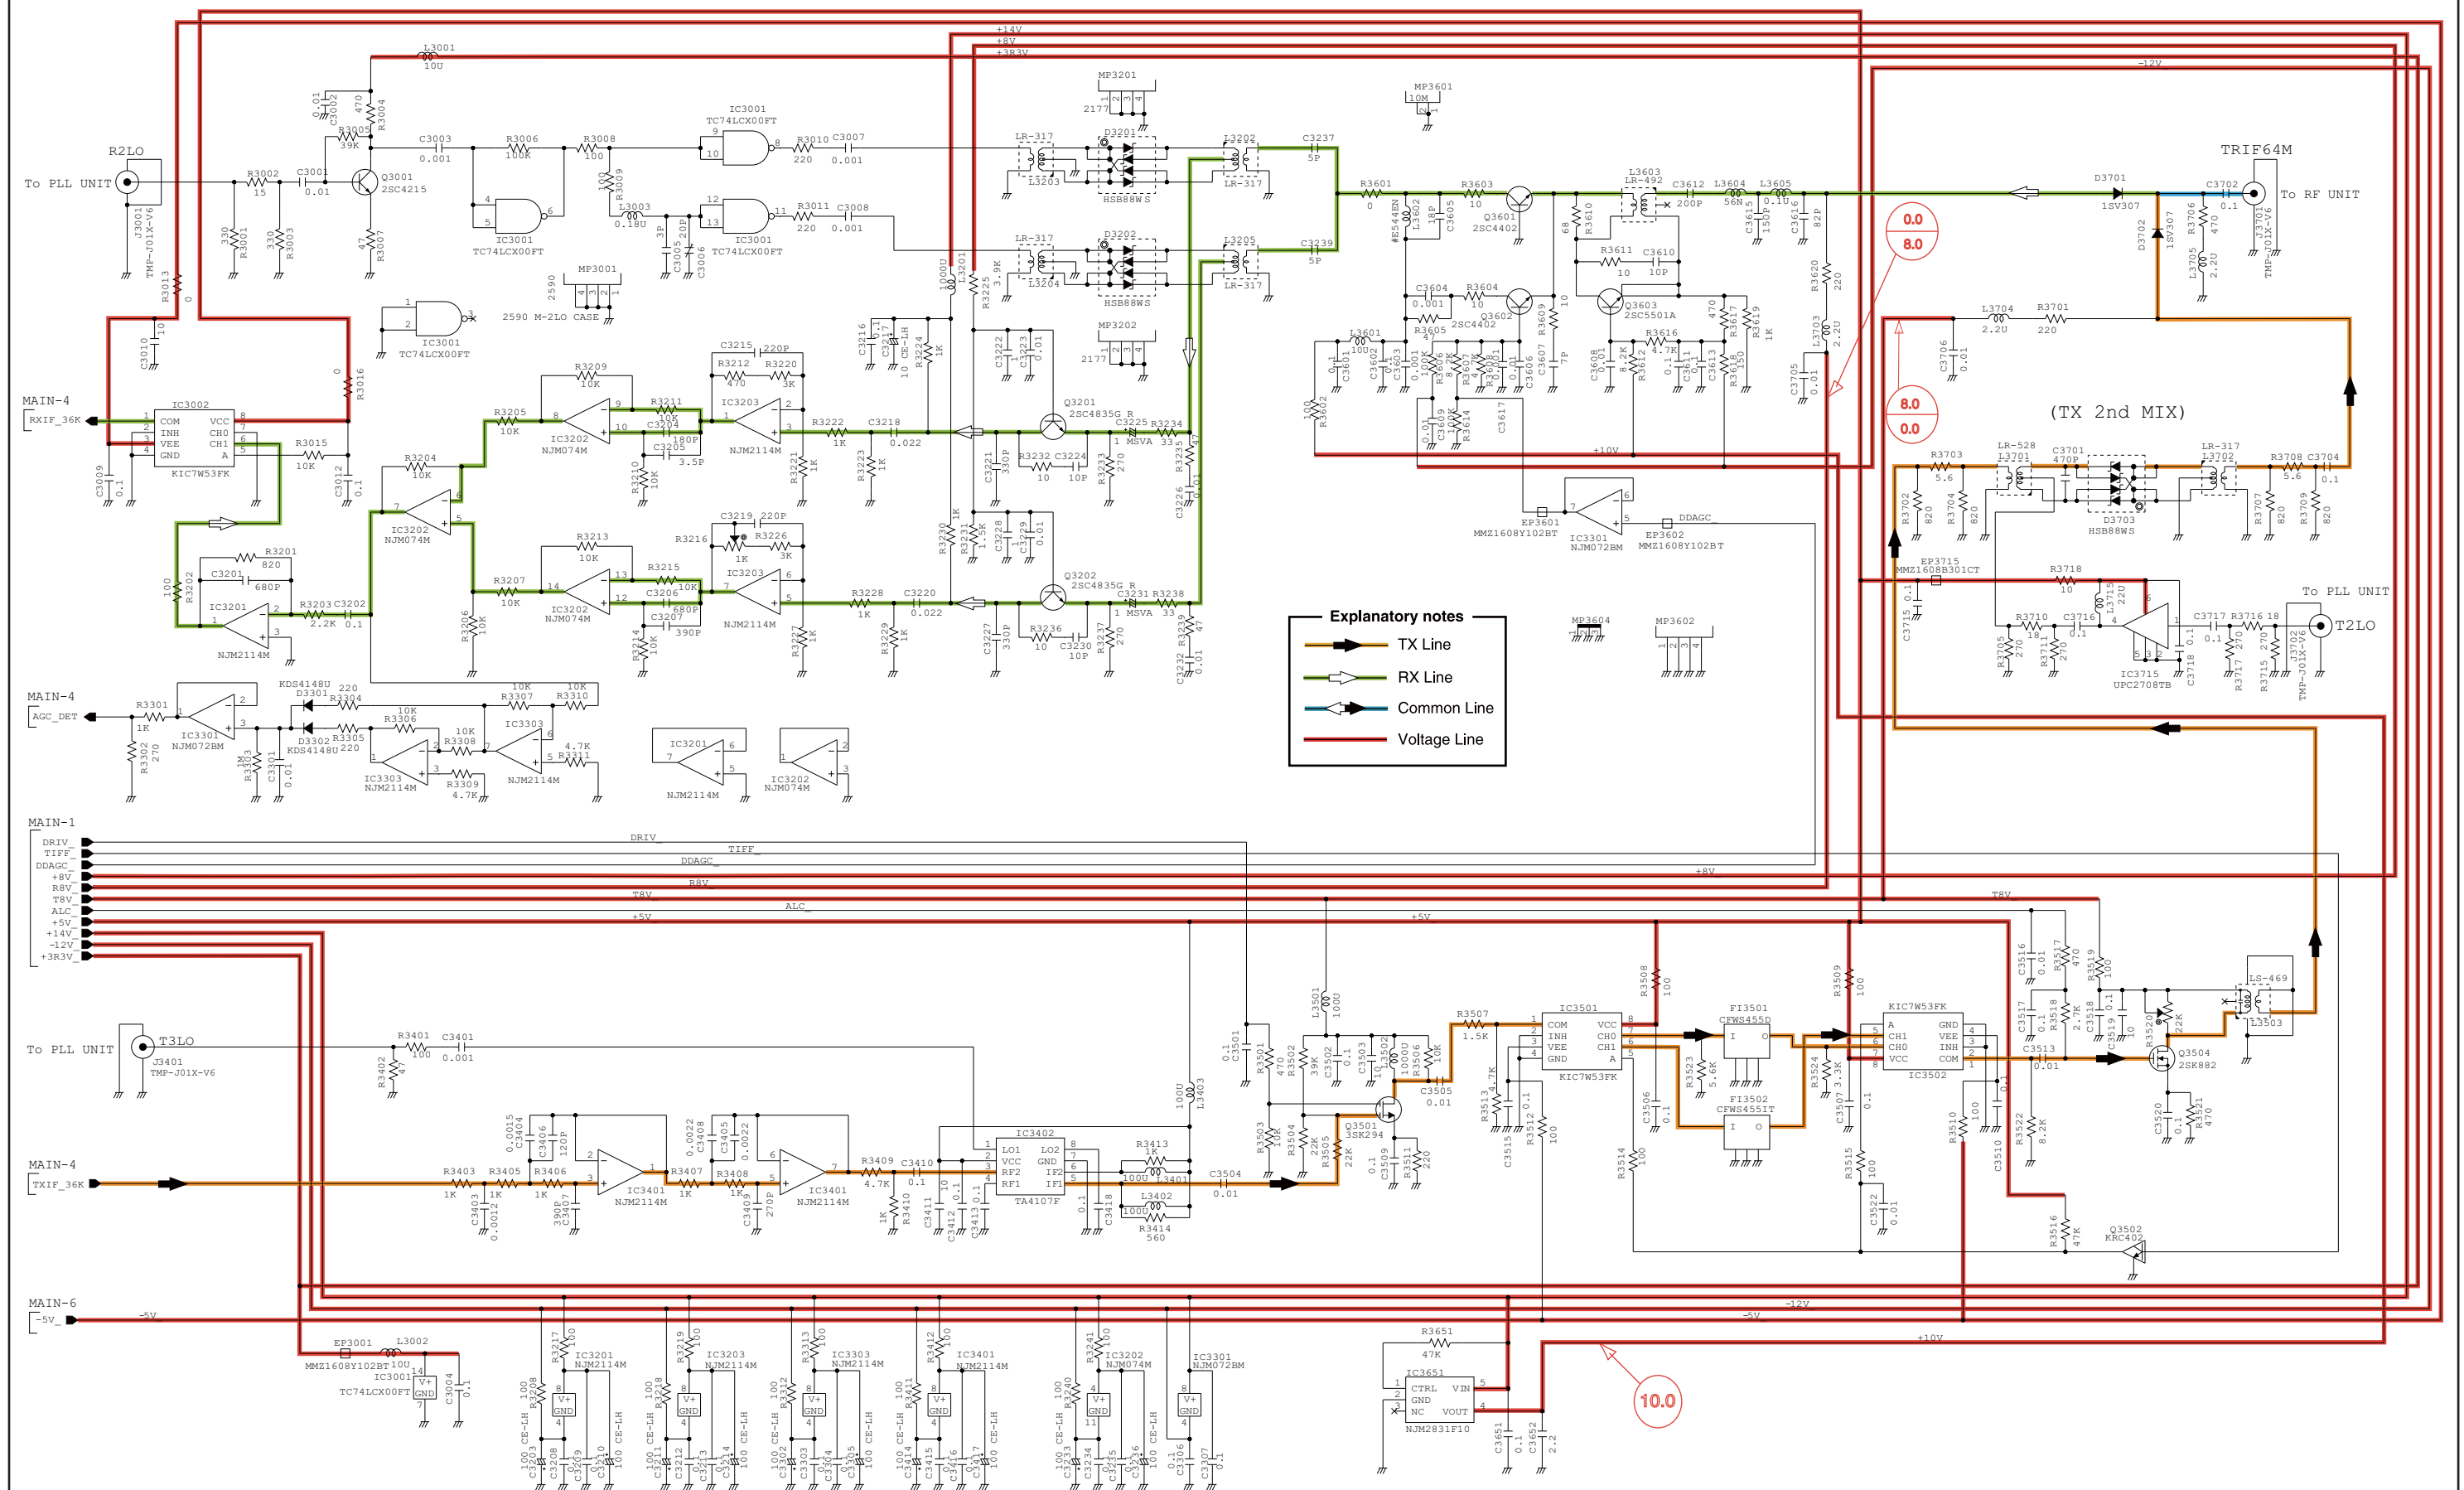


\*; Refer to "PARTS LIST."

# MAIN UNIT (4/6)

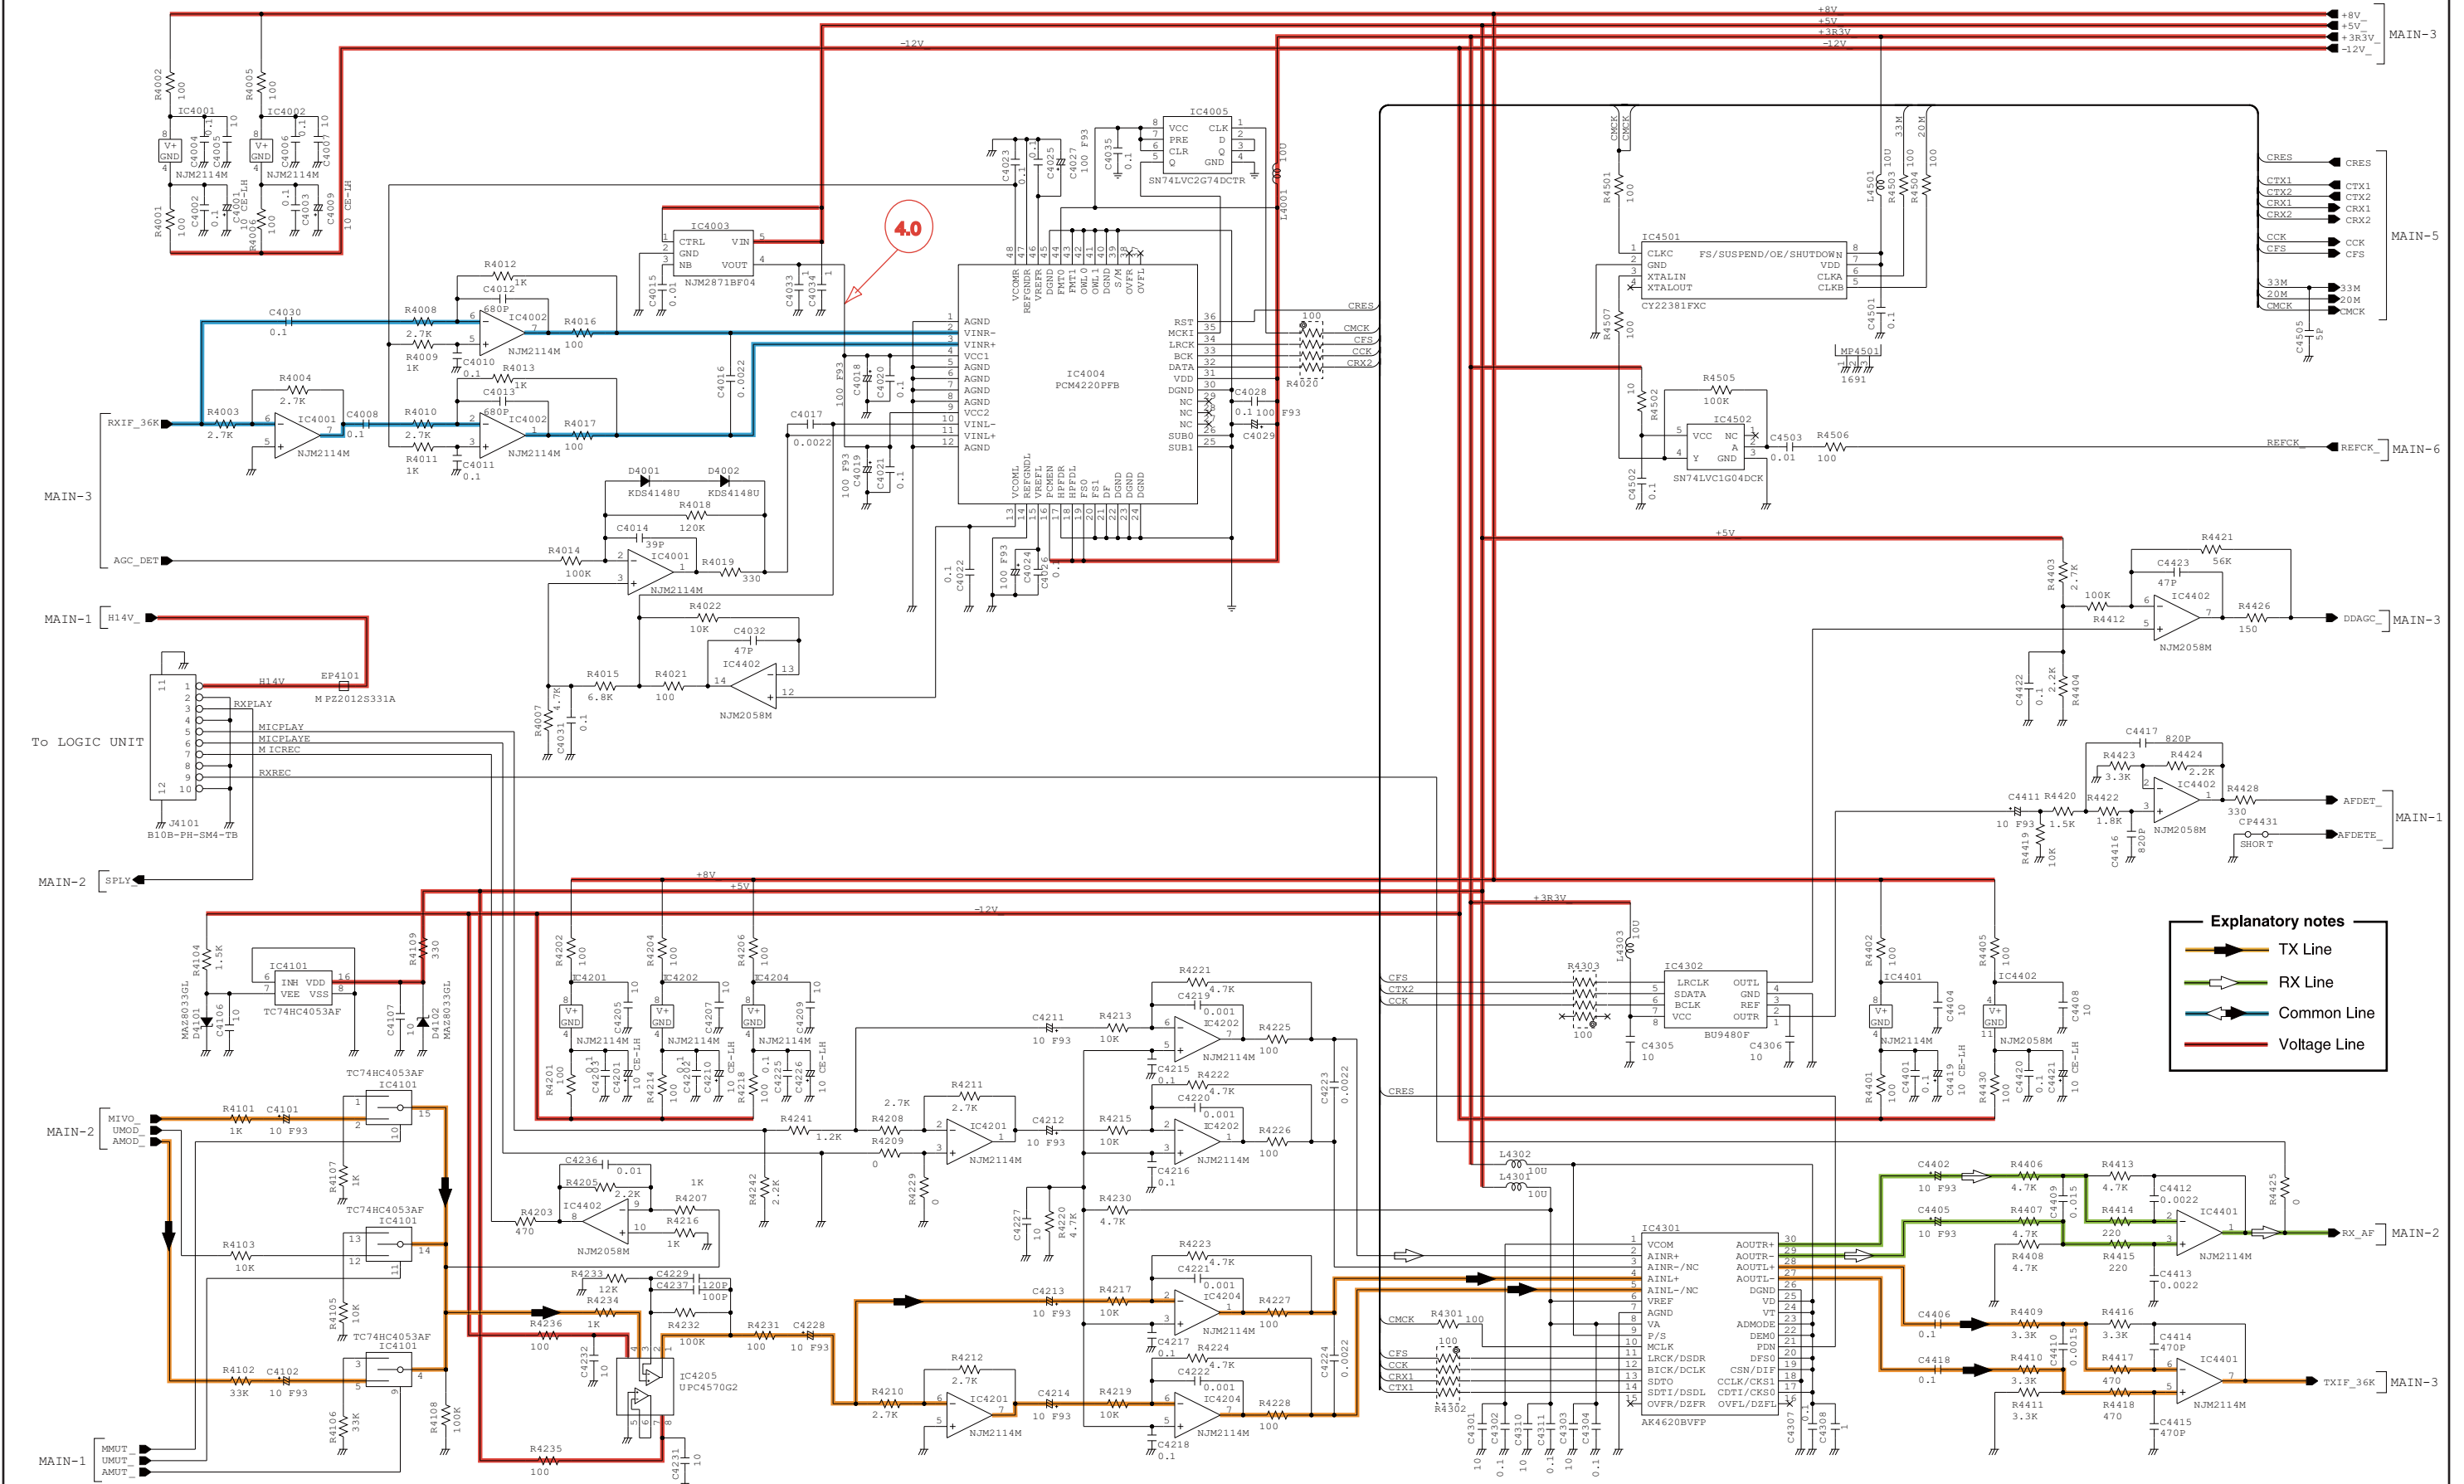


## MAIN UNIT (5/6)

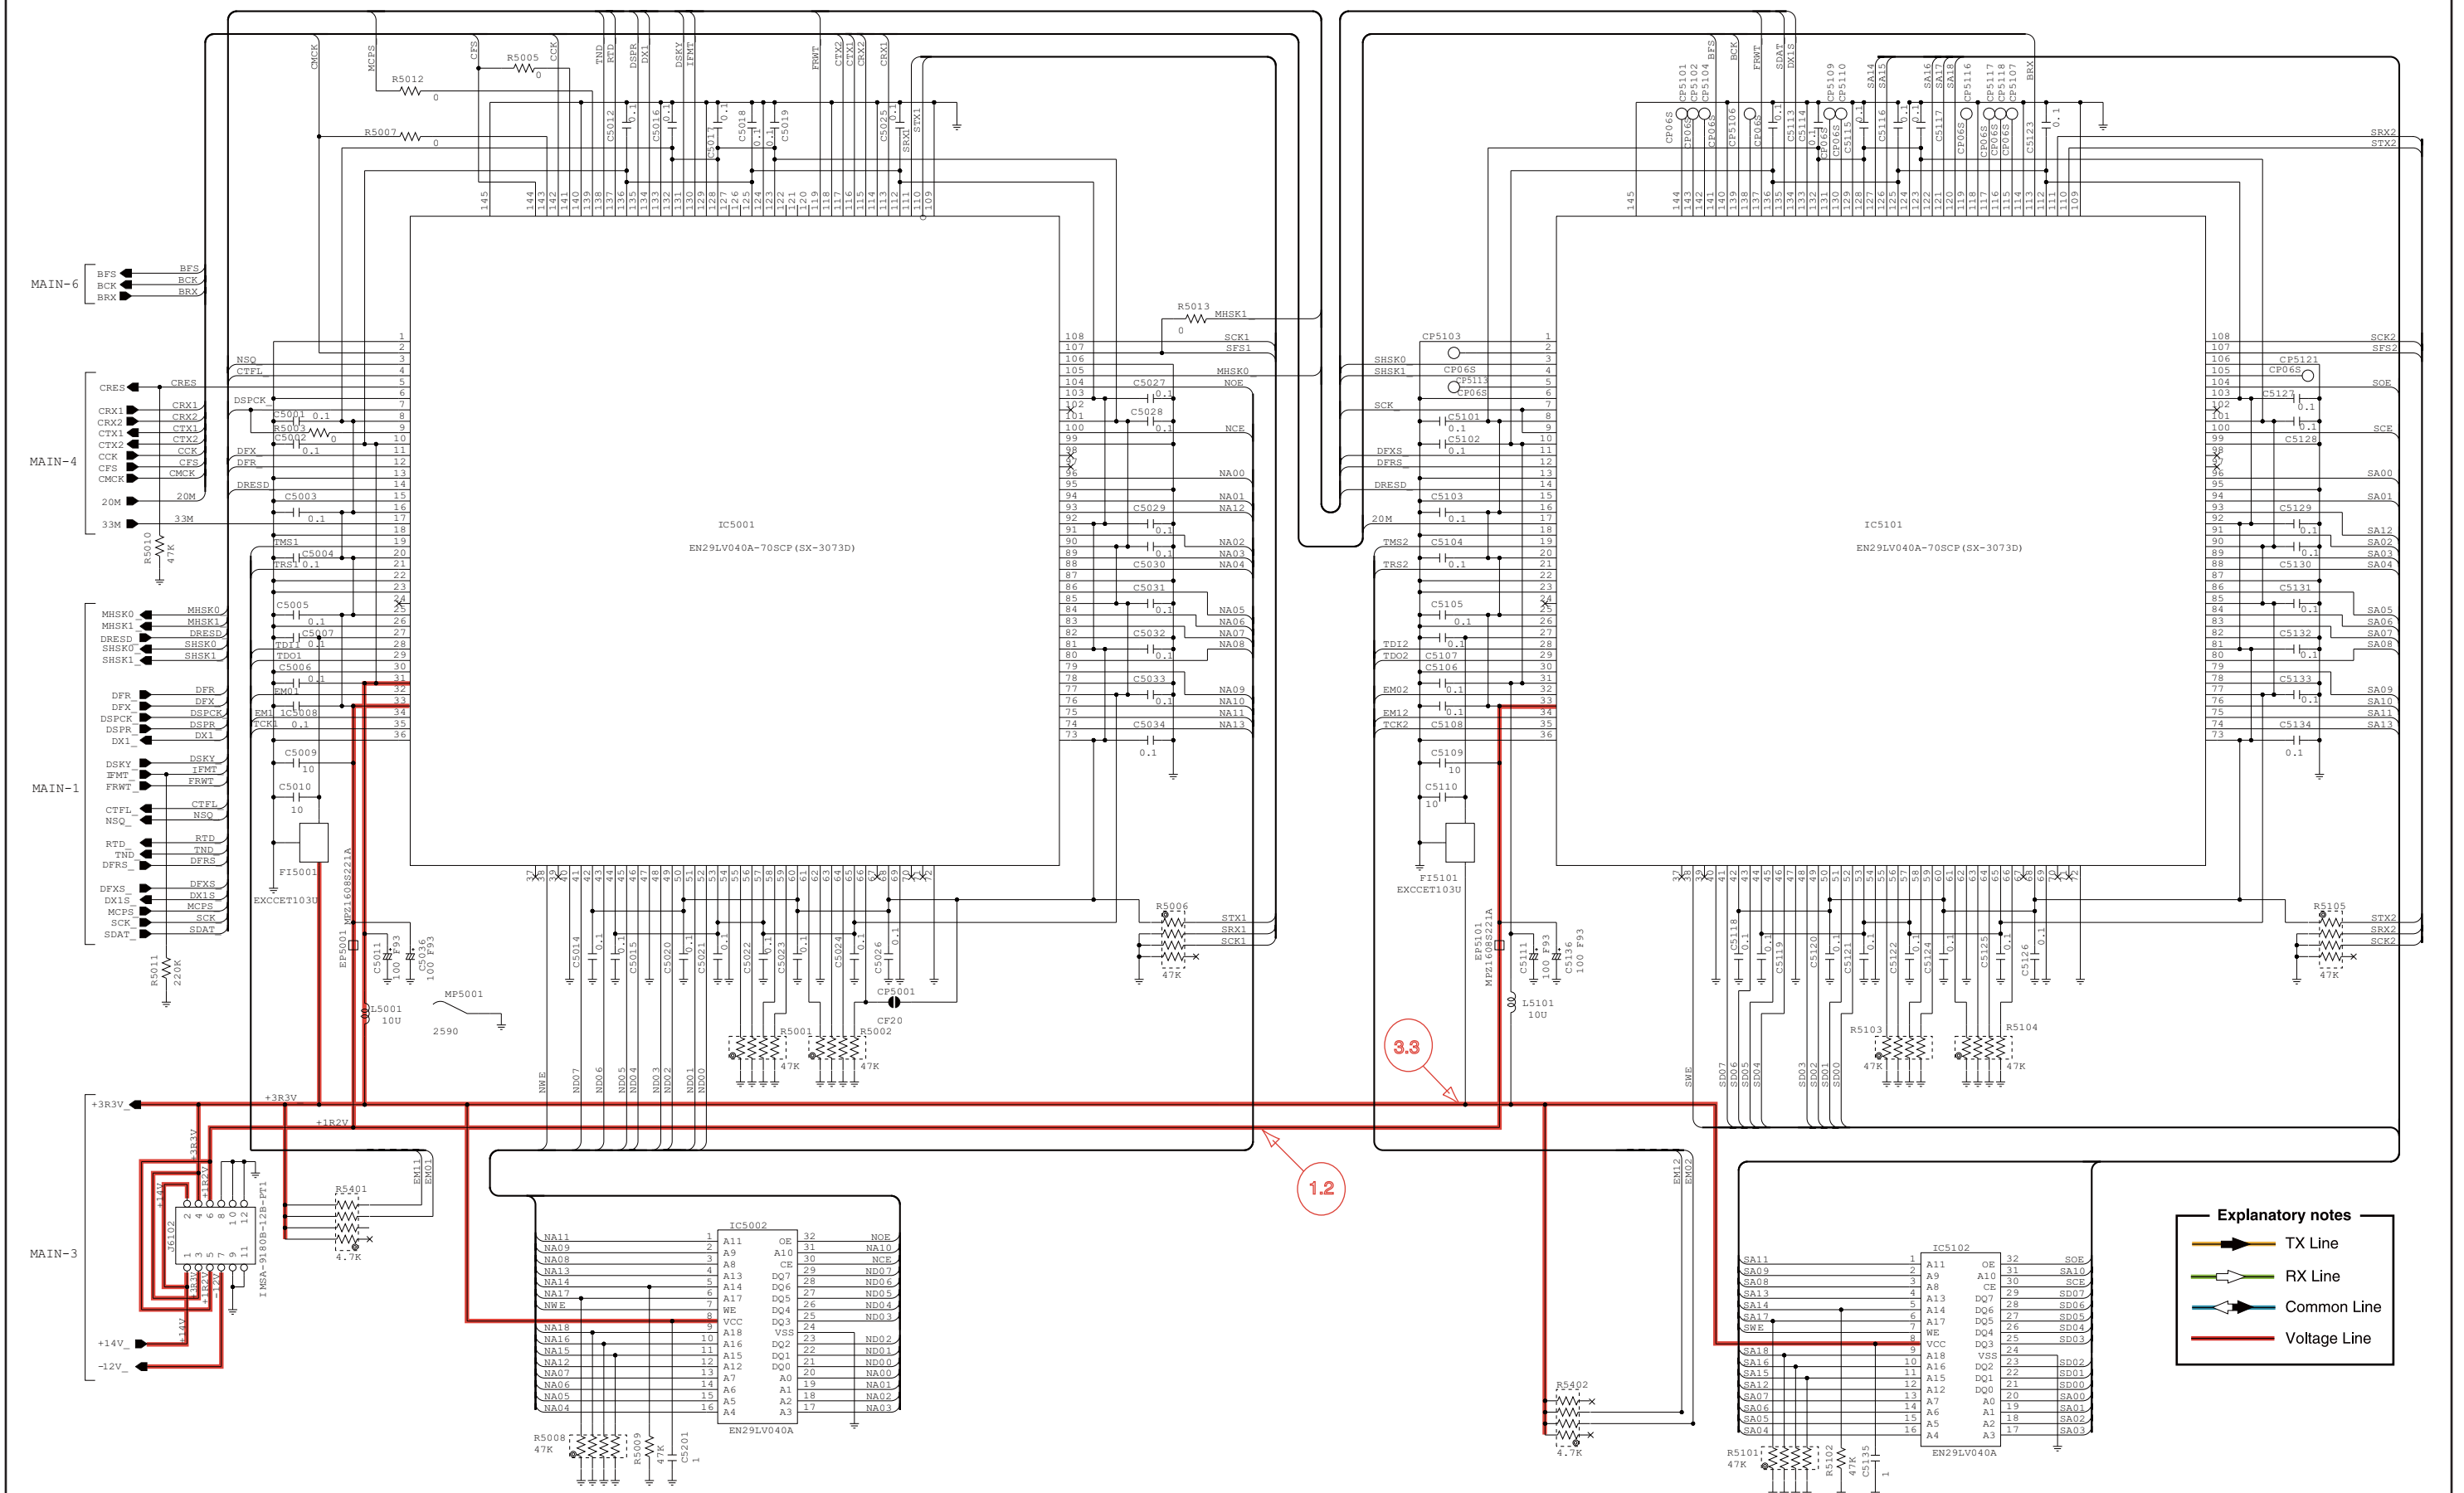


\*; Refer to "PARTS LIST."

## MAIN UNIT (6/6)

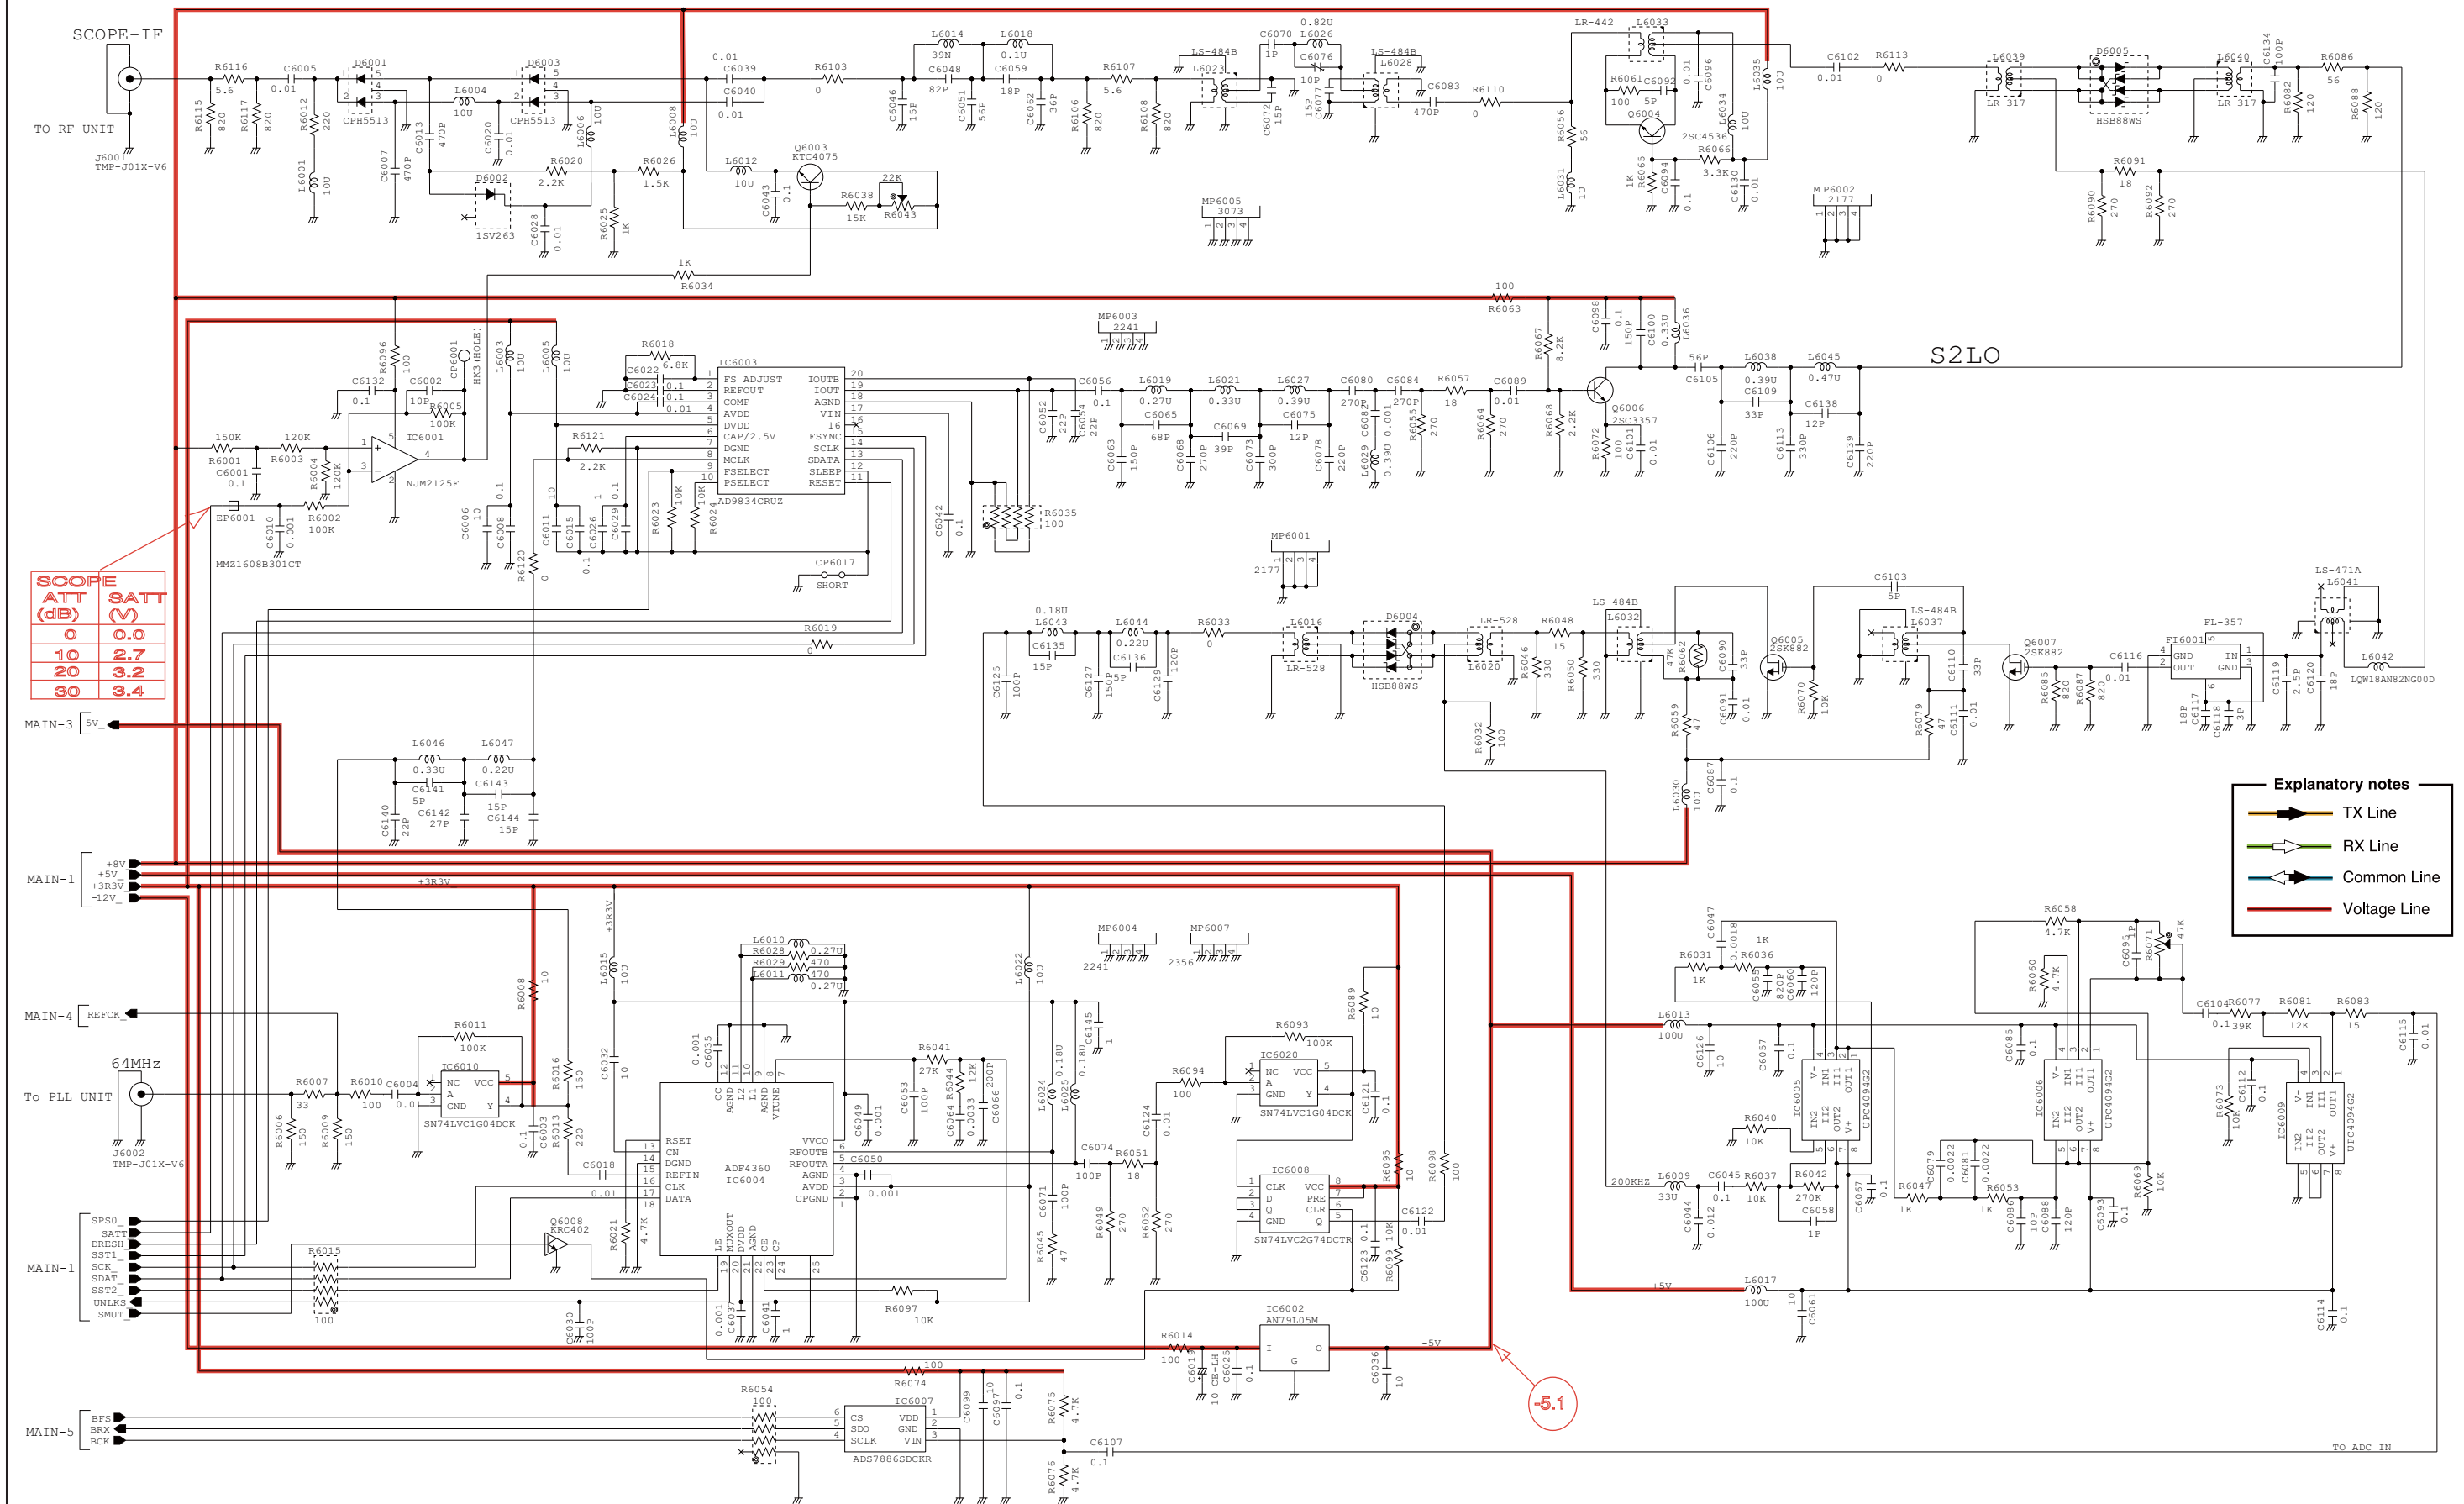


\*; Refer to "PARTS LIST."



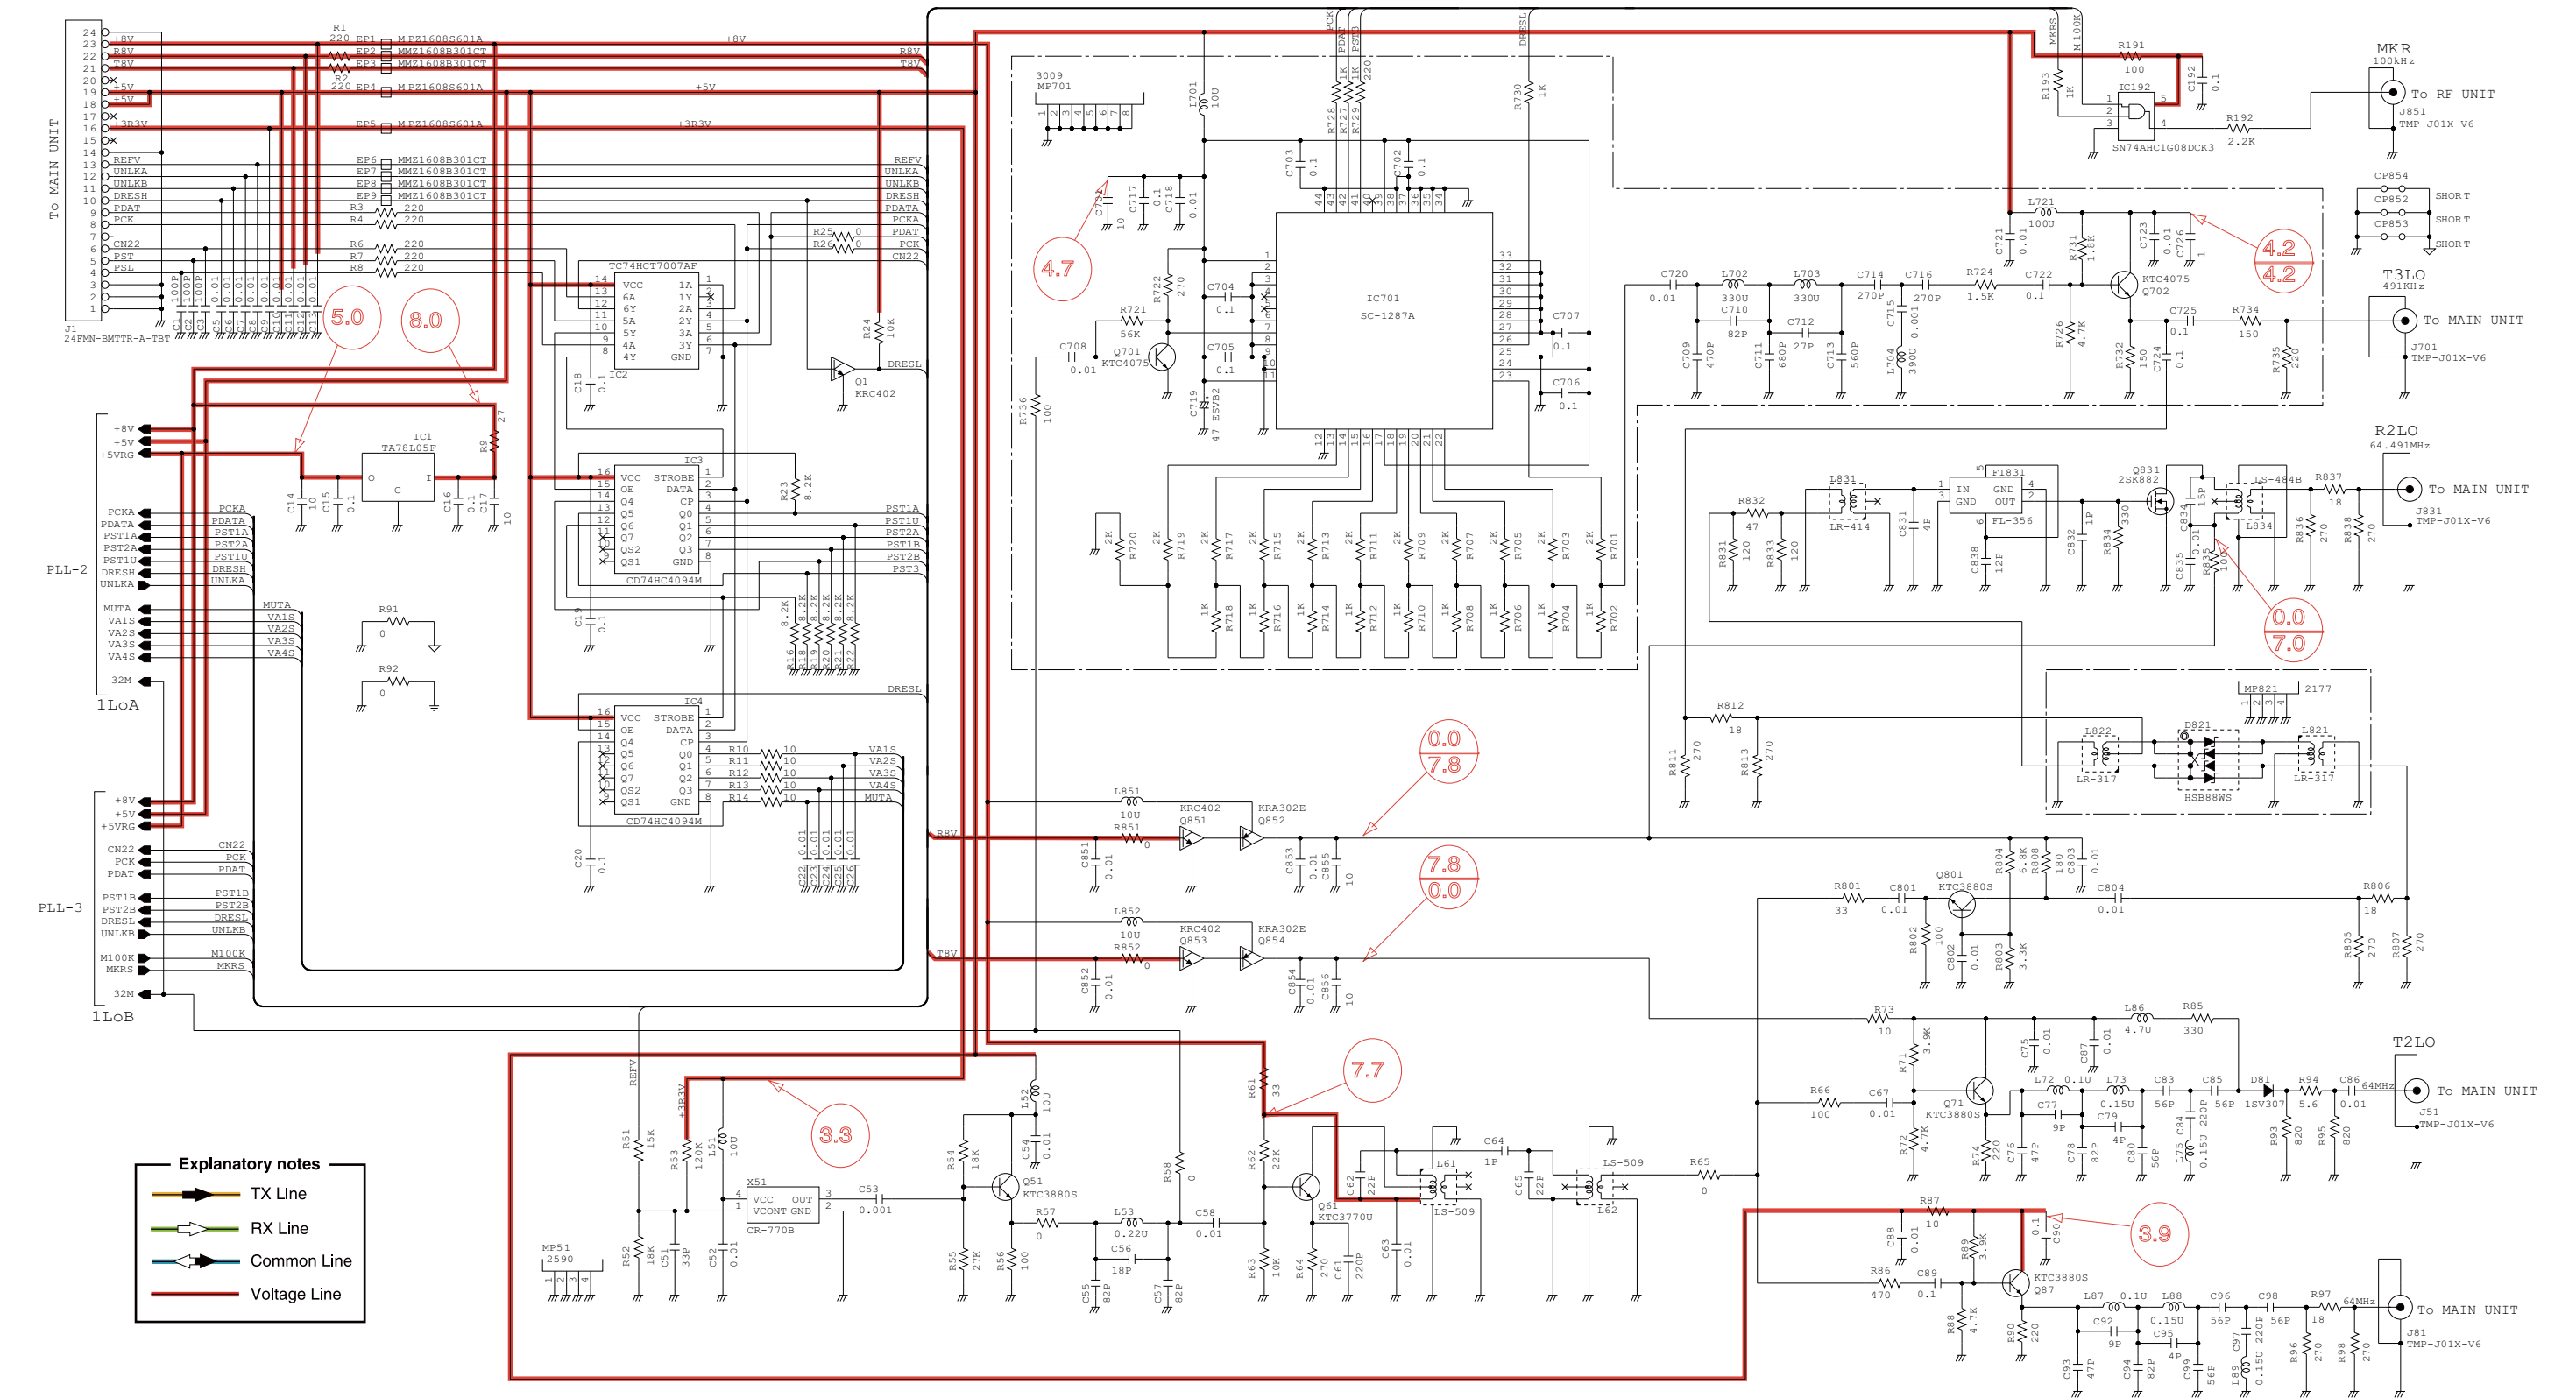


\*; Refer to "PARTS LIST."

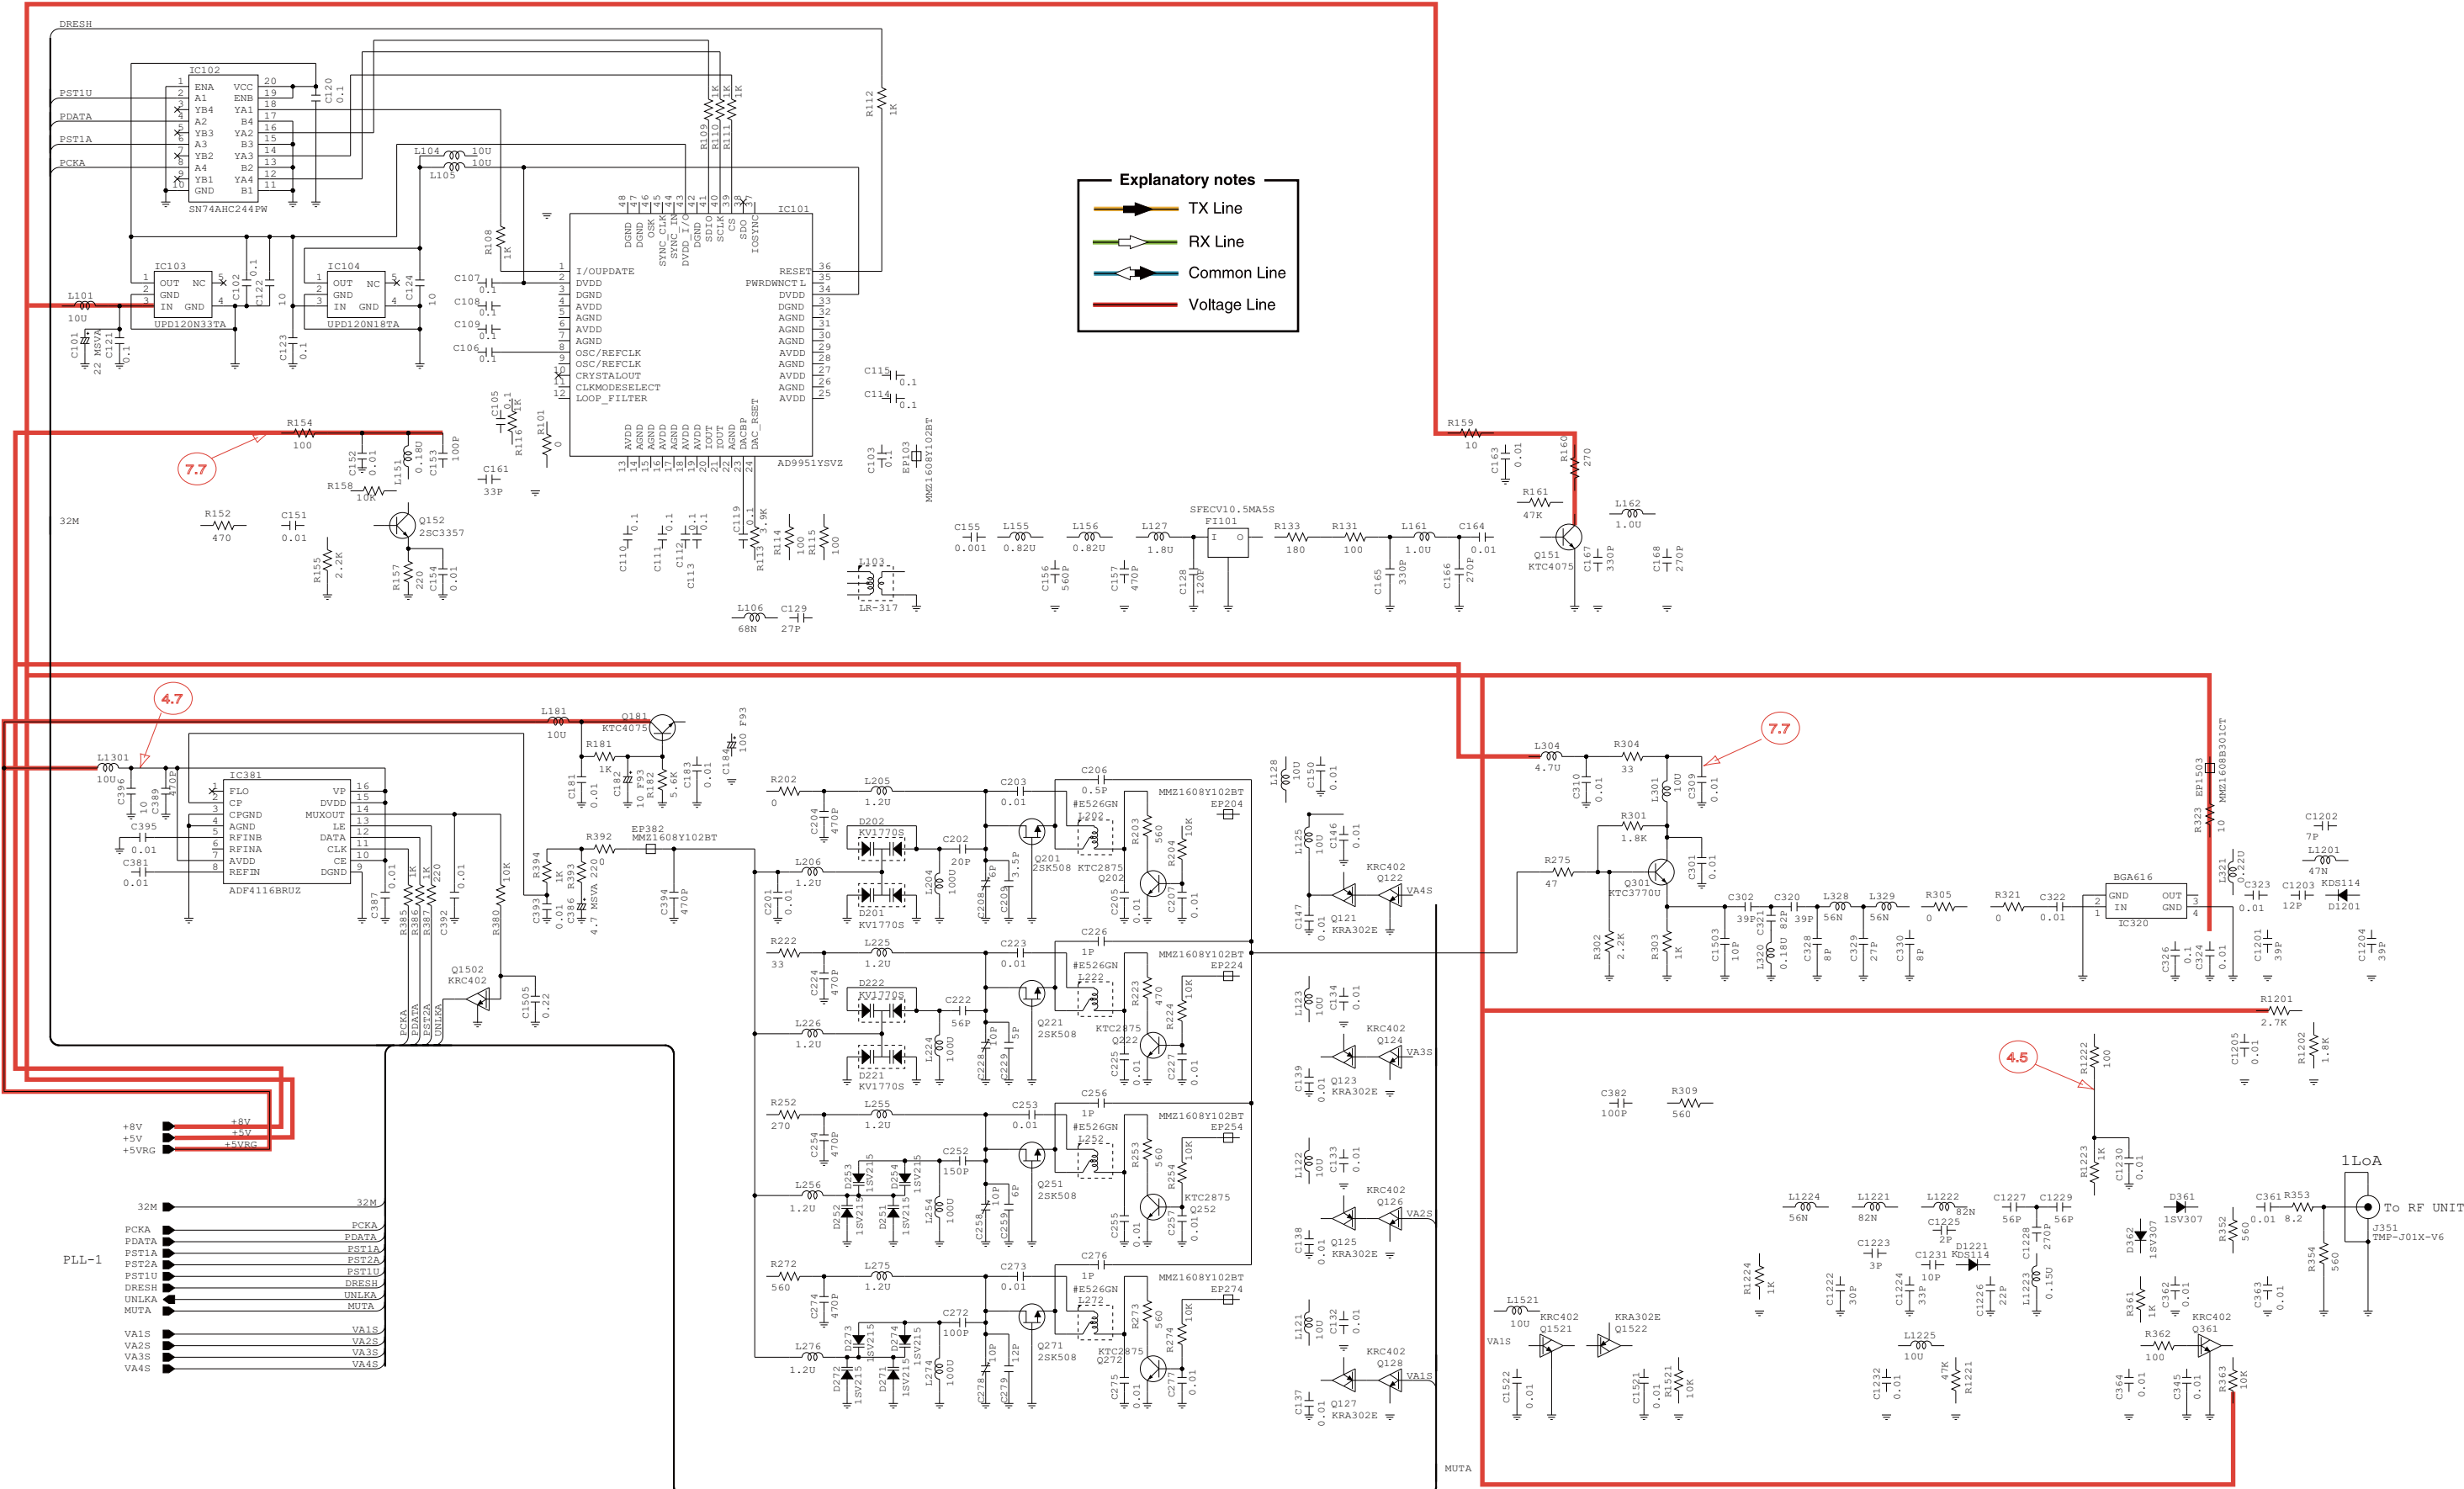


\*, Refer to "PARTS LIST"

## PLL UNIT (3/3)

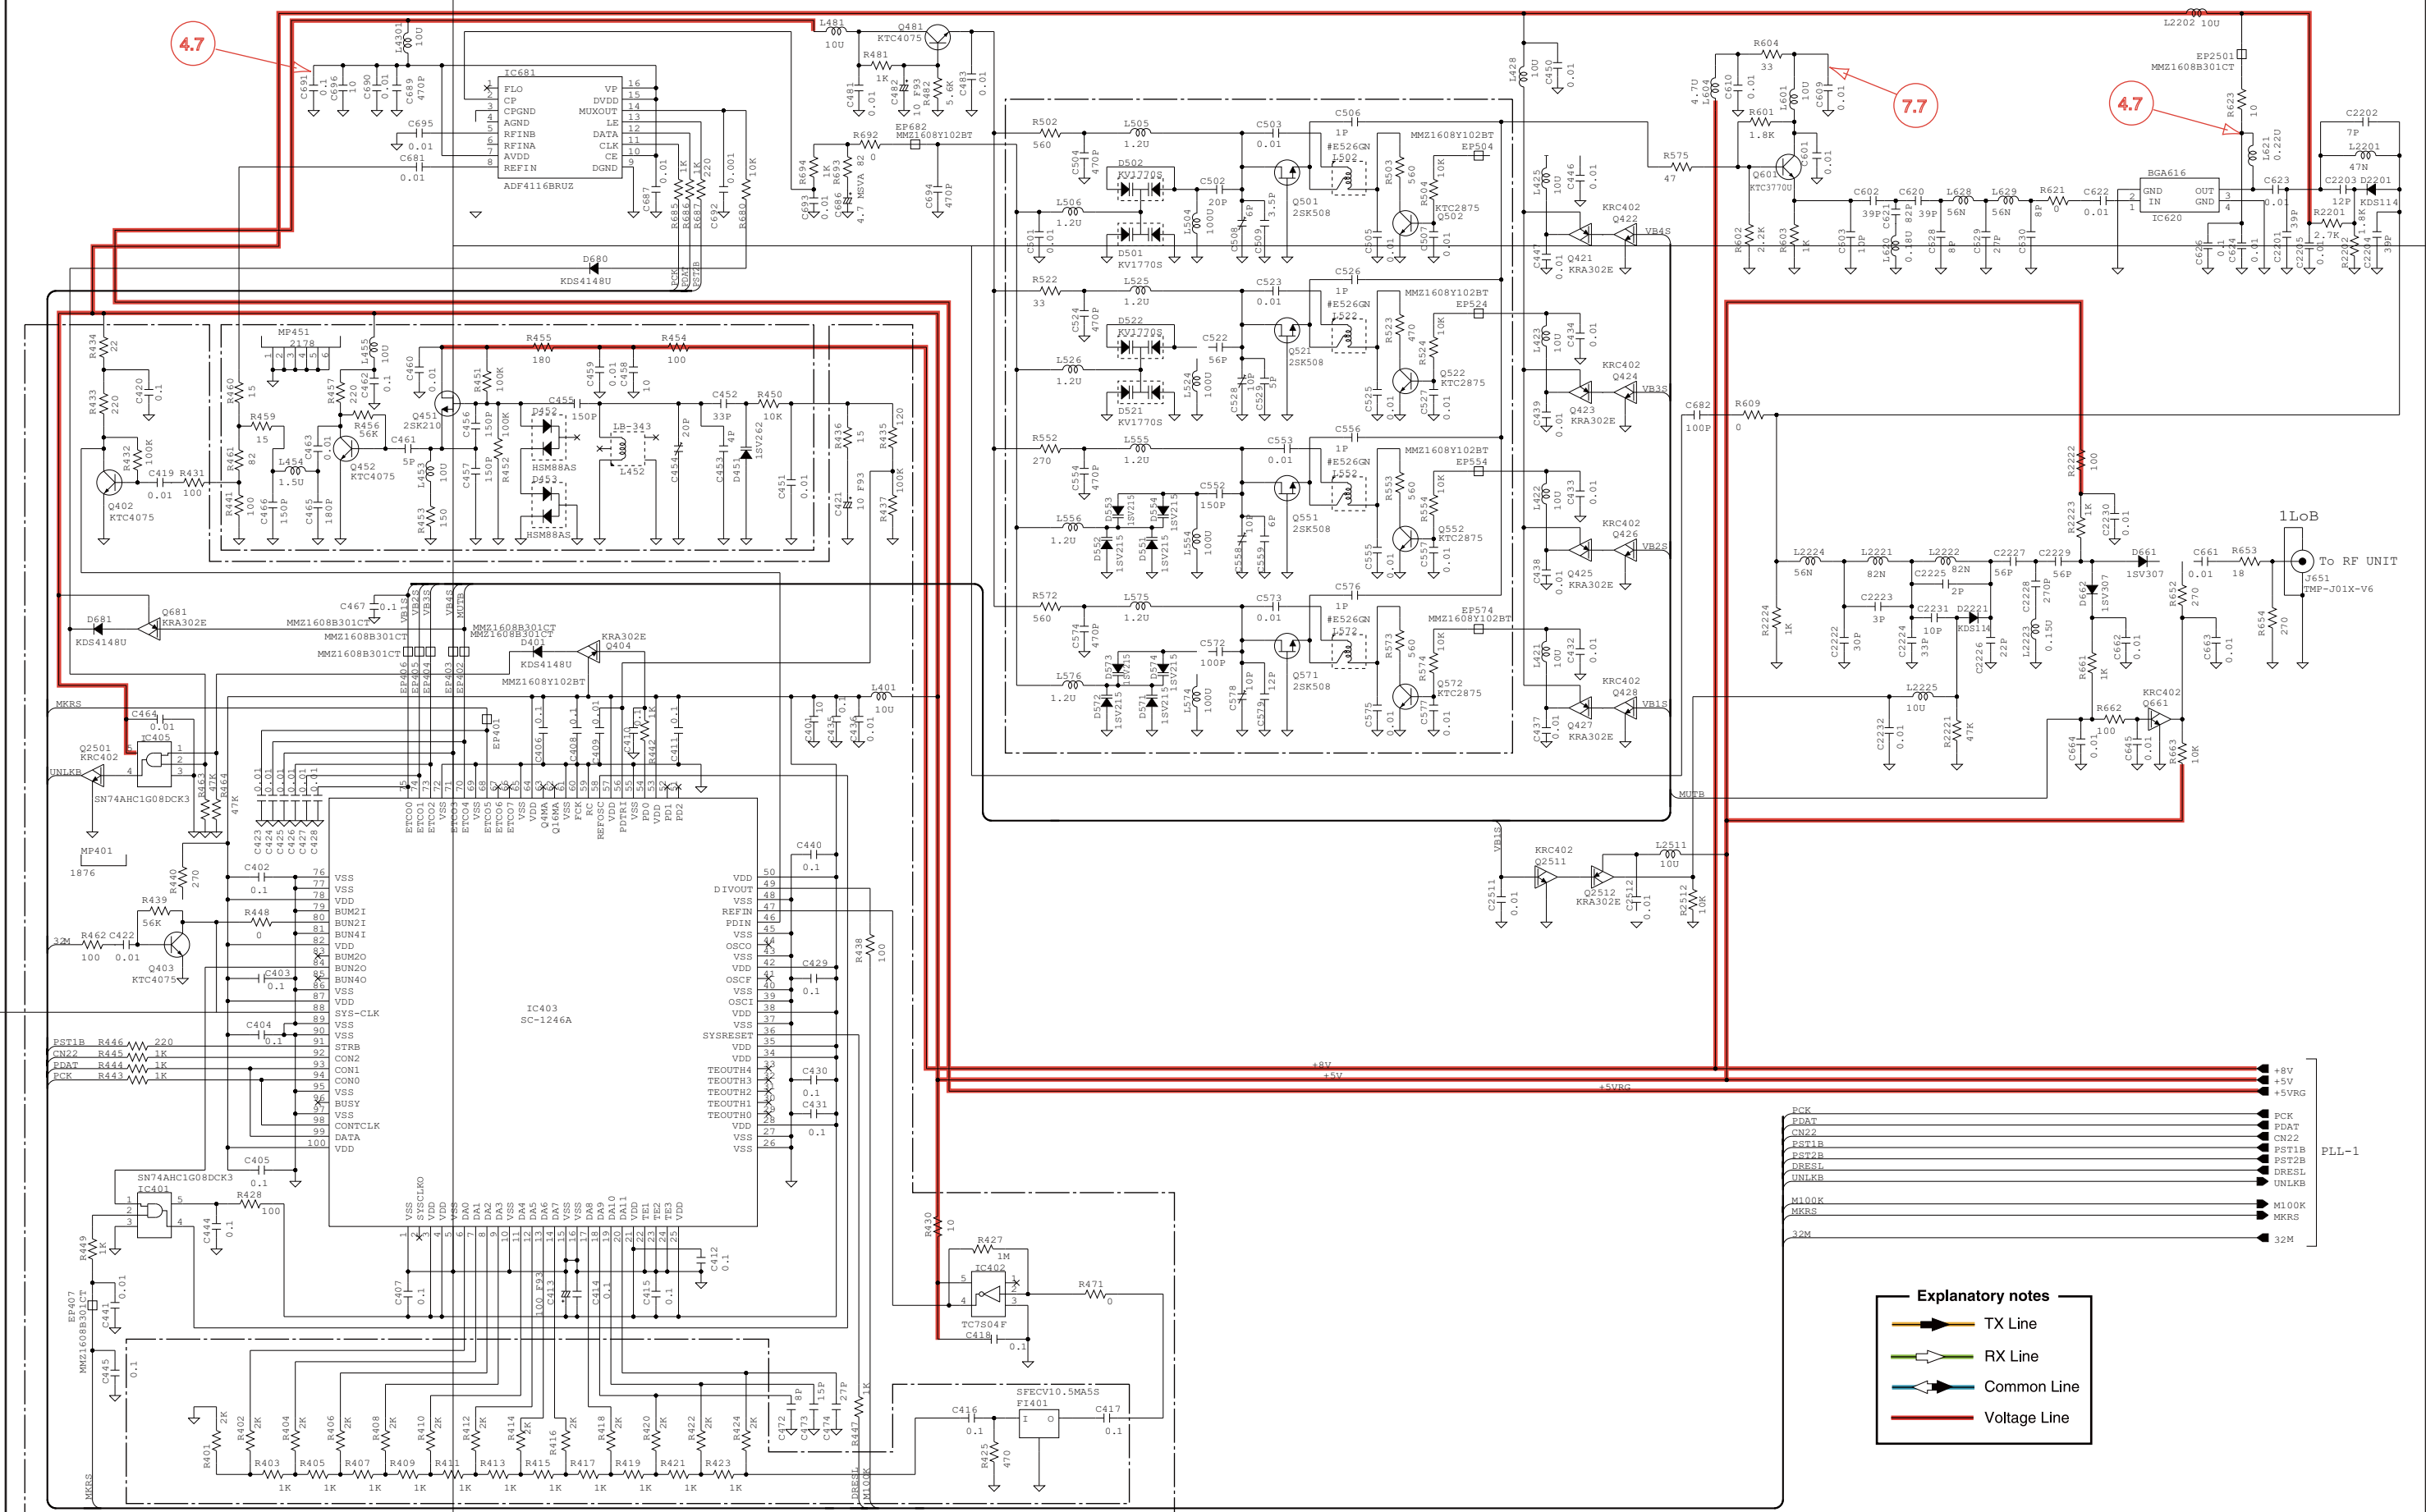


\*; Refer to "PARTS LIST."

## RF UNIT (1/2)

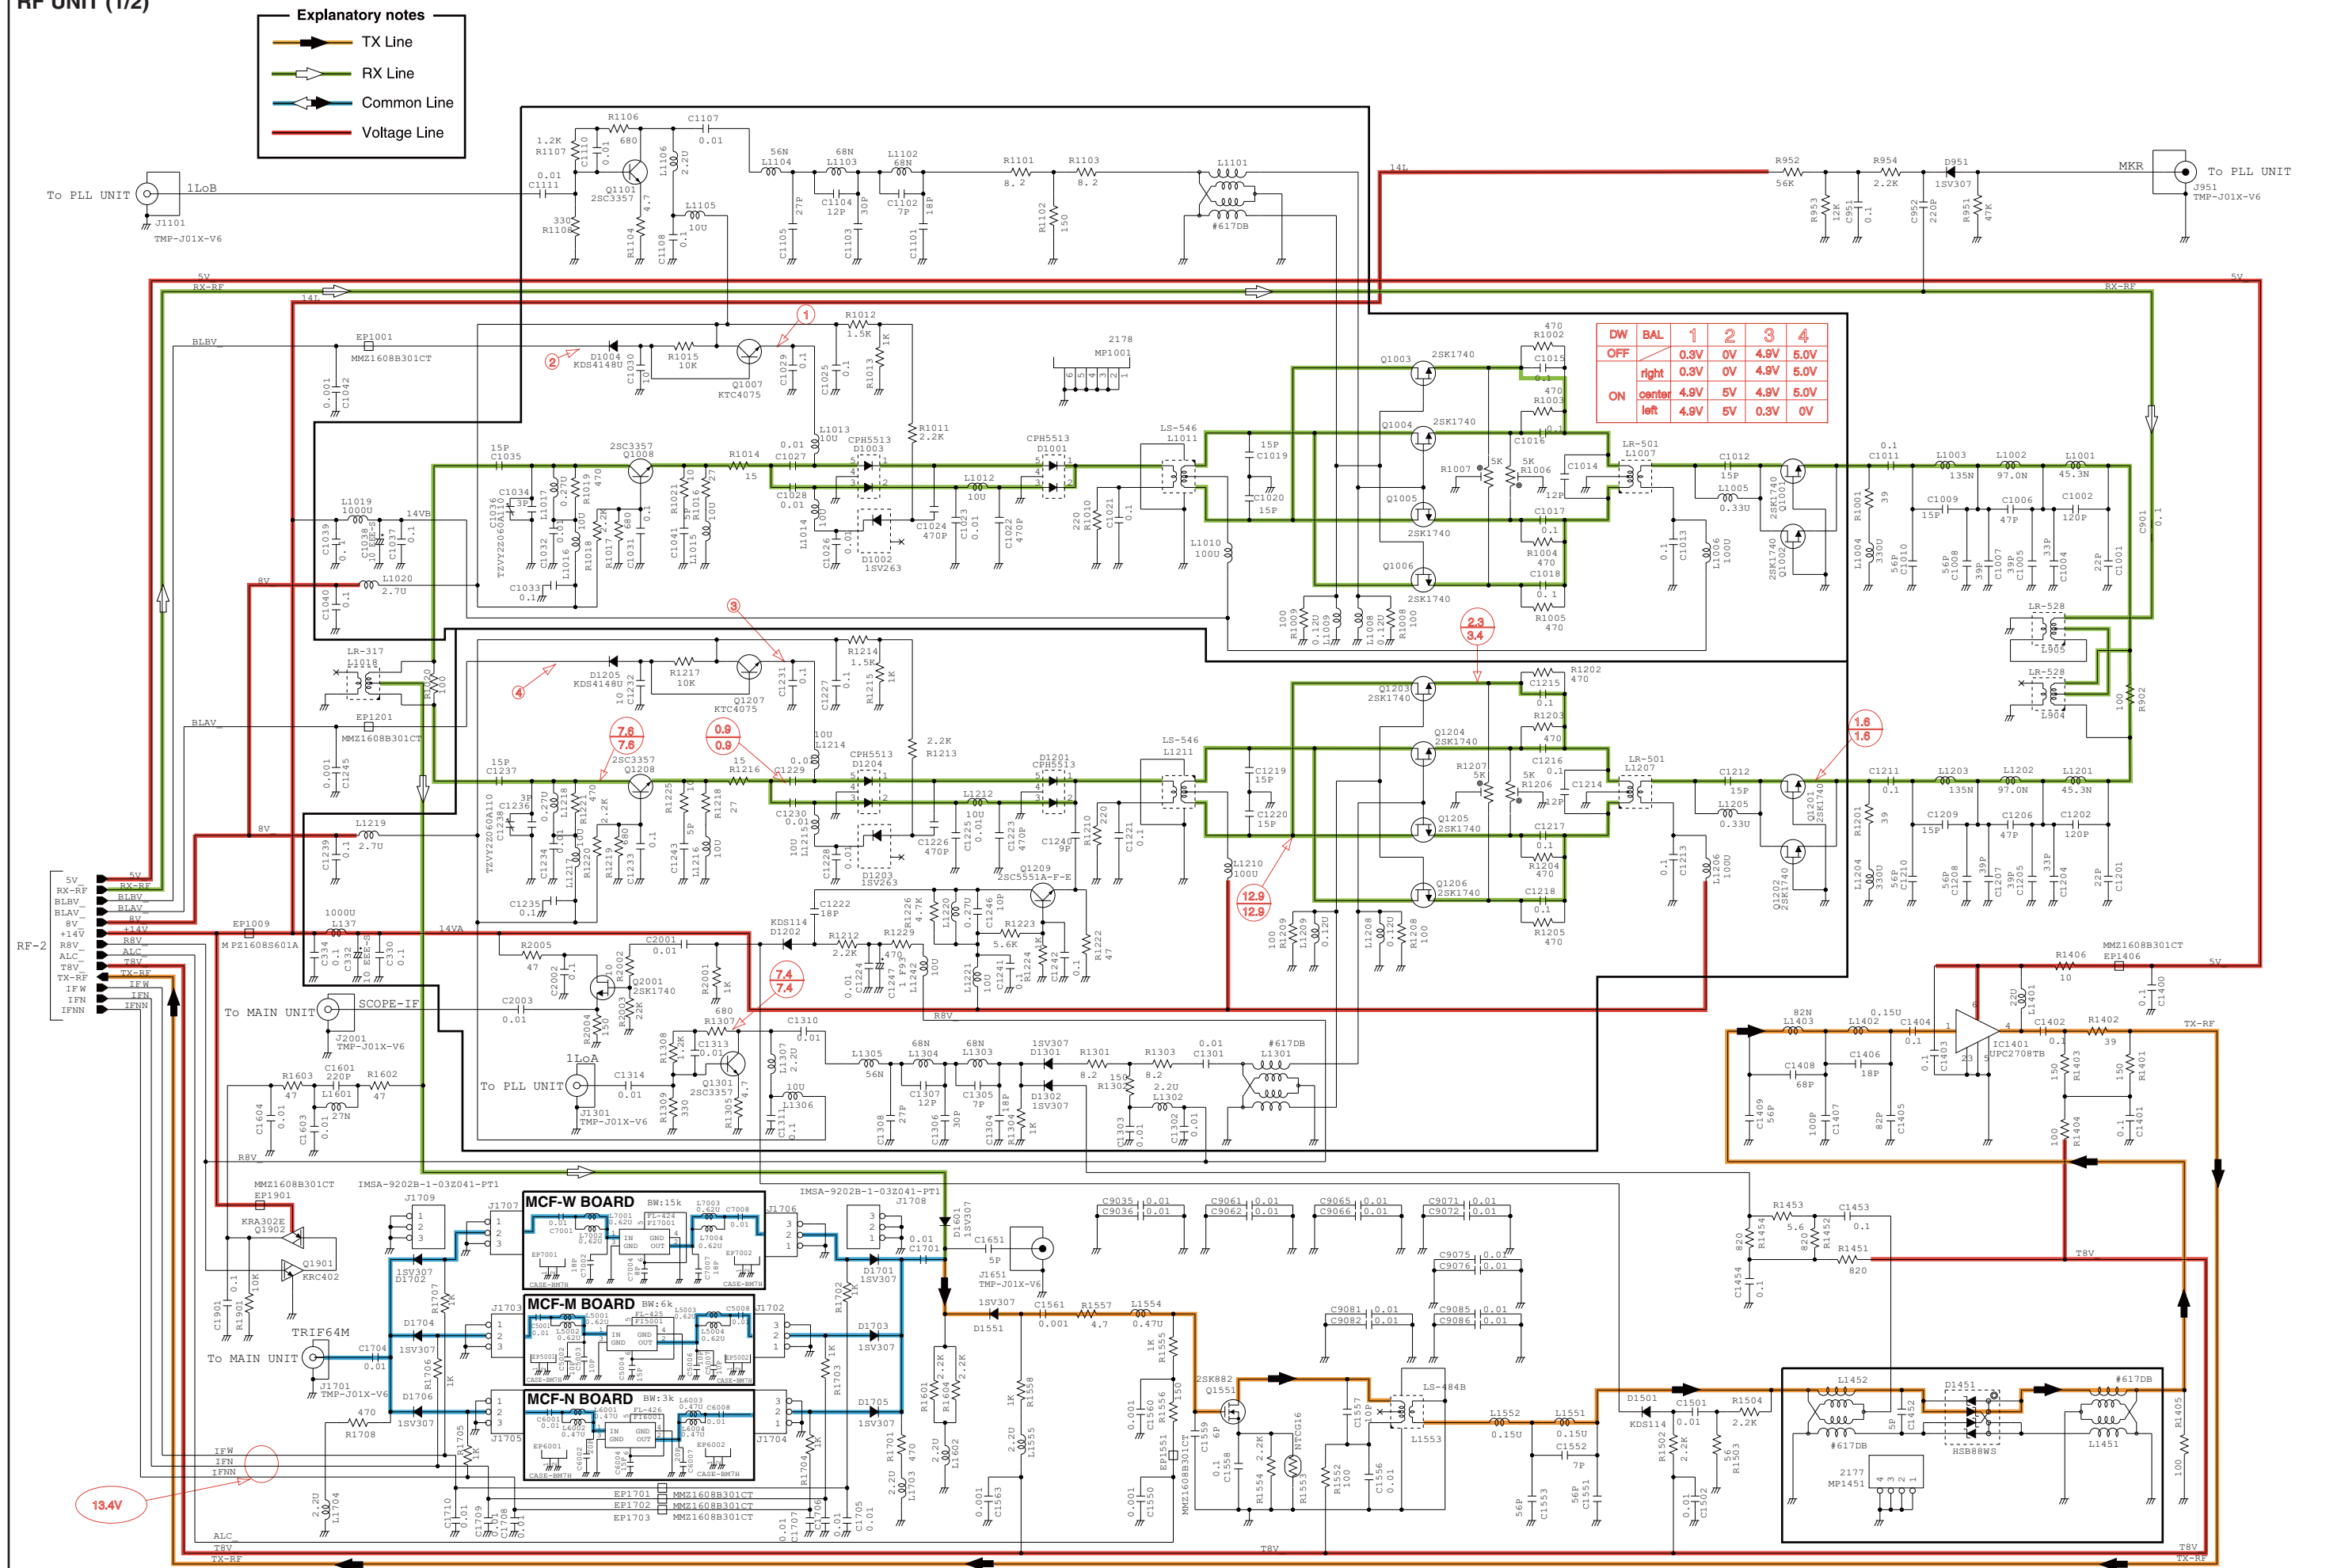

\*; Refer to "PARTS LIST."




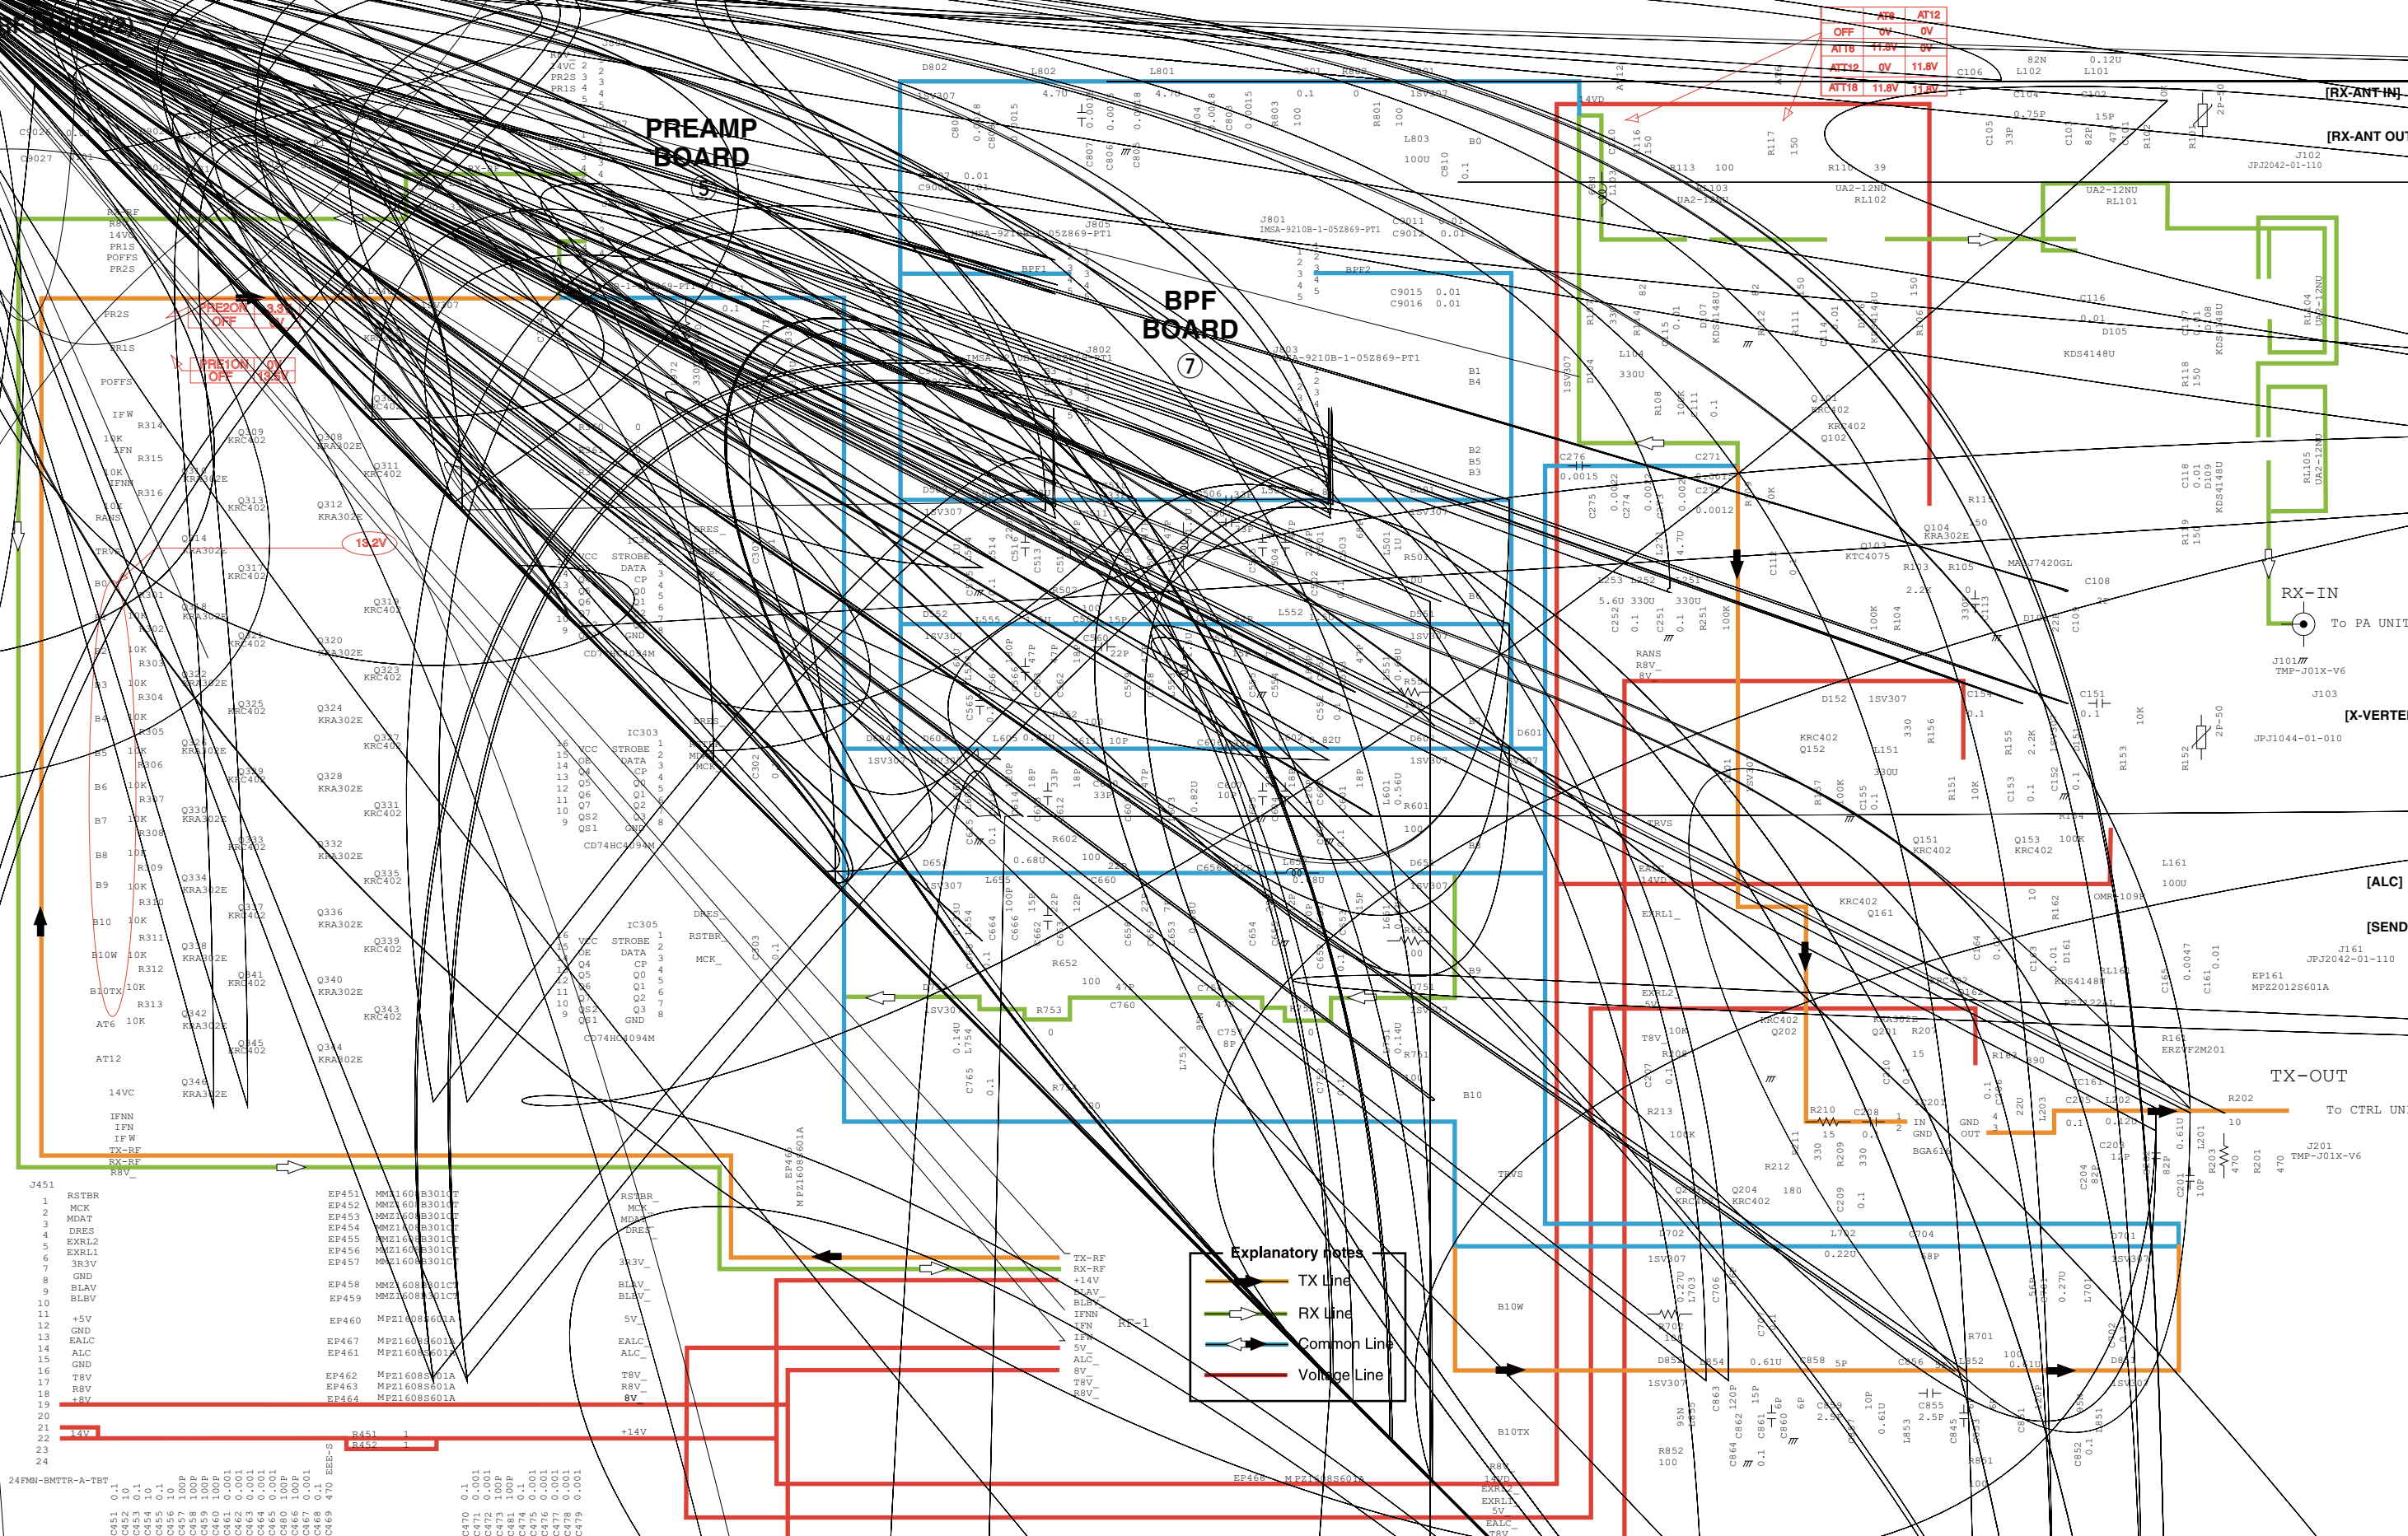


|                   |       |       |       |               |       |     |
|-------------------|-------|-------|-------|---------------|-------|-----|
| J451              | 1     | RSTBR | EP451 | MM21608B301CT | RS2BR | MCK |
|                   | 2     | MCK   | EP452 | MM21608B301CT | MCK   |     |
|                   | 3     | MDAT  | EP453 | MM21608B301CT | MDAT  |     |
|                   | 4     | DRES  | EP454 | MM21608B301CT | DRES  |     |
|                   | 5     | EXRL1 | EP455 | MM21608B301CT | EXRL1 |     |
|                   | 6     | EXRL2 | EP456 | MM21608B301CT | EXRL2 |     |
|                   | 7     | 3R3V  | EP457 | MM21608B301CT | 3R3V  |     |
|                   | 8     | GND   | EP458 | MM21608B301CT | GND   |     |
|                   | 9     | BLAV  | EP459 | MM21608B301CT | BLAV  |     |
|                   | 10    | BLBV  |       |               | BLBV  |     |
|                   | 11    | +5V   | EP460 | MP21608S601A  | 5V    |     |
|                   | 12    | GND   | EP467 | MP21608S601A  | GND   |     |
|                   | 13    | EALC  | EP461 | MP21608S601A  | EALC  |     |
|                   | 14    | ALC   |       |               | ALC   |     |
|                   | 15    | GND   | EP462 | MP21608S601A  | GND   |     |
|                   | 16    | T8V   | EP463 | MP21608S601A  | T8V   |     |
|                   | 17    | R8V   | EP464 | MP21608S601A  | R8V   |     |
|                   | 18    | +8V   |       |               | +8V   |     |
|                   | 19    |       |       |               |       |     |
|                   | 20    |       |       |               |       |     |
|                   | 21    |       |       |               |       |     |
|                   | 22    | 14V   | R451  | 1             | +14V  |     |
|                   | 23    |       | R452  | 1             |       |     |
|                   | 24    |       |       |               |       |     |
| 24FNN-BMTTR-A-TBT |       |       |       |               |       |     |
| C451              | 0.1   |       |       |               |       |     |
| C452              | 10    |       |       |               |       |     |
| C453              | 0.1   |       |       |               |       |     |
| C454              | 0.1   |       |       |               |       |     |
| C455              | 0.1   |       |       |               |       |     |
| C456              | 10    |       |       |               |       |     |
| C457              | 100P  |       |       |               |       |     |
| C458              | 100P  |       |       |               |       |     |
| C459              | 100P  |       |       |               |       |     |
| C460              | 100P  |       |       |               |       |     |
| C461              | 0.001 |       |       |               |       |     |
| C462              | 0.001 |       |       |               |       |     |
| C463              | 0.001 |       |       |               |       |     |
| C464              | 0.001 |       |       |               |       |     |
| C465              | 0.001 |       |       |               |       |     |
| C466              | 100P  |       |       |               |       |     |
| C467              | 0.001 |       |       |               |       |     |
| C468              | 0.001 |       |       |               |       |     |
| C469              | 470   | EEP-S |       |               |       |     |
| C470              | 0.1   |       |       |               |       |     |
| C471              | 0.001 |       |       |               |       |     |
| C472              | 100P  |       |       |               |       |     |
| C473              | 100P  |       |       |               |       |     |
| C474              | 0.1   |       |       |               |       |     |
| C475              | 0.001 |       |       |               |       |     |
| C476              | 0.001 |       |       |               |       |     |
| C477              | 0.001 |       |       |               |       |     |
| C478              | 0.001 |       |       |               |       |     |
| C479              | 0.001 |       |       |               |       |     |

\*; Refer to "PARTS LIST."

TUNER UNIT

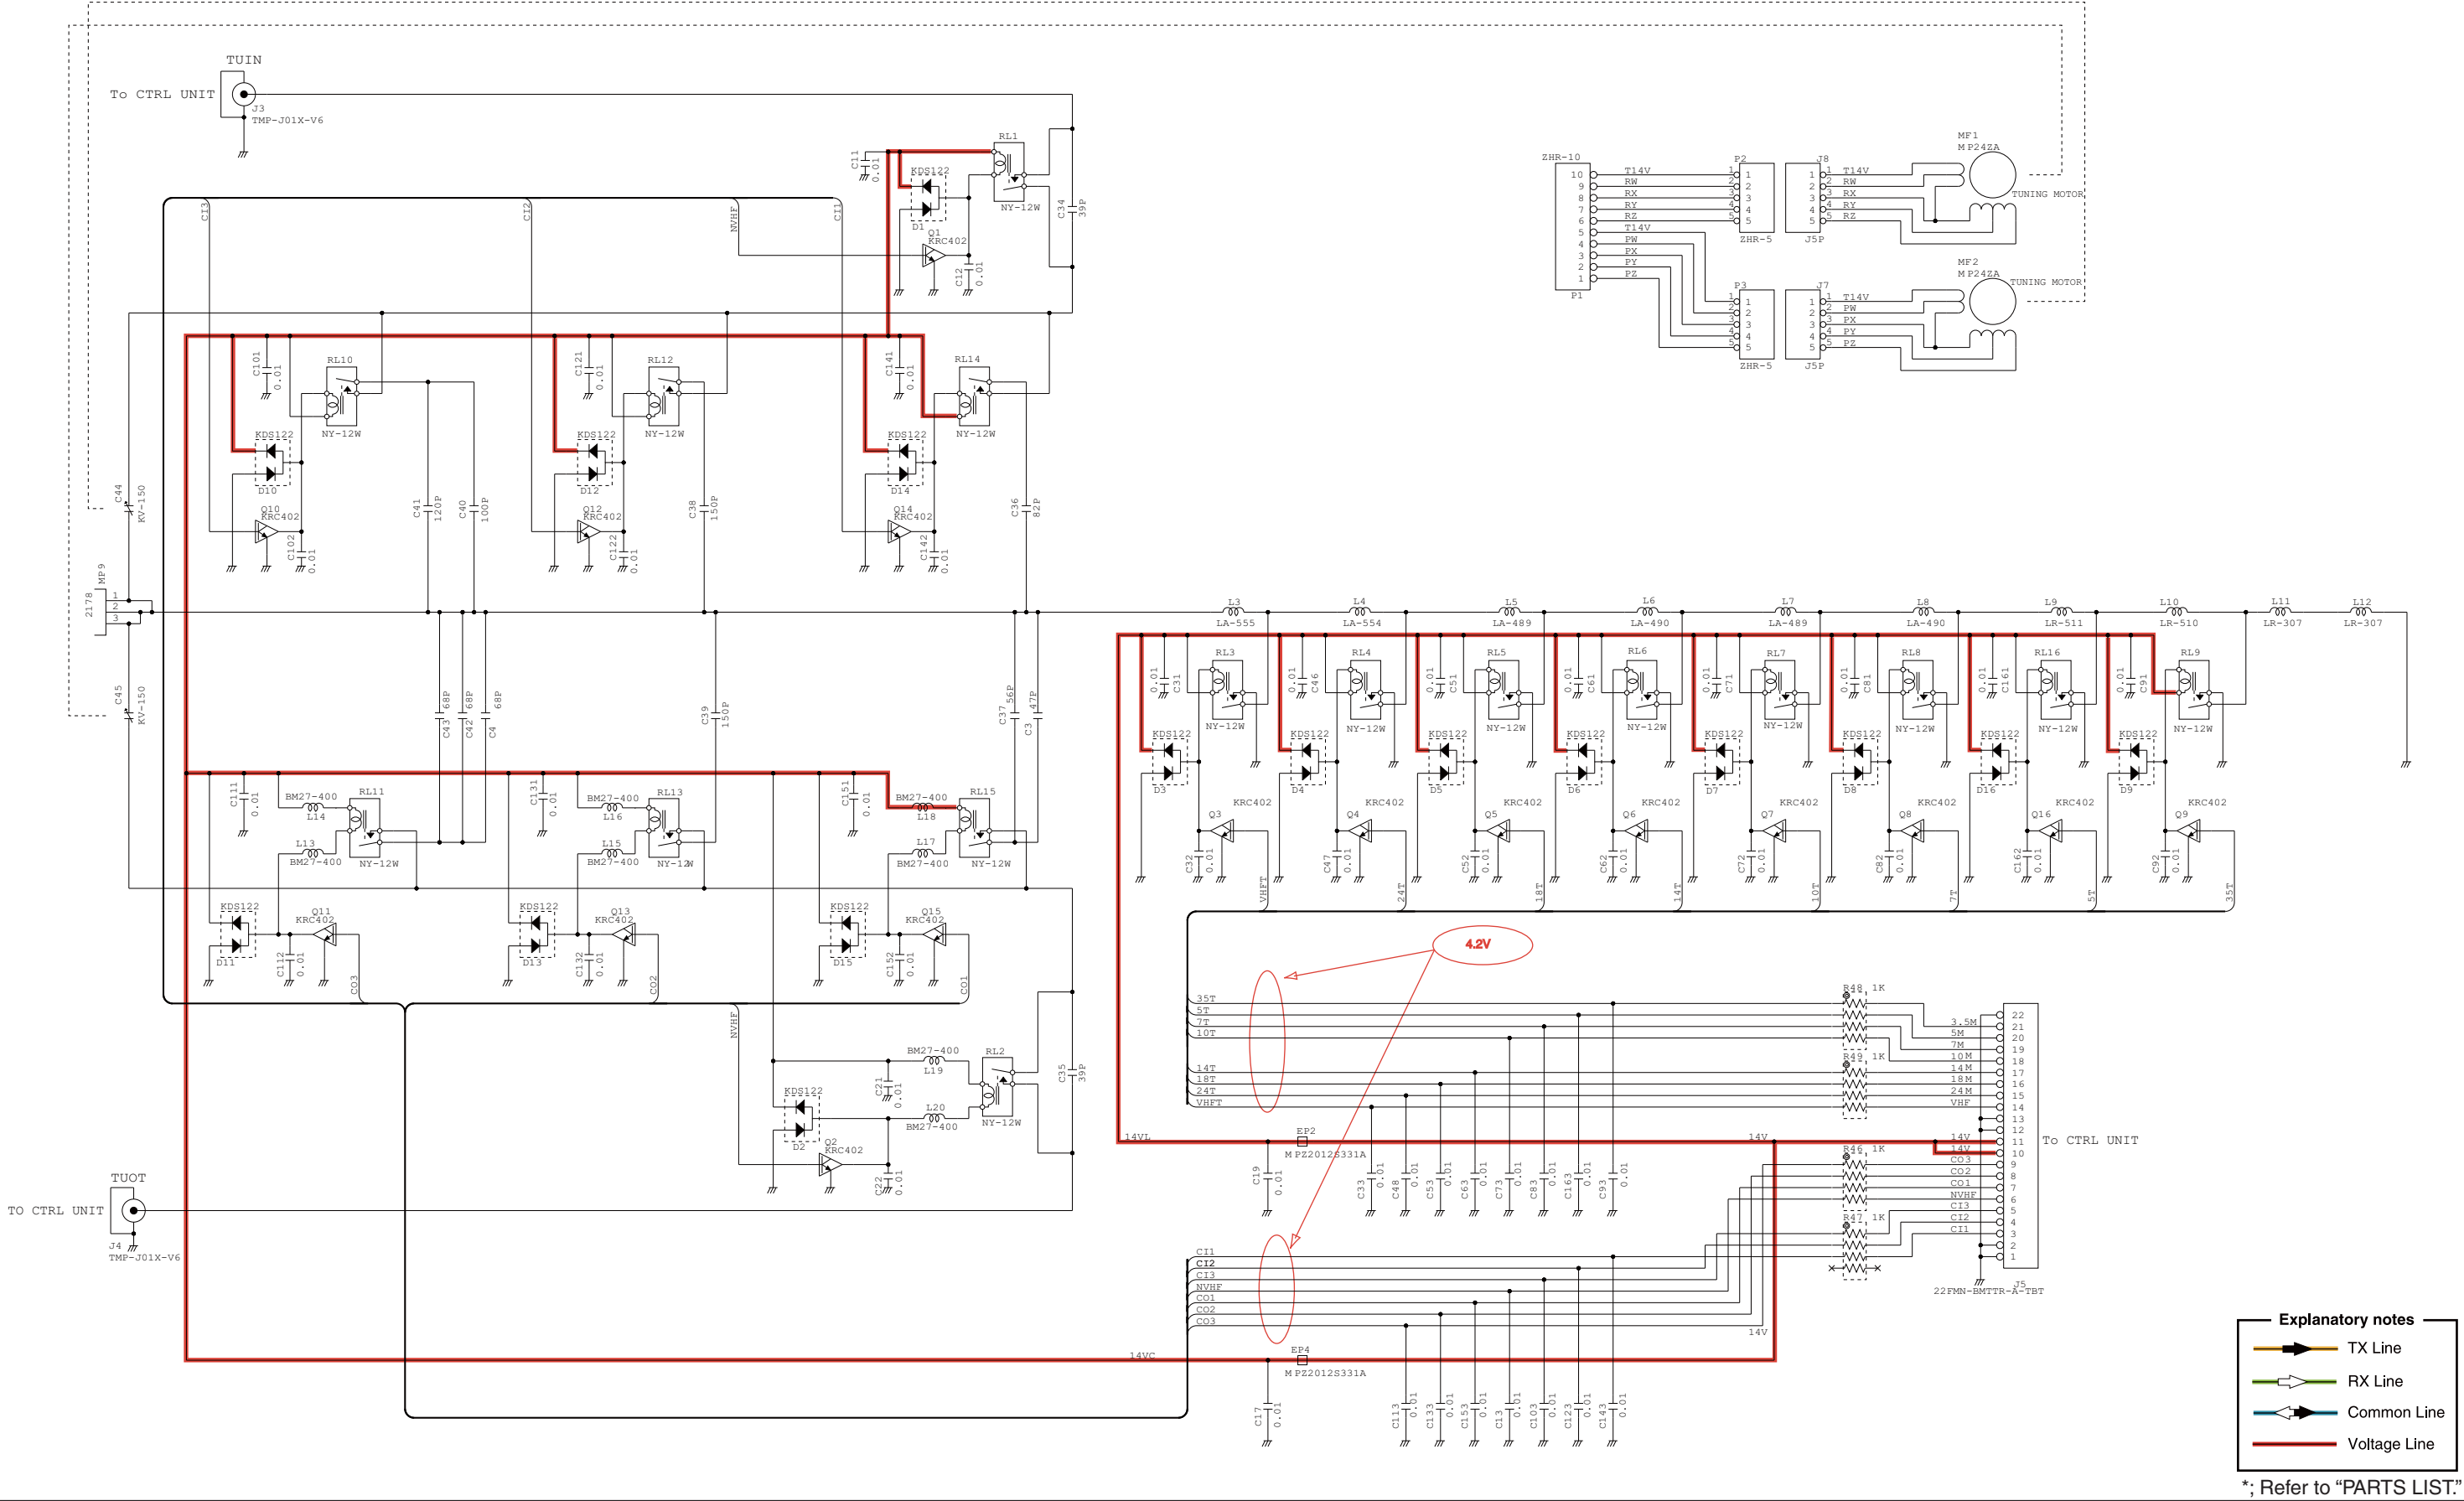


FILTER UNIT

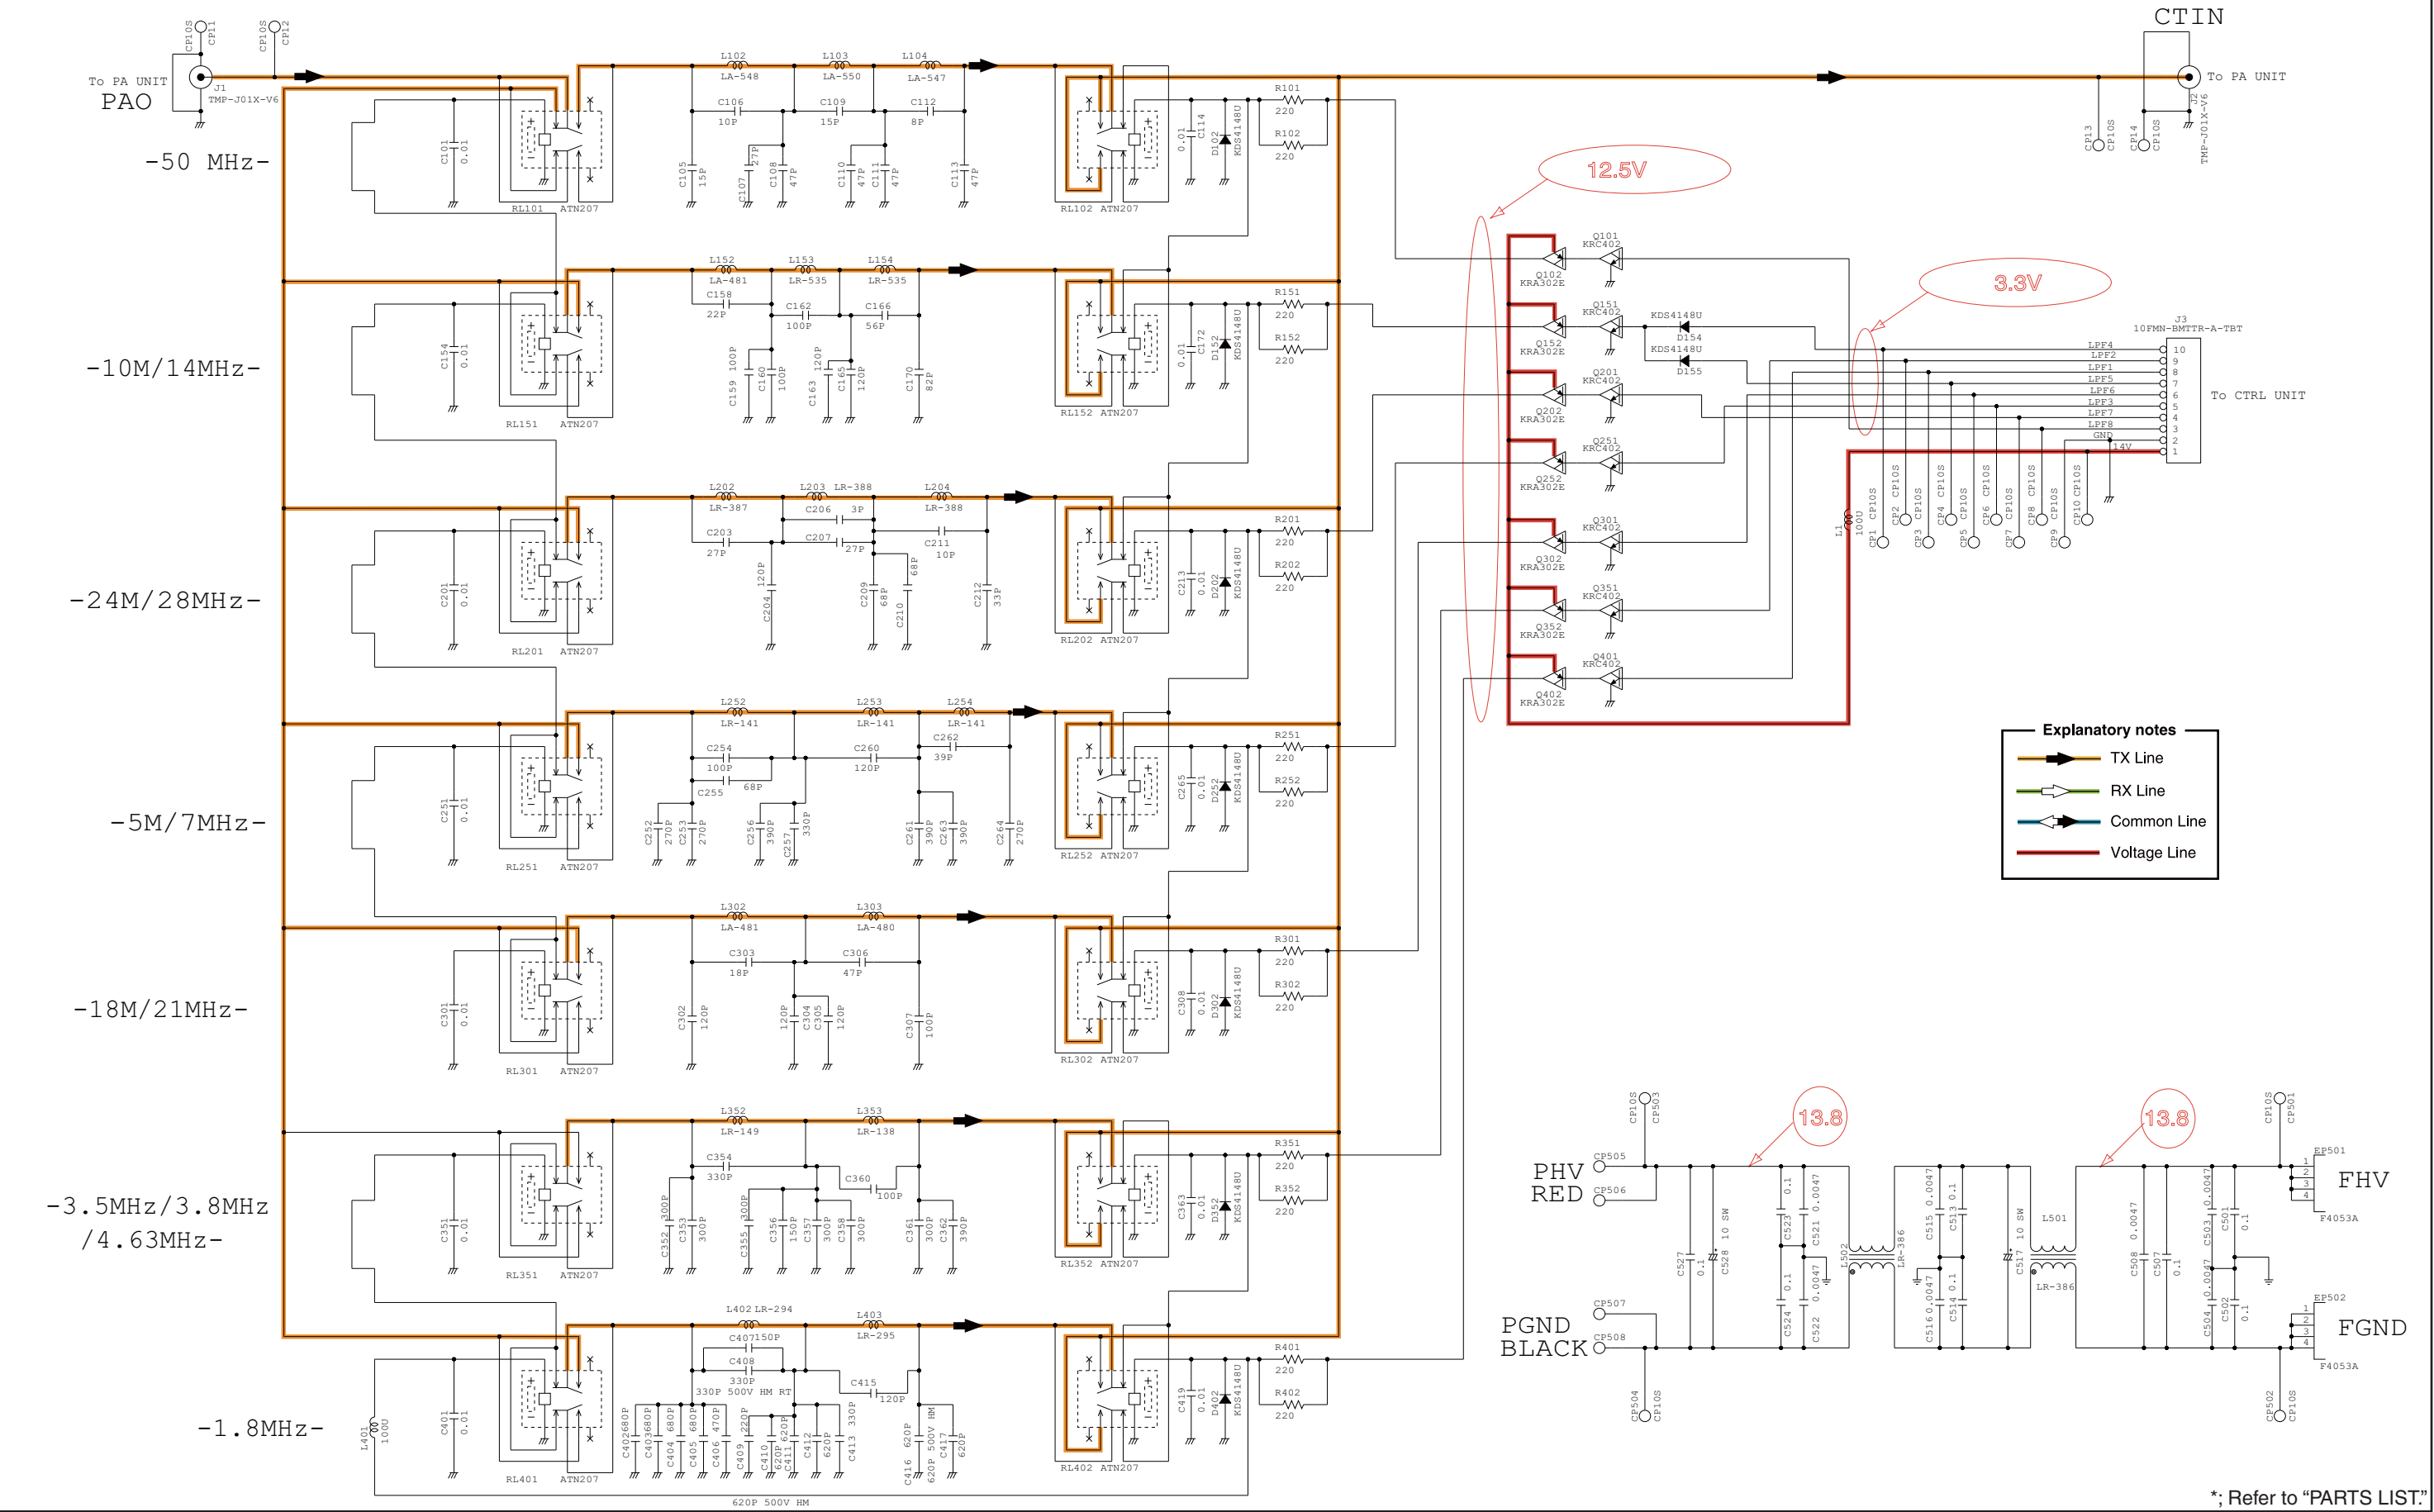

\*; Refer to "PARTS LIST."


## CTRL UNIT (1/3)

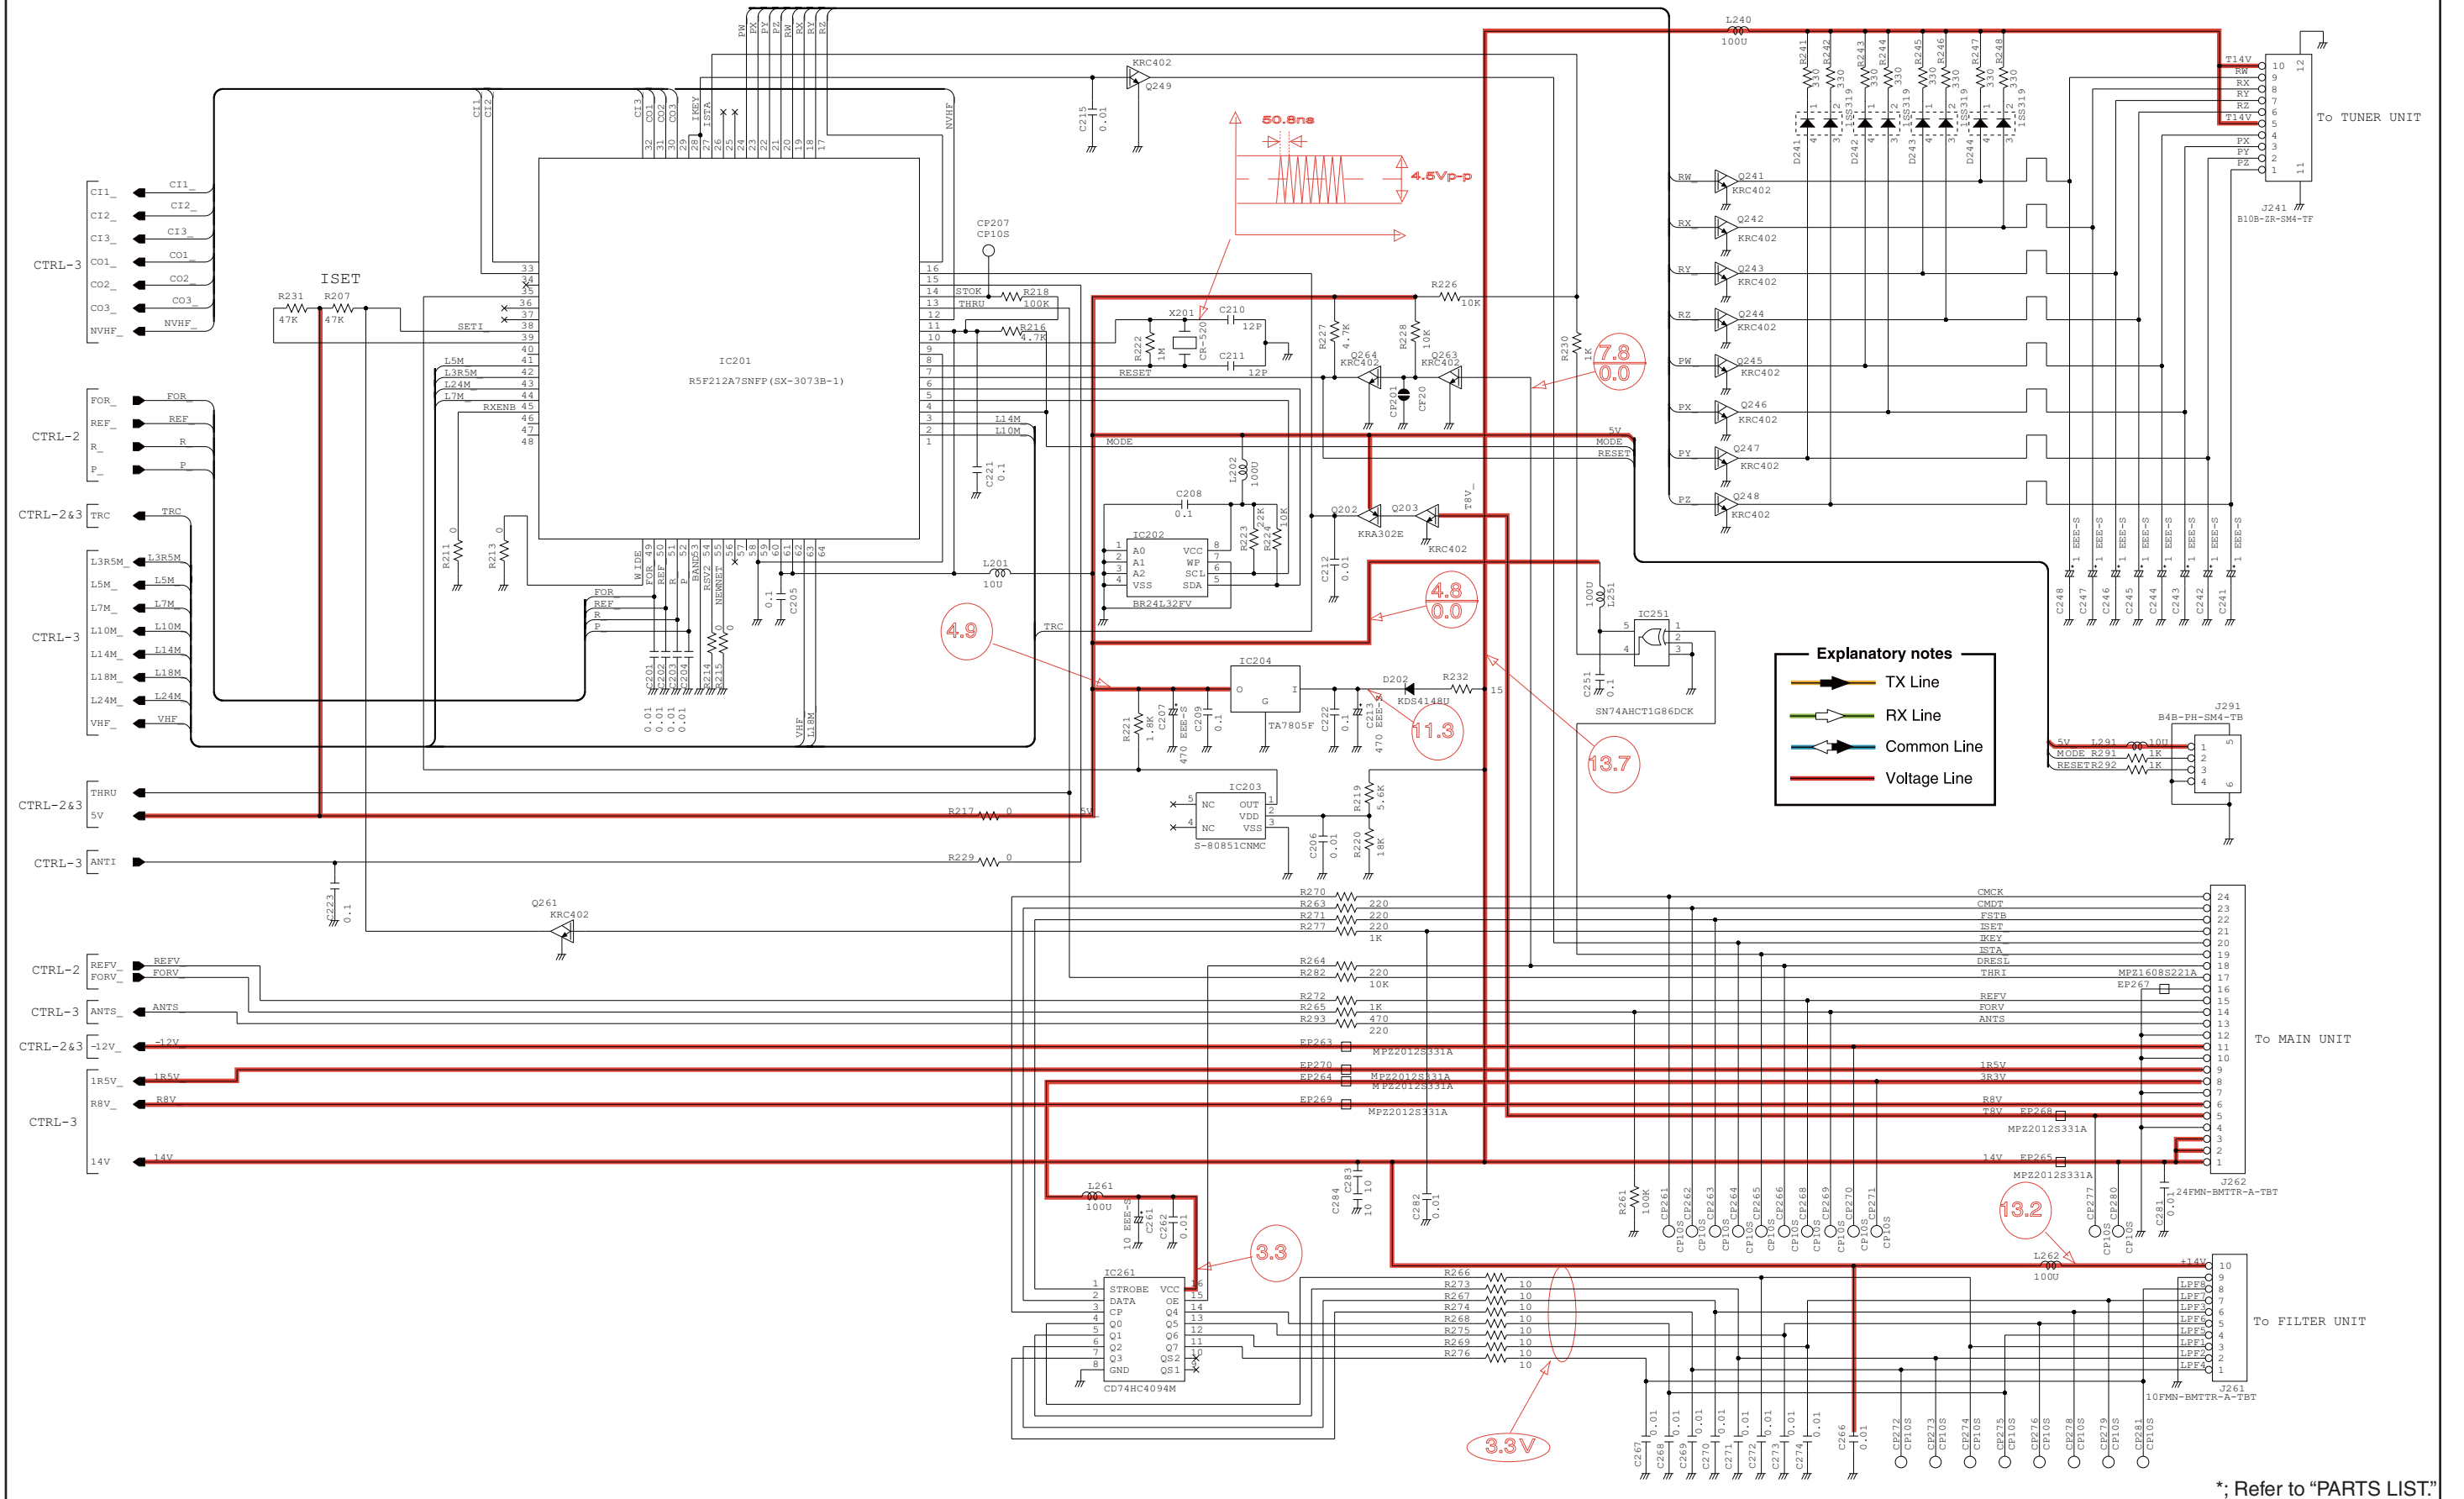

\*; Refer to "PARTS LIST."




CTRL UNIT (2/3)

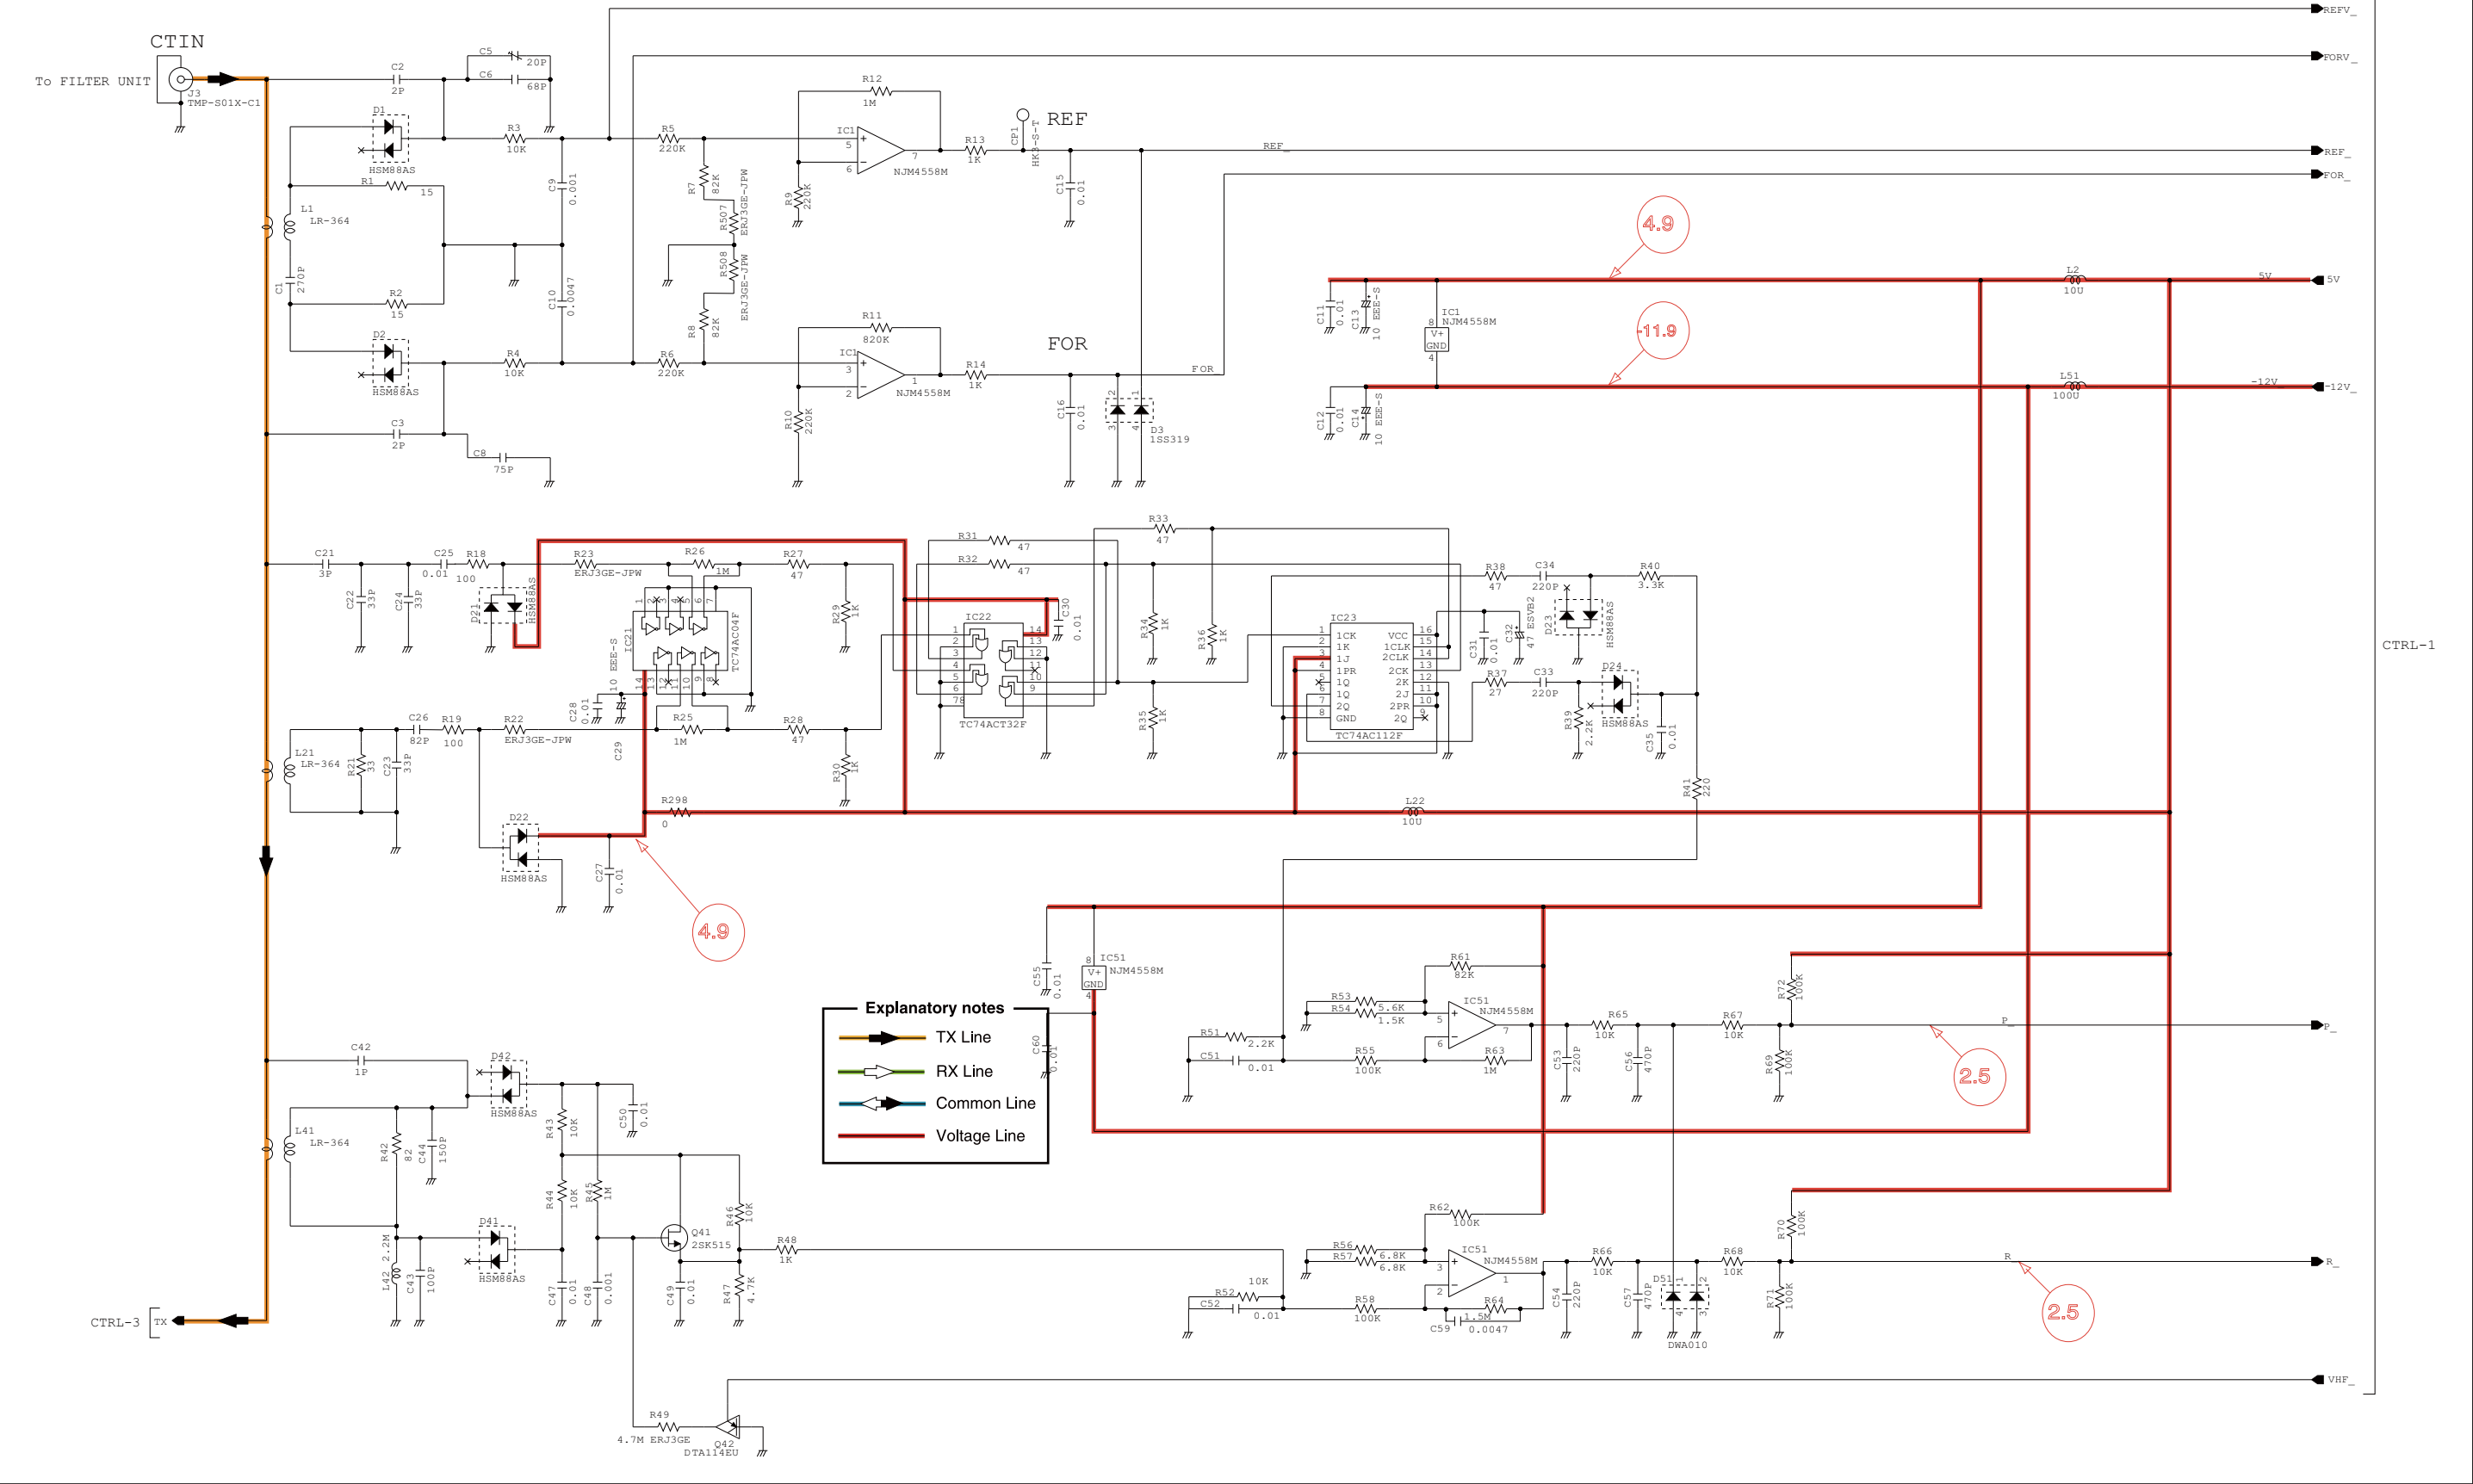


\*; Refer to "PARTS LIST"

## CTRL UNIT (3/3)

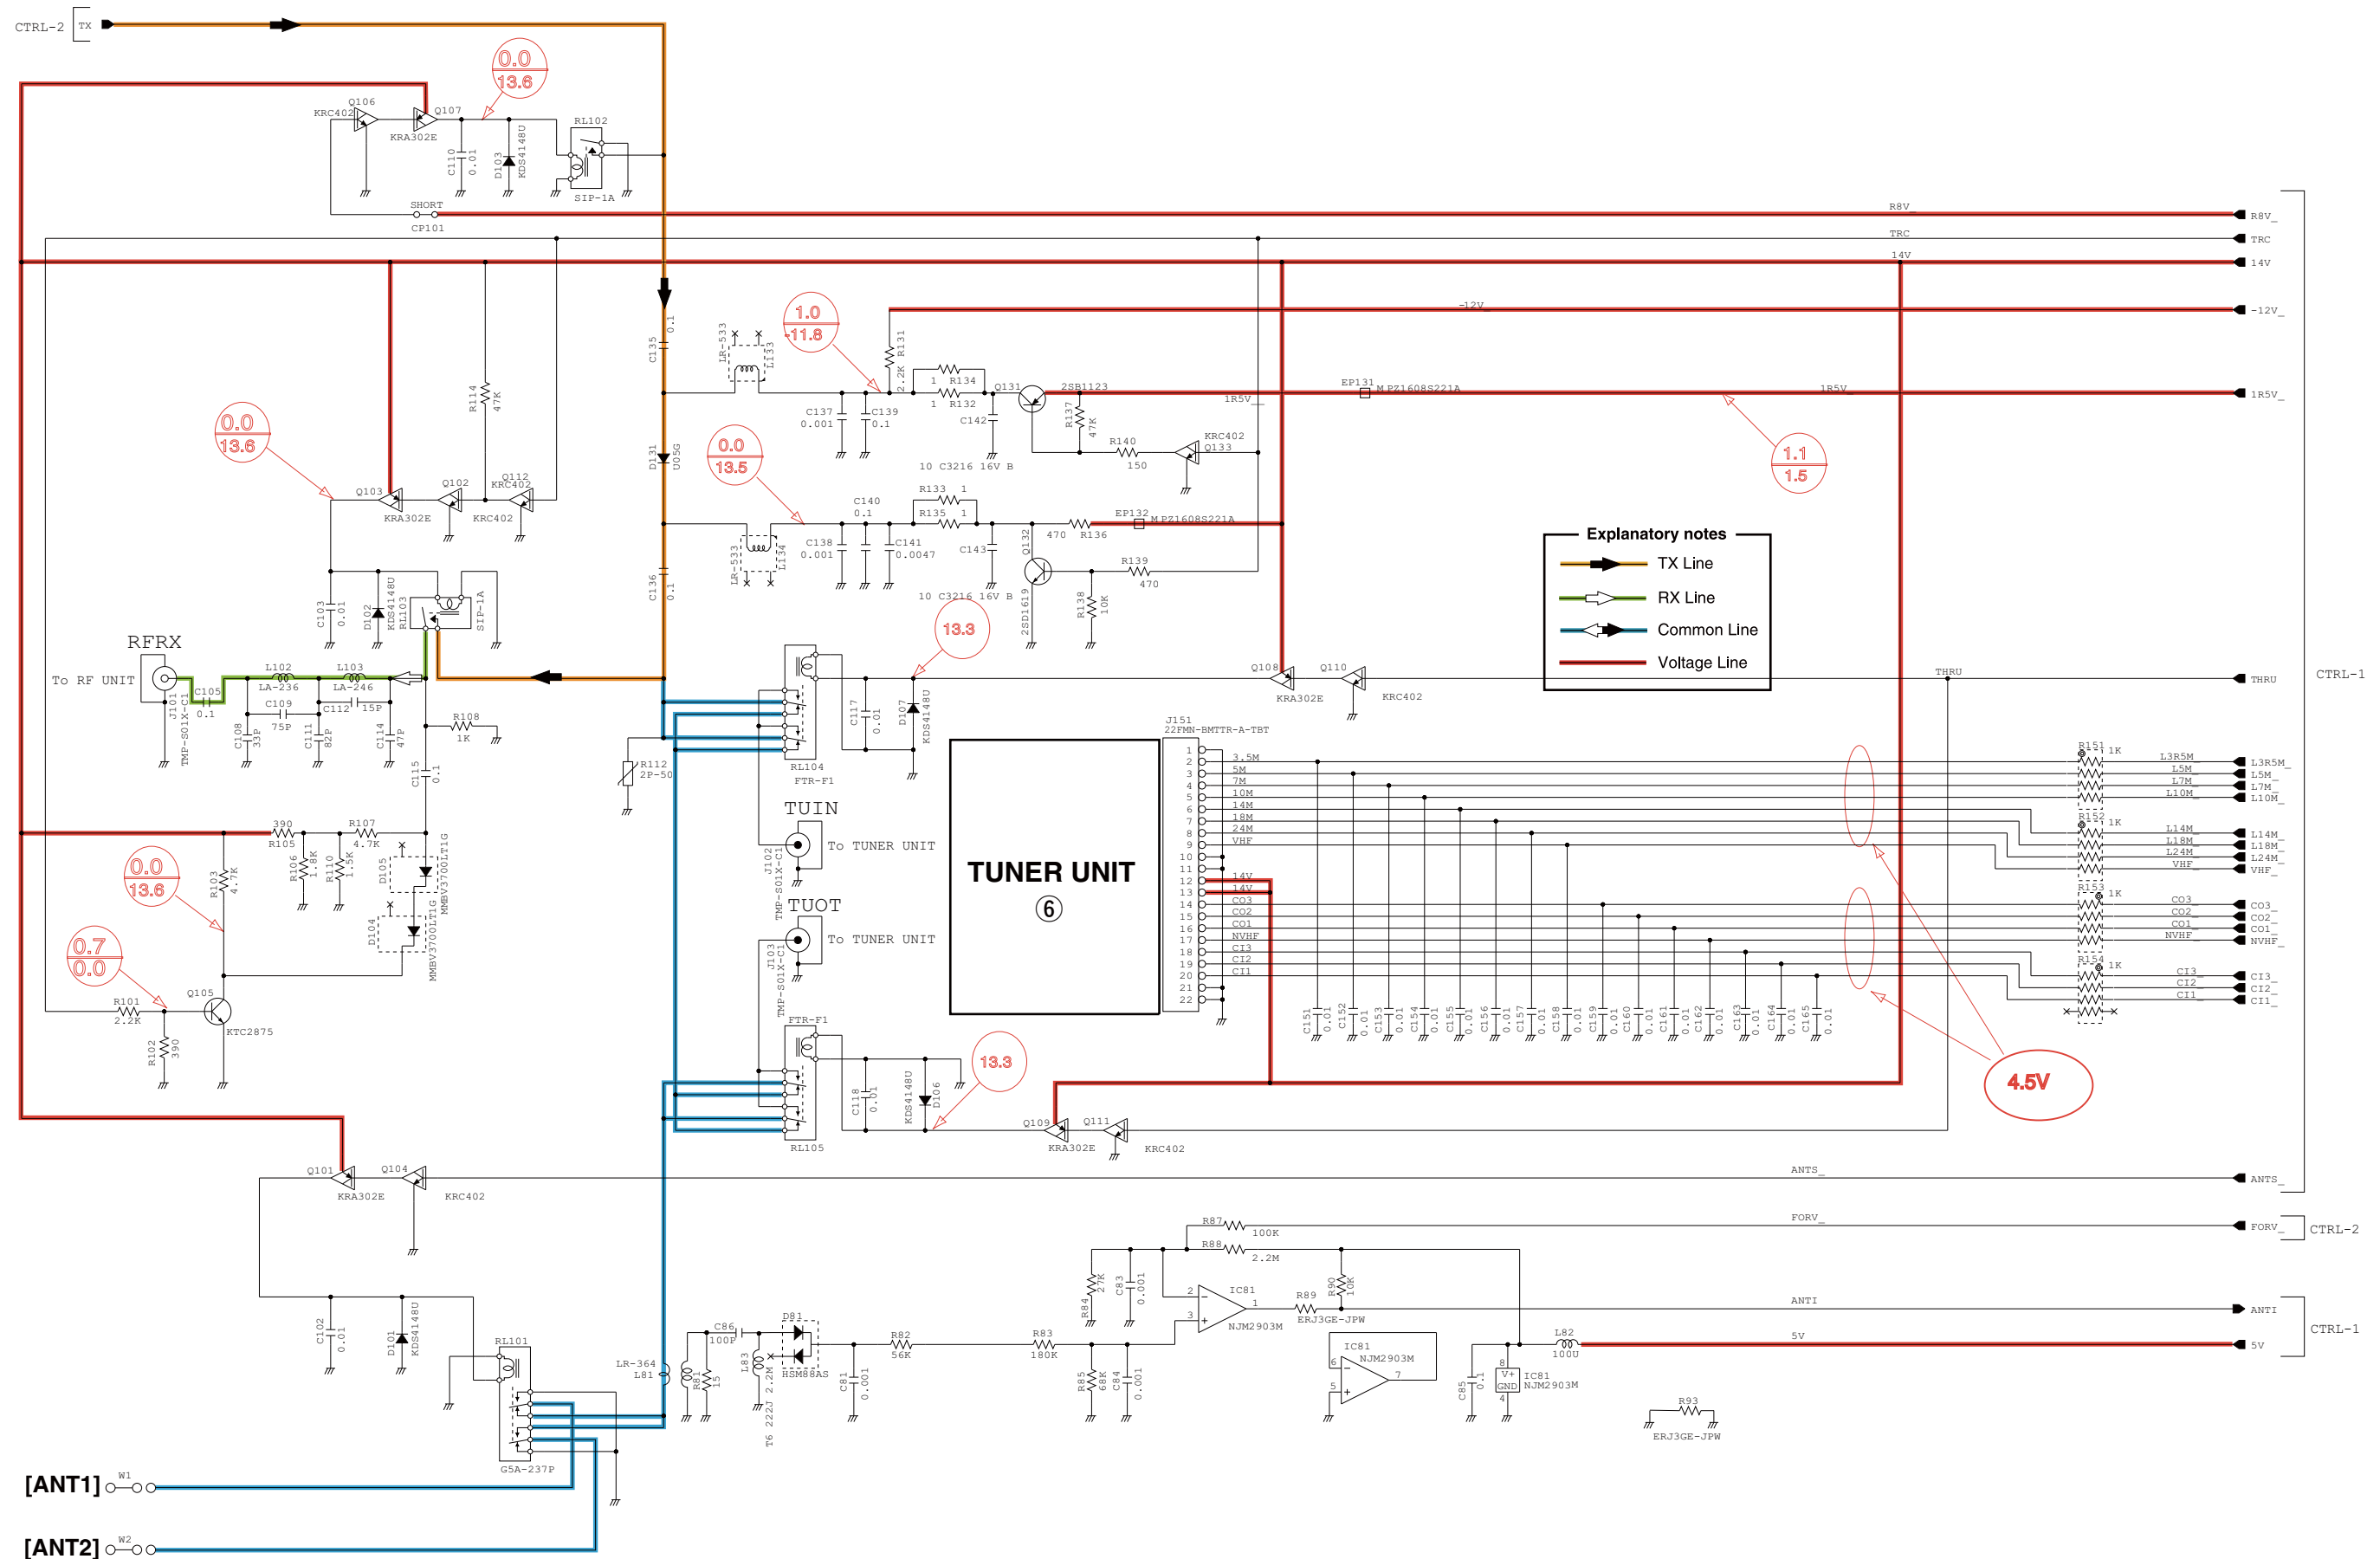


\*; Refer to "PARTS LIST."

BPF UNIT

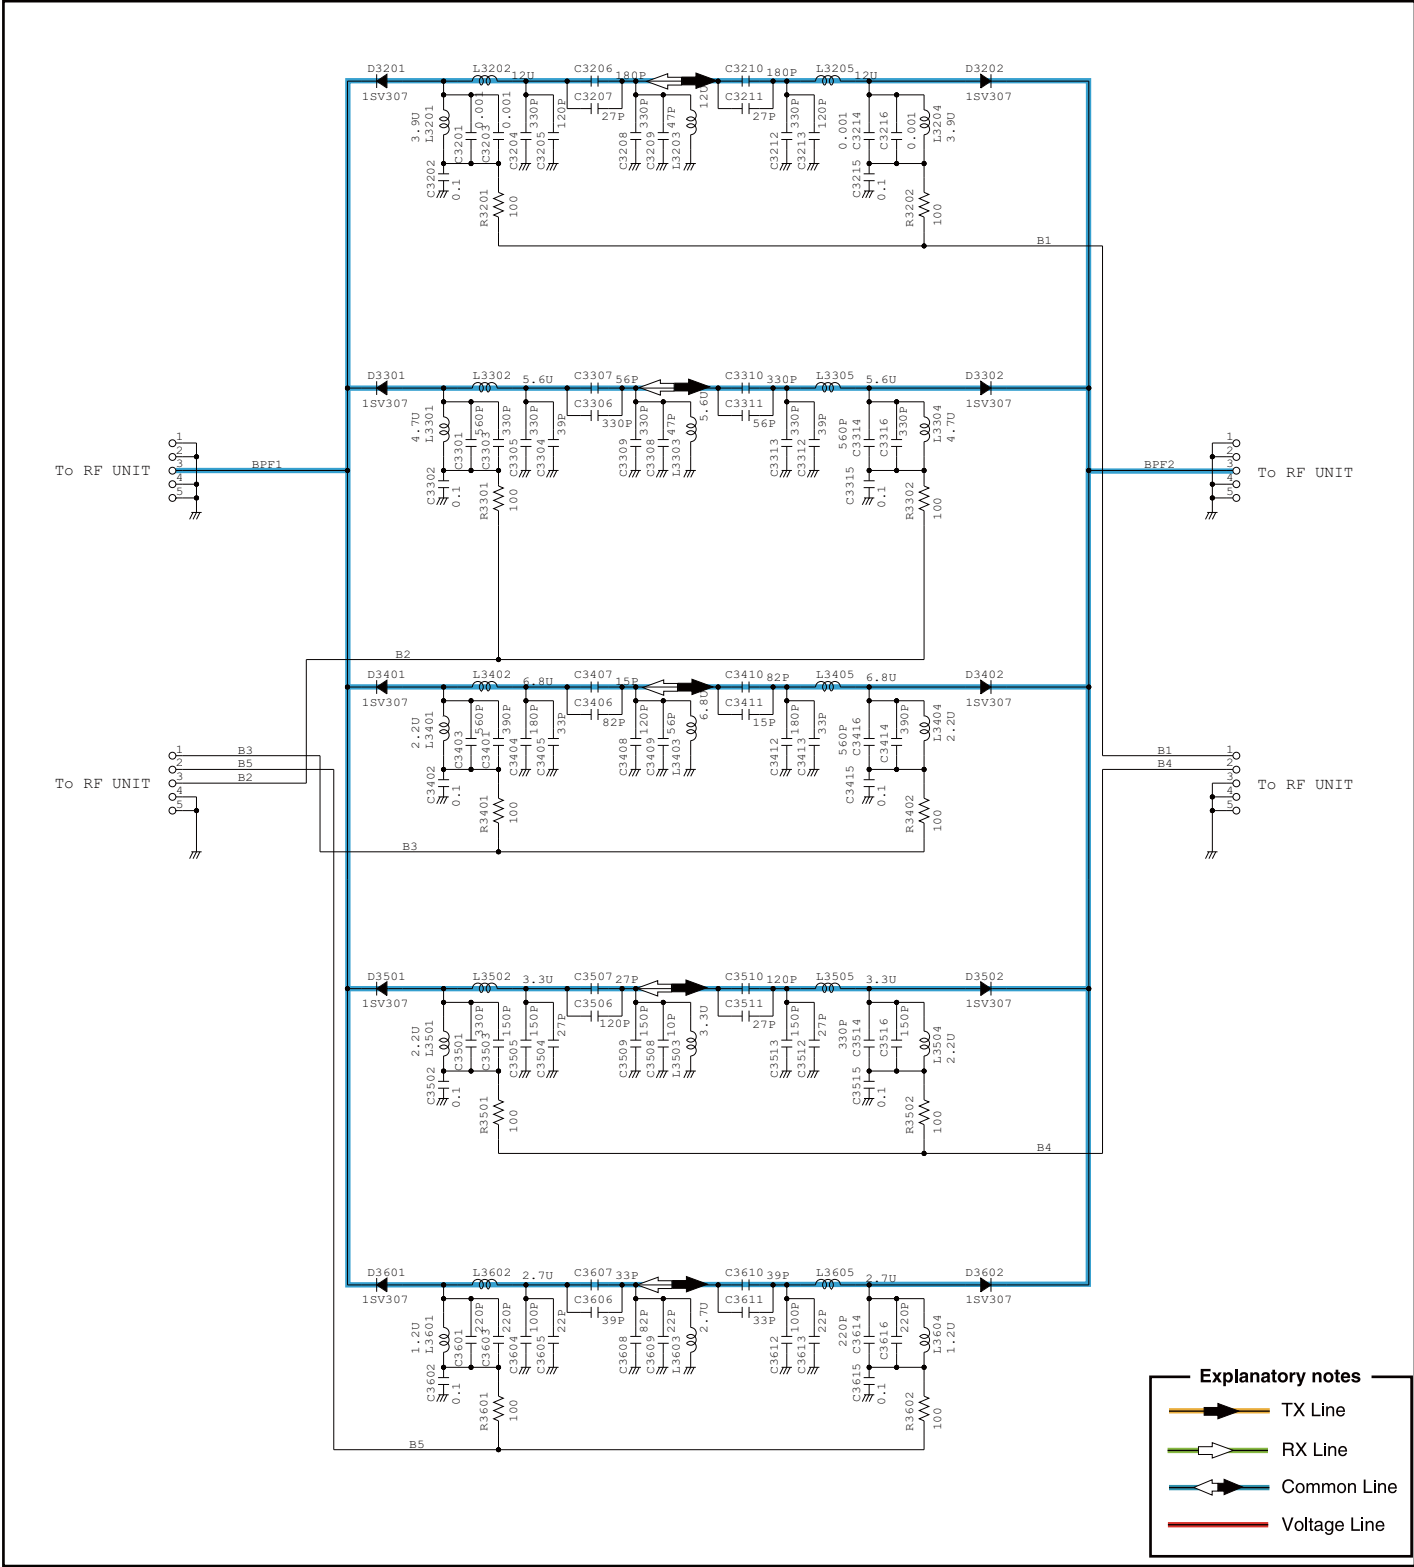


DCDC UNIT

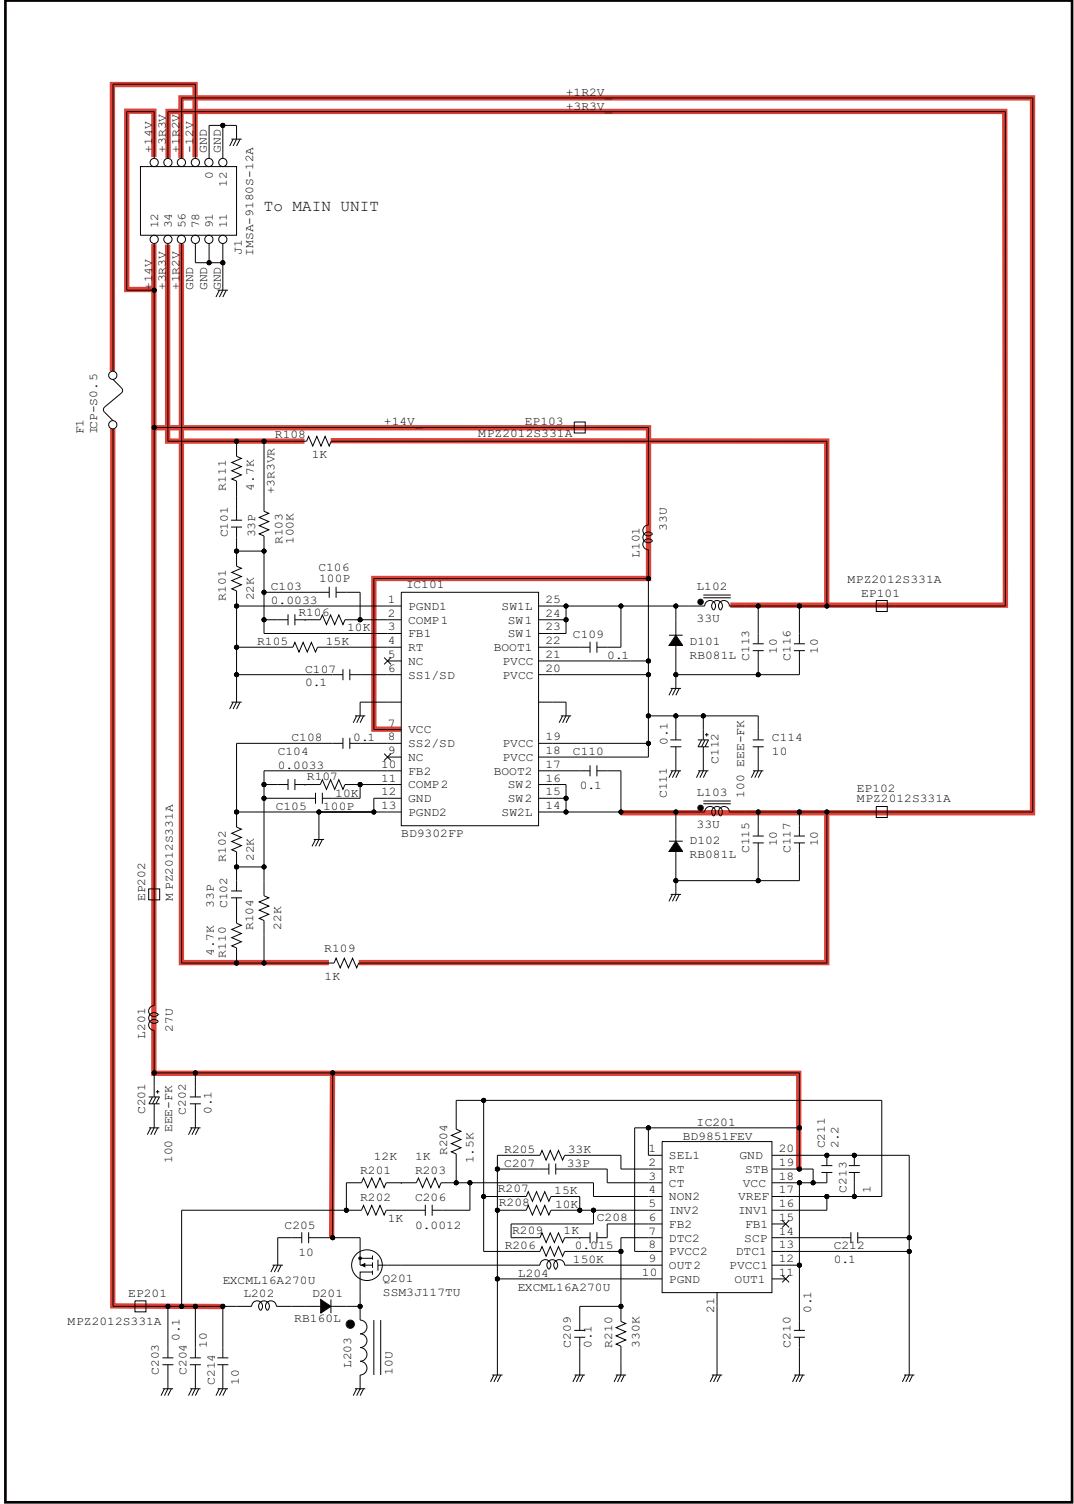


\*, Refer to "PARTS LIST."

PREAMP BOARD

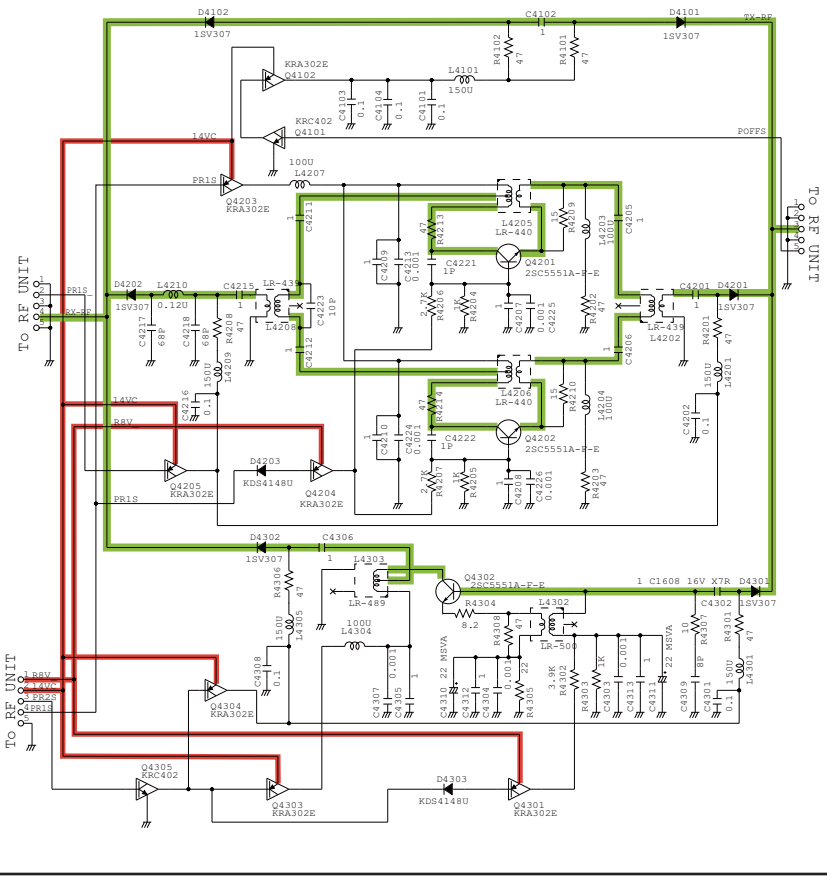

PA UNIT

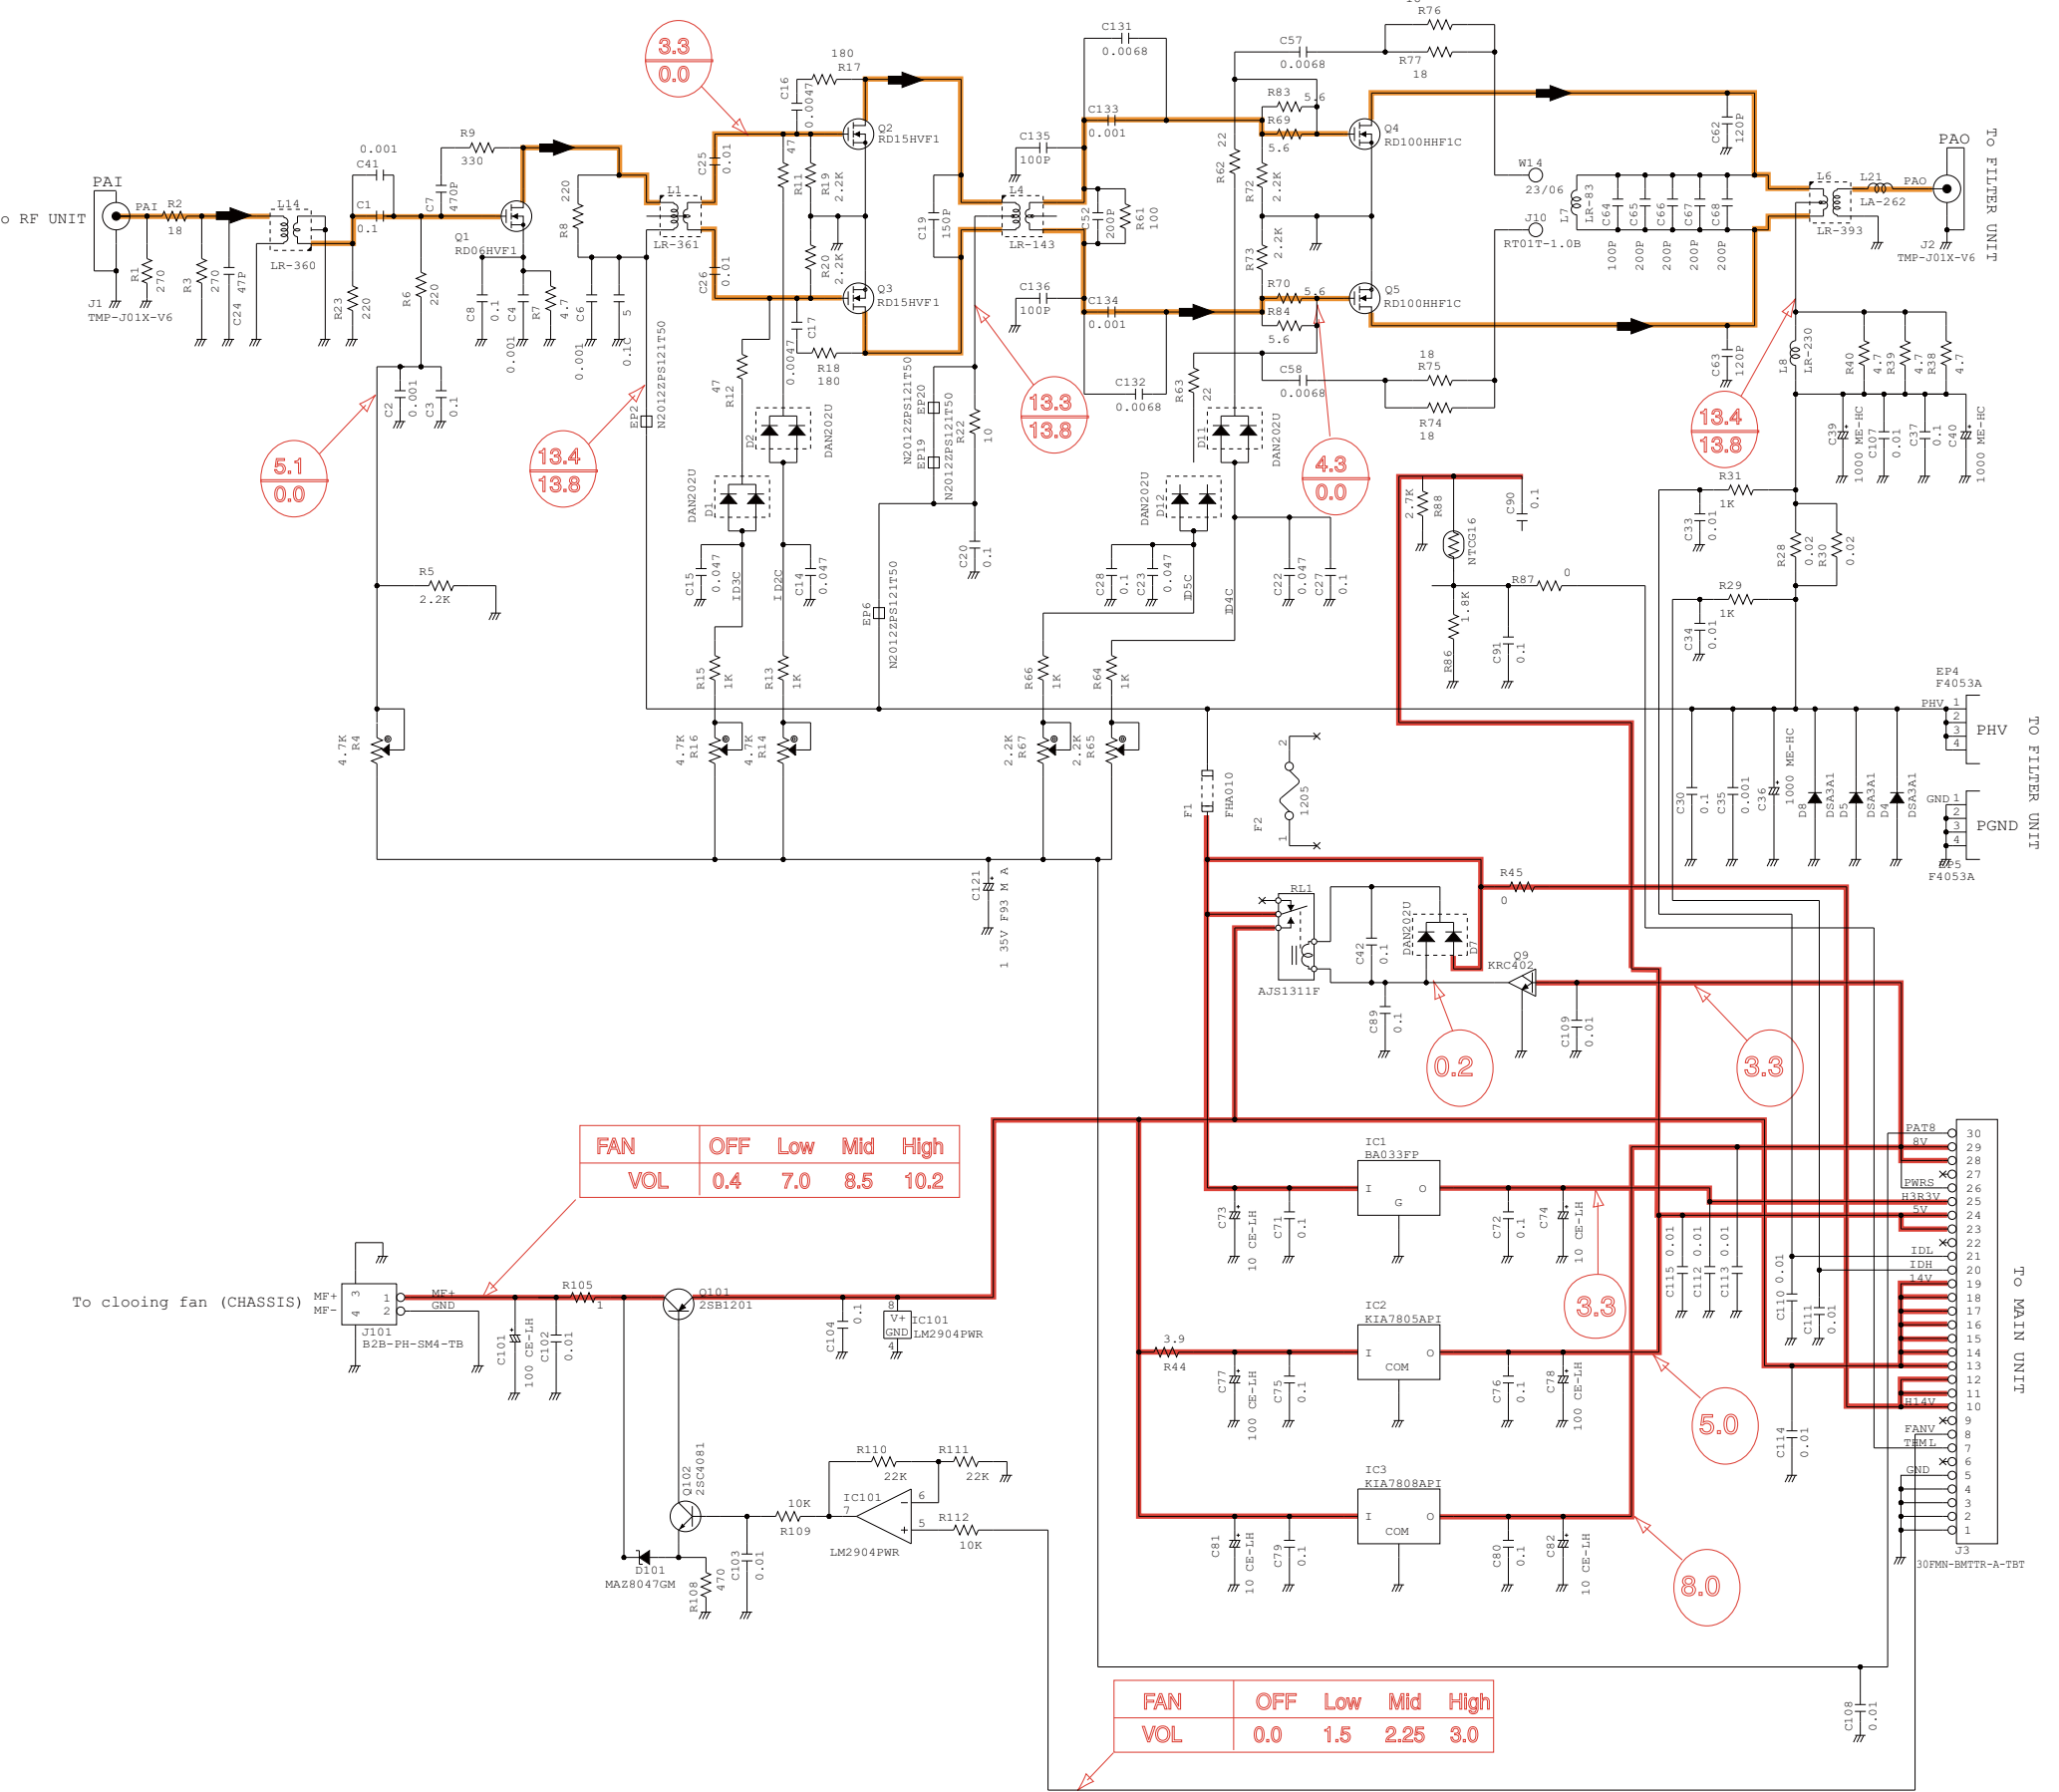



## Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan  
Phone : +81 (06) 6793 5302  
Fax : +81 (06) 6793 0013  
URL : <http://www.icom.co.jp/world/index.html>

### Icom America Inc.

<Corporate Headquarters>  
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.  
Phone : +1 (425) 454-8155 Fax : +1 (425) 454-1509  
URL : <http://www.icomamerica.com>  
E-mail : [sales@icomamerica.com](mailto:sales@icomamerica.com)  
<Customer Service>  
Phone : +1 (425) 454-7619

### Icom Canada

Glenwood Centre #150-6165  
Highway 17 Delta, B.C., V4K 5B8, Canada  
Phone : +1 (604) 952-4266 Fax : +1 (604) 952-0090  
URL : <http://www.icomcanada.com>  
E-mail : [info@icomcanada.com](mailto:info@icomcanada.com)

### Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road, Clayton VIC 3168 Australia  
Phone : +61 (03) 9549-7500 Fax : +61 (03) 9549-7505  
URL : <http://www.icom.net.au>  
E-mail : [sales@icom.net.au](mailto:sales@icom.net.au)

### Icom New Zealand

146A Harris Road, East Tamaki,  
Auckland, New Zealand  
Phone : +64 (09) 274 4062 Fax : +64 (09) 274 4708  
URL : <http://www.icom.co.nz>  
E-mail : [inquiries@icom.co.nz](mailto:inquiries@icom.co.nz)

### Beijing Icom Ltd.

10C07, Long silver Mansion, No.88, Yong Ding  
Road, Haidian District, Beijing, 100039, China  
Phone : +86 (010) 5889 5391/5392/5393  
Fax : +86 (010) 5889 5395  
E-mail : [bjicom@bjicom.com](mailto:bjicom@bjicom.com)  
URL : <http://www.bjicom.com>

### Icom (Europe) GmbH

Communication Equipment  
Auf der Krautweide 24  
65812 Bad Soden am Taunus, Germany  
Phone : +49 (6196) 76685-0 Fax : +49 (6196) 76685-50  
URL : <http://www.icomeurope.com>  
E-mail : [info@icomeurope.com](mailto:info@icomeurope.com)

### Icom Spain S.L

Ctra. Rubi, No. 88 Bajos A 08174, Sant Cugat del Valles, Barcelona, Spain  
Phone : +34 (93) 590 26 70 Fax : +34 (93) 589 04 46  
URL : <http://www.icomspain.com>  
E-mail : [icom@icomspain.com](mailto:icom@icomspain.com)

### Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.  
Phone : +44 (01227) 741741 Fax : +44 (01227) 741742  
URL : <http://www.icomuk.co.uk>  
E-mail : [info@icomuk.co.uk](mailto:info@icomuk.co.uk)

### Icom France s.a.s.

Zac de la Plaine  
1 Rue Brindejonc des Moulinais BP 5804  
31505 Toulouse Cedex, France  
Phone : +33 (5) 61 36 03 03 Fax : +33 (5) 61 36 03 00  
URL : <http://www.icom-france.com>  
E-mail : [icom@icom-france.com](mailto:icom@icom-france.com)

### Asia Icom Inc.

6F No.68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.  
Phone : +886 (02) 2559 1899 Fax : +886 (02) 2559 1874  
URL : <http://www.asia-icom.com>  
E-mail : [sales@asia-icom.com](mailto:sales@asia-icom.com)

### Icom Polska

81-850 Sopot, ul. 3 Maja 54, Poland  
Phone : +48 (58) 550 7135 Fax : +48 (58) 551 0484  
E-mail : [icompolska@icompolska.com.pl](mailto:icompolska@icompolska.com.pl)

Count on us!